

GROUP III



SINGLE PHASE		BOOSTING									
Line Voltage (Available)		230	380	416	425	430	435	440	440	450	460
Load Voltage (Output)		277	420	457	467	473	457	462	484	472	483
CAT. NO.											
T181061	Load kVA Amps	0.29 1.04	0.44 1.04	0.48 1.04	0.49 1.04	0.49 1.04	0.95 2.08	0.96 2.08	0.50 1.04	0.98 2.08	1.01 2.08
	Max. Size of Fuse or Breaker	3	3	3	3	3	6	6	3	6	6
T181062	Load kVA Amps	0.58 2.08	0.87 2.08	0.95 2.08	0.97 2.08	0.99 2.08	1.90 4.17	1.93 4.17	1.01 2.08	1.97 4.17	2.01 4.17
	Max. Size of Fuse or Breaker	6	6	6	6	6	10	10	6	10	10
T181063	Load kVA Amps	0.87 3.13	1.31 3.13	1.43 3.13	1.46 3.13	1.48 3.13	2.86 6.25	2.89 6.25	1.51 3.13	2.95 6.25	3.02 6.25
	Max. Size of Fuse or Breaker	10	6	6	6	6	15	15	6	15	15
T181064	Load kVA Amps	1.44 5.21	2.19 5.21	2.38 5.21	2.43 5.21	2.46 5.21	4.76 10.42	4.81 10.42	2.52 5.21	4.92 10.42	5.03 10.42
	Max. Size of Fuse or Breaker	15	10	10	10	10	15	15	10	15	15
T181065	Load kVA Amps	2.89 10.42	4.38 10.42	4.76 10.42	4.86 10.42	4.93 10.42	9.52 20.83	9.62 20.83	5.04 10.42	9.83 20.83	10.06 20.83
	Max. Size of Fuse or Breaker	20	15	15	15	15	30	30	15	30	30
T181066	Load kVA Amps	4.33 15.63	6.56 15.63	7.14 15.63	7.30 15.63	7.39 15.63	14.28 31.25	14.44 31.25	7.56 15.63	14.75 31.25	15.09 31.25
	Max. Size of Fuse or Breaker	25	25	25	25	25	45	45	25	45	45
T137920	Load kVA Amps	5.77 20.83	8.57 20.83	9.52 20.83	9.73 20.83	9.85 20.83	19.04 41.67	19.25 41.67	10.08 20.83	19.67 41.67	20.13 41.67
	Max. Size of Fuse or Breaker	35	30	30	30	30	60	60	30	60	60
T137921	Load kVA Amps	8.66 31.25	13.13 31.25	14.28 31.25	14.59 31.25	14.78 31.25	28.56 62.50	28.88 62.50	15.13 31.25	29.50 62.50	30.19 62.50
	Max. Size of Fuse or Breaker	50	50	45	45	45	90	90	45	90	90
T137922	Load kVA Amps	11.54 41.67	17.50 41.67	19.04 41.67	19.46 41.67	19.71 41.67	38.08 83.33	38.50 83.33	20.17 41.67	39.33 83.33	40.25 83.33
	Max. Size of Fuse or Breaker	70	60	60	60	60	110	110	60	110	110
T137923	Load kVA Amps	17.31 62.50	26.25 62.50	28.56 62.50	29.19 62.50	29.56 62.50	57.13 125.00	57.75 125.00	30.25 62.50	59.00 125.00	60.38 125.00
	Max. Size of Fuse or Breaker	100	90	90	90	90	175	175	90	175	175
T137924	Load kVA Amps	28.90 104.20	43.80 104.20	47.60 104.20	48.60 104.20	49.30 104.20	95.20 208.30	96.20 208.30	50.40 104.20	98.30 208.30	100.60 208.30
	Max. Size of Fuse or Breaker	175	150	150	150	150	300	300	150	300	300
T243570	Load kVA Amps	43.30 156.30	65.60 156.30	71.40 156.30	73.00 156.30	73.90 156.30	142.80 312.50	144.40 312.50	75.60 156.30	147.50 312.50	150.90 312.50
	Max. Size of Fuse or Breaker	250	225	225	225	225	450	450	225	450	450
T243571 ①	Load kVA Amps	57.70 208.30	87.50 208.30	95.20 208.30	97.30 208.30	98.50 208.30	190.40 416.70	192.50 416.70	100.80 208.30	196.70 416.70	201.30 416.70
	Max. Size of Fuse or Breaker	350	300	300	300	300	600	600	300	600	600
See Page 110 For Connection Diagrams		D	H	H	H	H	G	G	H	G	G

BUCKING			
277	480	480	504
230	436	456	480
0.29 1.25	0.50 1.15	1.05 2.29	1.10 2.29
3	3	6	6
0.58 2.50	1.00 2.29	2.09 4.58	2.20 4.58
6	6	10	10
0.86 3.75	1.50 3.44	3.14 6.88	3.30 6.88
6	6	15	15
1.44 6.25	2.50 5.73	5.23 11.46	5.50 11.46
10	10	15	15
2.88 12.50	5.00 11.46	10.45 22.92	11.00 22.92
15	15	30	30
4.31 18.75	7.49 17.19	15.68 34.38	16.50 34.38
20	20	45	45
5.75 25.00	9.99 22.92	20.90 45.83	22.00 45.83
30	30	60	60
8.63 37.50	14.99 34.38	31.35 68.75	33.00 68.75
40	40	90	90
11.50 50.00	19.98 45.83	41.80 91.67	44.00 91.67
60	60	110	110
17.25 75.00	29.98 68.80	62.70 137.50	66.00 137.50
80	80	175	175
28.80 125.00	50.00 114.60	104.50 229.20	110.00 229.20
150	150	300	300
43.10 187.50	74.90 171.90	156.80 343.80	165.00 343.80
200	200	450	450
57.50 250.00	99.90 229.20	209.00 458.30	220.00 458.30
300	300	600	600
J	I	E	E

① See chart on page 101.

NOTE: Inputs and Outputs may be reversed; kVA capacity remains constant. All applications above bold face line are suitable for 50/60 Hz. All applications below bold face line are suitable for 60 Hz only.



GROUP III

THREE PHASE		BOOSTING							
Line Voltage (Available)	399Y 230	380	430	440	460	460	480	480	480
Load Voltage (Output)	480Y 277	420	473	462	506	483	528	504	
CAT. NO.									
T181061	Load kVA Amps	0.86 1.04	0.76 1.04	0.85 1.04	1.66 2.08	0.91 1.04	1.74 2.08	0.95 1.04	1.82 2.08
	Max. Size of Fuse or Breaker	3	3	3	6	3	6	3	6
T181062	Load kVA Amps	1.73 2.08	1.51 2.08	1.70 2.08	3.33 4.16	1.82 2.08	3.48 4.16	1.90 2.08	3.63 4.16
	Max. Size of Fuse or Breaker	6	6	6	10	6	10	6	10
T181063	Load kVA Amps	2.60 3.12	2.27 3.12	2.56 3.12	4.99 6.24	2.73 3.12	5.22 6.25	2.85 3.12	5.45 6.24
	Max. Size of Fuse or Breaker	10	6	6	15	6	15	6	15
T181064	Load kVA Amps	4.33 5.20	3.78 5.20	4.26 5.20	8.32 10.40	4.56 5.20	8.70 10.40	4.76 5.20	9.08 10.40
	Max. Size of Fuse or Breaker	15	10	10	15	10	15	10	15
T181065	Load kVA Amps	8.60 10.40	7.56 10.40	8.52 10.40	16.64 20.80	9.11 10.40	17.40 20.80	9.51 10.40	18.16 20.80
	Max. Size of Fuse or Breaker	20	15	15	30	15	30	15	30
T181066	Load kVA Amps	12.90 15.60	11.34 15.60	12.77 15.60	24.97 31.20	13.67 15.60	26.10 31.20	14.27 15.60	27.24 31.20
	Max. Size of Fuse or Breaker	25	25	25	45	25	45	25	45
T137920	Load kVA Amps	17.30 20.80	15.12 20.80	17.03 20.80	33.29 41.60	18.23 20.80	34.80 41.60	19.02 20.80	36.31 41.60
	Max. Size of Fuse or Breaker	35	30	30	60	30	60	30	60
T137921	Load kVA Amps	25.90 31.20	22.69 31.20	25.55 31.20	49.93 62.40	27.34 31.20	52.20 62.40	28.53 31.20	54.47 62.40
	Max. Size of Fuse or Breaker	50	45	45	90	45	90	45	90
T137922	Load kVA Amps	34.60 41.60	30.25 41.60	34.07 41.60	66.58 83.20	36.46 41.60	69.60 83.20	38.04 41.60	72.63 83.20
	Max. Size of Fuse or Breaker	70	60	60	110	60	110	60	110
T137923	Load kVA Amps	52.00 62.50	45.45 62.50	51.18 62.50	100.03 125.00	54.69 62.50	104.57 125.00	57.07 62.50	109.12 125.00
	Max. Size of Fuse or Breaker	100	90	90	175	90	175	90	175
T137924	Load kVA Amps	86.10 104.00	75.62 104.00	85.17 104.00	166.44 208.00	91.15 104.00	174.01 208.00	95.11 104.00	181.57 208.00
	Max. Size of Fuse or Breaker	175	150	150	300	150	300	150	300
T243570	Load kVA Amps	129.30 156.00	113.43 156.00	127.75 156.00	249.66 312.00	136.72 156.00	261.01 312.00	142.67 156.00	272.36 312.00
	Max. Size of Fuse or Breaker	250	225	225	450	225	450	225	450
T243571 ^①	Load kVA Amps	173.10 208.00	151.25 208.00	170.33 208.00	332.89 416.00	182.29 208.00	348.02 416.00	190.22 208.00	363.15 416.00
	Max. Size of Fuse or Breaker	350	300	300	600	300	600	300	600
Quantity Required		3	2	2	2	2	2	2	2
See Page 110 For Connection Diagrams		F-F	B-B	B-B	G-G	B-B	G-G	B-B	G-G

BUCKING							
440	440	460	460	480	480	500	500
400	419	438	418	457	436	455	477
0.79 1.14	1.58 2.18	1.66 2.18	0.83 1.14	1.73 2.18	0.86 1.14	0.90 1.14	1.80 2.18
3	6	6	3	6	3	3	6
1.59 2.29	3.17 4.37	3.31 4.37	1.66 2.29	3.46 4.37	1.73 2.29	1.80 2.29	3.61 4.37
6	10	10	6	10	6	6	10
2.38 3.43	4.75 6.55	4.97 6.55	2.48 3.43	5.19 6.55	2.59 3.43	2.70 3.43	5.41 6.55
6	15	15	6	15	6	6	15
3.96 5.72	7.92 10.92	8.28 10.92	4.14 5.72	8.64 10.92	4.32 5.72	4.51 5.72	9.02 10.92
10	15	15	10	15	10	10	15
7.93 11.44	15.85 21.84	16.57 21.84	8.28 11.44	17.29 21.84	8.64 11.44	9.02 11.44	18.04 21.84
15	30	30	15	30	15	15	30
11.89 17.16	23.77 32.76	24.85 32.76	12.42 17.16	25.93 32.76	12.96 17.16	13.52 17.16	27.07 32.76
20	40	40	20	40	20	20	40
15.85 22.88	31.70 43.68	33.14 43.68	16.57 22.88	34.57 43.68	17.28 22.88	18.03 22.88	36.09 43.68
30	60	60	30	60	30	30	60
23.78 34.32	47.55 65.52	49.71 65.52	24.85 34.32	51.86 65.52	25.92 34.32	27.05 34.32	54.13 65.52
40	80	80	40	80	40	40	80
31.70 45.76	63.40 87.36	66.27 87.36	33.13 45.76	69.15 87.36	34.56 45.76	36.06 45.76	72.18 87.36
60	110	110	60	110	60	60	110
47.63 68.75	95.25 131.25	99.57 131.25	49.77 68.75	103.89 131.25	51.92 68.75	54.18 68.75	108.44 131.25
80	175	175	80	175	80	80	175
79.26 114.40	158.50 218.40	165.69 218.40	82.83 114.40	172.87 218.40	86.39 114.40	90.16 114.40	180.44 218.40
150	300	300	150	300	150	150	300
118.89 171.60	237.75 327.60	248.53 327.60	124.24 171.60	259.31 327.60	129.59 171.60	135.23 171.60	270.66 327.60
200	400	400	200	400	200	200	400
158.52 228.80	317.00 436.80	331.37 436.80	165.65 228.80	345.75 436.80	172.78 228.80	180.31 228.80	360.88 436.80
300	600	600	300	600	300	300	600
2	2	2	2	2	2	2	2
E-E	C-C	C-C	E-E	C-C	E-E	E-E	C-C

①See chart on page 101.

NOTE: (1) Inputs and Outputs may be reversed; kVA capacity remains constant. All applications above bold face line are suitable for 50/60 Hz. All applications below bold face line are suitable for 60 Hz only. (2) Connection Diagrams A-A and F-F cannot be reverse connected.

SPECIFICATIONS ①

GROUP I



120 X 240 PRIMARY VOLTS — 12/24 SECONDARY VOLTS — 60 Hz

CATALOG NUMBER	INSULATING TRANSFORMER RATING	SECONDARY MAXIMUM CURRENT OUTPUT		HEIGHT	APPROX. DIMENSIONS INCHES (CM.)			APPROX. NET WEIGHT LBS. (KG.)	DIMENSIONAL DRAWINGS
		12 V	24 V		WIDTH	DEPTH			
T181047	0.05 kVA	4.16	2.08	6.41 (16.3)	3.14 (8.0)	3.05 (7.7)	4 (1.8)	A	
T181048	0.10 kVA	8.32	4.16	7.16 (18.2)	3.89 (9.9)	3.67 (9.3)	5 (2.3)	A	
T181049	0.15 kVA	12.52	6.25	7.16 (18.2)	3.89 (9.9)	3.67 (9.3)	7 (3.2)	A	
T181050	0.25 kVA	20.80	10.40	8.68 (22.0)	4.08 (10.4)	3.88 (9.9)	10 (4.5)	B	
T181051	0.50 kVA	41.60	20.80	9.06 (23.0)	4.37 (11.1)	4.20 (10.7)	15 (6.8)	B	
T181052	0.75 kVA	62.50	31.25	9.68 (24.6)	4.75 (12.1)	4.51 (11.5)	19 (8.6)	B	
T111683	1.00 kVA	83.20	41.60	10.50 (26.7)	5.50 (14.0)	5.13 (13.0)	24 (10.9)	B	
T111684	1.50 kVA	125.00	62.50	11.62 (29.5)	5.50 (14.0)	5.13 (13.0)	30 (13.6)	B	
T111685	2.00 kVA	166.00	83.20	13.00 (33.0)	5.50 (14.0)	5.13 (13.0)	38 (17.2)	B	
T111686	3.00 kVA	250.00	125.00	11.50 (29.2)	10.31 (26.2)	7.13 (18.1)	55 (24.9)	C	
T111687	5.00 kVA	416.60	208.00	14.38 (36.5)	10.31 (26.2)	7.13 (18.1)	75 (34.0)	C	
T211688	7.50 kVA	625.00	312.50	20.81 (52.9)	11.12 (28.2)	10.84 (27.5)	125 (56.7)	D	
T211689	10.00 kVA	833.00	416.60	20.81 (52.9)	11.75 (29.8)	11.59 (29.4)	160 (72.6)	D	

GROUP II

120 X 240 PRIMARY VOLTS — 16/32 SECONDARY VOLTS — 60 Hz

CATALOG NUMBER	INSULATING TRANSFORMER RATING	SECONDARY MAXIMUM CURRENT OUTPUT		HEIGHT	APPROX. DIMENSIONS INCHES (CM.)			APPROX. NET WEIGHT LBS. (KG.)	DIMENSIONAL DRAWINGS
		16 V	32 V		WIDTH	DEPTH			
T181054	0.05 kVA	3.12	1.56	6.41 (16.3)	3.14 (8.0)	3.05 (7.7)	4 (1.8)	A	
T181055	0.10 kVA	6.25	3.12	7.16 (18.2)	3.89 (9.9)	3.67 (9.3)	5 (2.3)	A	
T181056	0.15 kVA	9.38	4.69	7.16 (18.2)	3.89 (9.9)	3.67 (9.3)	7 (3.2)	A	
T181057	0.25 kVA	15.60	7.80	8.68 (22.0)	4.08 (10.4)	3.88 (9.9)	10 (4.5)	B	
T181058	0.50 kVA	31.20	15.60	9.06 (23.0)	4.37 (11.1)	4.20 (10.7)	15 (6.8)	B	
T181059	0.75 kVA	46.90	23.40	9.68 (24.6)	4.75 (12.1)	4.51 (11.5)	19 (8.6)	B	
T113073	1.00 kVA	62.50	31.20	10.50 (26.7)	5.50 (14.0)	5.13 (13.0)	24 (10.9)	B	
T113074	1.50 kVA	93.70	46.90	11.62 (29.5)	5.50 (14.0)	5.13 (13.0)	30 (13.6)	B	
T113075	2.00 kVA	125.00	62.50	13.00 (33.0)	5.50 (14.0)	5.13 (13.0)	38 (17.2)	B	
T113076	3.00 kVA	187.50	93.80	11.50 (29.2)	10.31 (26.2)	7.13 (18.1)	55 (24.9)	C	
T113077	5.00 kVA	312.00	156.00	14.38 (36.5)	10.31 (26.2)	7.13 (18.1)	75 (34.0)	C	
T213078	7.50 kVA	468.00	234.00	20.81 (52.9)	11.12 (28.2)	10.84 (27.5)	125 (56.7)	D	
T213079	10.00 kVA	625.00	312.00	20.81 (52.9)	11.75 (29.8)	10.84 (27.5)	160 (72.6)	D	

GROUP III

240 X 480 PRIMARY VOLTS — 24/48 SECONDARY VOLTS — 60 Hz

CATALOG NUMBER	INSULATING TRANSFORMER RATING	SECONDARY MAXIMUM CURRENT OUTPUT		HEIGHT	APPROX. DIMENSIONS INCHES (CM.)			APPROX. NET WEIGHT LBS. (KG.)	DIMENSIONAL DRAWINGS
		24 V	48 V		WIDTH	DEPTH			
T181061	0.05 kVA	2.08	1.04	6.41 (16.3)	3.14 (8.0)	3.05 (7.7)	4 (1.8)	A	
T181062	0.10 kVA	4.16	2.08	7.16 (18.2)	3.89 (9.9)	3.67 (9.3)	5 (2.3)	A	
T181063	0.15 kVA	6.24	3.12	7.16 (18.2)	3.89 (9.9)	3.67 (9.3)	7 (3.2)	A	
T181064	0.25 kVA	10.40	5.20	8.68 (22.0)	4.08 (10.4)	3.88 (9.9)	10 (4.5)	B	
T181065	0.50 kVA	20.80	10.40	9.06 (23.0)	4.37 (11.1)	4.20 (10.7)	15 (6.8)	B	
T181066	0.75 kVA	31.20	15.60	9.68 (24.6)	4.75 (12.1)	4.51 (11.5)	19 (8.6)	B	
T137920	1.00 kVA	41.60	20.80	10.50 (26.7)	5.50 (14.0)	5.13 (13.0)	24 (10.9)	B	
T137921	1.50 kVA	62.40	31.20	11.62 (29.5)	5.50 (14.0)	5.13 (13.0)	30 (13.6)	B	
T137922	2.00 kVA	83.20	41.60	13.00 (33.0)	5.50 (14.0)	5.13 (13.0)	38 (17.2)	B	
T137923	3.00 kVA	125.00	62.50	11.50 (29.2)	10.31 (26.2)	7.13 (18.1)	55 (24.9)	C	
T137924	5.00 kVA	208.00	104.00	14.38 (36.5)	10.31 (26.2)	7.13 (18.1)	75 (34.0)	C	
T243570	7.50 kVA	312.00	156.00	20.81 (52.9)	11.12 (28.2)	10.84 (27.5)	135 (61.2)	D	
T243571	10.00 kVA	416.00	208.00	20.81 (52.9)	11.75 (29.8)	11.59 (29.4)	160 (72.6)	D	

① All units have ground studs for use with non-metallic conduit. All sizes of 0.75 kVA and less are suitable for 50/60 Hertz. Additional field wiring box may be required when using units as autotransformers.

Transformer Industry Standards

Underwriters' Laboratories, Inc. is an independent not for profit organization which tests products for safety.

Acme's transformers are designed and manufactured to comply with UL Standard 506, 1561, 1012, or 1062 and carry the applicable UL Listing Label. Because of the continuous product evolutions at Acme, it is best that you contact the factory for the current file and guide numbers associated with the listings.


The Canadian Standards Association is the Canadian counterpart to Underwriters' Laboratories. Acme's transformers are also constructed and rated to comply with

CSA Standards C22.2-47 and C22.2-66 and carry the CSA Certification Label.

All of Acme's transformers are manufactured to meet National Electrical Code requirements.

Other Agencies and Standards:

- National Electrical Manufacturers Association (NEMA) ST-20 1992 (R1978)
- American National Standards Institute (ANSI)
- OSHA
- IEEE

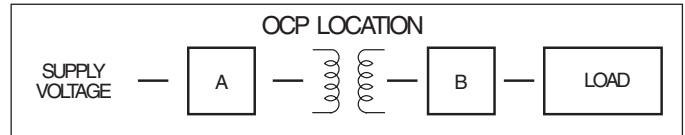

How to overcurrent protect (OCP) 600 volt class transformers and associated wiring . . . in accordance with the '99 National Electric Code (Articles 450-3(b) and 240-3 (i))

Case	Type of Supply Voltage	Phase	Number of Wires on Secondary	Protection Required	OCP Location	Primary		Secondary	
						Current (AMPS)	OCP (% of rating)	Current (AMPS)	OCP (% of rating)
1	Main	1Ø	2	Primary Only	A	≥9 <9, ≥2 <2	125 ① 167 max. 300 max.	Not Required	
2	Main	1Ø 3Ø	More than 2 Not Applicable	Primary & Secondary ②	A & B	≥9 <9, ≥2 <2	125 ① 167 max. 300 max.	≥9 <9	125 ① 167 max.
3	Feeder Circuit with OCP	1Ø	2	None on Either	—		Not Required		Not Required
4	Feeder Circuit with OCP	1Ø 3Ø	More than 2 Not Applicable	Secondary Only ②	B		Not Required	9 <9	125 ① 167 max.

Acme® Transformer™ Products vs. U/L Insulation Systems & U/L Standards

Acme Construction Style	Acme Catalog Product Name	U/L Standard	U/L Product Category	U/L File Number	U/L Listed Control #	U/L Insulation Number	Insulation System Temp./C	kVA Single Phase	kVA Three Phase
Enclosed	General Purpose and Buck-Boost	506	XPTQ	E79947V1	50B8	B3223	130	.050-.150	N/A
Compound Filled (Encapsulated)	General Purpose Buck-Boost & DIT	506	XPTQ	E79947V1	50B8	X3221 H3221	155 180	.25-5.0 7.5-25.0	3.0-6.0 7.5-75.0
	Panel Tran®	1062	YEFR	E56936V1	N/A	H3180 H3221	180 180	5.0 7.5-25.0	N/A 9.0-30.0
	Swim Pool & Spa	379	HDGV	E111069V1	N/A	H3180	180	0.10-.30	N/A
	Hardwired CVR	1012	QQFU	E86492V1	6B81	B3223 X3221	130 155	.25-3.0 5.0-15.0	N/A N/A
	Portable PLC	1012	QQFU	E86492V1	60B1	B3223	130	.25-2.0	N/A
Open Core & Coil	Industrial Control	506	XPTQ	E79947V1	50B8	B3223	130	.050-5.0	N/A
Air Cooled Ventilated & Non Ventilated	General Purpose Opti-Miser® & DIT	1561	XQNX	E12547V3	542B	C3222	220	37.5-250.0	25-1000
Enclosed	Air Conditioning and Refrigeration Appliance	NONE	NONE	NONE	N/A	NONE	130	.085-2.0	N/A

① % of rated current (or next higher standard rating).

② In cases where the secondary is overcurrent protected, the primary overcurrent protection rating can be no more than 250% (2.5 times) full load amps (shown on above chart). For example, if a 10 kVA, single phase transformer has a 480V primary and a 120/240 secondary, and the secondary is overcurrent protected, maximum primary overcurrent protection rating is 20.8 amps (full load current) x 2.5 (250%) = 52. Therefore, use a standard 50 amp fuse or breaker selected from NEC Section 240-6 (below).

Section 240-6 of the 1999 National Electrical Code. The standard ampere ratings for fuses and inverse time circuit breakers shall be considered 15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100, 110, 125, 150, 175, 200, 225, 250, 300, 350, 400, 450, 500, 600, 700, 800, 1000, 1200, 1600, 2000, 2500, 3000, 4000, 5000 and 6000 amperes.

Exception: Additional standard ratings for fuses shall be considered 1, 3, 6, 10, and 601. "Extracted by permission from ANSI/NFPA 70-1999, National Electrical Code®, Copyright®, 1999, National Fire Protection Association, Boston, MA."

Acme Electric—Power Distribution Products Division has never used polychlorinated biphenyls (PCBs) in the manufacture of our quality products.