

Preventa safety modules



For Emergency stop and switch monitoring -

Category 0

XPSAFL, XPSAR, XPSAK, XPSAXE, XPSAC, XPSAF

Catalog

October 2015



How can you fit a 6000-page catalog in your pocket ?


Schneider Electric provides you with the complete set of industrial automation catalogs all on a handy USB key for PC or in an application for tablets



Digi-Cat, a handy USB key for PC



- > Convenient to carry
- > Always up-to-date
- > Environmentally friendly
- > Easy-to-share format

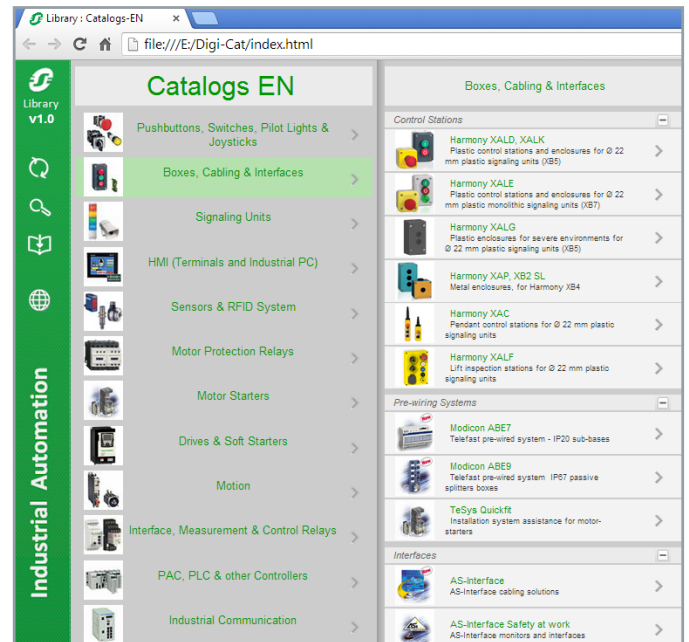

Contact your local representative to get your own Digi-Cat



e-Library, the app for tablets


If you have an iPad®:

- > Go to the App Store and search for e-Library
- > or scan the QR code



If you have an Android tablet:

- > Go to the Google Play Store™ and search for eLibrary
- > or scan the QR code



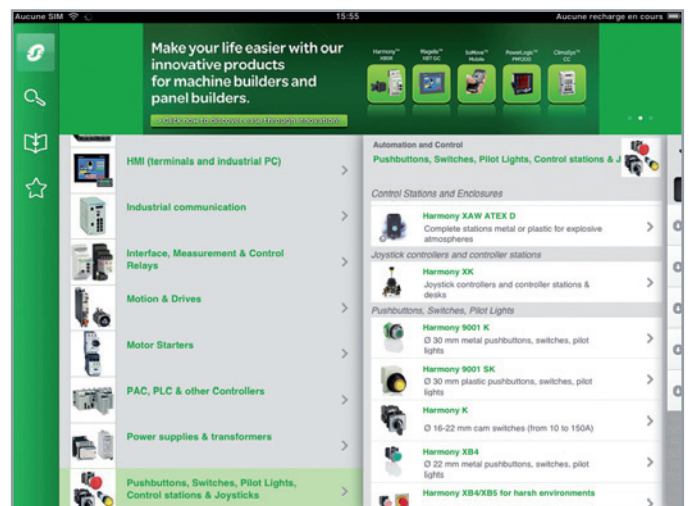


General contents

Preventa safety modules

For Emergency stop and switch monitoring - Category 0

■ Type XPSAFL, For Emergency stop, switch and safety light curtain monitoring	
- Operating principle,	
- References	page 4
■ Type XPSAR, For Emergency stop, switch or safety light curtain	
- Operating principle,	
- References	page 5
■ Type XPSAK, For Emergency stop, switch, sensing mat/edges or safety light curtain monitoring	
- Operating principle,	
- References	page 6
■ Type XPSAXE, For Emergency stop and switch monitoring	
- Operating principle,	
- References	page 7
■ Type XPSAC, For Emergency stop and switch monitoring	
- Operating principle,	
- References	page 8
■ Type XPSAF, For Emergency stop and switch monitoring	
- Operating principle,	
- References	page 9
■ Product reference index	
- Index.....	page 10



Operating principle

Safety modules **XPSAFL** meet the requirements of Performance Level PL e/Category 4 conforming to standard EN/ISO 13849-1.

They are used for:

- Monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1.
- Electrical monitoring of switches activated by protection devices conforming to standard EN/ISO 14119.
- They can also be used for monitoring type 4 light curtains conforming to EN 61496-1 that have solid-state safety outputs. This system conforms to Performance Level PL e/Category 4 in accordance with EN/ISO 13849-1.
- Housed in a compact enclosure, the modules have 3 safety outputs.
- Preventa safety modules **XPSAFL●●●●P** incorporate removable terminal blocks, thus optimising machine maintenance.
- To aid diagnostics, the modules have 3 LEDs on the front face which provide information on the monitoring circuit status.
- The Start button monitoring function is configurable depending on the wiring.

Maximum achievable safety level

- PL e/Category 4 conforming to EN/ISO 13849-1
- SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061

Product certifications

- UL
- CSA
- TÜV

References

Description	Connection	Number of safety circuits	Supply	Reference	Weight kg/ lb
Safety modules for Emergency stop, switch and safety light curtain monitoring	Captive screw clamp terminals Terminal block integrated in module	3	~ and = 24 V	XPSAFL5130	0.250/ 0.551
	Captive screw clamp terminals Terminal block removable from module	3	~ and = 24 V	XPSAFL5130P	0.250/ 0.551







XPSAFL5130

Preventa safety modules

Type XPSAR

For Emergency stop, switch or safety light curtain monitoring



XPSAR31144

Operating principle

Safety modules **XPSAR** meet the requirements of Performance Level PL e/Category 4 conforming to standard EN/ISO 13849-1 and are designed for the following safety applications:

- Monitoring Emergency stop circuits conforming to EN/ISO 13850 and EN/IEC 60204-1.
- Electrical monitoring of switches activated by protection devices conforming to standard EN/ISO 14119.
- Monitoring type 4 light curtains conforming to EN/IEC 61496-1 that have solid-state safety outputs with test function (light curtains XUS L).
- In addition to 7 safety outputs, modules **XPSAR** incorporate 2 relay signalling outputs and 4 solid-state signalling outputs for signalling to the process PLC.
- Safety modules **XPSAR●●●●●P** incorporate removable terminal blocks, thus optimising machine maintenance.
- To aid diagnostics, the modules have 4 LEDs on the front face which provide information on the monitoring circuit status.
- The Start button monitoring function is configurable depending on the wiring.

Maximum achievable safety level

- PL e/Category 4 conforming to EN/ISO 13849-1
- SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061

Product certifications

- UL
- CSA
- TÜV



References

Description	Connection	Number of safety circuits	Additional outputs/ solid-state outputs to PLC	Supply	Reference	Weight kg/ lb	
Safety modules for Emergency stop, switch or safety light curtain monitoring	Captive screw clamp terminals, Terminal block integrated in module	7	2 / 4	~ and ~ 24 V	XPSAR311144	0.300/ 0.661	
				~ 115 V ~ 24 V	XPSAR351144	0.400/ 0.882	
				~ 230 V ~ 24 V	XPSAR371144	0.400/ 0.882	
	Captive screw clamp terminals, Terminal block removable from module	7	2 / 4	~ and ~ 24 V	XPSAR311144P	0.300/ 0.661	
					~ 115 V ~ 24 V	XPSAR351144P	0.400/ 0.882
					~ 230 V ~ 24 V	XPSAR371144P	0.400/ 0.882

Preventa safety modules

Type XPSAK

For Emergency stop, switch, sensing mat/edges or safety light curtain monitoring



Operating principle

Safety modules **XPSAK** meet the requirements of Performance Level PL e/Category 4 conforming to standard EN/ISO 13849-1.

They are used for:

- Monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1.
- Electrical monitoring of switches activated by protection devices, with optional selection of synchronisation time between signals.
- Monitoring 4-wire sensing mats or edges.
- Monitoring type 4 light curtains conforming to EN/IEC 61496-1 which have solid-state safety outputs with test function (light curtains XUSL).
- Housed in a compact enclosure, the modules have 3 safety outputs, a relay signalling output and 4 solid-state signalling outputs for signalling to the process PLC.
- Preventa safety modules **XPSAK●●●●P** incorporate removable terminal blocks, thus optimising machine maintenance.
- To aid diagnostics, the modules have 4 LEDs on the front face which provide information on the monitoring circuit status.
- The Start button monitoring function is configurable depending on the wiring.

Maximum achievable safety level

- PL e/Category 4 conforming to EN/ISO 13849-1,
- SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061

Product certifications



- UL
- CSA
- TÜV

References

Description	Connection	Number of safety circuits	Additional outputs / Solid-state outputs for PLC	Supply	Reference	Weight kg/ lb
Safety modules for Emergency stop, switch, sensing mat/edges or safety light curtain monitoring	Captive screw clamp terminals Terminal block integrated in module	3	1 / 4	~ and --- 24 V	XPSAK311144	0.300/ 0.661
				~ 110 V --- 24 V	XPSAK361144	0.400/ 0.882
				~ 120 V --- 24 V	XPSAK351144	0.400/ 0.882
	Captive screw clamp terminals Terminal block removable from module	3	1 / 4	~ and --- 24 V	XPSAK311144P	0.300/ 0.661
				~ 48 V	XPSAK331144P	0.300/ 0.661
				~ 110 V --- 24 V	XPSAK361144P	0.400/ 0.882
~ 120 V --- 24 V	XPSAK351144P	0.400/ 0.882				
~ 230 V --- 24 V	XPSAK371144P	0.400/ 0.882				



XPSAK3●1144



Operating principle

Safety modules **XPSAXE** are used for monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1 and also meet the safety requirements for the electrical monitoring of switches in protective devices conforming to standard EN/ISO 14119.

- They provide protection for both the machine operator and the machine by immediately stopping the dangerous movement on receipt of a stop instruction from the operator, or on detection of a fault in the safety circuit itself.
- To aid diagnostics, the modules have LEDs which provide information on the monitoring circuit status.
- The **XPSAXE** module has 3 safety outputs and a relay output for signalling to the PLC

Maximum achievable safety level

- PL e/Category 4 conforming to EN/ISO 13849-1
- SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061

Product certifications

- UL
- CSA
- BG

References



Description	Connection	Number of instantaneous opening safety circuits	Additional outputs	Supply	Reference	Weight kg/lb
Safety modules for Emergency stop and switch monitoring	Captive screw clamp terminals Terminal block removable from module	3	1 relay	~ and = 24 V	XPSAXE5120P	0,229/ 0,505
	Spring terminals Terminal block removable from module	3	1 relay	~ and = 24 V	XPSAXE5120C	0,229/ 0,505



XPSAXE5120P



XPSAXE5120C



Operating principle

Safety modules **XPSAC** are used for monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1 and also meet the safety requirements for the electrical monitoring of switches in protective devices conforming to standard EN/ISO 14119.

- They provide protection for both the machine operator and the machine by immediately stopping the dangerous movement on receipt of a stop instruction from the operator, or on detection of a fault in the safety circuit itself.
- To aid diagnostics, the modules have LEDs which provide information on the monitoring circuit status.
- The **XPSAC** module has 3 safety outputs and a solid-state output for signalling to the PLC.

Maximum achievable safety level

- PL e/Category 4 conforming to EN/ISO 13849-1
- SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061

Product certifications

- UL
- CSA
- TÜV

References

Description	Connection	Number of instantaneous opening safety circuits	Additional outputs	Supply	Reference	Weight kg/lb
Safety modules for Emergency stop and switch monitoring	Captive screw clamp terminals Terminal block integrated in module	3	1 solid-state	~ and --- 24 V	XPSAC5121	0.160/ 0.353
				~ 48 V	XPSAC1321	0.210/ 0.463
				~ 115 V	XPSAC3421	0.210/ 0.463
				~ 230 V	XPSAC3721	0.210/ 0.463





XPSAC●●●●●



XPSAC●●●●●P

Captive screw clamp terminals Terminal block removable from module	3	1 solid-state	~ and --- 24 V	XPSAC5121P	0.160/ 0.353
			~ 48 V	XPSAC1321P	0.210/ 0.463
			~ 115 V	XPSAC3421P	0.210/ 0.463
			~ 230 V	XPSAC3721P	0.210/ 0.463



Operating principle

Safety modules **XPSAF** meet the requirements of Performance Level PL e/Category 4 conforming to standard EN/ISO 13849-1.

They are used for:

- Monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1.
- Electrical monitoring of switches activated by protection devices conforming to standard EN/ISO 14119.
- Housed in a compact enclosure, the modules have 3 safety outputs.
- Preventa safety modules **XPSAF●●●●P** incorporate removable terminal blocks, thus optimising machine maintenance.
- To aid diagnostics, the modules have 3 LEDs on the front face which provide information on the monitoring circuit status.
- The Start button monitoring function is configurable depending on the wiring.

Maximum achievable safety level

- PL e/Category 4 conforming to EN/ISO 13849-1
- SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061

Product certifications

- UL
- CSA
- TÜV

References

Description	Connection	Number of safety circuits	Supply	Reference	Weight kg/lb
Safety modules for Emergency stop and switch monitoring	Captive screw clamp terminals Terminal block integrated in module	3	~ and = 24 V	XPSAF5130	0.250/ 0.551
	Captive screw clamp terminals Terminal block removable from module	3	~ and = 24 V	XPSAF5130P	0.250/ 0.551



XPSAF5130

X	
XPSAC1321	8
XPSAC1321P	8
XPSAC3421	8
XPSAC3421P	8
XPSAC3721	8
XPSAC3721P	8
XPSAC5121	8
XPSAC5121P	8
XPSAF5130	9
XPSAF5130P	9
XPSAFL5130	4
XPSAFL5130P	4
XPSAK311144	6
XPSAK311144P	6
XPSAK331144P	6
XPSAK351144	6
XPSAK351144P	6
XPSAK361144	6
XPSAK361144P	6
XPSAK371144	6
XPSAK371144P	6
XPSAR311144	5
XPSAR311144P	5
XPSAR351144	5
XPSAR351144P	5
XPSAR371144	5
XPSAR371144P	5
XPSAXE5120C	7
XPSAXE5120P	7



More information on
<http://www.schneider-electric.com/machinesafety>

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric