

**ANAMET** 

# **FLEXIBLE CONDUITS AND CONNECTORS**



*100 Years of Flexible Safety*



100 years of Flexible Safety  
1908-2008

**Anamet is a global company with plants in Canada, the United States and Europe. Anamet has manufactured product for the Canadian electrical industry for the past 35 years.**

**Located in Eastern Ontario, Anamet Canada Inc. is proud to produce over 80% of the product sold in Canada within its own plant.**

**Truly, our products are 'Made in Canada'.**



**Certified as ISO 9001-2000, Anamet Canada is a high quality manufacturer, conforming to the requirements of our customers, while exceeding industry standards.**



**ANAMET ELECTRICAL INC.  
1000 Broadway Ave. East  
Mattoon, IL 61938  
UNITED STATES OF AMERICA**























**ANAMET EUROPE BV  
Transformatorweg 30  
1014 AK Amsterdam  
THE NETHERLANDS**

---

Anamet Canada Inc.  
PO Box 240, 36 Wolfe St.  
Frankford, Ontario K0K 2C0

Phone: (613) 398-1313  
Fax: (613) 398-6262  
[www.anametcanada.com](http://www.anametcanada.com)  
E-mail: [csr@anametcanada.com](mailto:csr@anametcanada.com)

# Table of Contents:

	Designation	Page	Product Features	Size Range	Approval
Metallic Liquid-tight	CSA	4	<b>Conseal:</b> Standard metallic liquid-tight - <b>BLACK 75°C</b>	3/8" - 4"	
	CW-BLUE	5	<b>Conseal:</b> Computer grade metallic liquid-tight - <b>BLUE 75°C</b>	3/8" - 2"	
	EFST	6	<b>Sealtite:</b> Extra-flexible metallic liquid-tight - <b>GREY 60°C</b>	1/4" - 6"	
	UA-CSA	7	<b>Sealtite:</b> Dual listed metallic liquid-tight - <b>GREY 60°C</b>	3/8" - 4"	
	OR	8	<b>Sealtite:</b> Oil Resistant metallic liquid-tight - <b>BLACK 105°C</b>	3/8" - 2"	
	MTC	9	<b>Sealtite:</b> Machine tool metallic liquid-tight - <b>BLACK 60°C</b>	3/8" - 2"	
	HTC	10	<b>Sealtite:</b> High temperature metallic liquid-tight - <b>BLACK 105°C</b>	3/8" - 2"	
	HC	11	<b>Sealtite:</b> High temperature metallic liquid-tight - <b>GREY 105°C</b>	3/8" - 2"	
	HTUA	12	<b>Sealtite:</b> High temperature UL metallic liquid-tight - <b>GREY 105°C</b>	3/8" - 4"	
	HTX	13	<b>Conseal:</b> Extreme temperature metallic liquid-tight - <b>YELLOW 135°</b>	3/8" - 2"	
	HCX	14	<b>Sealtite:</b> Extreme temperature metallic liquid-tight - <b>BLACK 150°C</b>	3/8" - 2"	
	EFL	15	<b>Sealtite:</b> Aluminum-core light weight liquid-tight - <b>GRAY 60°C</b>	3/8" - 4"	
	ZHUA	16	<b>Sealtite:</b> Low smoke, Zero Halogen liquid-tight - <b>BLACK 80°C</b>	3/8" - 4"	
	Shieldtite®	17	<b>Sealtite:</b> Bronze-core High Shielding liquid-tight - <b>GREY 105°C</b>	3/8" - 4"	
NWC	18	<b>Sealtite:</b> Radiation resistant metallic liquid-tight - <b>BLACK 89°C</b>	3/8" - 4"		
NM Liquid-tight	CNP	22	<b>Sealtite:</b> machine tool non-metallic liquid-tight - <b>ORANGE 60°C</b>	3/8" - 2"	
	NMUA	24	<b>Sealtite:</b> Standard non-metallic liquid-tight - <b>GREY 80°C</b>	3/8" - 2-1/2"	
	AC Whip Kits	24	<b>Convenience AC Whip Kits</b>	1/2" - 3/4"	
	NMEF	25	<b>Sealtite:</b> Extra flexible non-metallic tubing - <b>BLACK 80°C</b>	3/8" - 2"	
	ANA-QUICK	39	<b>Ana-Quick:</b> Nylon corrugated tubing - <b>BLACK 120°C</b>	1/4" - 2"	
Non-jacketed	AlFlex-CSA	27	<b>Aluminum</b> non-jacketed flexible conduit	5/16" - 4"	
	RWA	28	Reduced Wall <b>Aluminum</b> non-jacketed flexible conduit	3/8" - 2"	
	RWS	29	Reduced Wall <b>Steel</b> non-jacketed flexible conduit	3/8" - 2"	
	DSL	30	Standard weight, <b>galvanized steel</b> , extra-flexible, OEM conduit	3/16" - 3/4"	
	DE-710 / DE-183	31	Heavy duty, <b>galvanized steel</b> , extra-flexible, OEM conduit	5/16" - 3/4"	
	SL	32	Standard weight, <b>Stainless Steel</b> , extra-flexible, OEM conduit	5/32" - 1/2"	
	UI-CAP	32	Heavy Duty, <b>Stainless Steel</b> , extra-flexible, OEM conduit	5/32" - 1/2"	
Firetech	FTS	35	<b>Firetech Sleeve:</b> High Temperature conduit insulation sleeving	1/4" - 5"	
	FTW	35	<b>Firetech Wrap:</b> High Temperature conduit insulation wrap	1" - 5"	
	FTT	35	<b>Firetech Tape:</b> High Temperature protective tape	1" & 1-1/2"	
	FSH	35	<b>Firetech Sheet:</b> High Temperature protective sheet	36", 40" & 60"	
	FTL	36	<b>FireTech Lite:</b> High Temperature insulation	1/2" - 4"	
Connectors	LT	20	<b>Connectors:</b> Metallic for metallic liquid-tight	3/8" - 2"	
	SSLT	19	<b>Connectors:</b> Stainless for metallic liquid-tight	3/8" - 2"	
	STNM/SSNM	23	<b>Connectors:</b> Metallic for CNP (Type A) liquid-tight	3/8" - 2"	
	NMSC/NMLT	26	<b>Connectors:</b> Non-metallic for non-metallic liquid-tight (Type B)	3/8" - 2"	
	SSUI	33	<b>Connectors:</b> Stainless for Type DSL, SL and UI-CAP	3/8" - 1/2"	
	SSFT	36	<b>Connectors:</b> Stainless for Firetech Sleeve	3/8" - 1"	



## Conseal Type CSA: Standard Flexible Conduit

Trade Size	Item ID	Std. Pkg. METERS	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	10041	30	12.29 (0.484)	17.50 (0.690)	18.00 (0.710)	102 (4.0)	0.35 (24)
	10044	300					
1/2" (16)	10061	30	15.80 (0.622)	20.80 (0.820)	21.30 (0.840)	152 (6.0)	0.42 (28)
	10063	150					
	10064	300					
3/4" (21)	10071	30	20.83 (0.820)	26.16 (1.030)	26.67 (1.050)	203 (8.0)	0.55 (37)
	10073	150					
	10074	300					
1" (27)	10081	30	26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	254 (10.0)	0.80 (54)
	10083	150					
1-1/4" (35)	10090	15	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	318 (12.5)	1.13 (76)
	10091	75					
1-1/2" (41)	10100	15	40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	381 (15.0)	1.45 (97)
	10101	45					
2" (53)	10111	15	51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	508 (20.0)	1.67 (112)
	10113	30					
2-1/2" (63)	34075	8	62.99 (2.480)	72.10 (2.840)	73.00 (2.875)	635 (25.0)	2.88 (194)
3" (78)	34085	8	77.98 (3.070)	87.90 (3.460)	88.90 (3.500)	762 (30.0)	4.00 (269)
4" (103)	34095	8	101.60 (4.000)	113.30 (4.460)	114.30 (4.500)	1016 (40.0)	6.00 (403)

All dimensions in mm (inches)



Modified S Profile with cord packing 3/8" thru 1"

Square Lock Profile with cord packing 1-1/4" thru 2"

Interlocked Profile 2-1/2" thru 4"

### Conseal Type CSA:



- Flexible metal core liquid-tight conduit.
- Suitable for use in hazardous locations per CEC: Class I, Zone 2 & Div. 2; Class II Div. 1 & 2; Class III Div. 1 & 2.
- Also available by special order in other colours. (consult factory)
- Sequentially meter marked for easy cutting and stock control.
- Uses standard liquid-tight connectors for easy installation.
- Available in custom cut lengths

For connectors for this conduit, see page 19-20  
 For cutting instructions, see page 37  
 For Chemical Resistance, see page 38

**SPECIFICATIONS:**

- Galvanized steel core with Liquid-tight PVC jacket
- Colour: Black
- Temp. range: -20°C to +75°C (-4°F to +167° F)
- FT-4 Rated
- UV (sunlight) Resistant
- Corrosion Resistant
- Sequentially meter marked
- CSA Approved # 17419

**APPLICATIONS:**

- Standard industrial and commercial applications
- Motor hookup



## Conseal Type CW-Blue: Computer Flexible Conduit



Trade Size	Item ID	Std. Pkg. METERS	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	16041	30	12.29 (0.484)	17.50 (0.690)	18.00 (0.710)	102 (4.0)	0.35 (24)
	16044	300					
1/2" (16)	16061	30	15.80 (0.622)	20.80 (0.820)	21.30 (0.840)	152 (6.0)	0.42 (28)
	16064	300					
3/4" (21)	16071	30	20.83 (0.820)	26.17 (1.030)	26.67 (1.050)	203 (8.0)	0.55 (37)
	16073	150					
	16074	300					
1" (27)	16081	30	26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	254 (10.0)	0.80 (54)
	16083	150					
1-1/4" (35)	16090	15	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	318 (12.5)	1.13 (76)
	16092	75					
1-1/2" (41)	16100	15	40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	381 (15.0)	1.45 (97)
	16104	45					
2" (53)	16110	15	51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	508 (20.0)	1.67 (112)
	16111	30					

All dimensions in mm (inches)

Modified S Profile with  
copper wire 3/8" thru 2"




### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight PVC jacket
- Integral copper wire for electromagnetic interference suppression
- Colour: Blue
- Temp. range: -20°C to +75°C (-4°F to +167° F)
- FT-4 Rated
- UV (sunlight) Resistant
- Corrosion Resistant
- Sequentially meter marked
- CSA Approved # 17419

### APPLICATIONS:

- Computer room wiring to designate computer wiring.
- Other applications where additional EMI shielding required.

## Conseal Type CW-Blue:



- Flexible metal core liquid-tight conduit.
- Metal core wound with integral copper wire for EMI shielding.
- Designed for computer applications in the Canadian market.
- Suitable for use in hazardous locations per CEC: Class I, Zone 2 & Div. 2; Class II Div. 1 & 2; Class III Div. 1 & 2.
- Also available by special order in other colours. (consult factory)
- Sequentially meter marked for easier cutting and stock control.
- Uses standard liquid-tight connectors for easy installation.
- Available in custom cut lengths

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38



## Sealtite Type EFST: Extra Flexible Conduit

Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
1/4"	35983	30 (100)	6.22 (0.245)	11.30 (0.445)	11.68 (0.460)	89 (3.5)	0.21 (14)
	35981	152 (500)					
5/16" (10)	35993	30 (100)	9.91 (0.390)	14.22 (0.560)	14.61 (0.575)	102 (4.0)	0.22 (15)
	35991	152 (500)					
3/8" (12)	36202	30 (100)	12.32 (0.485)	17.53 (0.690)	18.03 (0.710)	101 (4.0)	0.31 (21)
1/2" (16)	36212	30 (100)	15.75 (0.620)	20.83 (0.820)	21.34 (0.840)	127 (5.0)	0.37 (25)
3/4" (21)	36222	30 (100)	20.70 (0.815)	26.16 (1.030)	26.67 (1.050)	152 (6.0)	0.58 (39)
1" (27)	36231	30 (100)	26.16 (1.030)	32.77 (1.290)	33.40 (1.315)	203 (8.0)	0.76 (51)
1-1/4" (35)	36241	15 (50)	34.80 (1.370)	41.53 (1.635)	42.16 (1.660)	229 (9.0)	0.98 (66)
1-1/2" (41)	36251	15 (50)	40.01 (1.575)	47.37 (1.865)	48.26 (1.900)	279 (11.0)	1.55 (104)
2" (53)	36261	15 (50)	51.31 (2.020)	59.44 (2.340)	60.33 (2.375)	355 (14.0)	2.02 (136)
2-1/2"	34272	7.6 (25)	62.99 (2.480)	72.14 (2.840)	73.03 (2.875)	482 (19.0)	2.71 (182)
3"	34281	7.6 (25)	77.98 (3.070)	87.88 (3.460)	88.90 (3.500)	762 (30.0)	3.79 (255)
3-1/2"	34301	7.6 (25)	88.90 (3.500)	100.58 (3.960)	101.60 (4.000)	813 (32.0)	4.67 (314)
4"	36291	7.6 (25)	101.60(4.000)	113.28 (4.460)	114.30 (4.500)	864 (34.0)	5.40 (363)
5"	36351	7.6 (25)	126.37 (4.975)	139.83 (5.505)	141.35(5.565)	1118 (44.0)	7.94 (534)
6"	36361	7.6 (25)	152.78 (6.015)	166.75 (6.565)	168.28 (6.625)	1524 (60.0)	9.91 (666)

All dimensions in mm (inches)



**Square Lock Profile** with cord packing 1/4" thru 1-1/4"



**Interlocked Profile** 1-1/2" thru 6"

### Sealtite Type EFST:

**RoHS**

- Flexible metal core liquid-tight conduit
- Designed for applications where no approvals are required.
- Also available in Black by special order.
- Uses standard liquid-tight connectors for easy installation.
- Available in custom cut lengths

For connectors for this conduit, see page 19-20  
 For cutting instructions, see page 37  
 For Chemical Resistance, see page 38

#### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight PVC jacket
- Colour: Grey (1/4" and 5/16" standard colour Black)
- Temp. range: -20°C to +60°C (-4°F to +140°F)
- UV (sunlight) Resistant
- Corrosion Resistant

#### APPLICATIONS:

- Applications where very small ID liquid-tight is required (ie: 1/4")
- Applications where no approvals are required.

## Sealtite Type UA-CSA: UL & CSA Approved Flexible Conduit



Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/M (lbs/cft)
				Min	Max		
3/8" (12)	34202	30 (100)	12.29 (0.484)	17.53 (0.690)	18.00 (0.710)	152 (6.0)	0.37 (25)
1/2" (16)	34212	30 (100)	15.80 (0.622)	20.88 (0.822)	21.30 (0.840)	178 (7.0)	0.43 (29)
	34213	305 (1000)					
3/4" (21)	34222	30 (100)	20.83 (0.820)	26.16 (1.030)	26.67 (1.050)	254 (10.0)	0.65 (44)
	34228	152 (500)					
1" (27)	34231	30 (100)	26.44 (1.041)	32.77 (1.290)	33.40 (1.315)	318 (12.0)	1.09 (73)
	34238	122 (400)					
1-1/4" (35)	34241	15 (50)	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	356 (14.0)	1.49 (100)
	34248	76 (250)					
1-1/2" (41)	34251	15 (100)	40.01 (1.575)	47.37 (1.865)	48.30 (1.900)	279 (11.0)	1.71 (112)
	34254	45 (150)					
2" (53)	34261	15 (50)	51.31 (2.020)	59.44 (2.340)	60.30 (2.375)	356 (14.0)	2.20 (148)
	34268	30 (100)					
2-1/2" (63)	34075	8 (27)	62.99 (2.480)	72.14 (2.840)	73.00 (2.875)	635 (19.0)	2.70 (182)
3" (78)	34085	8 (27)	77.98 (3.070)	87.88 (3.460)	88.90 (3.500)	762 (30.0)	3.79 (255)
4" (103)	34095	8 (27)	101.60 (4.000)	113.28 (4.460)	114.30 (4.500)	1016 (34.0)	5.39 (362)

All dimensions in mm (inches)

### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight PVC jacket
- Colour: Grey (2-1/2" - 4" Black)
- Temp. range: -20°C to +60°C (-4°F to +60°F)
- UV (sunlight) Resistant
- Corrosion Resistant
- CSA Approved: #LL15275
- UL Approved: #E18917

### APPLICATIONS:

- Applications where CSA and UL approvals are required.

**Square Lock Design** with copper wire 3/8" thru 1-1/4"



**Interlocked Design** 1-1/2" thru 4" (no ground wire)



## Sealtite Type UA-CSA:

RoHS



- Flexible metal core liquid-tight conduit
- Designed for applications at OEMs where UL & CSA approval is required or desirable.
- Approved in US (per NEC) for direct burial applications
- Suitable for use in hazardous locations per CEC & NEC: Class I, Zone 2 & Div. 2; Class II Div. 1 & 2; Class III Div. 1 & 2.
- Also available in Black by special order.
- Uses standard liquid-tight connectors for easy installation

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38



## Sealtite Type OR: Oil-Resistant Flexible Conduit

Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	36602	30 (100)	12.32 (0.485)	17.53 (0.690)	18.03 (0.710)	101 (4.0)	0.31 (21)
1/2" (16)	36612	30 (100)	15.75 (0.620)	20.83 (0.820)	21.34 (0.840)	127 (5.0)	0.37 (25)
3/4" (21)	36622	30 (100)	20.70 (0.815)	26.16 (1.030)	26.67 (1.050)	152 (6.0)	0.58 (39)
1" (27)	36631	30 (100)	26.16 (1.030)	32.77 (1.290)	33.40 (1.315)	203 (8.0)	0.76 (51)
1-1/4" (35)	36641	15 (50)	34.80 (1.370)	41.53 (1.635)	42.16 (1.660)	229 (9.0)	0.98 (66)
1-1/2" (41)	36651	15 (50)	40.01 (1.575)	47.37 (1.865)	48.26 (1.900)	279 (11.0)	1.55 (104)
2" (53)	36661	15 (50)	51.31 (2.020)	59.44 (2.340)	60.33 (2.375)	355 (14.0)	2.02 (136)

All dimensions in mm (inches)



**Square Lock Design with  
cord packing 3/8" thru 1-1/4"**



**Interlocked Design 1-1/2"  
thru 2"**

### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight PVC jacket
- Colour: Black
- Temp. range:-23°C to +105°C (-9°F to +221°F)
- UV (sunlight) Resistant
- Extra Oil Resistant
- Corrosion Resistant

### APPLICATIONS:

- Extreme resistance to oil.
- Petrochemical and steel industries
- Applications where no approvals are required.

**RoHS**

### Sealtite Type OR:

- Flexible metal core liquid-tight conduit.
- Designed for applications that need superior resistance to petroleum, synthetic oils and chemical degradation.
- Also available in Black by special order.
- Uses standard liquid-tight connectors for easy installation.

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38



## Sealtite Type MTC: Machine Tool Extra Flexible Conduit



Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	38302	30 (100)	12.29 (0.484)	17.25 (0.679)	17.88 (0.704)	76 (3.0)	0.24 (16)
	38304	244 (800)					
1/2" (16)	38312	30 (100)	15.80 (0.622)	20.78 (0.818)	21.41 (0.843)	102 (4.0)	0.30 (20)
	38314	152 (500)					
3/4" (21)	38322	30 (100)	20.83 (0.820)	25.63 (1.009)	26.26 (1.034)	127 (5.0)	0.36 (24)
	38328	152 (500)					
1" (27)	38331	30 (100)	26.44 (1.041)	31.19 (1.228)	31.95 (1.258)	152 (6.0)	0.45 (30)
	38338	122 (400)					
1-1/4" (35)	38341	15 (50)	35.05 (1.380)	39.75 (1.565)	40.51 (1.595)	178 (7.0)	0.60 (40)
	38348	76 (250)					
1-1/2" (41)	38351	15 (50)	40.01 (1.575)	46.48 (1.830)	47.24 (1.860)	203 (8.0)	1.04 (70)
	38354	46 (150)					
2" (53)	38361	15 (50)	51.31 (2.020)	57.66 (2.270)	58.42 (2.300)	254 (10.0)	1.29 (87)
	38638	30 (100)					

All dimensions in mm (inches)

Angled Profile 3/8" thru 2"



### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight PVC jacket
- Colour: Black
- Temp. range: -20°C to +60°C (-4°F to +140°F)
- UV (sunlight) Resistant
- Corrosion Resistant
- Tight bend radius

### APPLICATIONS:

- High flexibility
- Machine Tool industry

### Sealtite Type MTC:

RoHS

- **Flexible metal core liquid-tight conduit.**
- **Designed for Machine Tool industry for high flexibility.**
- **Very tight bend radius makes wiring machine tools easier.**
- **Uses standard liquid-tight connectors for easy installation.**

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38



## Sealtite Type HTC: CSA High Temperature Flexible Conduit

Trade	Item	Std. Pkg.	Inside Diameter	Outside Diameter		Bend	Weight
Size	ID	METERS	Min	Min	Max	Diameter	Kg/m (lbs/cft)
3/8" (12)	14041	30	12.29 (0.484)	17.5 (0.690)	18.00 (0.710)	102 (4.0)	0.33 (22)
1/2" (16)	14061	30	15.80 (0.622)	20.80 (0.820)	21.30 (0.840)	152 (6.0)	0.40 (27)
	14062	150					
	14063	300					
3/4" (21)	14071	30	20.83 (0.820)	26.17 (1.030)	26.67 (1.050)	203 (8.0)	0.53 (36)
	14072	150					
	14072	300					
1" (27)	14081	30	26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	254 (10.0)	0.73 (49)
	14083	150					
1-1/4" (35)	14090	15	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	318 (12.5)	1.07 (72)
1-1/2" (41)	14100	15	40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	381 (15.0)	1.33 (89)
2" (53)	14112	15	51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	508 (20.0)	1.67 (112)

All dimensions in mm (inches)



Modified S Profile with cord packing 3/8" thru 1"

Square Lock Profile with cord packing 1-1/4" thru 2"


### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight PVC jacket
- Colour: Black
- Temp. range: -20°C to +105°C (-4°F to +221°F)
- UV (sunlight) Resistant
- Corrosion Resistant
- Sequentially meter marked
- CSA Approved # 17419

### APPLICATIONS:

- Applications for high temperature.
- Steel and Petrochemical industries
- Applications where CSA approval is required.

### Sealtite Type HTC:



- Flexible metal core liquid-tight conduit
- Designed for applications where high temperature is required,
- Also available by special order in other colours. (consult factory)
- Sequentially meter marked for easy cutting and stock control.
- Uses standard liquid-tight connectors for easy installation.
- Available in custom cut lengths

For connectors for this conduit, see page 19-20  
 For cutting instructions, see page 37  
 For Chemical Resistance, see page 38

## Sealtite Type HC: Low Temperature Flexible Conduit



Trade	Item	Std. Pkg.	Inside Diameter	Outside Diameter		Bend	Weight
Size	ID	M (FT)	Min	Min	Max	Diameter	Kg/m (lbs/cft)
3/8" (12)	37202	30 (100)	12.32 (0.485)	17.53 (0.690)	18.03 (0.710)	101 (4.0)	0.31 (21)
1/2" (16)	37212	30 (100)	15.75 (0.620)	20.83 (0.820)	21.34 (0.840)	127 (5.0)	0.37 (25)
3/4" (21)	37222	30 (100)	20.70 (0.815)	26.16 (1.030)	26.67 (1.050)	152 (6.0)	0.58 (39)
1" (27)	37231	30 (100)	26.16 (1.030)	32.77 (1.290)	33.40 (1.315)	203 (8.0)	0.76 (51)
1-1/4" (35)	37241	15 (50)	34.80 (1.370)	41.53 (1.635)	42.16 (1.660)	229 (9.0)	0.98 (66)
1-1/2" (41)	37251	15 (50)	40.01 (1.575)	47.37 (1.865)	48.26 (1.900)	279 (11.0)	1.55 (104)
2" (53)	37261	15 (50)	51.31 (2.020)	59.44 (2.340)	60.33 (2.375)	355 (14.0)	2.02 (136)

All dimensions in mm (inches)

Square Lock Design with  
cord packing 3/8" thru 1-1/4"



Interlocked Design 1-1/2"  
thru 2"



### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight PVC jacket
- Colour: Grey
- Temp. range: -46°C to +105°C (-51°F to +221°F)
- UV (sunlight) Resistant

### Sealtite Type HC:

**RoHS**

- Flexible metal core liquid-tight conduit
- Designed for high/low temperatures. (-46°C to +105°C)
- Can be used in applications that do not require approvals.
- Uses standard liquid-tight connectors for easy installation.

### APPLICATIONS:

- Extra duty applications
- High or low temperature requirements
- Applications where no approvals are required

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38



## Sealtite Type HTUA: CSA/UL High Temp Flexible Conduit

Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	37402	30 (100)	12.29 (0.484)	17.50 (0.690)	18.00 (0.710)	152 (6.0)	0.36 (24)
	37404	244 (800)					
1/2" (16)	37412	30 (100)	15.80 (0.622)	20.80 (0.820)	21.30 (0.840)	178 (7.0)	0.43 (29)
	37414	152 (500)					
3/4" (21)	37422	30 (100)	20.83 (0.820)	26.17 (1.030)	26.67 (1.050)	254 (10.0)	0.64 (43)
	37428	152 (100)					
1" (27)	37431	30 (100)	26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	305 (12.0)	1.09 (73)
	37438	122 (400)					
1-1/4" (35)	37441	15 (50)	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	356 (14.0)	1.49 (100)
	37448	76 (250)					
1-1/2" (41)	37451	15 (50)	40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	279 (11.0)	1.67 (112)
	37454	46 (150)					
2" (53)	37461	15 (50)	51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	356 (14.0)	2.20 (148)
	37468	30 (100)					
2-1/2" (63)	37471	15 (100)	62.99 (2.480)	72.10 (2.840)	73.00 (2.875)	483 (19.0)	2.69 (181)
3" (78)	37481	7.6 (25)	77.98 (3.070)	87.90 (3.460)	88.90 (3.500)	762 (30.0)	3.79 (255)
4" (103)	37491	7.6 (25)	101.60 (4.000)	113.30 (4.460)	114.30 (4.500)	863 (34.0)	5.37 (361)

All dimensions in mm (inches)



**Square Lock Design** with copper wire 3/8" thru 1-1/4"



**Interlocked Design** 1-1/2" thru 4" (no ground wire)

### Sealtite Type HTUA:



- Flexible metal core liquid-tight conduit
- Designed for applications where a higher temperature range with UL approval is required or desired.
- Suitable for use in hazardous locations per NEC: Class I, Zone 2 & Div. 2; Class II Div. 1 & 2; Class III Div. 1 & 2.
- Approved in US (per NEC) for direct burial applications up to 2".
- Also available in Black by special order.
- Uses standard liquid-tight connectors for easy installation.

For connectors for this conduit, see page 19-20  
 For cutting instructions, see page 37  
 For Chemical Resistance, see page 38

### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight PVC jacket
- Colour: Grey
- Temp. range: -46°C to +105°C (-51°F to +221°F)  
 CSA max: +75°C (+167°F)
- UV (sunlight) Resistant
- Corrosion Resistant
- CSA Approved: #LL15275
- UL Approved: # E18917

### APPLICATIONS:

- Applications for high and low temperature where UL and CSA approvals are required.
- Steel and Petrochemical industries

Anamet Canada Inc.  
 PO Box 240, 36 Wolfe St.  
 Frankford, Ontario K0K 2C0

Phone: (613) 398-1313  
 Fax: (613) 398-6262  
 www.anametcanada.com  
 E-mail: csr@anametcanada.com

## Conseal Type HTX: Extra High Temperature Flexible Conduit



Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	13041	30	12.29 (0.484)	17.5 (0.690)	18.00 (0.710)	102 (4.0)	0.35 (24)
1/2" (16)	13061	30	15.80 (0.622)	20.80 (0.820)	21.30 (0.840)	152 (6.0)	0.42 (28)
3/4" (21)	13071	30	20.83 (0.820)	26.17 (1.030)	26.67 (1.050)	203 (8.0)	0.55 (37)
1" (27)	13081	30	26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	254 (10.0)	0.80 (54)
1-1/4" (35)	13090	15	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	318 (12.5)	1.13 (76)
1-1/2" (41)	13100	15	40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	381 (15.0)	1.45 (97)
2" (53)	13110	15	51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	508 (20.0)	1.67 (112)

All dimensions in mm (inches)

Modified S Profile with cord packing 3/8" thru 1"

Square Lock Profile with cord packing 1-1/4" thru 2"



### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight TPE jacket
- Colour: Yellow
- Temp. range: -60°C to +135°C (-76°F to +275°F)  
Intermittent to +150°C (+302°F)
- UV (sunlight) Resistant
- Extra Corrosion Resistant
- Oil Resistant

### APPLICATIONS:

- Extreme duty applications
- Extreme high or low temperature requirements
- Applications where no approvals are required

### Conseal Type HTX:

- Flexible metal core liquid-tight conduit
- Designed for extreme temperatures. (-60°C to +135°C)
- Available standard in Yellow.
- Also available by special order in other colours. (consult factory)
- Sequentially meter marked for easy cutting and stock control.
- Uses standard liquid-tight connectors for easy installation.
- Available in custom cut lengths

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37





## Sealtite Type HCX: Extreme Temperature Flexible Conduit

Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	39102	30 (100)	12.32 (0.485)	17.53 (0.690)	18.03 (0.710)	101 (4.0)	0.31 (21)
1/2" (16)	39112	30 (100)	15.75 (0.620)	20.83 (0.820)	21.34 (0.840)	127 (5.0)	0.37 (25)
3/4" (21)	39122	30 (100)	20.70 (0.815)	26.16 (1.030)	26.67 (1.050)	152 (6.0)	0.58 (39)
1" (27)	39131	30 (100)	26.16 (1.030)	32.77 (1.290)	33.40 (1.315)	203 (8.0)	0.76 (51)
1-1/4" (35)	39141	15 (50)	34.80 (1.370)	41.53 (1.635)	42.16 (1.660)	229 (9.0)	0.98 (66)
1-1/2" (41)	39151	15 (50)	40.01 (1.575)	47.37 (1.865)	48.26 (1.900)	279 (11.0)	1.55 (104)
2" (53)	39161	15 (50)	51.31 (2.020)	59.44 (2.340)	60.33 (2.375)	355 (14.0)	2.02 (136)

All dimensions in mm (inches)



**Square Lock Design** with  
cord packing 1/4" thru 1-1/4"

**Interlocked Design** 1-1/2"  
thru 2"

### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight TPE jacket
- Colour: Black
- Temp. range: -60°C to +150°C (-65°F to +302°F)
- UV (sunlight) Resistant
- Extra Corrosion Resistant
- Oil Resistant

### APPLICATIONS:

- Extreme duty applications
- Extreme high or low temperature requirements
- Applications where no approvals are required

### Sealtite Type HCX:

**RoHS**

- Flexible metal core liquid-tight conduit
- Designed for extreme temperature applications where superior resistance to temperature ranges is required. (-60°C to +150°C)
- Available standard in Black.
- Uses standard liquid-tight connectors for easy installation.

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37

## Sealtite Type EFL: Aluminum Core Flexible Conduit



Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	38002	30 (100)	12.32 (0.485)	17.53 (0.690)	18.03 (0.710)	101 (4.0)	0.21 (14)
1/2" (16)	38012	30 (100)	15.75 (0.620)	20.83 (0.820)	21.34 (0.840)	127 (5.0)	0.24 (16)
3/4" (21)	38022	30 (100)	20.70 (0.815)	26.16 (1.030)	26.67 (1.050)	152 (6.0)	0.28 (19)
1" (27)	38031	30 (100)	26.16 (1.030)	32.77 (1.290)	33.40 (1.315)	203 (8.0)	0.48 (32)
1-1/4" (35)	38041	15 (50)	34.80 (1.370)	41.53 (1.635)	42.16 (1.660)	229 (9.0)	0.63 (42)
1-1/2" (41)	38051	15 (50)	40.01 (1.575)	47.37 (1.865)	48.26 (1.900)	279 (11.0)	0.86 (58)
2" (53)	38061	15 (50)	51.31 (2.020)	59.44 (2.340)	60.33 (2.375)	355 (14.0)	1.16 (78)
2-1/2" (63)	38071	15 (50)	62.99 (2.480)	72.10 (2.840)	73.00 (2.875)	635 (25.0)	1.53 (103)
3" (78)	38081	7.6 (25)	77.98 (3.070)	87.90 (3.460)	88.90 (3.500)	762 (30.0)	1.83 (123)
4" (103)	38091	7.6 (25)	101.60 (4.000)	113.30 (4.460)	114.30 (4.500)	1016 (40.0)	2.92 (196)

All dimensions in mm (inches)

### SPECIFICATIONS:

- Aluminum core with Liquid-tight PVC jacket
- Colour: Grey
- Temp. range: -20°C to +60°C (-4°F to + 140°F)
- UV (sunlight) Resistant
- Corrosion Resistant

### APPLICATIONS:

- Where weight is a concern
- Railcars and locomotives
- Transport Trucks/trailers
- Applications where no approvals are required.

**Square Lock Design** with cord packing 3/8" thru 1-1/4"



**Interlocked Design** 1-1/2" thru 4"



## Sealtite Type EFL:

**RoHS**

- **Flexible aluminum core liquid-tight conduit**
- **Designed for applications where weight is a major concern, as in the transportation industry.**
- **Lightweight.**
- **Uses standard liquid-tight connectors for easy installation.**

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38



## Sealtite Type ZHUA: Zero Halogen/Low Smoke Flexible Conduit

Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	ZHUA002	30 (100)	12.29 (0.484)	17.50 (0.690)	18.00 (0.710)	152 (6.0)	0.37 (25)
1/2" (16)	ZHUA012	30 (100)	15.80 (0.622)	20.80 (0.820)	21.30 (0.840)	178 (7.0)	0.43 (29)
3/4" (21)	ZHUA022	30 (100)	20.83 (0.820)	26.17 (1.030)	26.67 (1.050)	254 (10.0)	0.65 (44)
1" (27)	ZHUA031	30 (100)	26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	305 (12.0)	1.09 (73)
1-1/4" (35)	ZHUA041	15 (50)	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	356 (14.0)	1.49 (100)
1-1/2" (41)	ZHUA051	15 (50)	40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	279 (11.0)	1.67 (112)
2" (53)	ZHUA061	15 (50)	51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	356 (14.0)	2.2 (148)
2-1/2" (63)	ZHUA072	7.6 (25)	62.99 (2.480)	72.10 (2.840)	73.00 (2.875)	483 (19.0)	2.71 (182)
3" (78)	ZHUA081	7.6 (25)	77.98 (3.070)	87.90 (3.460)	88.90 (3.500)	762 (30.0)	3.79 (255)
4" (103)	ZHUA091	7.6 (25)	101.60 (4.000)	113.30 (4.460)	114.30 (4.500)	863 (34.0)	5.39 (362)

All dimensions in mm (inches)



**Square Lock Design** with copper wire 3/8" thru 1-1/4"

**Interlocked Design** 1-1/2" thru 4" (no ground wire)

### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight PUR jacket
- Colour: Black
- Temp. range: -40°C to +80°C (-40°F to +176°F) Dry  
Wet: +60°C (+140°F)  
Oil: +70°C (+158°F)
- UV (sunlight) Resistant
- Corrosion Resistant
- UL Approved to UL-94 V-0 and UL-360. # E18917
- Meets or exceeds: ASTM-E162 (Flame spread); ASTM-E662 (Smoke density); Bombardier SMP-800C (Toxic gas generation)

### APPLICATIONS:

- Commercial applications where Zero Halogen and Low Smoke conduit is specified.
- UL Approved
- Rail & Aerospace Transport
- Commercial buildings

## Sealtite Type ZHUA:



- Flexible metal core liquid-tight conduit
- Special Polyurethane jacket providing maximum protection from toxic gases, smoke density, carbon monoxide levels and HCL levels. Halogen free, flame retardant and low smoke.
- Designed for commercial applications where Zero Halogen and Low Smoke standards are required.
- Suitable for use in hazardous locations per NEC: Class I, Zone 2 & Div. 2; Class II Div. 1 & 2; Class III Div. 1 & 2.
- Uses standard liquid-tight connectors for easy installation.

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37

## Sealtite Type Shieldtite® : EMI/EMP Resistant Flexible Conduit



Trade Size	Item ID	Std. Pkg. METERS	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	450200	AVAILABLE IN RANDOM LENGTHS	12.29 (0.484)	17.50 (0.690)	18.00 (0.710)	152 (6.0)	0.36 (24)
1/2" (16)	450202		15.80 (0.622)	20.80 (0.820)	21.30 (0.840)	178 (7.0)	0.42 (28)
3/4" (21)	450204		20.83 (0.820)	26.17 (1.030)	26.67 (1.050)	254 (10.0)	0.63 (42)
1" (27)	450206		26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	305 (12.0)	0.83 (56)
1-1/4" (35)	450208		35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	356 (14.0)	1.12 (75)
1-1/2" (41)	450210		40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	279 (11.0)	1.43 (96)
2" (53)	450212		51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	356 (14.0)	1.86 (125)
2-1/2" (63)	450214		62.99 (2.480)	72.10 (2.840)	73.00 (2.875)	483 (19.0)	2.46 (165)
3" (78)	450216		77.98 (3.070)	87.90 (3.460)	88.90 (3.500)	762 (30.0)	3.14 (211)
4" (103)	450220		101.60 (4.000)	113.30 (4.460)	114.30 (4.500)	863 (34.0)	4.43 (298)

All dimensions in mm (inches)

Square Lock Design with  
cord packing 1/4" thru 1-1/4"



Interlocked Design 1-1/2"  
thru 4"



### SPECIFICATIONS:

- Bronzecore with Liquid-tight PVC jacket
- Colour: Grey
- Temp. range: -46°C to +105°C (-51°F to +221°F)
- UV (sunlight) Resistant
- Corrosion Resistant
- Special Bronze core provides high-level shielding protection
- Meets MIL-STD-1310D
- Provides shielding effectiveness of 81-119 Db at 1 Mhz to 1 Ghz.


### APPLICATIONS:

- Applications where high shielding is required.
- Military, Power generation, Communications

## Sealtite Type Shieldtite® :

RoHS

- Flexible bronze core liquid-tight conduit
- Designed for applications needing superior EMI and EMP shielding.
- Uses standard liquid-tight connectors for easy installation.

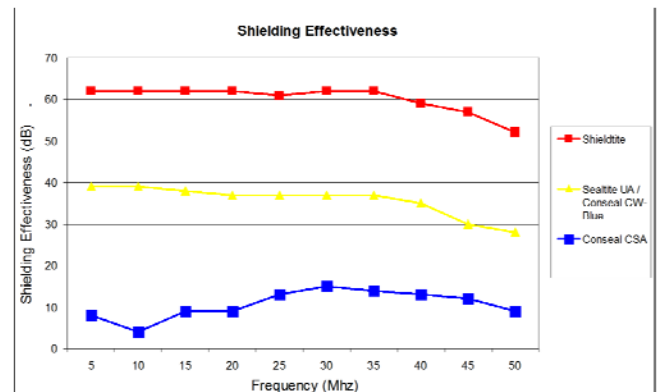

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38



## Sealtite Type NWC: Radiation Resistant Flexible Conduit

Trade	Item	Std. Pkg.	Inside Diameter	Outside Diameter		Bend	Weight
Size	ID	M (FT)	Min	Min	Max	Diameter	Kg/m (lbs/cft)
3/8" (12)	NWC999	30 (100)	12.29 (0.484)	17.50 (0.690)	18.00 (0.710)	406 (16.0)	0.37 (25)
1/2" (16)	NWC009	30 (100)	15.80 (0.622)	20.80 (0.820)	21.30 (0.840)	457 (18.0)	0.43 (29)
3/4" (21)	NWC019	30 (100)	20.83 (0.820)	26.17 (1.030)	26.67 (1.050)	660 (26.0)	0.65 (44)
1" (27)	NWC029	30 (100)	26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	762 (30.0)	1.09 (73)
1-1/4" (35)	NWC039	15 (50)	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	914 (36.0)	1.49 (100)
1-1/2" (41)	NWC049	15 (50)	40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	1016 (40.0)	1.67 (112)
2" (53)	NWC059	15 (50)	51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	1118 (44.0)	2.2 (148)
2-1/2" (63)	NWC069	7.6 (25)	62.99 (2.480)	72.10 (2.840)	73.00 (2.875)	1219 (48.0)	2.71 (182)
3" (78)	NWC079	7.6 (25)	77.98 (3.070)	87.90 (3.460)	88.90 (3.500)	1524 (60.0)	3.79 (255)
4" (103)	NWC089	7.6 (25)	101.60 (4.000)	113.30 (4.460)	114.30 (4.500)	1829 (72.0)	5.39 (362)

All dimensions in mm (inches)



**Square Lock Design** with copper wire 3/8" thru 1-1/4"



**Interlocked Design** 1-1/2" thru 4" (no ground wire)

### SPECIFICATIONS:

- Galvanized steel core with Liquid-tight polyethylene jacket
- Colour: Black
- Temp. range: -40°C to +89°C (-40°F to +192°F)
- Radiation Resistant
- Corrosion Resistant
- Meets IEEE 323-1974 and IEEE 383-1974 guidelines
- Acceptable for use within nuclear containment areas.

### APPLICATIONS:

- Applications requiring radiation resistance
- Power generation, military, medical.

## Sealtite Type NWC:

**RoHS**

- Flexible metal core liquid-tight conduit
- Special polyethylene jacket that provides resistance to radiation.
- Suitable for use in Nuclear Containment areas.
- Uses standard liquid-tight connectors for easy installation.

For connectors for this conduit, see page 19-20  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38



# Metallic Connectors



## SSLT Connectors: Stainless Steel Premium Connectors



### Straight:



Trade	Item	Dimensions			KO Size	Weight	Standard
Size	ID	A	B	C	NPT	Kg(lb)/Pkg	Package
3/8"	SSLT38	37.00 (1.457)	13.00 (0.512)	26.00 (1.024)	1/2"	1.6 (3.5)	25
1/2"	SSLT50	37.00 (1.457)	13.00 (0.512)	29.00 (1.142)	1/2"	2.0 (4.4)	25
3/4"	SSLT75	40.00 (1.575)	15.00 (0.591)	35.00 (1.379)	3/4"	1.1 (2.4)	10
1"	SSLT100	46.00 (1.811)	15.00 (0.591)	45.00 (1.772)	1"	0.7 (1.4)	5


All dimensions in mm (inches)

### 90 Degree:



Trade	Item	Dimensions				KO Size	Weight	Standard
Size	ID	A	B	C	D	NPT	Kg(lb)/Pkg	Package
3/8"	SSLT9038	36.00 (1.417)	13.00 (0.512)	26.00 (1.024)	43.00 (1.693)	1/2"	1.0 (2.2)	10
1/2"	SSLT9050	36.00 (1.417)	13.00 (0.512)	29.00 (1.142)	43.00 (1.693)	1/2"	1.3 (2.9)	10
3/4"	SSLT9075	43.00 (1.693)	15.00 (0.591)	35.00 (1.379)	48.00 (1.890)	3/4"	1.6 (3.5)	10
1"	SSLT90100	48.00 (1.890)	15.00 (0.591)	45.00 (1.772)	59.00 (2.323)	1"	1.2 (2.6)	5

All dimensions in mm (inches)

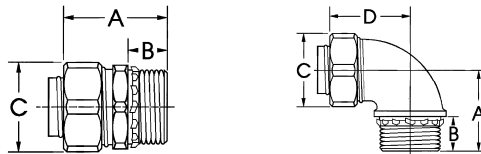

### SSLT Series Liquid-tight Connectors:



- Approved for any metallic flexible conduit as well as NMUA and NMEF Non-metallic conduits
- NPT threads. Available in Metric threads by special order.

#### SPECIFICATIONS:

- 303 Stainless Steel
- Colour: Silver
- NPT Threads
- Temp. range: -45°C to +105°C (-49°F to +221°F)
- cUL Approved: # E234207
- UL Approved: # E234207

### EX Sealtite Connectors: (Optional)



- Approved for Hazardous Location Zones:
  - Ex I M2 - Ex d I / Ex e I
  - Ex II GD - Ex d IIC / Ex e II
- Available by special order from factory.
- Contact Anamet or rep for details.




Phone: (613) 398-1313  
 Fax: (613) 398-6262  
 www.anametcanada.com  
 E-mail: csr@anametcanada.com

Anamet Canada Inc.  
 PO Box 240, 36 Wolfe St.  
 Frankford, Ontario K0K 2C0



## LT Connectors: Standard LT Series


### Straight:



Trade	Item	Dimensions			KO Size	Weight	Standard
Size	ID	A	B	C	NPT	Kg(lb)/Pkg	Package
3/8"	LT38	36.57 (1.440)	12.95 (0.510)	32.00 (1.260)	1/2"	1.6 (3.5)	25
1/2"	LT50	36.57 (1.440)	13.08 (0.520)	35.18 (1.385)	1/2"	2.0 (4.4)	25
3/4"	LT75	39.75 (1.562)	12.70 (0.500)	43.69 (1.720)	3/4"	1.1 (2.4)	10
1"	LT100	46.35 (1.825)	15.06 (0.593)	48.26 (1.900)	1"	0.7 (1.5)	5
1-1/4"	LT125	52.53 (2.068)	15.87 (0.625)	55.27 (2.176)	1-1/4"	1.1 (2.4)	5
1-1/2"	LT150	51.00 (2.008)	15.87 (0.625)	63.68 (2.507)	1-1/2"	0.6 (1.3)	2
2"	LT200	53.42 (2.103)	15.06 (0.593)	80.72 (3.178)	2"	0.8 (1.8)	2

All dimensions in mm (inches)

### 90 Degree:



Trade	Item	Dimensions			KO Size	Weight	Standard
Size	ID	A	B	C	NPT	Kg(lb)/Pkg	Package
3/8"	LT9038	52.37 (2.062)	13.20 (0.520)	59.44 (2.340)	1/2"	1.0 (2.2)	10
1/2"	LT9050	54.05 (2.128)	13.34 (0.525)	58.72 (2.312)	1/2"	1.3 (2.9)	10
3/4"	LT9075	63.88 (2.515)	12.95 (0.510)	67.67 (2.664)	3/4"	1.6 (3.5)	10
1"	LT90100	70.05 (2.758)	17.15 (0.675)	92.46 (3.640)	1"	1.2 (2.6)	5
1-1/4"	LT90125	85.39 (3.362)	17.78 (0.700)	99.36 (3.912)	1-1/4"	0.8 (1.8)	2
1-1/2"	LT90150	88.90 (3.500)	15.34 (0.604)	110.95 (4.368)	1-1/2"	1.1 (2.4)	2
2"	LT90200	104.29 (4.106)	17.27 (0.680)	123.57 (4.865)	2"	1.5 (3.3)	2

All dimensions in mm (inches)

### LT Series Liquid-tight Connectors:



- Approved for any metallic flexible conduit as well as NMUA and NMEF Non-metallic conduits
- Disassembly not required for connection to liquid-tight conduit

#### SPECIFICATIONS:

- Zinc Die-Cast
- Colour: Silver
- Temp. range: -18°C to +90°C (0°F to +194°F)
- CSA Approved: # LR49636
- UL Approved: # E60812

## OEM / End User Options:



### Custom Colours:

*Many of our jacketed conduits can be produced in custom colours. Whether it is to colour code the wiring in an industrial plant or computer center, or to match the local team's colours, Anamet can create a custom colour run of many of our products. Relatively short runs are possible, as we extrude our products in our own facility in Eastern Ontario. This also allows us to provide quick turn around on these custom orders.*

### Cut Lengths:

*Many OEM customers require a large number of the exact same length conduits for making up wiring harnesses. Anamet can provide this value add in our plant at time of production, reducing waste and increasing efficiency. Quick turn around is possible as most products are manufactured in our own plant.*





## Sealtite Type CNP (Type A): Non-metallic Robotic Flexible Conduit

Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	38602	30 (100)	12.32 (0.485)	19.20 (0.755)	19.68 (0.775)	127 (5.0)	0.22 (15)
	38601	76 (250)					
1/2" (16)	38612	30 (100)	15.75 (0.620)	23.11 (0.910)	23.62 (0.930)	152 (6.0)	0.31 (21)
	38611	61 (200)					
	38613	243 (800)					
3/4" (21)	38622	30 (100)	20.70 (0.815)	29.21 (1.150)	29.72 (1.170)	203 (8.0)	0.45 (30)
	38621	53 (150)					
	38623	243 (800)					
1" (27)	38631	30 (100)	26.16 (1.030)	35.94 (1.415)	36.57 (1.440)	305 (12.0)	0.64 (43)
	38633	152 (500)					
1-1/4" (35)	38641	15 (50)	34.79 (1.370)	45.72 (1.800)	46.35 (1.825)	356 (14.0)	0.86 (58)
	38643	61 (100)					
1-1/2" (41)	38651	15 (50)	40.26 (1.585)	51.94 (2.045)	52.83 (2.080)	406 (16.0)	1.21 (81)
	38653	30 (100)					
2" (53)	38661	15 (50)	51.94 (2.045)	66.17 (2.605)	67.06 (2.640)	457 (18.0)	1.82 (122)
	38663	30 (100)					

All dimensions in mm (inches)



Nylon Reinforced with inner and outer PVC jackets

### SPECIFICATIONS:

- Smooth inner PVC core with outer oil resistant PVC cover bonded together with nylon reinforcing braid
- Colour: Orange
- Temp. range: -20°C to +60°C (-4°F to +140°F)
- UV (sunlight) Resistant
- Oil Resistant
- CSA Approved: # LL15275-10
- UL Approved: # E75863

### APPLICATIONS:

- Automotive applications requiring continuous flexing
- Food machine applications where non-metallic and flexing required

### Sealtite Type CNP:

RoHS



- Non-metallic Type A liquid-tight conduit
- Great for constantly flexing applications
- Good for abrasion and where physical abuse may exist
- Available standard in Orange.
- Also available in Grey by special order.
- Uses Type A Connector only.

For connectors for this conduit, see page 23  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38

Anamet Canada Inc.  
PO Box 240, 36 Wolfe St.  
Frankford, Ontario K0K 2C0

Phone: (613) 398-1313  
Fax: (613) 398-6262  
www.anametcanada.com  
E-mail: csr@anametcanada.com


# NON-METALLIC Series



## Connectors Type STNM / SSNM: Connectors for CNP Type A Conduit (ONLY)




### Straight:



Trade	Item	Dimensions			KO Size	Weight	Std.
Size	ID	A	B	C	NPT	Kg(lb)/Pkg	Pkg.
3/8"	STNM38	54.76 (2.156)	15.09 (0.594)	29.36 (1.156)	1/2"	2.5 (5.6)	25
1/2"	STNM50	65.89 (2.594)	15.09 (0.594)	33.35 (1.313)	1/2"	3.7 (8.1)	25
3/4"	STNM75	65.89 (2.594)	15.09 (0.594)	41.27 (1.625)	3/4"	5.0 (11)	25
1"	STNM100	73.02 (2.875)	18.26 (0.719)	49.23 (1.938)	1"	1.5 (3.2)	5
1-1/4"	STNM125	86.51 (3.406)	19.05 (0.750)	61.11 (2.406)	1-1/4"	2.7 (6.0)	5
1-1/2"	STNM150	87.33 (3.438)	19.05 (0.750)	70.64 (2.781)	1-1/2"	1.4 (3.0)	2
2"	STNM200	100.81 (3.969)	19.05 (0.750)	85.73 (3.375)	2"	1.1 (2.4)	1

All dimensions in mm (inches)

### 90 Degree:



Trade	Item	Dimensions mm (in.)				KO Size	Weight	Std.
Size	ID	A	B	C	D	NPT	Kg(lb)/Pkg	Pkg.
3/8"	STNM9038	51.59 (2.031)	15.09 (0.594)	29.36 (1.156)	31.75 (1.250)	1/2"	3.4 (7.5)	25
1/2"	STNM9050	60.32 (2.375)	15.09 (0.594)	33.35 (1.313)	32.54 (1.281)	1/2"	4.3 (9.5)	25
3/4"	STNM9075	63.50 (2.500)	15.09 (0.594)	41.27 (1.625)	36.53 (1.438)	3/4"	2.5 (5.5)	10
1"	STNM90100	69.85 (2.750)	18.26 (0.719)	49.23 (1.938)	44.45 (1.750)	1"	1.9 (4.1)	5
1-1/4"	STNM90125	88.11 (3.469)	19.05 (0.750)	61.11 (2.406)	50.01 (1.969)	1-1/4"	3.5 (7.7)	5
1-1/2"	STNM90150	91.29 (3.594)	19.05 (0.750)	70.64 (2.781)	57.15 (2.250)	1-1/2"	1.8 (4.0)	2
2"	STNM90200	122.25 (4.813)	19.05 (0.750)	85.73 (3.375)	64.29 (2.531)	2"	1.4 (3.1)	1

All dimensions in mm (inches)

### STNM Series Liquid-tight Connectors:




- Only approved for use with Sealtite Type CNP flexible conduit.

#### SPECIFICATIONS:

- Zinc plated Steel
- Colour: Silver
- CSA Approved.
- UL Approved.

### Stainless Steel Connectors Straight:



Trade	Item	Dimensions			KO Size	Weight	Standard
Size	ID	A	B	C	METRIC	Kg/Pkg	Package
3/8"	SSNM38	36.50 (1.437)	13.00 (0.512)	30.00 (1.181)	M16	1.0	10
1/2"	SSNM50	41.50 (1.634)	13.00 (0.512)	36.00 (1.417)	M20	1.3	10
3/4"	SSNM75	43.50 (1.713)	15.00 (0.591)	41.00 (1.614)	M25	1.6	10
1"	SSNM100	48.00 (1.890)	15.00 (0.591)	50.00 (1.969)	M32	1.2	5

All dimensions in mm (inches)


#### SPECIFICATIONS:

- 303 Stainless Steel
- IP67 - Washdown Application

Phone: (613) 398-1313  
 Fax: (613) 398-6262  
 www.anametcanada.com  
 E-mail: csr@anametcanada.com


Anamet Canada Inc.  
 PO Box 240, 36 Wolfe St.  
 Frankford, Ontario K0K 2C0





## Sealtite Type NMUA (Type B): Non-metallic Flexible Conduit

### NMUA:



Co-extruded spiral with smooth inner and outer walls

Trade	Item	Std. Pkg.	Inside Diameter	Outside Diameter		Bend	Weight
Size	ID	METERS	Min	Min	Max	Diameter	Kg/m (lbs/cft)
3/8" (12)	39302	30	12.29 (0.484)	17.53 (0.690)	18.03 (0.710)	102 (4.0)	0.17 (11)
1/2" (16)	39312	30	15.80 (0.622)	20.83 (0.820)	21.34 (0.840)	165 (6.5)	0.23 (15)
	39313	150					
	39314	300					
3/4" (21)	39322	30	20.83 (0.820)	26.16 (1.030)	26.67 (1.050)	216 (8.5)	0.30 (20)
	39323	150					
1" (27)	39331	30	26.44 (1.041)	32.77 (1.290)	33.40 (1.315)	330 (13.0)	0.40 (27)
1-1/4" (35)	39341	15	35.05 (1.380)	41.40 (1.630)	42.16 (1.660)	406 (16.0)	0.53 (36)
1-1/2" (41)	39353	15	40.01 (1.575)	47.37 (1.865)	48.26 (1.900)	457 (18.0)	0.67 (45)
2" (53)	39361	15	51.31 (2.020)	59.44 (2.340)	60.33 (2.375)	564 (22.2)	1.00 (67)
2-1/2" (63)	39371	8	62.99 (2.480)	72.10 (2.840)	73.00 (2.875)	635 (25.0)	1.35 (91)

\* 2-1/2" is not CSA or UL Approved. All dimensions in mm (inches)

### AC Whip Kits:



Trade	Item ID	Length	Connectors	Wire
Size	Kit	Conduit	Included	Gauge
1/2"	WK5042	4ft	1xStr, 1x90°	3 x #10
1/2"	WK5062	6ft	1xStr, 1x90°	3 x #10
1/2"	WK5082	8ft	1xStr, 1x90°	3 x #10
3/4"	WK7542	4ft	1xStr, 1x90°	2 x #8, 1 x #10
3/4"	WK7562	6ft	1xStr, 1x90°	2 x #8, 1 x #10
3/4"	WK7582	8ft	1xStr, 1x90°	2 x #8, 1 x #10

All dimensions in mm (inches)

### Sealtite Type NMUA :

RoHS



- Non-metallic Type B liquid-tight conduit
- Designed for standard commercial and industrial applications
- Approved in US (per NEC) for direct burial applications
- Also available by special order in other colours. (consult factory)
- Uses special non-metallic connectors for easy installation. Can also be used with standard liquid-tight connector.
- Available in custom cut lengths

For connectors for this conduit, see page 26 (or 19-20)  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38

### SPECIFICATIONS:

- Co-extruded PVC conduit.
- Colour: Grey
- Temp. range: -18°C to +80°C (0°F to +176°F) Dry  
Wet: +60°C (+140°F)  
Oil: +70°C (+158°F)
- UV (sunlight) Resistant
- Oil Resistant
- CSA Approved: # 20817
- UL Approved: # E211327

### KITS:

- Kits assembled with CSA/UL approved components.

### APPLICATIONS:

- HVAC industry
- Commercial and industrial applications requiring UL & CSA Approvals.

# NON-METALLIC Series



## Sealtite Type NMEF (Type B): Non-metallic Flexible Tubing




### NMEF:



Trade Size	Item ID	Std. Pkg. M (FT)	Inside Diameter Min	Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
				Min	Max		
3/8" (12)	39802	30 (100)	12.29 (0.484)	17.53 (0.690)	18.03 (0.710)	102 (4.0)	0.13 (9)
1/2" (16)	39812	30 (100)	15.80 (0.622)	20.83 (0.820)	21.34 (0.840)	165 (6.5)	0.17 (11)
3/4" (21)	39822	30 (100)	20.83 (0.820)	26.16 (1.030)	26.67 (1.050)	216 (8.5)	0.20 (13)
1" (27)	39831	30 (100)	26.44 (1.041)	32.77 (1.290)	33.40 (1.315)	330 (13.0)	0.30 (20)
1-1/4" (35)	39841	30 (100)	35.05 (1.380)	41.40 (1.630)	42.16 (1.660)	406 (16.0)	0.33 (22)
1-1/2" (41)	39853	15 (50)	40.01 (1.575)	47.37 (1.865)	48.26 (1.900)	457 (18.0)	0.40 (27)
2" (53)	39861	15 (50)	51.31 (2.020)	59.44 (2.340)	60.33 (2.375)	564 (22.2)	0.67 (45)

All dimensions in mm (inches)

Co-extruded spiral with smooth inner wall



### SPECIFICATIONS:

- Co-extruded PVC conduit.
- Extra Flexible
- Colour: Black
- Temp. range: -18°C to +80°C (0°F to +176°F)  
Wet: +60°C (+140°F)  
Oil: +70°C (+158°F)
- UV (sunlight) Resistant
- Oil Resistant

### APPLICATIONS:

- OEM machine building.
- Industrial applications where tight bend radii are required.

### Sealtite Type NMEF:



- **Non-metallic Type B liquid-tight tubing**
- **Designed for OEM and industrial applications**
- **Uses special non-metallic connectors for easy installation. Can also be used with standard liquid-tight connector.**
- **Available in custom cut lengths**

For connectors for this conduit, see page 26 (or 19-20)  
For cutting instructions, see page 37  
For Chemical Resistance, see page 38


Phone: (613) 398-1313  
Fax: (613) 398-6262  
www.anametcanada.com  
E-mail: csr@anametcanada.com

Anamet Canada Inc.  
PO Box 240, 36 Wolfe St.  
Frankford, Ontario K0K 2C0



## Non-Metallic Connectors: Connectors for NMUA/NMEF Type B ONLY


### One Piece:



Trade	Item	A	B	C	KO Size	Weight	Standard
<b>Size</b>	<b>ID</b>	<b>Dimensions - STRAIGHT</b>			<b>NPT</b>	<b>Kg(lb)/Pkg</b>	<b>Packaging</b>
3/8"	NMSC38	34.29 (1.350)	13.59 (0.535)	31.52 (1.241)	1/2"	0.3 (0.7)	25
1/2"	NMSC50	36.58 (1.440)	13.59 (0.535)	31.34 (1.234)	1/2"	0.3 (0.7)	25
3/4"	NMSC75	38.48 (1.515)	13.59 (0.535)	38.61 (1.520)	3/4"	0.5 (1.1)	25
		<b>Dimensions - 90°</b>					
3/8"	NMSC9038	53.34 (2.100)	13.59 (0.535)	62.03 (2.442)	1/2"	0.5 (1.1)	25
1/2"	NMSC9050	53.34 (2.100)	13.59 (0.535)	63.60 (2.504)	1/2"	0.5 (1.1)	25
3/4"	NMSC9075	62.36 (2.455)	13.59 (0.535)	71.91 (2.831)	3/4"	0.9 (2.0)	25

All dimensions in mm (inches)


### 3 Piece:

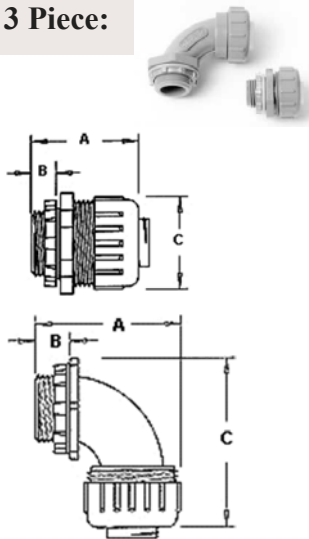

Trade	Item	A	B	C	KO Size	Weight	Standard
<b>Size</b>	<b>ID</b>	<b>Dimensions - STRAIGHT</b>			<b>NPT</b>	<b>Kg(lb)/Pkg</b>	<b>Packaging</b>
3/8"	NMLT38	36.20 (1.425)	13.59 (0.535)	36.09 (1.421)	1/2"	0.5 (1.1)	25
1/2"	NMLT50	36.20 (1.425)	13.59 (0.535)	36.09 (1.421)	1/2"	0.5 (1.1)	25
3/4"	NMLT75	37.46 (1.475)	13.97 (0.550)	40.21 (1.583)	3/4"	0.3 (0.7)	10
1"	NMLT100	49.53 (1.950)	17.02 (0.670)	48.89 (1.925)	1"	0.3 (0.7)	5
1-1/4"	NMLT125	56.31 (2.217)	16.38 (0.645)	61.42 (2.418)	1-1/4"	0.4 (0.9)	5
1-1/2"	NMLT150	54.74 (2.155)	16.76 (0.660)	68.58 (2.700)	1-1/2"	0.3 (0.7)	2
2"	NMLT200	60.96 (2.400)	17.02 (0.670)	85.34 (3.360)	2"	0.4 (0.9)	2
		<b>Dimensions - 90°</b>					
3/8"	NMLT9038	59.06 (2.325)	13.20 (0.562)	61.98 (2.440)	1/2"	0.3 (0.7)	10
1/2"	NMLT9050	59.06 (2.325)	13.34 (0.562)	61.98 (2.440)	1/2"	0.3 (0.7)	10
3/4"	NMLT9075	64.77 (2.550)	12.95 (0.545)	72.14 (2.840)	3/4"	0.4 (0.9)	10
1"	NMLT90100	80.01 (3.150)	17.15 (0.630)	99.62 (3.922)	1"	0.4 (0.9)	5
1-1/4"	NMLT90125	112.77 (4.440)	17.78 (0.645)	118.11 (4.650)	1-1/4"	0.7 (1.5)	5
1-1/2"	NMLT90150	114.55 (4.510)	15.34 (0.660)	122.17 (4.810)	1-1/2"	0.4 (0.9)	2
2"	NMLT90200	128.57 (5.062)	17.27 (0.670)	135.13 (5.320)	2"	0.6 (1.3)	2

All dimensions in mm (inches)

### Swivel (0-90 Degree):

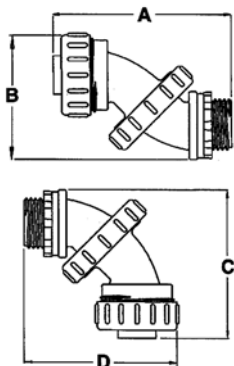

Trade	Item	A	B	C	D	KO Size	Weight	Standard
<b>Size</b>	<b>ID</b>	<b>Dimensions - Swivel 0-90°</b>				<b>NPT</b>	<b>Kg/Pkg</b>	<b>Packaging</b>
1/2"	NMLT5090	70.23 (2.765)	49.40 (1.945)	59.03 (2.324)	60.63 (2.387)	1/2"	0.4 (0.9)	10
3/4"	NMLT7590	89.92 (3.540)	65.79 (2.590)	82.55 (3.250)	71.63 (2.820)	3/4"	0.6 (1.3)	10

All dimensions in mm (inches)



RoHS

#### SPECIFICATIONS:

- Non-metallic PVC material
- Colour: Grey
- Temp. range: -18°C to +90°C (0°F to +194°F)
- UV (sunlight) Resistant
- CSA Approved: # LR49636
- UL Approved: # E60812

# ALUM-FLEX Series



## Aluminum Flex Type CSA: Non-Jacketed Flexible Conduit



Trade Size	Item ID	Std. Pkg. METERS	Inside Diameter Min	Outside Diameter Max	Bend Diameter	Weight Kg/m (lbs/cft)
5/16" (10)	30030	75	7.92 (0.312)	12.59 (0.510)	89 (3.5)	0.088 (6)
	30032	300				
3/8" (12)	30040	75	9.53 (0.375)	15.49 (0.610)	102 (4.0)	0.099 (7)
	30042	300				
7/16" (14)	30050	75	11.10 (0.437)	17.15 (0.675)	114 (4.5)	0.105 (7)
	30052	300				
1/2" (16)	30060	30	15.88 (0.625)	23.37 (0.920)	152 (6.0)	0.245 (16)
	30066	300				
3/4" (21)	30070	30	20.62 (0.812)	28.97 (1.105)	203 (8.0)	0.313 (21)
	30072	150				
	30073	300				
1" (27)	30080	30	25.40 (1.000)	35.05 (1.380)	254 (10.0)	0.481 (32)
	30081	150				
1-1/4" (35)	30090	15	31.75 (1.250)	41.40 (1.630)	318 (12.5)	0.578 (39)
	30092	75				
1-1/2" (41)	30100	15	38.10 (1.500)	49.53 (1.950)	381 (15.0)	0.660 (44)
	30102	45				
2" (53)	30110	15	50.80 (2.000)	62.23 (2.450)	508 (20.0)	0.876 (59)
	30111	30				
2-1/2" (63)	30120	15	63.50 (2.500)	77.72 (3.060)	635 (25.0)	1.180 (79)
3" (78)	30130	15	76.20 (3.000)	90.42 (3.560)	762 (30.0)	1.265 (85)
3-1/2" (91)	30140	15	88.90 (3.500)	103.12 (4.060)	889 (35.0)	1.465 (98)
4" (103)	30150	15	101.60 (4.000)	115.82 (4.560)	1016 (40.0)	1.693 (114)

All dimensions in mm (inches)

Modified S Profile 3/8" thru 4"



### SPECIFICATIONS:

- Aluminum strip-wound core
- Temperature range: +500°C (+932°F) Max.
- CSA Approved: # 20817

### APPLICATIONS:

- Commercial and industrial applications where liquid-tight protection is not required.

### Aluminum Flex Type CSA:



- Non-jacketed aluminum flexible conduit
- Designed for commercial and industrial applications in Canadian market.
- Uses standard 'L-16' series connectors.
- Available in custom cut lengths

For cutting instructions, see pg. 37

Phone: (613) 398-1313  
 Fax: (613) 398-6262  
 www.anametcanada.com  
 E-mail: csr@anametcanada.com

Anamet Canada Inc.  
 PO Box 240, 36 Wolfe St.  
 Frankford, Ontario K0K 2C0

## Aluminum Flex Type RWA: Non-Jacketed Flexible Conduit

Trade Size	Item ID	Std. Pkg. FEET	Inside Diameter		Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
			Min	Max	Min	Max		
3/8" (12)	441503	100	9.52 (0.375)	9.96 (0.393)	14.22 (0.560)	15.49 (0.610)	102 (4.0)	3.0 (7)
	441504	1000						
1/2" (16)	441513	100	15.88 (0.625)	16.38 (0.645)	21.84 (0.860)	23.37 (0.920)	152 (6.0)	4.9 (11)
	441517	1000						
3/4" (21)	441523	100	20.62 (0.812)	21.21 (0.835)	26.54 (1.045)	28.97 (1.105)	203 (8.0)	6.4 (14)
	441526	500						
	441527	1000						
1" (27)	441532	50	25.40 (1.000)	26.42 (1.040)	33.02 (1.300)	35.05 (1.380)	254 (10.0)	10.0 (22)
	441533	300						
	441534	500						
1-1/4" (35)	441542	50	31.75 (1.250)	33.02 (1.300)	39.37 (1.550)	41.40 (1.630)	318 (12.5)	19.0 (42)
1-1/2" (41)	441551	25	38.10 (1.500)	40.01 (1.575)	46.99 (1.850)	49.53 (1.950)	381 (15.0)	21.0 (46)
2" (53)	441561	25	50.80 (2.000)	52.83 (2.080)	59.69 (2.350)	62.23 (2.450)	508 (20.0)	28.0 (62)
2-1/2" (63)	441571	25	63.50 (2.500)	-	72.64 (2.860)	77.72 (3.060)	640 (25.0)	36.0 (80)
3" (78)	441581	25	76.20 (3.000)	-	85.34 (3.360)	90.42 (3.560)	760 (30.0)	42.0 (93)
3-1/2" (91)	441601	25	88.90 (3.500)	-	98.04 (3.860)	103.12 (4.060)	890 (35.0)	52.0 (115)
4" (103)	441591	25	101.60 (4.000)	-	110.74 (4.360)	115.82 (4.560)	1020 (40.0)	61.0 (135)



Modified S Profile  
3/8" thru 4"

All dimensions in mm (inches)

### Aluminum Flex Type RWA:



- Non-jacketed aluminum flexible conduit
- Designed for commercial and industrial applications in US market.
- Uses standard 'L-16' series connectors.
- Available in custom cut lengths.

#### SPECIFICATIONS:

- Aluminum strip-wound core, non-jacketed
- Temperature range: +500°C (+932°F) Max.
- UL Approved: # E98045
- 3/8" only is CSA and UL Approved

#### APPLICATIONS:

- Commercial and industrial applications where liquid-tight is not required and UL approval is needed.

For cutting instructions, see pg. 37

## Steel Flex Type RWS: Non-Jacketed Flexible Conduit



Trade Size	Item ID	Std. Pkg. FEET	Inside Diameter		Outside Diameter		Bend Diameter	Weight Kg/m (lbs/cft)
			Min	Max	Min	Max		
3/8" (12)	455503	100	9.52 (0.375)	9.96 (0.393)	14.22 (0.560)	15.49 (0.610)	102 (4.0)	8.2 (18)
	455506	500						
	455507	1000						
1/2" (16)	455513	100	15.88 (0.625)	16.38 (0.645)	21.84 (0.860)	23.37 (0.920)	152 (6.0)	14.5 (32)
	455526	500						
	455517	1000						
3/4" (21)	455523	100	20.62 (0.812)	21.21 (0.835)	26.54 (1.045)	28.97 (1.105)	203 (8.0)	18.5 (41)
	455526	500						
	455527	1000						
1" (27)	455532	50	25.40 (1.000)	26.42 (1.040)	33.02 (1.300)	35.05 (1.380)	254 (10.0)	35.4 (78)
1-1/4" (35)	455542	50	31.75 (1.250)	33.02 (1.300)	39.37 (1.550)	41.40 (1.630)	318 (12.5)	40.8 (90)
1-1/2" (41)	455551	25	38.10 (1.500)	40.01 (1.575)	46.99 (1.850)	49.53 (1.950)	381 (15.0)	52.6 (116)
2" (53)	455561	25	50.80 (2.000)	52.83 (2.080)	59.69 (2.350)	62.23 (2.450)	508 (20.0)	67.1 (148)

All dimensions in mm (inches)

Modified S Profile  
3/8" thru 2"



### SPECIFICATIONS:

- Zinc-coated steel strip-wound core, non-jacketed
- Temperature range: +450°C (+842°F) Max.
- UL Approved: # E98045

### APPLICATIONS:

- Commercial and industrial applications where liquid-tight is not required and UL approval is needed.

## Steel Flex Type RWS:



- Non-jacketed galvanized steel flexible conduit
- Designed for commercial and industrial applications in US market.
- Uses standard 'L-16' series connectors.
- Available in custom cut lengths.

For cutting instructions, see pg. 37





## Steel Flex Type DSL: Non-Jacketed Extra Flexible Steel Conduit

Actual ID	Description	Item	Std. Pkg.	Inside Diameter	Outside Diameter	Bend Diameter	Weight
Size	ID	ID	M (FT)	Min	Max	mm (in.)	Kg/m (lbs/cft)
3/16"	DSL-3	460012	76 (250)	4.78 (0.188)	6.98 (0.275)	51 (2.0)	0.067 (5)
1/4"	DSL-4	460022	76 (250)	6.35 (0.250)	8.89 (0.350)	51 (2.0)	0.092 (6)
5/16"	DSL-5	460032	76 (250)	7.95 (0.313)	10.97 (0.432)	63 (2.5)	0.105 (7)
		460032-3	914 (3000)				
3/8"	DSL-6	460042	61 (200)	9.53 (0.375)	12.65 (0.498)	76 (3.0)	0.148 (10)
		460042-2	610 (2000)				
7/16"	DSL-7	460052	61 (200)	11.13 (0.438)	14.35 (0.565)	76 (3.0)	0.164 (11)
1/2"	DSL-8	460057	61 (200)	12.70 (0.500)	16.08 (0.633)	76 (3.0)	0.18 (12)
9/16"	DSL-9	460067	61 (200)	14.30 (0.563)	17.78 (0.700)	76 (3.0)	0.213 (14)
5/8"	DSL-10	460072	45 (150)	15.87 (0.625)	19.38 (0.763)	102 (4.0)	0.289 (19)
3/4"	DSL-12	460077	45 (150)	19.05 (0.750)	22.73 (0.895)	102 (4.0)	0.356 (24)

All dimensions in mm (inches)



Square Lock Design

### SPECIFICATIONS:

- Galvanized steel square-lock non-jacketed conduit
- Zinc coated steel provides superior corrosion resistance
- Temperature range: +450°C (+842°F) Max.
- Exceptional flexibility for tight "U" bend radius

### APPLICATIONS:

- OEM applications where tight bend radius is required, but no approvals are required.

### Type DSL Galvanized Steel Conduit:

**RoHS**

- Ultra flexible galvanized steel conduit
- Designed for OEM applications where high flexibility but no approvals are required.
- Installs easily using standard armoured or flexible conduit connectors.
- Available in custom cut lengths

For cutting instructions, see pg. 37

# ULTRA-FLEX Series



## Steel Flex Type DE-710 / DE-183: Standard Flexible Conduit



### DE-710: (UL 1286 Recognized)

Actual ID	Item	Std. Pkg.	Inside Diameter	Outside Diameter		Bend	Weight
Size	ID	METERS	Min	Min	Max	Diameter	Kg/m (lbs/cft)
5/16"	452100	AVAILABLE IN RANDOM LENGTHS	7.95 (0.313)	11.58 (0.456)	12.22 (0.481)	63 (2.5)	0.164 (11)
3/8"	452105		9.53 (0.375)	13.18 (0.519)	13.82 (0.544)	63 (2.5)	0.18 (12)
7/16"	452110		11.13 (0.438)	14.76 (0.581)	15.39 (0.606)	76 (3.0)	0.198 (13)
1/2"	452115		12.70 (0.500)	16.36 (0.644)	16.99 (0.669)	76 (3.0)	0.225 (15)
9/16" OP	452120		14.30 (0.563)	17.98 (0.708)	18.57 (0.731)	76 (3.0)	0.286 (19)
5/8"	452125		15.87 (0.625)	18.75 (0.738)	19.38 (0.763)	89 (3.5)	0.255 (17)
3/4"	452130		19.05 (0.750)	21.34 (0.840)	22.10 (0.870)	102 (4.0)	0.295 (20)

All dimensions in mm (inches)

Square Lock Design



### DE-183: (UL 1286 and UL 183 Recognized)

Actual ID	Item	Std. Pkg.	Inside Diameter	Outside Diameter		Bend	Weight
Size	ID	METERS	Min	Min	Max	Diameter	Kg/m (lbs/cft)
1/2"	552115	AVAILABLE IN RANDOM LENGTHS	12.32 (0.485)	16.26 (0.640)	17.02 (0.670)	63 (2.5)	0.328 (22)
9/16"	552120		13.89 (0.547)	17.96 (0.707)	18.72 (0.737)	76 (3.0)	0.344 (23)
5/8"	552125		15.49 (0.610)	19.56 (0.770)	20.32 (0.800)	83 (3.3)	0.388 (26)
3/4"	552130		18.67 (0.735)	22.73 (0.895)	23.49 (0.925)	89 (3.5)	0.453 (30)

All dimensions in mm (inches)

Square Lock Design



#### SPECIFICATIONS:

- Galvanized steel square-lock non-jacketed conduit
- Zinc coated steel provides superior corrosion resistance
- Temperature range: +450°C (+842°F) Max.
- Exceptional flexibility for tight "U" bend radius
- UL Approved: # E39679
- CSA Acceptable. CSA Report No. LO-4000, 4158

#### APPLICATIONS:

- OEM applications in office furniture and medical markets

### Type DE-710 / 183 Galvanized Steel:



- Ultra flexible galvanized steel conduit
- Designed for OEM applications in the office furniture and medical industries
- UL Recognized to UL 1 and UL 1286. DE-183 further UL Recognized to UL 183.
- Also available in an OVAL version. (Consult factory)
- Available in custom cut lengths

For cutting instructions, see pg. 37

Phone: (613) 398-1313  
 Fax: (613) 398-6262  
 www.anametcanada.com  
 E-mail: csr@anametcanada.com

Anamet Canada Inc.  
 PO Box 240, 36 Wolfe St.  
 Frankford, Ontario K0K 2C0



## Stainless Steel Ultra-Flex Type SL/ UI-Cap: Ultra Flexible Stainless Steel Conduit

### Type SL:



Square Lock Design

Size	Item ID	Std. Pkg. Feet	Inside Diameter Min	Outside Diameter mm (in.)		Bend Dia. mm (in.)	Weight Kg/m (lbs/cft)
				Min	Max		
5/32"	460613	AVAILABLE IN RANDOM LENGTHS	3.86 (0.152)	5.89 (0.232)	6.20 (0.244)	51 (2.0)	1.59 (107)
3/16"	460616		4.65 (0.183)	6.68 (0.263)	6.98 (0.275)	51 (2.0)	1.82 (122)
7/32"	460619		5.23 (0.206)	7.39 (0.291)	7.77 (0.306)	51 (2.0)	2.10 (141)
1/4"	460622		6.22 (0.245)	8.38 (0.330)	8.76 (0.345)	51 (2.0)	2.50 (168)
9/32"	460626		7.27 (0.286)	9.17 (0.361)	9.55 (0.376)	63 (2.5)	2.72 (183)
5/16"	460628		7.67 (0.302)	10.46 (0.412)	10.85 (0.427)	63 (2.5)	2.95 (198)
3/8"	460634		9.22 (0.363)	12.01 (0.473)	12.52 (0.493)	76 (3.0)	3.41 (229)
1/2"	460643		12.27 (0.483)	15.32 (0.603)	15.82 (0.623)	83 (3.3)	4.54 (305)

All dimensions in mm (inches)

### Type UI-CAP:



Interlocked Design

Actual ID Size	Item ID	Std. Pkg. Feet	Inside Diameter Min	Outside Diameter mm (in.)		Bend Dia. mm (in.)	Weight Kg/m (lbs/cft)
				Min	Max		
5/32"	451550	AVAILABLE IN RANDOM LENGTHS	4.06 (0.160)	6.48 (0.255)	6.86 (0.270)	63 (3.0)	3.00 (202)
3/16"	451554		4.57 (0.180)	6.98 (0.275)	7.37 (0.290)	63 (3.0)	3.63 (244)
1/4"	451564		6.22 (0.245)	8.64 (0.340)	9.02 (0.355)	63 (3.0)	4.54 (305)
5/16"	451568		7.87 (0.310)	10.29 (0.405)	10.21 (0.420)	63 (3.0)	5.68 (382)
3/8"	451572		9.40 (0.370)	12.32 (0.485)	12.83 (0.505)	63 (3.0)	6.58 (442)
7/16"	451574		10.97 (0.432)	13.89 (0.547)	14.40 (0.567)	126 (5.0)	7.72 (519)
1/2"	451576		12.57 (0.495)	15.49 (0.610)	16.00 (0.630)	126 (5.0)	7.26 (488)

All dimensions in mm (inches)

### Type SL and Type UI-CAP:

**RoHS**

- Flexible Stainless Steel conduit
- Designed for OEM applications where corrosion is an issue and no approvals are required.
- Type SL: Square-locked profile.
- Type UI-Cap: Fully-interlocked profile
- Available in custom cut lengths.

For connectors for this conduit, see page 33  
For cutting instructions, see page 37

#### SPECIFICATIONS:

- Type 302 Stainless Steel square-lock (SL) or fully-interlocked (UI-CAP).
- Temperature range: +450°C (+842°F) Max.

#### APPLICATIONS:

- Applications where corrosion is an issue and where no approvals are required
- Sensor cable protection
- OEM Probe cables

# SS ULTRA-FLEX Series



## Stainless Steel Flex Connectors: For use with Type SL/UI-Cap




### Straight:



SL/UI	Item	Dimensions			KO Size	Weight	Standard
Size	ID	A	B	C	NPT	Kg(lb)/Pkg	Package
3/8"	SSUI38	37.00 (1.457)	13.00 (0.512)	26.00 (1.024)	1/2"	1.6 (3.5)	25
1/2"	SSUI50	37.00 (1.457)	13.00 (0.512)	29.00 (1.142)	1/2"	2.0 (4.4)	25

All dimensions in mm (inches)




### 90 Degree:



SL/UI	Item	Dimensions				KO Size	Weight	Standard
Size	ID	A	B	C	D	NPT	Kg(lb)/Pkg	Package
3/8"	SSUI9038	36.00 (1.417)	13.00 (0.512)	26.00 (1.024)	43.00 (1.693)	1/2"	1.0 (2.2)	10
1/2"	SSUI9050	36.00 (1.417)	13.00 (0.512)	29.00 (1.142)	43.00 (1.693)	1/2"	1.3 (2.9)	10

All dimensions in mm (inches)



Special ferrule allows fitting to accept Ultra Flexible Type SL sizes 3/8" and 1/2". Positive ferrule connection for interconnect to standard NPT applications.

### SPECIFICATIONS:

- 303 Stainless Steel (internal ferrule: Nickel-plated Brass)
- Colour: Silver
- Temp. range: -45°C to +105°C (-49°F to +221°F)

### SSUI Series Stainless Steel Connectors:

- Special ferrule allows connection to either Type SL conduit
- Excellent for harsh installation
- Excellent protection for small diameter cables or fiber-optics
- Corrosion resistant

Phone: (613) 398-1313  
 Fax: (613) 398-6262  
 www.anametcanada.com  
 E-mail: csr@anametcanada.com

Anamet Canada Inc.  
 PO Box 240, 36 Wolfe St.  
 Frankford, Ontario K0K 2C0



## Firetech: Protective Sleeving

### Firetech Sleeve/Wrap/Tape/Blanket:

- Flexible Sleeving for protection of cables from high heat or flame.
- Silicone based cover over a knitted glass fiber sleeve.
- Superior temperature range for extreme environments.
- Abrasion resistant—Ready for the worst environment.
- The ultimate protection for harsh industrial applications.
- Can be enhanced by adding additional layer of Firetech Lite.
- Sleeve is UL Recognized for Canada and US.



### Firetech VCO:

- Any of the standard Firetech Sleeves can be slit and sewn with a high temperature hook-and-loop closure. This allows easy assembly and removal without disconnecting cables.
- Ordered by required length. Consult Factory for details.



### Firetech Lite:

- Flexible Sleeving for protection of cables from high heat.
- Braided glass fiber sleeve.
- Superior temperature range for extreme environments.
- Can be used to increase heat resistance of Firetech Sleeve.



### Firetech Connectors:

- Anamet Stainless Steel fittings for Firetech come with a special internal collar to allow the Firetech Sleeve to be held firmly, creating a method of sealing the ends of the sleeve that is stronger than Tape. Allows interconnect into standard NPT applications and provides a cleaner finished installation.





## Firetech SLEEVE



The following part numbers are available in non-standard lengths as required:

FTS-4 (1/4")  
 FTS-6 (3/8")  
 FTS-8 (1/2")  
 FTS-12 (3/4")  
 FTS-16 (1")

Change part number to:  
 FTS-x-9

Description	Inside Diameter	Weight Kg(lb)	Std. Pkg.
	Inches (mm)	per package	FEET
FTS-4-5	1/4" (6)	1.60 (3.53)	50
FTS-5-5	5/16" (8)	1.80 (3.97)	50
FTS-6-5	3/8" (10)	2.25 (4.96)	50
FTS-7-5	7/16" (11)	2.50 (5.51)	50
FTS-8-5	1/2" (13)	2.95 (6.50)	50
FTS-10-5	5/8" (16)	3.20 (7.05)	50
FTS-12-5	3/4" (19)	3.85 (8.49)	50
FTS-14-5	7/8" (22)	4.10 (9.04)	50
FTS-16-5	1" (25)	4.75 (10.47)	50
FTS-18-5	1-1/8" (29)	5.00 (11.02)	50
FTS-20-5	1-1/4" (32)	5.90 (13.01)	50
FTS-22-5	1-3/8" (35)	6.80 (14.99)	50
FTS-24-5	1-1/2" (38)	7.75 (17.09)	50
FTS-26-5	1-5/8" (41)	7.95 (17.53)	50
FTS-28-5	1-3/4" (44)	8.20 (18.08)	50
FTS-32-5	2" (51)	9.10 (20.06)	50
FTS-36-5	2-1/4" (57)	9.75 (21.49)	50
FTS-40-5	2-1/2" (64)	10.45 (23.04)	50
FTS-44-5	2-3/4" (70)	11.60 (25.57)	50
FTS-48-5	3" (76)	13.20 (29.10)	50
FTS-52-5	3-1/4" (83)	15.70 (34.61)	50
FTS-56-5	3-1/2" (89)	16.35 (36.05)	50
FTS-60-5	3-3/4" (95)	16.80 (37.04)	50
FTS-64-5	4" (102)	17.50 (38.58)	50
FTS-72-5	4-1/2" (114)	18.40 (40.56)	50
FTS-80-5	5" (127)	19.20 (42.33)	50

## SPECIFICATIONS:

- Knitted glass fiber coated with silicone rubber (non-asbestos)
- Colour: Red
- Temperature range:  
 +260°C (500°F) Continuous  
 +1090°C (2000°F) 15-20 min.  
 +1650°C (3000°F) 15-30 sec.
- Firetech Tape rated 246°C (475°F)
- Silicone cover sheds molten metal/glass immediately avoiding heat transfer
- UL Recognized for Canada and US—File # E321462 (Sleeve only)

## APPLICATIONS:

- Extreme duty applications
- Extreme high heat or flame

## Firetech WRAP



Description	Width	Weight Kg(lb)	Std. Pkg.
	Inches (mm)	per package	FEET
FTW-1-5	1" (25)	1.35 (2.98)	50
FTW-2-5	2" (51)	2.25 (4.96)	50
FTW-3-5	3" (76)	3.65 (8.05)	50
FTW-4-5	4" (102)	4.75 (10.47)	50
FTW-5-5	5" (127)	5.90 (13.01)	50

All dimensions inches(mm)

## TAPE



Description	W x L x Thickness	Weight Kg(lb)	Std. Pkg.
	Inches (metric)	per roll	
FTT-16	1" x 432" x .020" (25.4mm x 10.9m x 0.51mm)	0.14 (0.31)	Per Roll
FTT-24	1 1/2" x 432" x .060" (38.1mm x 10.9m x 1.52mm)	0.45 (0.99)	Per Roll

## BLANKET



Description	Width inches (mm)	Weight Kg(lb)	Std. Pkg.
	& Sides Coated	per foot	
FSH-36-2	36" (914mm) FSH-36-2 coated 2 sides	0.36 (0.79)	Per Foot
FSH-60-2	60" (1,524mm) FSH-60-2 coated 2 sides	0.91 (2.01)	Per Foot
FSH-40-1	40" (1,014mm) FSH-40-1 coated 1 side	0.60 (1.32)	Per Foot

Phone: (613) 398-1313  
 Fax: (613) 398-6262  
 www.anametcanada.com  
 E-mail: csr@anametcanada.com

Anamet Canada Inc.  
 PO Box 240, 36 Wolfe St.  
 Frankford, Ontario K0K 2C0





## Firetech Lite: Extreme Temperature Sleeve

### Firetech Lite:



Description	Inside Diameter	Weight Kg(lb)	Std. Pkg.
	Inches(mm)	per package	FEET (M)
FTL-8-5	1/2" (13)	2.95 (6.50)	330 (101)
FTL-12-5	3/4" (19)	3.85 (8.49)	300 (91)
FTL-16-5	1" (25)	4.75 (10.47)	290 (88)
FTL-20-5	1-1/4" (32)	5.90 (13.01)	280 (85)
FTL-24-5	1-1/2" (38)	7.75 (17.09)	225 (69)
FTL-32-5	2" (51)	9.10 (20.06)	190 (58)
FTL-40-5	2-1/2" (64)	10.45 (23.03)	180 (55)
FTL-48-5	3" (76)	13.20 (29.10)	170 (52)
FTL-64-5	4" (102)	17.50 (38.58)	140 (43)

All dimensions in mm (inches)

### SPECIFICATIONS:

- Braided glass fibre sleeve
- Colour: White
- Temperature range:  
+538°C (1000°F) Continuous  
+705°C (1300°F) 15-20 min.
- Provides economical cable protection where exposure to molten splash, oils or moisture is not a factor.
- Can be used in conjunction with Firetech Sleeve to provide additional insulation values.

### APPLICATIONS:

- High heat areas where splash and oils are not a factor.

## SSFT Series Liquid-tight Connectors:

### Straight:



FTS/FTL Size	Item ID	Dimensions			KO Size NPT	Weight Kg(lb)/Pkg	Standard Package
		A	B	C			
1/2"	SSFT38	37.00 (1.457)	13.00 (0.512)	26.00 (1.024)	1/2"	1.6 (3.5)	25
5/8"	SSFT50	37.00 (1.457)	13.00 (0.512)	29.00 (1.142)	1/2"	2.0 (4.4)	25
7/8"	SSFT75	40.00 (1.575)	15.00 (0.591)	35.00 (1.379)	3/4"	1.1 (2.4)	10
1"	SSFT100	46.00 (1.811)	15.00 (0.591)	45.00 (1.772)	1"	0.7 (1.4)	5

All dimensions in mm

### 90 Degree:



FTS/FTL Size	Item ID	Dimensions				KO Size NPT	Weight Kg(lb)/Pkg	Standard Package
		A	B	C	D			
1/2"	SSFT9038	36.00 (1.417)	13.00 (0.512)	26.00 (1.024)	43.00 (1.693)	1/2"	1.0 (2.2)	10
5/8"	SSFT9050	36.00 (1.417)	13.00 (0.512)	29.00 (1.142)	43.00 (1.693)	1/2"	1.3 (2.9)	10
7/8"	SSFT9075	43.00 (1.693)	15.00 (0.591)	35.00 (1.379)	48.00 (1.890)	3/4"	1.6 (3.5)	10
1"	SSFT90100	48.00 (1.890)	15.00 (0.591)	45.00 (1.772)	59.00 (2.323)	1"	1.2 (2.6)	5

All dimensions in mm

# Cutting Instructions



## Conduit Cutting instructions:

### Cutting Anamet Conseal and Sealtite conduits:


#### Importance of clean, square cut:

- Easier connector attachment
- Conduit makes full contact with base of liquid-tight connector
- Gives greater holding power to connector
- Assures a liquid-tight assembly throughout.

#### Cutting Conseal and Sealtite Conduit with metallic core:

- Cut Conseal and Sealtite square using a sharp saw to avoid excessive burns. Conseal is sequentially marked at meter intervals for easy measuring.
- Hack saw: Suggest blade having 32 teeth per inch.
- Band Saw: Suggest blade 1/2" wide x 0.025" thick having 24 teeth per inch, no set. Blade speed should be approximately 350 feet per minute.
- Do NOT use abrasive wheel.

**CAUTION: Ground conductor required. DO NOT HANDLE BELOW -25°C.**



#### Hand cutting Sealtite Non-metallic Conduit:

- Square clean cuts are important for effective assembly with electrical connectors. Type B conduit is sequentially marked at meter intervals for easy measuring.
- Sealtite Type CNP and NMUA conduit can be cut most easily with a sharpened 'parrot-shaped' electrical cable slicer.
- Good clean cuts can also be made with a sharp shoe knife. A little liquid detergent used to 'wet' the knife blade will reduce frictional drag appreciably.
- Cutting the conduit with a saw is not recommended.

**CAUTION: Ground conductor required. DO NOT HANDLE BELOW -18°C.**

#### Hand cutting Aluminum Flex:

- Putting electrical tape around the point to cut will avoid conduit fr
- Cut in center of tape, using a hacksaw, 32 teeth per inch, no set. Tl more square cut.

#### Benfield Saw Box: (optional)

The Benfield Saw Box is a metal jig designed for easy clean cutting of flexible liquid-tight conduit



Conseal and NMUA is packaged in shrink wrap up to 1-1/2". Conseal 2" and all sizes of Sealtite are packaged in boxes.

Phone: (613) 398-1313  
Fax: (613) 398-6262  
www.anametcanada.com  
E-mail: csr@anametcanada.com

Anamet Canada Inc.  
PO Box 240, 36 Wolfe St.  
Frankford, Ontario K0K 2C0

The following chart gives a guideline of chemical resistance of PVC jacketed conduits.

1 - Excellent 2 - Good 3 - Fair 4 - Poor

Chemical	Concent	Resista
Acetate Solvents		4
Acetic Acid	10%	2
Acetic Acid (Glacial)		3
Acetone		4
Acrylonitrile		1
Alcohols (Aliphatic)		3
Aluminum Chloride		1
Aluminum Sulfate		1
Ammonia (Anhydrous)		4
Ammonia (Aqueous)		1
Ammoniated Latex		1
Ammonium Chloride		1
Ammonium Hydroxide		1
Amyl Acetate		4
Aniline Oils		4
Aromatic Hydrocarbons		4
Asphalt		4
ASTM Fuel A		3
ASTM Fuel B		4
ASTM #1 Oil		2
ASTM #3 Oil		3
Barium Chloride		1
Barium Sulphide		1
Barium Hydroxide		1
Benzene (Benzol)		4
Benzene (Petroleum Ether)		3
Black Liquor		1
Bordeaux Mixture		1
Boric Acid		1
Butyl Acetate		4
Butyl Alcohol		2
Calcium Hydroxide		1
Calcium Hypochloride		1
Carbolic Acid (Phenol)		2
Carbon Dioxide		1
Carbon Disulphide		4
Carbon Tetrachloride		4
Carbonic Acid		1
Casein		1
Caustic Soda		1
Chlorine Gas (wet)		4
Chlorine Gas (dry)		4
Chlorine (water solution)		3
Chlorobenzene		4
Chlorinated Hydrocarbons		4
Chromic Acid	10%	2
Citric Acid		1
Coal Tar		4
Coconut Oil		3
Corn Oil		1
Cottonseed Oil		3

Chemical	Concent	Resist
Creosote		4
Cresol		3
Cresylic Acid		4
Cyclohexane		2
DDT Weed Killer		1
Dibutyl Phthalate		4
Diesel Oils		3
Diethylene Glycol		2
Diethyl Ether		1
Di-isodecyl Phthalate		4
Diocetyl Phthalate		4
Dow General Weed Killer		4
Dow General Weed Killer		2
Ethyl Alcohol		3
Ethylene Dichloride		4
Ethylene Glycol		2
Ferric Chloride		1
Ferric Sulphate		1
Ferrous Chloride		1
Ferrous Sulphate		1
Formaldehyde		4
Fuel Oil		2
Furfural		3
Gallic Acid		1
Gasoline (Hi test)		3
Glycerine		1
Grease		1
Green Sulphate Liquor		1
Heptachlor in Petroleum		1
Heptane		3
Hexane		3
Hydrobromic Acid		1
Hydrochloric Acid	10%	1
Hydrochloric Acid	40%	3
Hydrochloric Acid	70%	4
Hydrofluorobonic Acid		1
Hydrofluorosilicic Acid		1
Hydrogen Peroxide	10%	1
Iso-octane		3
Isopropyl Acetate		4
Isopropyl Acetate		2
Jet Fuels (JP-3, 4 and 5)		3
Kerosene		3
Ketones		4
Linseed Oil		1
Lubricating Oils		1
Magnesium Chloride		1
Magnesium Hydroxide		1
Magnesium Sulphate		1
Malathion 50 in Aromatics		4
Malic Acid		1

Chemical	Concent	Resista
Methyl Acetate		4
Methyl Alcohol		3
Methyl Bromide		4
Methyl Ethyl Ketone		4
Methylene Chloride		4
Mineral Oil		1
Monochlorobenzene		4
Muriatic Acid (see Hydrochloric Acid)		-
Naphtha		3
Naphthalene		4
Nitric Acid	10%	1
Nitric Acid	35%	1
Nitric Acid	70%	4
Oleic Acid		1
Oleum		4
Oxalic Acid		1
Pentachlorophenal in Oil		2
Pentane		3
Perchloroethylene		4
Petroleum Ether		3
Phenol		2
Phosphoric Acid	85%	1
Pitch		2
Potassium Hydroxide		1
Propyl Alcohol		2
Ritchfield "A" Weed Killer		3
Sea Water		1
Sodium Hydroxide	10%	1
Sodium Hydroxide	50%	1
Soybean Oil		3
Sodium Cyanide		1
Stoddard Solvent		4
Styrene		4
Sulpher Dioxide (liquid)		4
Sulpheric Acid	50%	1
Sulpheric Acid	98%	4
Sulphurous Acid		2
Tall Oil		4
Tannic Acid		1
Toluene		4
Trichlorethylene		4
Triethanol Amine		3
Tricresyl Phosphate (Skydrol)		4
Turpentine		3
Vinegar		1
Vinyl Chloride		4
Water		1
White Liquor		1
Xylene		4
Zinc Chloride		1
Zinc Sulphate		1



## ANA-QUICK<sup>®</sup> Nylon Flexible Conduit



*Anamet Canada introduces, ANA-QUICK—the latest innovation for installing wiring for Machine Builders.*




ANA-QUICK conduit:  
available in 3 types.

- **Easy installation**
- **IP68 Rated Conduit, IP67 Rated Fittings**
- **CSA & UL Recognized (AC6S series & fittings)**
- **Wide variety of accessories available**
- **Conduit available in 3 types:**
  - **AC6L—thin wall Nylon 6**
  - **AC6S—standard wall Nylon 6 CSA & UL Rec.**
  - **AC12S—standard wall Nylon 12 for Robotics**
- **Connectors available in NPT, Metric & PG connections.**
- **All product available from stock at Anamet's Canadian plant in Colborne, Ontario.**



New design eliminates need for extra tools to remove fittings. IP67 is standard for these fittings.

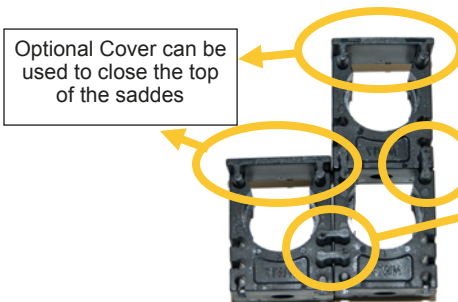

Optional Cover can be used to close the top of the saddles

Small linking pieces are available to allow saddles to be combined



ANA-QUICK: A Complete System!

ANA-QUICK Saddles and Covers are uniquely designed to allow combination for high density installations. (Covers are ordered separately from saddles.)



ANA-QUICK Nylon System is in a separate catalogue.  
Please contact your rep or customer service to get a copy sent to you.



## ANAMET CANADA Complete Product Offering:

### Liquidtight Conduits:

- **Conseal Metallic Flexible Conduits**
  - Type CSA Canada's standard in CSA Approved Flexible Conduit
  - Type CW Computer Blue CSA Approved
  - Type HTC High Temperature Flexible Conduit
  - Type HTX Extreme Temperature Flexible Conduit
- **Sealtite Metallic Flexible Conduits:**
  - Type EFST Extra Flexible Conduit
  - Type UA-CSA Dual Rated CSA and UL Conduit
  - Type OR Oil Resistant Conduit
  - Type MTC Metallic Machine Tool Conduit
  - Type HC High Temperature Conduit
  - Type HTUA High Temperature, UL Approved Conduit
  - Type HCX High and Low Temperature Conduit
  - Type EFL Aluminum Core Conduit
  - Type ZHUA Low Smoke, Zero Halogen UL approved Conduit
  - Type Shieldtite High EMI/EMP Shielded Conduit
  - Type NWC Nuclear Radiation Resistant Conduit
- **Sealtite Non-Metallic Conduits**
  - Type NMUA CSA / UL Conduit
  - Type NMEF Extra Flexible OEM Tubing
  - Type CNP Type A CSA/UL Orange Conduit
- **ANA-QUICK Nylon Conduits**
  - Complete conduit system for machine building applications

### Non-Jacketed Conduits:

- **Aluminum - No Jacket:**
  - CSA Aluminum CSA approved flexible Conduit
  - RW Aluminum UL approved flexible Conduit
  - RW Steel UL approved steel flexible Conduit
- **Galvanized Steel - No Jacket**
  - Type DSL Extra Flexible OEM Conduit
  - Type DE-710/183 Extra Flexible Heavy Duty Conduit
- **Stainless Steel**
  - Type SL Standard Duty OEM Conduit
  - Type UI Cap Heavy Duty OEM Conduit

### Protective Sleeving:

- **Firetech Protective Sleeving**
  - Sleeve, Wrap, Tape Extreme temperature sleeving, wrap, tape and blanket

### Connectors:

- LT Series For Conseal and Sealtite conduits
- SSLT Series SS Connectors for Conseal and Sealtite conduits
- NMLT Series For Type NMUA and NMEF conduits
- STNM Series For Type CNP conduit

Contact your local rep, or the factory to be sent our complete catalog.

## ANAMET CANADA INC.

36 Wolfe St. PO Box 240  
Frankford, Ontario K0K 2C0

Telephone: (613) 398-1313

Fax: (613) 398-6262

<http://www.anametcanada.com/>

E-mail: [csr@anametcanada.com](mailto:csr@anametcanada.com)