NEC/CEC:

Listed for Ordinary (Unclassified) Locations

Applications

- Use in branch circuit wiring for wet, damp or dry locations.
- May be used as a junction box or a device box for switches, receptacles, GFCIs, etc.
- Lampholders are for use in exterior and interior applications to provide safety and security for driveways, doorways and walkways.
- Lighting fixtures are for use in areas where moisture ingress is a concern such as construction sites, tunnels, bridges and subways.

Features

- Rugged continuous and seamless diecast construction prevents entry of dirt, dust and moisture.
- Polyester powder coating is applied for uniform cosmetic coating and weatherproof durability.
- Mounting can be achieved with mounting lugs (provided) or by using the integral mounting knockouts.
- · Smooth, accurately tapped hubs prevent wire abrasion.
- Clear UL marking and volumetric marking cast into each box and extension ring facilitate electrical inspection.
- Continuous box and cover compression ensure complete sealing at gasket interface to prevent moisture entry.
- Lockable covers and covers with integral devices are offered.
- Closure plugs (2), mounting lugs (2) and green ground screw provided with each box.
- Mounting hardware and gasket provided with each cover.
- Locking swivel knuckle on lampholders permits positive lamp positioning and accurate directional aiming.
- Lampholders are supplied with all hardware including locknuts, porcelain sockets and internal gaskets for reliability and weather protection.
- Photocells and lampholders are supplied with long leads (4" from the end of the knuckle) to facilitate wiring.
- Lighting fixtures are factory assembled and fully gasketed to ensure fast and easy installation.
- Complete installation instructions are provided with each item.
- In-Use covers include patented inserts and comply with NEC requirements.
- Lighting fixtures are individually boxed, labeled and bar coded for ease of handling and identification.

Standard Materials/Finishes

- Boxes, extensions, covers, lamp-holders, lighting fixtures, and closure plugs: diecast aluminum
- In-use covers: polycarbonate
- Lugs: stamped aluminum (one- and two-gang boxes), integrally cast (round boxes)
- Cover screws: plated steel
- Gaskets: closed cell foam (covers), fiber (lampholders), closed cell foam or fiber (lighting fixtures)
- Glass: annealed glass
- Sockets: porcelain (lampholders and lighting fixtures)

NEC/CEC Certifications and Compliances

- UL Standard: 514A, 514D, 1598 as applicable
- UL Listed: E2527, E53330
- CSA Standard: C22.2 No. 18.1, C22.2 No. 250.0 as applicable
- cUL Listed: E2527
- NEMA: FB-1, OS-1



Most of the boxes, covers and lampholders are individually shrink wrapped, labeled and bar coded for ease of handling and identification.

Sturdy corrugated boxes with easy lift-off top with shrink wrapping facilitate merchandising. ppleton

0ZAGEDN



EMERSON

One-Gang Weatherproof Outlet Boxes and Extensions

Closure plugs, ground screw and mounting lugs included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

	Depth (Inches)	Wiring Cubic Inch Capacity	Hub Size (Inches)	No. Of Hubs	Catalog Number
0	2	18.3	1/2	4	WSL150 ①
	2	18.3	3/4	4	WSL175
	2	18.3	1/2	3	WSM150 ①
0	2	18.3	3/4	3	WSM175
	2	18.3	1	3	WSM110
0	2	18.3	1/2	5	WSP150
	2	18.3	3/4	5	WSP175
	2	18.3	1/2	5	WSX150
0	2	18.3	3/4	5	WSX175
	2	18.3	1	5	WSX110
F. 2. 3	2-5/8	25.5	1/2	3	WDM150
	2-5/8	25.5	3/4	3	WDM175
	2-5/8	25.5	1	3	WDM110

D Catalog number shown represents gray color. White (Suffix -W) and Bronze (Suffix -B) also available. Consult local sales representative for lead time.

One-Gang Weatherproof Outlet Boxes and Extensions

Closure plugs, ground screw and mounting lugs included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations


Depth (Inches)	Wiring Cubic Inch Capacity	Hub Size (Inches)	No. Of Hubs	Catalog Number
2-5/8	25.5	1/2	5	WDX150
2-5/8	25.5	3/4	5	WDX175
2-5/8	25.5	1	5	WDX110
1	9.5	-	_	WE1
1-1/2	12.5	1/2	4	WEFX50
1-1/2	12.5	3/4	4	WEFX75



One-Gang Box and Extension Dimensions

Closure plugs, ground screw and mounting lugs included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

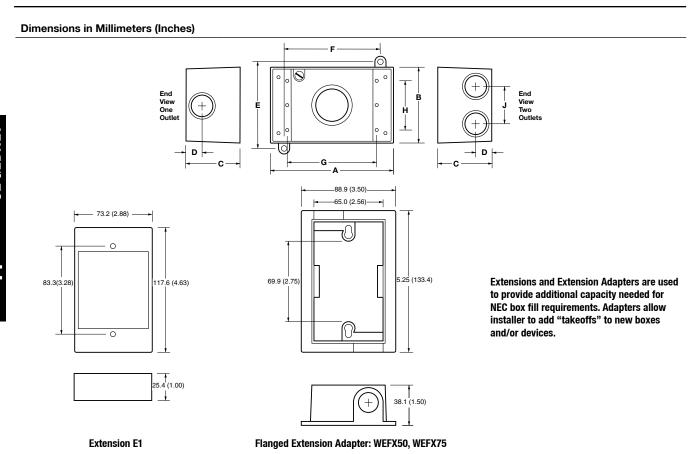

А	В	C	D	E	F	G	Н	J	Catalog Number
115.8 (4.56)	71.4 (2.81)	50.8 (2.00)	17.5 (0.68)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	36.5 (1.43)	WSL150
115.8 (4.56)	71.4 (2.81)	50.8 (2.00)	17.5 (0.68)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	36.5 (1.43)	WSL175
115.8 (4.56)	71.4 (2.81)	50.8 (2.00)	17.5 (0.68)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WSM150
115.8 (4.56)	71.4 (2.81)	50.8 (2.00)	17.5 (0.68)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WSM175
115.8 (4.56)	71.4 (2.81)	50.8 (2.00)	17.5 (0.68)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WSM110
115.8 (4.56)	71.4 (2.81)	50.8 (2.00)	17.5 (0.68)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	36.5 (1.43)	WSP150
115.8 (4.56)	71.4 (2.81)	50.8 (2.00)	17.5 (0.68)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	36.5 (1.43)	WSP175
115.8 (4.56)	71.4 (2.81)	50.8 (2.00)	17.5 (0.68)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WSX150
115.8 (4.56)	71.4 (2.81)	50.8 (2.00)	17.5 (0.68)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WSX175
114.8 (4.52)	70.4 (2.77)	50.8 (2.00)	17.5 (0.68)	86.4 (3.40)	100.1 (3.94)	82.6 (3.25)	47.8 (1.88)	-	WSX110
115.8 (4.56)	71.4 (2.81)	66.8 (2.63)	19.1 (0.75)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WDM150
115.8 (4.56)	71.4 (2.81)	66.8 (2.63)	19.1 (0.75)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WDM175
115.8 (4.56)	71.4 (2.81)	66.8 (2.63)	19.1 (0.75)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WDM110
115.8 (4.56)	71.4 (2.81)	66.8 (2.63)	19.1 (0.75)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WDX150
115.8 (4.56)	71.4 (2.81)	66.8 (2.63)	19.1 (0.75)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WDX175
115.8 (4.56)	71.4 (2.81)	66.8 (2.63)	19.1 (0.75)	77.7 (3.06)	88.9 (3.50)	82.6 (3.25)	47.8 (1.88)	-	WDX110

Visit our website at www.emerson.com or contact us at (800) 621-1506. © June 2016

86

Two-Gang Weatherproof Outlet Boxes and Extensions

Closure plugs, ground screw and mounting lugs included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

	Depth (Inches)	Wiring Cubic Inch Capacity	Hub Size (Inches)	No. of Hubs	Catalog Number
0000	2.2	30.2	1/2	7	WSK250
0 0 1 N	2.2	30.2	3/4	7	WSK275
0	2.2	30.2	1/2	4	WSL250
100 m	2.2	30.2	3/4	4	WSL275
86 6	2.2	30.2	1/2	3	WSM250
Contraction of the second	2.2	30.2	3/4	3	WSM275
8 -	2.2	30.2	1	3	WSM210
0	2.2	30.2	1/2	5	WSP250
JA AN	2.2	30.2	3/4	5	WSP275
8 6 4 6	2.2	30.2	1/2	6	WSR250
0'P 1 90	2.2	30.2	3/4	6	WSR275

Two-Gang Weatherproof Outlet Boxes and Extensions

Closure plugs, ground screw and mounting lugs included.


NEC/CEC: Listed for Ordinary (Unclassified) Locations


	Depth (Inches)	Wiring Cubic Inch Capacity	HubSize (Inches)	No. Of Hubs	Catalog Number
BILLING OF O	2.2	30.2	1/2	7	WST250
o por o	2.2	30.2	3/4	7	WST275
80.00	2.2	30.2	1/2	5	WSX250
O D	2.2	30.2	3/4	5	WSX275
8	2.2	30.2	1	5	WSX210
8 0. 00	2.78	36	1/2	7	WDK250
000	2.78	36	3/4	7	WDK275
1 P IN IN	2.78	36	1	7	WDK210
00.000	2.78	36	1/2	5	WDP250
0	2.78	36	3/4	5	WDP275
P	2.78	36	1	5	WDP210
	1	16	_	_	WE2

Two-Gang Box and Extension Dimensions

NEC/CEC: Listed for Ordinary (Unclassified) Locations

Dimensions in Millimeters (Inches)

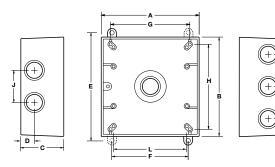



Extension WE2 – Dimensions in Millimeters (Inches) Extensions and Extension Adapters are used to provide additional capacity needed for NEC box fill requirements. Adapters allow installer to add "take-offs" to new boxes and/or devices.

$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$												Catalog
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$									J	K		Number
									-	-	82.6 (3.25)	WSK250
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	115.0											W0K075
	(4.52)	(4.52)	(2.14)	(0.63)	(4.86)	(3.86)	(3.69)	(3.78)	_	_	(3.25)	WSK2/5
	115.0	115.0	54.5	16.0						_		WSI 250
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	(4.52)											1102200
	115.0									_		WSL275
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	(4.52)								(1.50)			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	(4.52)	(4.52)	54.5 (2 14)		(4.86)	96.∠ (3.86)		90.1 (3.78)	-	-		WSM250
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	115.0	115.0	54.5	16.0	123.6	98.2	93.7	96.1				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				(0.63)					-	-	(3.25)	WSM275
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	115.0	115.0	54.5	16.0	123.6	98.2	93.7	96.1			82.6	WEMDIO
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	(4.52)	(4.52)	(2.14)	(0.63)	(4.86)	(3.86)	(3.69)		_	_		VV SIVIZ IU
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	115.0	115.0	54.5		123.6						82.6	WSP250
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$												
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$									38.1	_		WSP275
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	(4.52)	(4.52)	(2.14)	(0.63)	(4.80)	(3.80)	(3.09)					
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	(4.52)	(4.52)	(2 14)	(0.63)	(4.86)	90.2 (3.86)	93.7 (3.69)	(3.78)	(1.50)	-		WSR250
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$					123.6	98.2	93 7		38.1			
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	(4.52)	(4.52)			(4.86)	(3.86)				-	(3.25)	WSR275
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	115.0					98.2				38.1		WETZED
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	(4.52)	(4.52)	(2.14)	(0.63)	(4.86)	(3.86)	(3.69)	(3.78)	_			W3120U
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	115.0	115.0	54.5	16.0	123.6	98.2	93.7	96.1	_	38.1	82.6	WST275
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$										(1.50)		101215
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	115.0	115.0	54.5		123.6				-	-	82.6	WSX250
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$												
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	(4.52)	(4 52)				90.2 (3.86)			-	-	02.0 (3.25)	WSX275
$\begin{array}{c c c c c c c c c c c c c c c c c c c $												
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	(4.52)	(4.52)	(2.14)	(0.63)	(4.86)	(3.86)	(3.69)		-	-		WSX210
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	115.0	115.0	67.8		123.6	98.2	93.7		38.1			WDK250
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	(4.52)	(4.52)	(2.66)	(0.85)	(4.86)	(3.86)	(3.69)			-	(3.25)	WDK250
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	115.0		67.8			98.2				_		WDK275
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$		(4.52)										1101(215
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	115.0	115.0	67.8	21.7	123.6	98.2	93.7	96.1	38.1	-	82.6	WDK210
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$												-
115.0 115.0 67.8 21.7 123.6 98.2 93.7 96.1 38.1 82.6 WDP275 (4.52) (4.52) (2.66) (0.85) (4.86) (3.86) (3.69) (3.78) (1.50) - (3.25) WDP275 115.0 115.0 67.8 21.7 123.6 98.2 93.7 96.1 38.1 - 82.6 WDP275	(4.52)		07.8 (2.66)						38.1 (1.50)	-		WDP250
(4.52) (4.52) (2.66) (0.85) (4.86) (3.86) (3.69) (3.78) (1.50) - (3.25) WDP275 115.0 115.0 67.8 21.7 123.6 98.2 93.7 96.1 38.1 82.6 WDP210											· · · ·	
115.0 115.0 67.8 21.7 123.6 98.2 93.7 96.1 38.1 82.6 wpp210	(4.52)	(4.52)	(2.66)	(0.85)	(4.86)	(3.86)		(3.78)	(1.50)	-	(3.25)	WDP275
	115.0			21.7	123.6	98.2	93.7		38.1			
										-		WDP210

~ **EMERSON**

Round Weatherproof Outlet Boxes and Extensions

Closure plugs, ground screw and mounting lugs included.


@Appleton 026EDNEY

COMMERCIAL PRODUCTS: COMMERCIAL SWITCH AND OUTLET BOXES AND COVERS

NEC/CEC: Listed for Ordinary (Unclassified) Locations

	Depth (Inches)	Wiring Cubic Inch Capacity	Hub Size (Inches)	No. Of Hubs	Catalog Number
	1.62	16	1/2	5	WRX50 ①
	1.62	16	3/4	5	WRX75 ①
	1.62	16	1/2	5	WRX50CG
	1.62	16	3/4	5	WRX75CG
0	1.62	16.5	1/2	4	WERX50
S	1.62	16.5	3/4	4	WERX75

Dimensions in Millimeters (Inches)

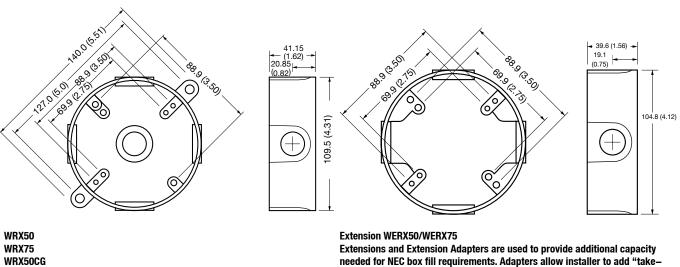

offs" to new boxes and/or devices.

WRX75CG

1 Catalog number shown represents gray color. White (Suffix -W) and Bronze (Suffix -B) also available. Consult local sales representative for lead time.

Weatherproof Lampholders

NEC/CEC: Listed for Ordinary (Unclassified) Locations

Locking swivel knuckle permits lamp positioning and aiming.

Supplied with porcelain sockets, gaskets, extra long leads, locknut and other hardware. For aiming horizontal or downward. For use with 150 W.

	Description	Color	Catalog Number	Dimensions in Millimeters (Inches)
a the	Unfinished Lampholder	Metal	WLU1	o 76.2 (3.00)
0	Finished Lampholder	Gray	WLI ()	


① Catalog number shown represents gray color. White (Suffix -W) and Bronze (Suffix -B) also available. Consult local sales representative for lead time.



One-Gang Weatherproof Covers

Gasket and mounting hardware included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

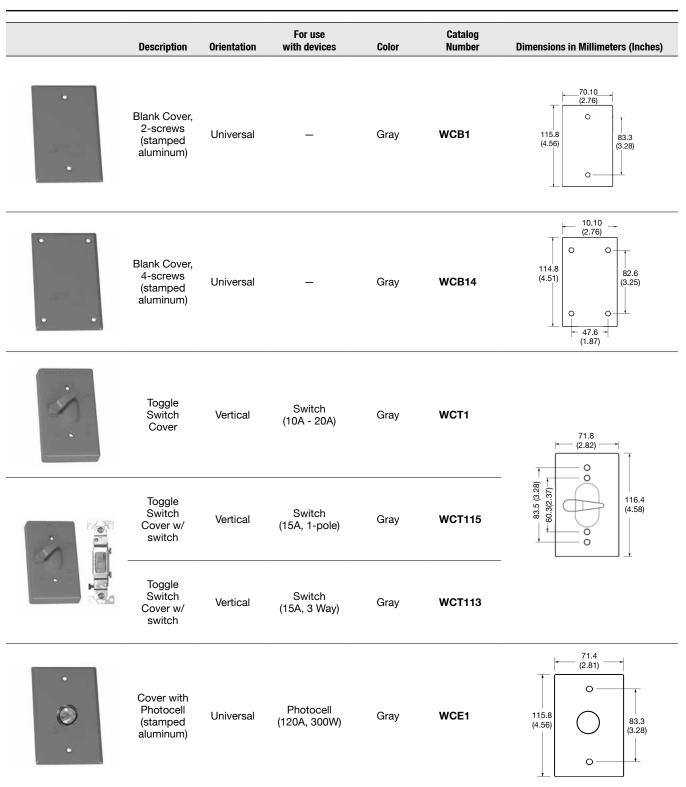


③Appleton 026EDNEY

One-Gang Weatherproof Covers

Gasket and mounting hardware included.

NEC/CEC:

Listed for Ordinary (Unclassified) Locations

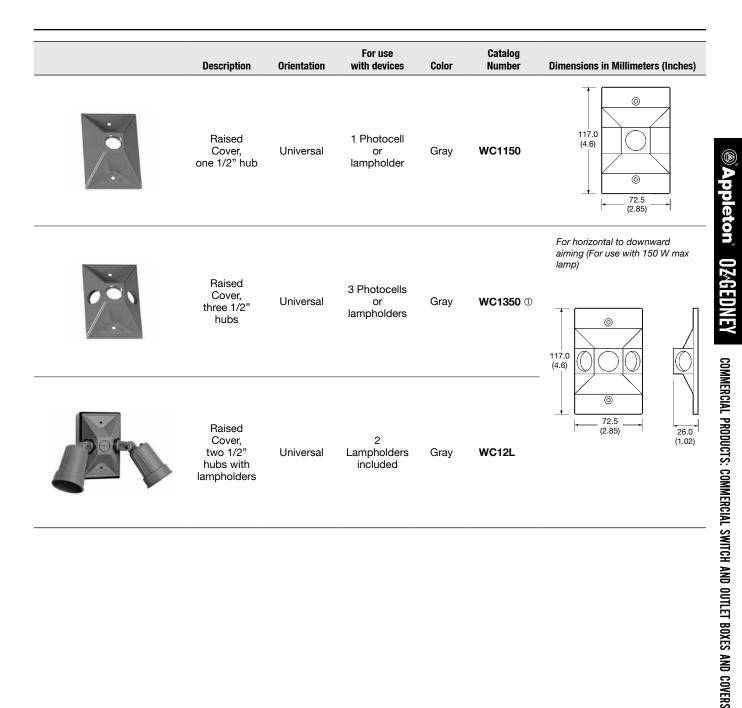


D Catalog number shown represents gray color. White (Suffix -W) and Bronze (Suffix -B) also available. Consult local sales representative for lead time.



One-Gang Weatherproof Covers

Gasket and mounting hardware included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

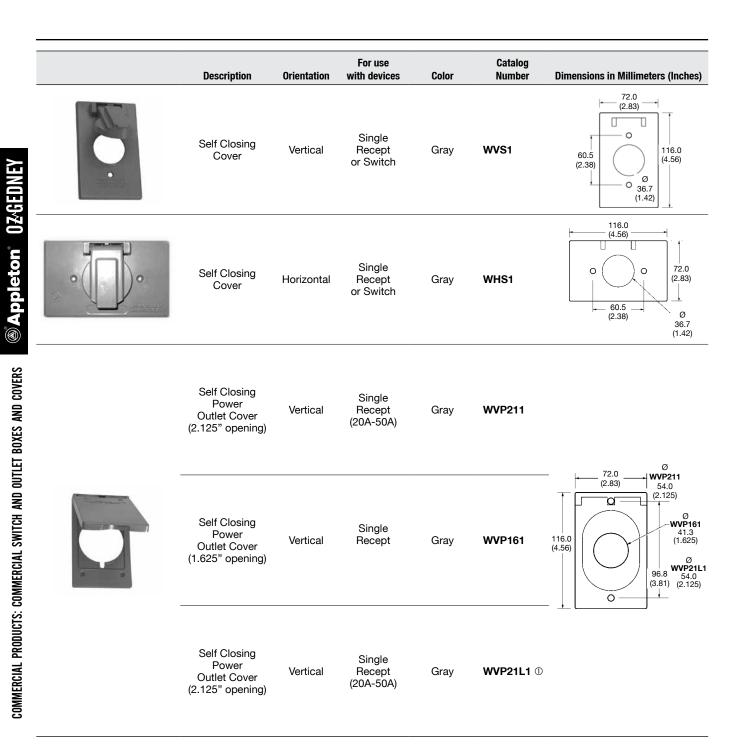

1) Hasp diameter 3/16". Lock not included.

One-Gang Weatherproof In-Use Covers with Inserts

Gasket and mounting hardware included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

In-Use cover, 2-7/8" dep 3/8" hole for padlock (polycarbonate) Universal Clear WCIU Image: Clear dep 3/8" hole for padlock (polycarbonate) In-Use cover, 3-1/2" dep 3/8" hole for padlock (polycarbonate) Universal Clear WCDU1 Image: Clear dep 3/8" hole for padlock (polycarbonate) Universal Clear WCDU1 Image: Clear dep 3/8" hole for padlock (polycarbonate) Universal Clear WCDU1 Image: Clear dep 3/8" hole for padlock (polycarbonate) Universal Clear WCDU1 Image: Clear dep 3/8" hole for padlock (polycarbonate) Universal Clear WCDU1 Image: Clear dep 3/8" hole for padlock (polycarbonate) Universal Clear WCDU1 Image: Clear dep 3/8" hole for padlock (polycarbonate) Universal Clear WCDU1 Image: Clear dep 3/8" hole for padlock (polycarbonate) Universal Clear WCDU1 Image: Clear dep 3/8" hole for padlock (polycarbonate) Universal Clear WCDU1 Image: Clear dep 3/8" hole for padlock (polycarbonate) Universal Clear WCDU1		Description	Orientation	Color	Catalog Number
1 and WCDIU1 Inserts 3 inserts produce 14 configurations		deep 3/8" hole for padlock	Universal	Clear	WCIU
1 and WCDIU1 Inserts 3 inserts produce 14 configurations gang In-Use inserts can be used in both vertical and horizontal applications, by simply changing the hinge points. Image: Configuration of the inserts	Ê	deep 3/8" hole for padlock	Universal	Clear	WCDIU1
	A A A A A A A A A A A A A A A A A A A	(polycarbonate)			

① Provided with inserts, devices not included.




One-Gang Weatherproof Covers

Gasket and mounting hardware included.

NEC/CEC:

Listed for Ordinary (Unclassified) Locations

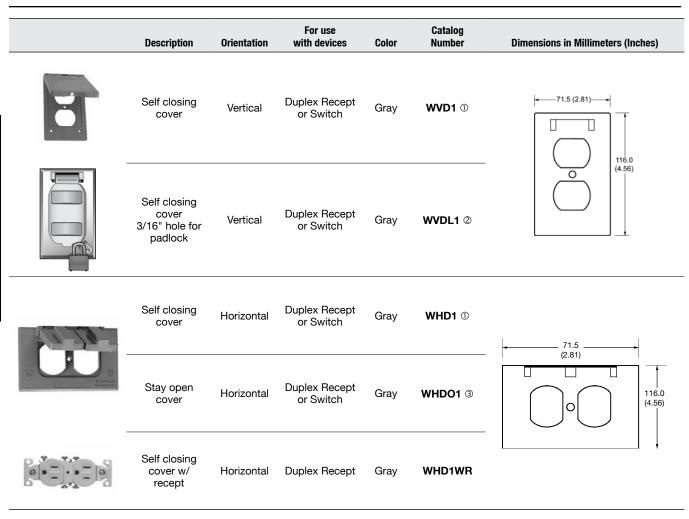

COMMERCIAL PRODUCTS: COMMERCIAL SWITCH AND OUTLET BOXES AND COVERS

(@`Appleton' 02⁄GEDNEY

① Catalog number shown represents gray color. White (Suffix -W) and Bronze (Suffix -B) also available. Consult local sales representative for lead time.
② Hasp diameter 3/16". Lock not included.


3 Not UL Listed.



One-Gang Weatherproof Covers

Gasket and mounting hardware included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

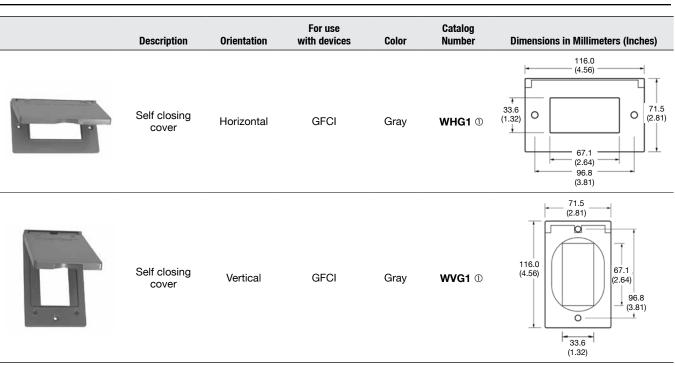


① Catalog number shown represents gray color. White (Suffix -W) and Bronze (Suffix -B) also available. Consult local sales representative for lead time.



Two-Gang Weatherproof Covers and Dimensions

Gasket and mounting hardware included.


NEC/CEC: Listed for Ordinary (Unclassified) Locations

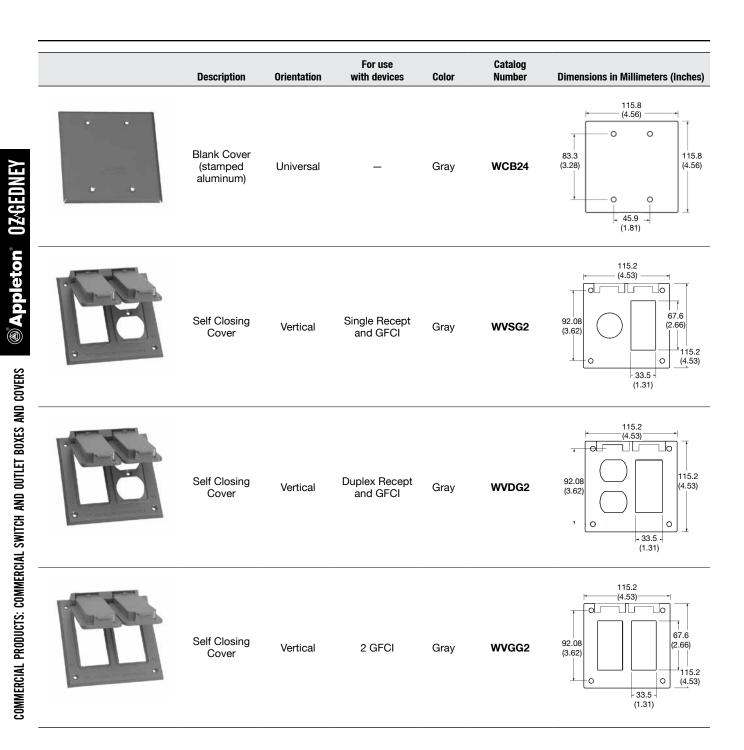

Two-Gang Weatherproof Covers and Dimensions

Gasket and mounting hardware included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

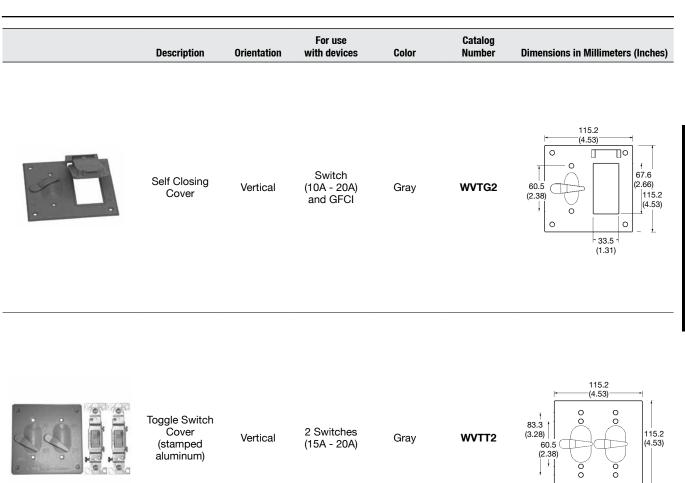


eton

Two-Gang Weatherproof Covers and Dimensions

Gasket and mounting hardware included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

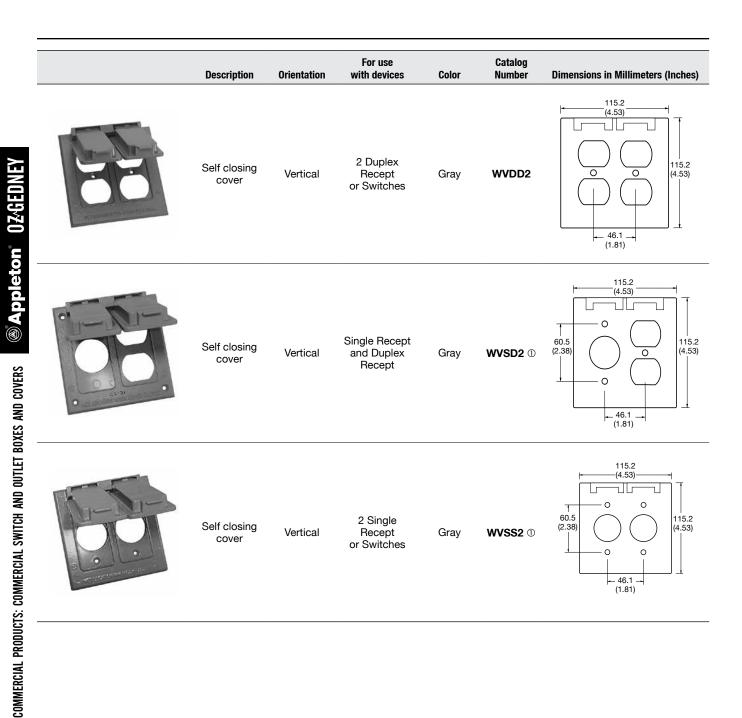

① Catalog number shown represents gray color. White (Suffix - W) and Bronze (Suffix -B) also available. Consult local sales representative for lead time.




Two-Gang Weatherproof In-Use Covers with Inserts

Gasket and mounting hardware included.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

Description	Orientation	Color	Catalog Number
In-Use Cover, 2-1/4" Deep (polycarbonate) 3/8" hole for padlock	Vertical	Clear	WCIU2 ①

WCIU2 Inserts- 6 inserts produce 70 configurations Two gang In-Use convertible inserts snap together to create combinations for almost every application.

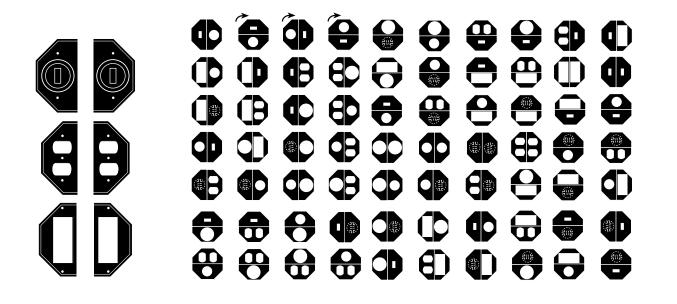


Provided with inserts, devices not included.



Round Weatherproof Covers and Dimensions

Gasket and mounting hardware included. Lampholders are adjustable. Porcelain sockets.

NEC/CEC: Listed for Ordinary (Unclassified) Locations

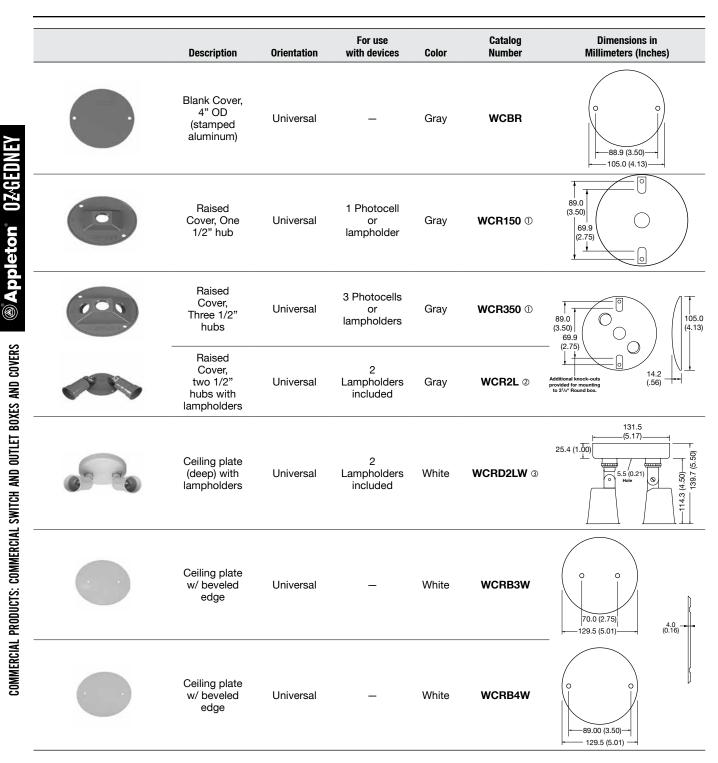

1 Catalog number shown represents gray color. White (Suffix -W) and Bronze (Suffix -B) also available. Consult local sales representative for lead time. © For horizontal to downward aiming For use with 150W max. lamp. Box not included.

3 For use with 150W max. lamp.



Weatherproof Incandescent Fixtures

NEC/CEC: Listed for Ordinary (Unclassified) Locations

Factory assembled with guard, 120 volt rated.

Ground screw, closure plugs and mounting lugs included. Use with 125 °C (257 °F) supply wire. Use with medium base incandescent lamps, Grav color,

	Mounting	Hub Size	No. of		Dimensions In Millimeters (Inches)						Catalog
	Style	(Inches)	Hubs	Wattage	Α	В	C	D	E	F	Number
	Pendant	1/2	1	100	85.0 (3.34)	231.0 (9.09)	105.5 (4.15)	251.0 (9.88)	_	_	WFA1050
1	Pendant	3/4	1	100	85.0 (3.34)	231.0 (9.09)	105.5 (4.15)	251.0 (9.88)	_	_	WFA1075
	Pendant	1/2	1	200	109.8 (4.32)	266.7 (10.50)	135.5 (5.33)	279.4 (11.00)	_	_	WFA2050
S	Pendant	3/4	1	200	111.3 (4.38)	266.7 (10.50)	135.5 (5.33)	279.4 (11.00)	_	_	WFA2075
	Ceiling	1/2	5	100	85.0 (3.34)	219.0 (8.62)	105.5 (4.15)	238.0 (9.37)	_	_	WFC1050
	Ceiling	3/4	5	100	85.0 (3.34)	219.0 (8.62)	108.0 (4.15)	238.0 (9.37)	_	_	WFC1075
	Ceiling	1/2	5	200	109.8 (4.32)	266.7 (10.50)	135.5 (5.33)	273.1 (10.75)	_	_	WFC2050
	Ceiling	3/4	5	200	109.8 (4.32)	266.7 (10.50)	135.5 (5.33)	273.1 (10.75)	_	_	WFC2075
	Wall	1/2	5	100	85.0 (3.34)	184.2 (7.25)	105.5 (4.15)	207.0 (8.14)	118.0 (4.64)	106.0 (4.17)	WFW1050
	Wall	3/4	5	100	85.0 (3.34)	184.2 (7.25)	105.5 (4.15)	207.0 (8.14)	118.0 (4.64)	106.0 (4.17)	WFW107
	Wall	1/2	5	200	109.8 (4.32)	222.3 (8.75)	135.5 (5.33)	235.0 9.25	118.0 (4.64)	114.3 (4.50)	WFW2050
	Wall	3/4	5	200	109.8 (4.32)	222.3 (8.75)	135.5 (5.33)	235.0 9.25	118.0 (4.64)	114.3 (4.50)	WFW2075
nensions in Millimeters	(Inches)										
			в								

WFA Series

WFC Series

WFW Series


103

~ **EMERSON**

Weatherproof Accessories and Replacement Parts

@`Appleton' 026EDNEY

NEC/CEC: Listed for Ordinary (Unclassified) Locations

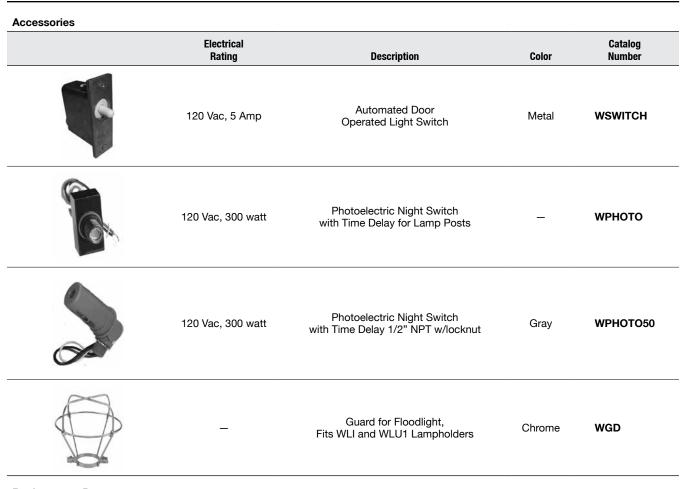

Replacement Parts

Description	Color	Catalog Number
Universal 1 gang gasket	Black	WGSK1
Universal 2 gang gasket	Black	WGSK2
1 gang gasket, single and duplex covers	Black	WGSKD1
External lampholder gasket	Black	WGSKEL
2 Mounting lugs w/ screws	Gray	WLUGS
4-1" closure Plugs	Gray	WPLG104 ①
4–1/2" Closure Plugs	Gray	WPLG504 ①
4–3/4" Closure Plugs	Gray	WPLG754 ①
Heavy duty wire guard for 100 watt fixtures, #8 AWS	_	WFG1
Heavy duty wire guard for 200 watt fixtures, #8 AWS	_	WFG2
Glass globe for 100 W lighting fixtures	_	WFGL1
Glass globe for 200 W lighting fixtures	_	WFGL2

① Catalog number shown represents gray color. White (Suffix -W) and Bronze (Suffix -B) also available. Consult local sales representative for lead time.