


Service Wedge Clamps

Type W — Stainless Steel Wedge Clamps


- For use on copper neutral
- Stainless Steel wedge and slider

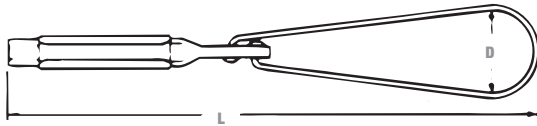

Cat. No.	Conductor Range			Dimensions (in.)		Typical Tensile Values	
	ACSR	Al	AAAC	D	L	Conductor	Value (lb.)
W62D	2-6	1 str. - 6 sol.	2-6	2-3/8 flex.	12	2 6 x 1 ACSR	1200

Type W — Aluminum Service Wedge Clamps for use with ACSR, Aluminum, AAAC Conductors

- For dead-ending self-supporting drop wire
- Saves conductor – drop wire may be cut to exact length
- Can be attached to bare neutral at any point in the span
- Adjustments in drop wire sag are easily made
- Grips ACSR, AAAC, or aluminum conductors

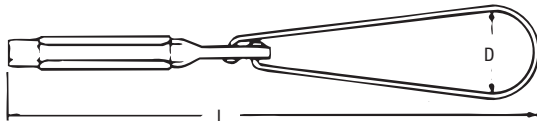

"FC" Flexible Bail
(Bail Length – 11-1/2 in.)



Rigid Stainless Steel Bail
(Bail Length – 6-1/2 in.)

Cat. No.	Description	Conductor Range			Dimensions (in.)		Typical Tensile Values	
		ACSR	Al	AAAC	D	L	Conductor	Value (lb.)
W62-1	W-1 Series Aluminum Wedge and Slider	2-6	1 str. - 6 sol.	2-6	2-3/8 flex.	12, 17-1/2	2 6 x 1 ACSR	1200
W62-1FC	W-1 Series Aluminum Wedge and Slider	2-6	1 str. - 6 sol.	2-6	2-3/8 flex.	12, 17-1/2	2 6 x 1 ACSR	1200
W20-1	W-1 Series Aluminum Wedge and Slider	1/0-4	2/0 str. - 2 sol.	1/0-4	2-3/8 flex.	12-1/2, 18-1/2	1/0 6 x 1 ACSR	1800
W20-1FC	W-1 Series Aluminum Wedge and Slider	1/0-4	2/0 str. - 2 sol.	1/0-4	2-3/8 flex.	12-1/2, 18-1/2	1/0 6 x 1 ACSR	1800
W40-1*	W-1 Series Aluminum Wedge and Slider	4/0-2/0	4/0 str. - 2 sol.	4/0-2/0	2-3/8 flex.	12-3/4, 18-1/2	4/0 6 x 1 ACSR	1900
W40-1FC*	W-1 Series Aluminum Wedge and Slider	4/0-2/0	4/0 str. - 2 sol.	4/0-2/0	2-3/8 flex.	12-3/4, 18-1/2	4/0 6 x 1 ACSR	1900
W62-1B	W-1B Series for extremely corrosive areas. Iridited Aluminum Wedge and Slider	2-6	1 str. - 6 sol.	2-6	2-3/8 flex.	12, 17-1/2	2 6 x 1 ACSR	1200
W62-1BFC	W-1B Series for extremely corrosive areas. Iridited Aluminum Wedge and Slider	2-6	1 str. - 6 sol.	2-6	2-3/8 flex.	12, 17-1/2	2 6 x 1 ACSR	1200
W20-1B	W-1B Series for extremely corrosive areas. Iridited Aluminum Wedge and Slider	1/0-4	2/0 str. - 2 sol.	1/0-4	2-3/8 flex.	12-1/2, 18-1/2	1/0 6 x 1 ACSR	1800
W20-1BFC	W-1B Series for extremely corrosive areas. Iridited Aluminum Wedge and Slider	1/0-4	2/0 str. - 2 sol.	1/0-4	2-3/8 flex.	12-1/2, 18-1/2	1/0 6 x 1 ACSR	1800
W40-1B*	W-1B Series for extremely corrosive areas. Iridited Aluminum Wedge and Slider	4/0-2/0	4/0 str. - 2 sol.	4/0-2/0	2-3/8 flex.	12-3/4, 18-1/2	4/0 6 x 1 ACSR	1900
W40-1BFC*	W-1B Series for extremely corrosive areas. Iridited Aluminum Wedge and Slider	4/0-2/0	4/0 str. - 2 sol.	4/0-2/0	2-3/8 flex.	12-3/4, 18-1/2	4/0 6 x 1 ACSR	1900

* W40 series clamps rated 850 lb. ultimate tension for 1/0 ACSR, AL, or AAAC.