

PVC Coated Form Fittings - C Form 7

Calbond offers the full line of Form 8 and Form 7 PVC coated conduit bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.


Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are 1/2" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws



Standards:

- UL Listed Standard 514B
- CSA Standard: C22.2 No. 18

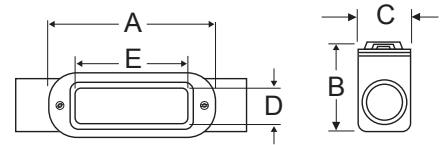

UL Listings and Compliances:

- Ferrous electrical conduit / File # DYIX.E226472
- Ferrous electrical conduit with PVC coating / File # DYJC.E226472

C Form 7										
Item Number	Trade Size	Size Metric (mm)	A	B	C	D	E	Weight Per 100 (lbs)	Aluminum Item Number	
PV0500C17	1/2"	16	6.38	1.42	1.46	0.94	3.19	100	PA0500C17SA	
PV0700C27	3/4"	21	75.00	1.67	1.64	1.13	3.81	140	PA0700C27SA	
PV1000C37	1"	27	9.00	1.92	1.83	1.38	4.50	220	PA1000C37SA	
PV1200C47	1-1/4"	35	9.94	2.35	2.27	1.75	5.00	270	PA1200C47SA	
PV1500C57	1-1/2"	41	11.19	2.60	2.52	1.94	5.44	400	PA1500C57SA	
PV2000C67	2"	53	11.19	3.17	3.08	2.44	6.38	550	PA2000C67SA	
PV2500C77	2-1/2"	63	14.00	3.67	4.33	3.56	8.38	1000	PA2500C77SA	
PV3000C87	3"	78	13.75	4.42	4.33	3.56	8.38	1180	PA3000C87SA	