



Carlon®

Circuit Safe Pushbutton Enclosures T&B Catalog Number:

CP100N
 UPC Number: 03448110600
 Status: Active
 Description:

Non-metallic 30.5mm (1) hole pushbutton enclosure.

Features

- Integrally molded mounting flange.
- Brass screw inserts
- 304 stainless steel screws.
- High-impact strength
- Grounding plate is included on the cover.

Standards

- Screw cover pushbutton enclosures with 1, 2 and 3 hole openings are listed per UL 50 for industrial controls.
- Non-metallic hinged cover enclosures with multiple hole openings are UL Listed.

Application

- Standard oil-tight pushbuttons, switches and pilot lights.
- Conduit entries
- Junction boxes
- MRO and OEM applications
- Wall mount enclosures are resistant to most corrosive agents.
- Universal pushbutton holes are designed to accommodate all standard oil-tight pushbuttons, switches and pilot lights.

General




Material Thermoplastic

Dimension Information

Width (inches)	3.5
Height (inches)	4.88
Depth (inches)	3.38
A (inches)	3.13
B (inches)	2.81
C (inches)	3
F (inches)	3.38
G (inches)	3.25
J (inches)	2.38
L (inches)	4
R (inches)	0.63
S (inches)	2.5

Packaging

Package in Units	12
T&B Sold in UOM	Each
T&B Weight Per UOM	0.71 lbs. Each

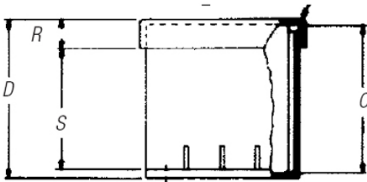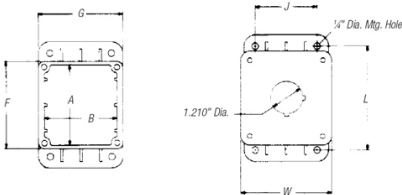

Application Support

T&B Sales Drawings

wsd-ac01670

Notes

All Circuit Safe® pushbutton enclosures are furnished with standard hole dimensions; 1/32 in. diameter with keyways at 12 o'clock and 3 o'clock.

Certifications



File Nbr:

E108856

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email:techsupport@tnb.com