



## Enterprise Grade Commercial Products

### Index

<b>Network Wiring</b>	<b>Page</b>
<b>Enterprise Grade Commercial Products</b>	
Modular Keystone Jacks . . . . .	W-2
Audio/Video Keystone Connectors . . . . .	W-3
Hubbell iSTATION Face Plates . . . . .	W-5
Hubbell iSTATION Outlet Frames . . . . .	W-6
HDMI Connectors and Audio/Video Modules . . . . .	W-7
Hubbell iSTATION Audio/Video Modules . . . . .	W-8
Hubbell iSTATION Front-Loading Frames and Modules . . . . .	W-9
Hubbell iSTATION Surface Mount Boxes . . . . .	W-10
Universal Patch Panels. . . . .	W-11
Standard UTP Wiring Conventions. . . . .	W-12
<b>netSELECT® Products</b>	<b>W-13</b>
<b>Structured Wiring</b>	
In-Wall AV Delivery . . . . .	W-14
HDMI Products. . . . .	W-15
Advantages and Wiring Layout . . . . .	W-16
Network Enclosures . . . . .	W-17
Network Modules . . . . .	W-18
Audio/Video Modules . . . . .	W-19
Universal Consolidation Blocks, Patch Panels and Patch Cords. . . . .	W-20
Accessories . . . . .	W-21
<b>Data Communications and Audio/Video</b>	
Modular Snap Fit Jacks . . . . .	W-22
Decorator Frames. . . . .	W-23
Molded-In Voice/Data/Video . . . . .	W-24
Molded-In Plates . . . . .	W-25
Telephone Wall Jacks . . . . .	W-26

### Keystone Jacks and Connectors



### HDMI Connectors



### Hubbell iSTATION Surface Mount Boxes



### Modular Snap Fit Jacks





HXJ6B



HXJ6OR

### Hubbell Xcelerator Jacks, Category 6

The NEXTSPEED® Category 6 system is designed to deliver headroom beyond 500MHz for dependable Multi-gigabit Ethernet applications. NEXTSPEED's extended bandwidth provides reliability with zero bit error rate performance for today's high speed digital communications.

Color	Catalog Number	Bag of 25 Catalog Number
Almond	HXJ6AL	HXJ6AL25
Black	HXJ6BK	HXJ6BK25
Blue	HXJ6B	HXJ6B25
Gray	HXJ6GY	HXJ6GY25
Green	HXJ6GN	HXJ6GN25
Ivory	HXJ6EI	HXJ6EI25
Light Almond	HXJ6LA	HXJ6LA25
Office White	HXJ6OW	HXJ6OW25
Orange	HXJ6OR	HXJ6OR25
Red	HXJ6R	HXJ6R25
White	HXJ6W	HXJ6W25
Yellow	HXJ6Y	HXJ6Y25

### Hubbell Xcelerator Jacks, Category 5e

Supports 10/100/1000BASE-T applications with usable bandwidth of 190 MHz in the channel.

Color	Catalog Number	Bag of 25 Catalog Number
Almond	HXJ5EAL	HXJ5EAL25
Black	HXJ5EBK	HXJ5EBK25
Blue	HXJ5EB	HXJ5EB25
Gray	HXJ5EGY	HXJ5EGY25
Green	HXJ5EGN	HXJ5EGN25
Ivory	HXJ5EEI	HXJ5EEI25
Light Almond	HXJ5ELA	HXJ5ELA25
Office White	HXJ5EOW	HXJ5EOW25
Orange	HXJ5EOR	HXJ5EOR25
Red	HXJ5ER	HXJ5ER25
White	HXJ5EW	HXJ5EW25
Yellow	HXJ5EY	HXJ5EY25



HXJ5EBK

### Hubbell Xcelerator Jacks, 6-Position USOC

Color	Catalog Number	Bag of 25 Catalog Number
Almond	HXJUAL	-
Black	HXJUBK	-
Blue	HXJUB	-
Gray	HXJUGY	-
Green	HXJUGN	-
Ivory	HXJUEI	-
Light Almond	HXJULA	-
Office White	HXJUOW	HXJUOW25
Orange	HXJUOR	-
Red	HXJUR	-
White	HXJUW	-
Yellow	HXJUY	-



HXJUEI

### Jack Icons\*

Bag of 100 icons. Snaps to front of enterprise grade Hubbell Xcelerator jacks.



Color	Blank	Computer	Telephone
Black	IBK100	IBK100C	IBK100T
Blue	IB100	IB100C	IB100T
Brown	IBN100	IBN100C	IBN100T
Gray	IGY100	IGY100C	IGY100T
Green	IGN100	IGN100C	IGN100T
Ivory	IEI100	IEI100C	IEI100T
Orange	IOR100	IOR100C	IOR100T
Purple	IP100	IP100C	IP100T
Red	IR100	IR100C	IR100T
White	IW100	IW100C	IW100T
Yellow	IY100	IY100C	IY100T



IP100C

Note: \*Not UL Listed, CSA Certified.



### F-Type Connectors

Distributes high quality video signal to the workstation. These connectors install with a snap and provide quick, easy “screw-on” termination. Compatible with TV, CATV and CCTV, home theater and entertainment systems, satellite, security and surveillance systems, VCR/DVD applications.

Color	F-Type Coupler Bulkhead F/F	F-Type Coupler Bulkhead F/F Gold	F-Type to RCA Bulkhead F/F Gold	F-Type Recessed
Almond	<b>SFFALX</b>	<b>SFFGAL</b>	–	–
Black	<b>SFFBX</b>	<b>SFFGBK</b>	<b>SFRFGBK</b>	<b>SFGRFBK</b>
Gray	<b>SFFGX</b>	<b>SFFGGY</b>	<b>SFRFGGY</b>	<b>SFGRFGY</b>
Ivory	<b>SFFEX</b>	<b>SFFGEI</b>	<b>SFRFGEI</b>	<b>SFGRFEI</b>
Light Almond	<b>SFFLAX</b>	<b>SFFGLA</b>	–	–
Office White	<b>SFFX</b>	<b>SFFGOW</b>	<b>SFRFGOW</b>	<b>SFGRFOW</b>
White	<b>SFFWX</b>	<b>SFFGW</b>	<b>SFRFGW</b>	<b>SFGRFW</b>



**SFFGGY**



**SFGRFOW**



**SFRC110R**



**SFRCR**



**SFRCROW**



**SFRCRF**



**SFSV110BK**

### RCA Connectors

Distributes component and composite audio and video signals from device to device. Typical applications include TV, cable, VCR/DVD, camera, camcorder, projector, home theater, and entertainment centers.

Insulator Color	RCA 110 Punch-Down Black Housing	RCA Solder Coupler Termination		
		Office White Housing	Additional Housing Color*	RCA Recessed*
Black	–	<b>SFRC</b>	<b>SFRCBKxx</b>	<b>SFRCBKRxx</b>
Blue	<b>SFRC110B</b>	<b>SFRCBOW</b>	<b>SFRCBxx</b>	<b>SFRCBRxx</b>
Green	<b>SFRC110GN</b>	<b>SFRCGNOW</b>	<b>SFRCGNxx</b>	<b>SFRCGNRxx</b>
Orange	–	<b>SFRCOROW</b>	<b>SFRCORxx</b>	<b>SFRCORRxx</b>
Red	<b>SFRC110R</b>	<b>SFRCR</b>	<b>SFRCRxx</b>	<b>SFRCRRxx</b>
White	<b>SFRC110W</b>	<b>SFRCW</b>	<b>SFRCWxx</b>	<b>SFRCWRxx</b>
Yellow	<b>SFRC110Y</b>	<b>SFRCY</b>	<b>SFRCYxx</b>	<b>SFRCYRxx</b>

Insulator Color	RCA Gold Pass-through, Office White Housing	F/F Coupler Additional Housing Color*
Black	<b>SFRCBKFF</b>	<b>SFRCBKFFxx</b>
Blue	<b>SFRCBFFOW</b>	<b>SFRCBFFxx</b>
Green	<b>SFRCGNFFOW</b>	<b>SFRCGNFFxx</b>
Orange	<b>SFRCORFFOW</b>	<b>SFRCORFFxx</b>
Red	<b>SFRCRFF</b>	<b>SFRCRFFxx</b>
White	<b>SFRCWFF</b>	<b>SFRCWFFxx</b>
Yellow	<b>SFRCYFF</b>	<b>SFRCYFFxx</b>

Note: \*Additional Housing colors: **xx** = **AL** (Almond), **BK** (Black), **EI** (Ivory), **GY** (Gray), **LA** (Light Almond), and **W** (White).

### S-Video Connectors

Transmits video information over a cable by dividing the signal into two separate signals (chrominance) for color and (luminance) for brightness. Applications include cable, satellite, DVD, camera, camcorder, projector, home theater, entertainment systems, security, and surveillance.

Color	S-Video 110 Punch-Down	S-Video F/F Coupler
Black	<b>SFSV110BK</b>	<b>SFSVBK</b>




### Gender Changers, 9 and 15-Pin Connections

Unit of Measure	15-Pin, 90° F/F Coupler	HD 9-Pin F/F Coupler	HD 15-Pin F/F Coupler
1 per bag	<b>15901</b>	–	–
10 per bag	<b>159010</b>	<b>9GC10</b>	<b>15GC10</b>

### Screw Terminal, 9 and 15-Pin Connections

Unit of Measure	HD 9-Pin Screw Term	HD 15-Pin Screw Term	HD 15-Pin, Screw Term, Keystone Front Mount
10 per bag	<b>9ST10</b>	<b>15ST10</b>	<b>SF15ST</b>



SFBBOW

SFBGOW



SFSPGR

SPPBK10




SF35FFOW

SF35STOW




SFC5EW

SFC6EBK




SFUSBAA3BK

SFUSBAB3BK



SFUSBABB

SFUSBAAB



SFB10

SFSBE110

### BNC Connectors

Distributes PRO audio video through coaxial 75 ohm signal to the work area. Applications include TV, CCTV, analog and digital CATV, VCR, HDTV satellite, security and surveillance systems.

Color	BNC Connector Nickel Finish	BNC Connector Gold Finish
Black	<b>SFBBK</b>	<b>SFBGBK</b>
Gray	<b>SFBGY</b>	<b>SFBGGY</b>
Ivory	<b>SFBEI</b>	<b>SFBGEI</b>
Light Almond	<b>SFBLA</b>	<b>SFBGLA</b>
Office White	<b>SFBOW</b>	<b>SFBGOW</b>
White	<b>SFBW</b>	<b>SFBGW</b>

### Gold Speaker Post Connectors and Plugs\*

Ring Color	Speaker Post Connector Office White Housing	Speaker Post/ Banana Plugs
Black	<b>SFSPGBK</b>	<b>SPPBK10</b>
Red	<b>SFSPGR</b>	<b>SPPR10</b>

### 3.5mm Stereo Jacks\*

Distributes stereo or mono audio signals to and from devices. Applications include laptop and desktop computer audio I/O output, PRO audio distribution, projectors, and IR (infrared) signal transmission.

Housing Color	3.5mm F/F Coupler	3.5mm Stereo Jack	3.5mm Screw Term.
Black	<b>SF35FFBK</b>	<b>SF35SJBK</b>	<b>SF35STBK</b>
Gray	<b>SF35FFGY</b>	<b>SF35SJGY</b>	<b>SF35STGY</b>
Ivory	<b>SF35FFEI</b>	<b>SF35SJEI</b>	<b>SF35STEI</b>
Light Almond	<b>SF35FFLA</b>	<b>SF35SJLA</b>	<b>SF35STLA</b>
Office White	<b>SF35FFOW</b>	<b>SF35SJ</b>	<b>SF35STOW</b>
White	<b>SF35FFW</b>	<b>SF35SJW</b>	<b>SF35STW</b>

### Inline Couplers\*

Use to deliver a quick and easy interconnect solution at the desktop or in the cross connect.

Color	Wiring: T568A/B	Wiring: T568A/B
Black	<b>SFC5EBK</b>	<b>SFC6EBK</b>
White	<b>SFC5EW</b>	<b>SFC6EW</b>

### USB Connectors

Use to provide a simple and easy way to add a USB connection to a work area.

Housing Color	USB 3.0, A to A, Pass-Thru, F/F, Coupler	USB 3.0, A to B, Pass-Thru, F/F, Coupler	USB 2.0, A to A, Pass-Thru, F/F, Coupler	USB 2.0, A to B, Pass-Thru, F/F, Coupler
Black	<b>SFUSBAA3BK</b>	<b>SFUSBAB3BK</b>	-	-
Blue	-	-	<b>SFUSBAAB</b>	<b>SFUSBABB</b>
Office White	-	-	<b>SFUSBAAOW</b>	<b>SFUSBABOW</b>
White	-	-	<b>SFUSBAAW</b>	<b>SFUSBABW</b>

### Blank Connectors, 10-Pack

Housing Color	Blanks	Smooth Blanks
Almond	<b>SFBAL10</b>	<b>SFSBAL10</b>
Black	<b>SFB10</b>	<b>SFSBBK10</b>
Gray	<b>SFBG10</b>	<b>SFSBGY10</b>
Ivory	<b>SFBE10</b>	<b>SFSBE10</b>
Light Almond	<b>SFBLA10</b>	<b>SFSBLA10</b>
Office White	<b>SFB10</b>	<b>SFSBOW10</b>
White	<b>SFBW10</b>	<b>SFSBW10</b>

Note: \*Not UL Listed.






**IFP Face Plates, with Label Fields, 1- and 2-Gang**



Color	1-Gang					2-Gang		
	1-Port	2-Port	3-Port	4-Port	6-Port	6-Port	9-Port	12-Port
Almond	<b>IFP11AL</b>	<b>IFP12AL</b>	<b>IFP13AL</b>	<b>IFP14AL</b>	<b>IFP16AL</b>	<b>IFP26AL</b>	-	-
Black	<b>IFP11BK</b>	<b>IFP12BK</b>	<b>IFP13BK</b>	<b>IFP14BK</b>	<b>IFP16BK</b>	<b>IFP26BK</b>	<b>IFP29BK</b>	<b>IFP212BK</b>
Gray	<b>IFP11GY</b>	<b>IFP12GY</b>	<b>IFP13GY</b>	<b>IFP14GY</b>	<b>IFP16GY</b>	<b>IFP26GY</b>	<b>IFP29GY</b>	<b>IFP212GY</b>
Ivory	<b>IFP11EI</b>	<b>IFP12EI</b>	<b>IFP13EI</b>	<b>IFP14EI</b>	<b>IFP16EI</b>	<b>IFP26EI</b>	<b>IFP29EI</b>	<b>IFP212EI</b>
Light Almond*	<b>IFP11LA</b>	<b>IFP12LA</b>	<b>IFP13LA</b>	<b>IFP14LA</b>	<b>IFP16LA</b>	<b>IFP26LA</b>	<b>IFP29LA</b>	<b>IFP212LA</b>
Office White	<b>IFP11OW</b>	<b>IFP12OW</b>	<b>IFP13OW</b>	<b>IFP14OW</b>	<b>IFP16OW</b>	<b>IFP26OW</b>	<b>IFP29OW</b>	<b>IFP212OW</b>
White	<b>IFP11W</b>	<b>IFP12W</b>	<b>IFP13W</b>	<b>IFP14W</b>	<b>IFP16W</b>	<b>IFP26W</b>	<b>IFP29W</b>	<b>IFP212W</b>

Note: \*Light Almond plates match Office White non-metallic raceway, boxes, jacks and connectors.

**Stainless Steel Face Plates without Label Fields, 1- and 2-Gang**

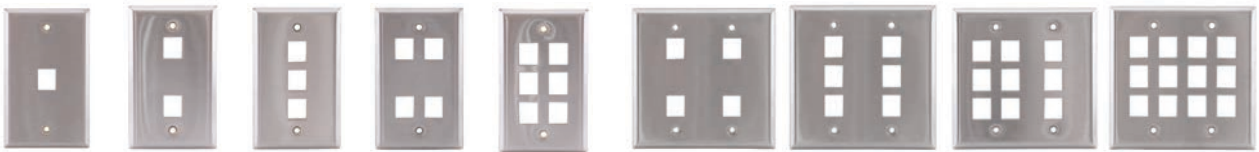

Catalog No.	1-Gang					2-Gang			
	1-Port	2-Port	3-Port	4-Port	6-Port	4-Port	6-Port	9-Port	12-Port
	<b>SSF11</b>	<b>SSF12</b>	<b>SSF13</b>	<b>SSF14</b>	<b>SSF16</b>	<b>SSF204</b>	<b>SSF206</b>	<b>SSF209</b>	<b>SSF212</b>

**Stainless Steel Face Plates with Label Fields**

1-Gang	Catalog Number
1-Port	<b>SSFL11</b>
2-Port	<b>SSFL12</b>
3-Port	<b>SSFL13</b>
4-Port	<b>SSFL14</b>
6-Port	<b>SSFL16</b>

**Duplex and Decorator Plates with Label Fields**

	Color	Duplex Plate	Decorator Plate
	Almond	<b>IFP18AL</b>	<b>IFP126AL</b>
	Office White	<b>IFP18OW</b>	<b>IFP126OW</b>

**Standard Duplex and Decorator Plates with No Label Fields, 1- and 2-Gang**

	Color	1-Gang Duplex Plate	1-Gang Decorator Plate	2-Gang Decorator Plate
	Almond	<b>NP8AL</b>	<b>NP26AL</b>	<b>NP262AL</b>
	Black	<b>NP8BK</b>	<b>NP26BK</b>	<b>NP262BK</b>
	Ivory	<b>NP8I</b>	<b>NP26I</b>	<b>NP262I</b>
	Gray	<b>NP8GY</b>	<b>NP26GY</b>	<b>NP262GY</b>
	Light Almond*	<b>NP8LA</b>	<b>NP26LA</b>	<b>NP262LA</b>
	White	<b>NP8W</b>	<b>NP26W</b>	<b>NP262W</b>

Note: \*Light Almond plates match Office White non-metallic raceway, boxes, jacks and connectors.

**630 Wall Phone Plates, 1-Gang**


Stainless Steel, 1-Gang wall phone plate.



**P630S1GJ6**    **P630SR1GJ6**

Jack Format	Includes Gray Jack	Catalog Number
Flush	6-position USOC, RJ25	<b>P630S1GJ6</b>
Flush	8-position Cat. 5e, RJ45	<b>P630S1GJ8</b>
Recessed	6-position USOC, RJ25	<b>P630SR1GJ6</b>
Recessed	8-position Cat. 5e, RJ45	<b>P630SR1GJ8</b>

**Keystone Opening**  
 Hole size for mounting  
 all Hubbell Jacks.





### HDMI\*\* Decorator Frames



Color	1-Port	2-Port
Black	<b>NS801BK</b>	<b>NS802BK</b>
Gray	<b>NS801GY</b>	<b>NS802GY</b>
Ivory	<b>NS801I</b>	<b>NS802I</b>
Light Almond	<b>NS801LA</b>	<b>NS802LA</b>
White	<b>NS801W</b>	<b>NS802W</b>

Note: \*\*HDMI (High Definition Media Interface).

### Blank Duplex Outlet Frames, 1-Gang



Color	Keystone 2-Port	Keystone 4-Port
Almond	<b>BR106AL</b>	<b>Q106AL</b>
Black	<b>BR106B</b>	<b>Q106B</b>
Gray	<b>BR106G</b>	<b>Q106G</b>
Ivory	<b>BR106E</b>	<b>Q106E</b>
Light Almond*	<b>BR106LA</b>	<b>Q106LA</b>
Office White	<b>BR106C</b>	<b>Q106O</b>
White	<b>BR106W</b>	<b>Q106W</b>

Note: \*Light Almond frames match Office White non-metallic raceway, boxes, jacks and connectors.

### Blank Decorator Outlet Frames, 1-Gang



Color	Keystone 2-Port	Keystone 3-Port	Keystone 4-Port	Keystone 6-Port	HD15/9 or HDMI	(2) HD15/9 or HDMI	(1) Recessed HD15/9 or HDMI	.406 in. (10.3) hole	Blank
Almond	<b>ISF2AL</b>	<b>ISF3AL</b>	<b>ISF4AL</b>	<b>ISF6AL</b>	<b>ISFB15AL</b>	—	—	<b>NS621AL</b>	<b>NS620AL</b>
Black	<b>ISF2BK</b>	<b>ISF3BK</b>	<b>ISF4BK</b>	<b>ISF6BK</b>	<b>ISFB15BK</b>	<b>ISFB215BK</b>	<b>ISFBR15BK</b>	—	—
Gray	<b>ISF2GY</b>	<b>ISF3GY</b>	<b>ISF4GY</b>	<b>ISF6GY</b>	<b>ISFB15GY</b>	<b>ISFB215GY</b>	<b>ISFBR15GY</b>	—	—
Ivory	<b>ISF2EI</b>	<b>ISF3EI</b>	<b>ISF4EI</b>	<b>ISF6EI</b>	<b>ISFB15EI</b>	<b>ISFB215EI</b>	<b>ISFBR15EI</b>	<b>NS621I</b>	<b>NS620I</b>
Light Almond*	—	—	—	—	<b>ISFB15LA</b>	—	—	<b>NS621LA</b>	<b>NS620LA</b>
Office White	<b>ISF2OW</b>	<b>ISF3OW</b>	<b>ISF4OW</b>	<b>ISF6OW</b>	<b>ISFB15OW</b>	<b>ISFB215OW</b>	<b>ISFBR15OW</b>	—	—
White	<b>ISF2W</b>	<b>ISF3W</b>	<b>ISF4W</b>	<b>ISF6W</b>	<b>ISFB15W</b>	<b>ISFB215W</b>	<b>ISFBR15W</b>	<b>NS621W</b>	<b>NS620W</b>

Note: \*Light Almond frames match Office White non-metallic raceway, boxes, jacks and connectors.

### Secure-IT Plates



Secure-IT Plates protect mated and unmated connections from physical damage and unauthorized tampering. Available in Tamper-Resistant and Weatherproof versions.



TPF1W

#### Tamper-Resistant Plates

Color	1-Gang/4-Port Catalog Number
Black	<b>TPF1BK</b>
Gray	<b>TPF1GY</b>
Office White	<b>TPF1OW</b>
White	<b>TPF1W</b>



TWPF1GY

#### NEMA 3R Weatherproof Plates

Color	1-Gang/4-Port Catalog Number
Gray	<b>TWPF1GY</b>



**HDMI Connectors**



**HDMI Feed Thru Coupler**

Description	Catalog Number
Single	<b>HDMIC14</b>



**Keystone HDMI Feed Thru**

Description	Color	Catalog Number
Single	Black	<b>SFHC14BK</b>
Single	White	<b>SFHC14W</b>



**HDMI Feed Thru 3-Inch Tail**

Description	Catalog Number
Single	<b>HDMIT14</b>

**DVI Adapters/Couplers**



**DVI-I Coupler**

Description	Catalog Number
Single	<b>DVI1</b>



**DVI to VGA Adapter**

Description	Catalog Number
Single	<b>DVI151</b>



**DVI to HDMI Adapter**

Description	Catalog Number
Single	<b>DVIHDMI1</b>



**DVI to HDMI Adapter**

Description	Catalog Number
Single	<b>HDMIC1</b>

**110 Audio Video Modules\***

Description	Housing Color	Catalog Number
RCA Component, Video to 110 Termination, 1 Unit, 75 ft. max. HD Cat 5, 5e, 6 UTP	Almond	<b>IMCR1101AL</b>
	Black	<b>IMCR1101BK</b>
	Ivory	<b>IMCR1101EI</b>
	Gray	<b>IMCR1101GY</b>
	Office White	<b>IMCR1101OW</b>
S-Video, Stereo RCA Audio to 110 Termination, 1 Unit, 100 ft. max. Cat 5, 5e, 6 UTP	Almond	<b>IMSR1101AL</b>
	Black	<b>IMSR1101BK</b>
	Ivory	<b>IMSR1101EI</b>
	Gray	<b>IMSR1101GY</b>
	Office White	<b>IMSR1101OW</b>
S-Video, 3.5mm Stereo Jack to 110 Termination, 1 Unit, 100 ft. max. Cat 5, 5e, 6	Almond	<b>IMSV351101AL</b>
	Black	<b>IMSV351101BK</b>
	Ivory	<b>IMSV351101EI</b>
	Gray	<b>IMSV351101GY</b>
	Office White	<b>IMSV351101OW</b>
RCA Composite, Video, Stereo Audio to 110 Termination, 1 Unit, 100 ft. max. Cat 5, 5e, 6	Almond	<b>IMR1101AL</b>
	Black	<b>IMR1101BK</b>
	Ivory	<b>IMR1101EI</b>
	Gray	<b>IMR1101GY</b>
	Office White	<b>IMR1101OW</b>
Stereo RCA, Audio 110 Termination, 1 Unit, 100 ft. max. Cat 5, 5e, 6	Almond	<b>IMAR1101AL</b>
	Black	<b>IMAR1101BK</b>
	Ivory	<b>IMAR1101EI</b>
	Gray	<b>IMAR1101GY</b>
	Office White	<b>IMAR1101OW</b>
	White	<b>IMAR1101W</b>



**IMCR1101W**



**IMSR1101W**



**IMSV351101W**



**IMR1101W**



**IMAR1101W**

Note: \*Not UL Listed.



**IMCRS15OW**



**IMCRS10W**



**IM3RS10W**



**IMRSJ10W**



**IMCRF10W**



**IM3RF10W**



**IMSP10W**



**SPPBK10**

**SPPR10**

### 110 Audio Video Modules

Description	Housing Color	Catalog Number
RCA Component Video,* Audio 110 Termination, 1.5 Unit	Almond	<b>IMCRS15AL</b>
	Black	<b>IMCRS15BK</b>
	Ivory	<b>IMCRS15EI</b>
	Gray	<b>IMCRS15GY</b>
	Office White	<b>IMCRS15OW</b>
	White	<b>IMCRS15W</b>
RCA Component* Video, Solder, 1 Unit	Almond	<b>IMCRS1AL</b>
	Black	<b>IMCRS1BK</b>
	Ivory	<b>IMCRS1EI</b>
	Gray	<b>IMCRS1GY</b>
	Office White	<b>IMCRS10W</b>
	White	<b>IMCRS1W</b>
RCA Composite, Video Audio, Solder, 1 Unit	Almond	<b>IM3RS1AL</b>
	Black	<b>IM3RS1BK</b>
	Ivory	<b>IM3RS1EI</b>
	Gray	<b>IM3RS1GY</b>
	Office White	<b>IM3RS10W</b>
	White	<b>IM3RS1W</b>
RCA Composite, Video, 3.5mm Stereo Jack, Solder, 1 Unit	Almond	<b>IMRSJ1AL</b>
	Black	<b>IMRSJ1BK</b>
	Ivory	<b>IMRSJ1EI</b>
	Gray	<b>IMRSJ1GY</b>
	Office White	<b>IMRSJ10W</b>
	White	<b>IMRSJ1W</b>

### Gold Feed-Through Audio Video RCA Couplers

Description	Housing Color	Catalog Number
RCA Component* Video, Gold, Pass-Through, F/F Coupler, 1 Unit	Almond	<b>IMCRF1AL</b>
	Black	<b>IMCRF1BK</b>
	Ivory	<b>IMCRF1EI</b>
	Gray	<b>IMCRF1GY</b>
	Office White	<b>IMCRF10W</b>
	White	<b>IMCRF1W</b>
RCA Composite, Video Audio, Gold, Pass-Through, F/F Coupler, 1 Unit	Almond	<b>IM3RF1AL</b>
	Black	<b>IM3RF1BK</b>
	Ivory	<b>IM3RF1EI</b>
	Gray	<b>IM3RF1GY</b>
	Office White	<b>IM3RF10W</b>
	White	<b>IM3RF1W</b>

### Gold Speaker Posts and Banana Plugs

Description	Housing Color	Catalog Number
Speaker Post, Gold, Black and Red, Screw Termination	Almond	<b>IMSP1AL</b>
	Black	<b>IMSP1BK</b>
	Ivory	<b>IMSP1EI</b>
	Gray	<b>IMSP1GY</b>
	Office White	<b>IMSP10W</b>
	White	<b>IMSP1W</b>
Speaker Banana Plugs*, Gold, Screw Termination, 10-Packs	Black	<b>SPPBK10</b>
	Red	<b>SPPR10</b>


Note: \*Not UL Listed.





**Modular Face Plate Frames**

Color	1-Gang	2-Gang
Almond	<b>IMF1AL</b>	<b>IMF2AL</b>
Black	<b>IMF1BK</b>	<b>IMF2BK</b>
Gray	<b>IMF1GY</b>	<b>IMF2GY</b>
Ivory	<b>IMF1EI</b>	<b>IMF2EI</b>
Office White	<b>IMF1OW</b>	<b>IMF2OW</b>
White	<b>IMF1W</b>	<b>IMF2W</b>



**Raceway Bezel Frames\***

Color	1-Gang
Almond	<b>KPIMBZAL</b>
Gray	<b>KPIMBZGY</b>
Office White	<b>KPIMBZOW</b>



**Unloaded Keystone Modules**

Color	1-Port, Flat 1 Unit	2-Port, Flat 1 Unit	1-Port, Angled 1.5 Unit	2-Port, Angled 1.5 Unit	Recessed Angle 1-Port, 1.5 Unit	Recessed Angle 2-Port, 1.5 Unit
Almond	<b>IM1K1AL</b>	<b>IM2K1AL</b>	<b>IM1KA15AL</b>	<b>IM2KA15AL</b>	-	-
Black	<b>IM1K1BK</b>	<b>IM2K1BK</b>	<b>IM1KA15BK</b>	<b>IM2KA15BK</b>	<b>IM1IA15BK</b>	<b>IM2IA15BK</b>
Ivory	<b>IM1K1EI</b>	<b>IM2K1EI</b>	<b>IM1KA15EI</b>	<b>IM2KA15EI</b>	<b>IM1IA15EI</b>	<b>IM2IA15EI</b>
Gray	<b>IM1K1GY</b>	<b>IM2K1GY</b>	<b>IM1KA15GY</b>	<b>IM2KA15GY</b>	<b>IM1IA15GY</b>	<b>IM2IA15GY</b>
Office White	<b>IM1K1OW</b>	<b>IM2K1OW</b>	<b>IM1KA15OW</b>	<b>IM2KA15OW</b>	<b>IM1IA15OW</b>	<b>IM2IA15OW</b>
White	<b>IM1K1W</b>	<b>IM2K1W</b>	<b>IM1KA15W</b>	<b>IM2KA15W</b>	<b>IM1IA15W</b>	<b>IM2IA15W</b>

Color	Blank 0.5 Unit	Blank 1 Unit	Blank 1.5 Unit	SC Angled 1-Port, 1.5 Unit	SC Angled 2-Port, 1.5 Unit
Almond	<b>IMB05AL</b>	<b>IMB1AL</b>	<b>IMB15AL</b>	-	-
Black	<b>IMB05BK</b>	<b>IMB1BK</b>	<b>IMB15BK</b>	<b>IM1SCA15BK</b>	<b>IM2SCA2BK</b>
Ivory	<b>IMB05EI</b>	<b>IMB1EI</b>	<b>IMB15EI</b>	<b>IM1SCA15EI</b>	<b>IM2SCA2EI</b>
Gray	<b>IMB05GY</b>	<b>IMB1GY</b>	<b>IMB15GY</b>	<b>IM1SCA15GY</b>	<b>IM2SCA2GY</b>
Office White	<b>IMB05OW</b>	<b>IMB1OW</b>	<b>IMB15OW</b>	<b>IM1SCA15OW</b>	<b>IM2SCA2OW</b>
White	<b>IMB05W</b>	<b>IMB1W</b>	<b>IMB15W</b>	<b>IM1SCA15W</b>	<b>IM2SCA2W</b>

**HD (High Definition) 15-Pin/9-Pin Modules**

	Blank HD15/9 or HDMI Module, 1 Unit	<b>IMBDS1xx</b>	10-Pack
	Blank HD15/9 or HDMI Module, 1.5 Unit	<b>IMBDSA15xx</b>	1-Pack

**DVI Modules**

	DVI Blank, Unloaded, 1.5 Unit	<b>IMBDVI15xx</b>	1-Pack
		<b>IMBDVI1015xx</b>	10-Pack

Note: xx = Color: **AL** (Almond), **BK** (Black), **EI** (Ivory), **GY** (Gray), **LA** (Light Almond), **OW** (Office White), and **W** (White).

**Hubbell iSTATION Audio/Video Modules**

XLR, speakON® and ¼ inch modules applications include video distribution, desktop and laptop computers, monitors, cameras, microphones and projectors, home theater and entertainment. Note: Order IMAVB15 series blank modules with AV connectors for Hubbell iSTATION applications.

	AV Blank 1.5 Unit	<b>IMAVB15xx*</b>	10-Pack
	XLR Screw Terminal	<b>XLRST10</b>	
	XLR Solder-Type	<b>XLR10</b>	
	speakON® Conn. Solder-Type	<b>SC10</b>	
	USB Feed-Thru A-to-B	<b>USB10</b>	
	¼" Stereo Jack Solder-Type	<b>14S10</b>	

Note: xx = Color: **AL** (Almond), **BK** (Black), **EI** (Ivory), **GY** (Gray), **LA** (Light Almond), **OW** (Office White), and **W** (White).


\*Not UL Listed.

speakON® is a registered trademark of Neutrik® AG.



### Specifications

- Low-profile design.
- Accepts XJ jacks, audio video and fiber connectors.
- Provided with double-sided tape and mounting screws for easy installation.
- UL and cUL listed.
- Constructed with a high-impact resistant, flame-retardant polymer.
- ANSI/TIA-606B compliant.

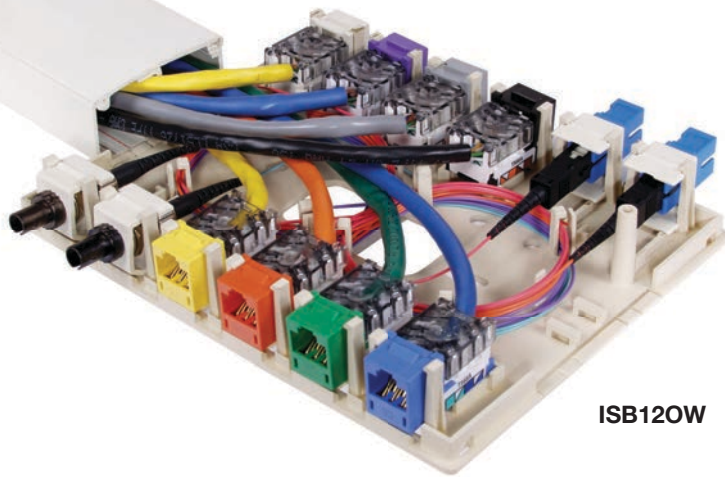

**ISB120W**



**ISB10W**



**ISB20W**



**ISB40W**



**ISB60W**



**ISB120W**

### ISB Surface Mount Boxes, 1- and 2-Port

Ideal for open office, compact surface mount environments, and retrofits to support data, voice, and multimedia applications. Can be mounted with supplied surface mounting screws or double-sided adhesive tape.

Color	1-Port Catalog Number	2-Port Catalog Number
Ivory	<b>ISB1EI</b>	<b>ISB2EI</b>
Office White	<b>ISB10W</b>	<b>ISB20W</b>
White	<b>ISB1W</b>	<b>ISB2W</b>

### ISB Surface Mount Boxes, 4- and 6-Port

Ideal for open office MUTOA cabling, compact surface mount environments, and retrofits to support data, voice, and multimedia applications. Features adjustable furniture latches to provide an additional mounting option to common ANSI/TIA/EIA standard furniture openings, and solutions requiring fiber. Box bases feature fiber storage posts that can store one meter fiber cable after termination.

Color	4-Port Catalog Number	6-Port Catalog Number
Ivory	<b>ISB4EI</b>	<b>ISB6EI</b>
Office White	<b>ISB40W</b>	<b>ISB60W</b>
White	<b>ISB4W</b>	<b>ISB6W</b>


### ISB Surface Mount Boxes, 12-Port

Ideal for open office MUTOA cabling, large capacity surface mount applications and retrofits to support data, voice, and multimedia installations. Can be mounted with supplied surface mounting screws or double-sided adhesive tape and mounted to NEMA electric boxes or relay racks.

Color	12-Port Catalog Number
Ivory	<b>ISB12EI</b>
Office White	<b>ISB120W</b>
White	<b>ISB12W</b>

### Consolidation Point Block, Category 6 and Category 5e

Description	Catalog Number
Category 6, 12-Port, Universal, 89D	<b>P612U</b>
Category 5e, 12-Port, Universal, 89D	<b>P5E12U</b>



P612U

P5E12U

### Universal Patch Panel, Category 5e

Description	Catalog Number
24-Port, 1.75" H	<b>P5E24UE</b>
48-Port, 3.50" H	<b>P5E48UE</b>
96-Port, 7.0" H	<b>P5E96UE</b>



P5E24UE



P6E48U

### Universal Patch Panel, Category 6

Description	Catalog Number
24-Port, 1.75" H	<b>P6E24U</b>
48-Port, 3.50" H	<b>P6E48U</b>
96-Port, 7.0" H	<b>P6E96U</b>



UDX24E

### Keystone Jack Panel, Unloaded\*

Description	Catalog Number
Wall Mount, 12-Port, Black	<b>UDX1289</b>
Rack Mount, 24-Port, 1.75" H, Black	<b>UDX24E</b>
Rack Mount, 48-Port, 3.5" H, Black	<b>UDX48E</b>

Note: \*Not UL Listed.

### Rear Cable Management Bar\*

Description	Catalog Number
Screws to the rear flange of a 19-inch rack	<b>CMBR</b>

Note: \*Not UL Listed.



CMBR



## Horizontal UTP Cable and Patch Cords


- Solid copper 4-pair 24 or better AWG UTP is specified for distribution cabling. Stranded UTP is specified for patch cords for flexibility. Shielded cable is not commonly used in the U.S. splices and bridge taps are not permitted.
- Cable, connectors and patch cords shall be marked with the performance category. Always match performance categories of cables and components throughout the infrastructure.
- All cable, cords and connecting hardware shall meet performance requirements of ANSI/TIA/EIA-568-C.1 and 568-C.2. Hubbell assures this compliance with all products and cable partners.

### COLOR CODING:



## Recognized Connector and Wiring Configurations

- 8-position modular jack/plug.
- 8-position modular panel/plug.
- T568A wiring or T568B wiring options.
- Cat. 5e or Cat. 6 recommended.

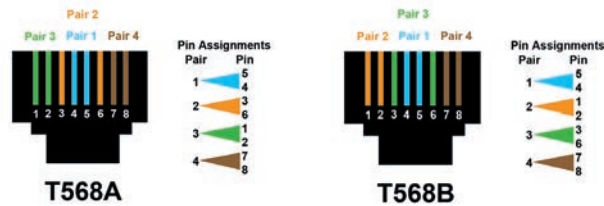

## RJ45 - TIA-568 Conventions

Two wiring standards were adopted. Both configurations provide equivalent transmission performance.




- Preferred method
- Directly compatible with 2-pair voice and Token Ring systems utilizing 6-position connectors



- Optional method
- AT&T's standard
- Directly compatible with AT&T phone systems

## LAN Wiring Conventions


Local Area Network standards designed to operate over UTP specify pin/pair assignments on modular connectors for various signal transmission protocols. While TIA/EIA-568A and 568B conventions support all of these designations, there are some cases where the user chooses to cable only the number of pairs required to support these applications.




- 10 Mbps Ethernet over UTP
- 100 Mbps Ethernet



- 4/16 Mbps Token Ring over copper



- 100 Mbps FDDI over copper (pending)



- 1000 Mbps/10Gb Ethernet over UTP
- Uses all four pairs







## Index

netSELECT® Products	Page
<b>Structured Wiring</b>	
In-Wall AV Delivery .....	W-14
HDMI Products .....	W-15
Advantages and Wiring Layout .....	W-16
Network Enclosures .....	W-17
Network Modules .....	W-18
Audio/Video Modules .....	W-19
Universal Consolidation Blocks, Patch Panels and Patch Cords .....	W-20
Accessories .....	W-21
<b>Data Communications and Audio/Video</b>	
Modular Snap Fit Jacks .....	W-22
Decorator Frames .....	W-23
Molded-In Voice/Data/Video .....	W-24
Molded-In Plates .....	W-25
Telephone Wall Jacks .....	W-26

### In-Wall AV Delivery and HDMI Products

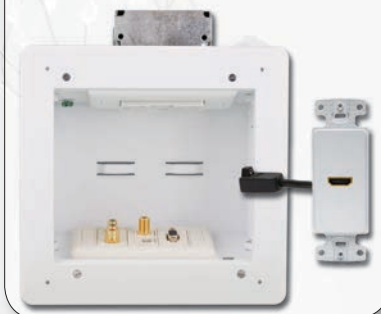


### Universal Blocks, Patch Panels and Cords

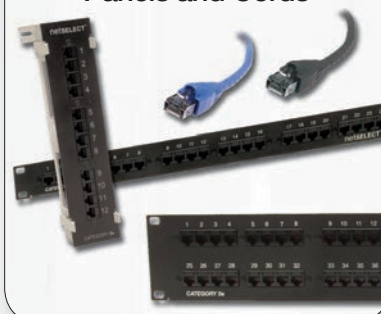

### Modular Snap Fit Jacks





### Molded-In Voice/Data/Video

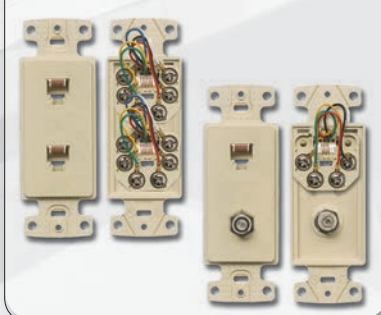



Hubbell's netSELECT® Flat Panel Television (FPTV) connection enclosure delivers high-density connectivity and power in the wall. This allows flat panel displays and interactive "smart" boards to sit flush against walls with no dangling cords. It quickly installs to studs or sheetrock without additional components or hardware.

- 18 Gauge white powder coated rugged steel base
- 2-Gang enclosure with two 1½ and 1¼ inch KOs
- Stud or sheetrock mounting integrated
- Supplied ABS trim ring quickly cleans up sheetrock rough-in
- Optional screw on cover reduces tampering
- cULus 1863 Listed

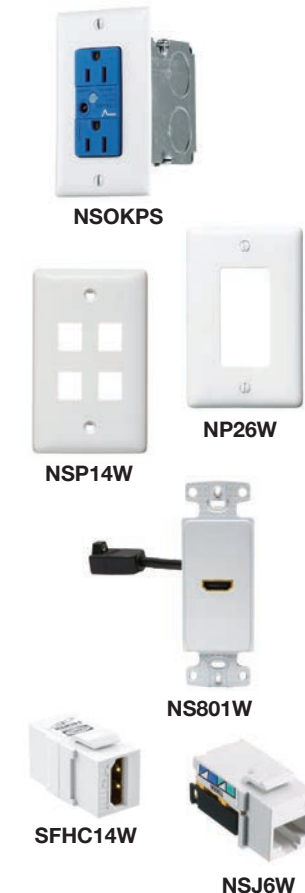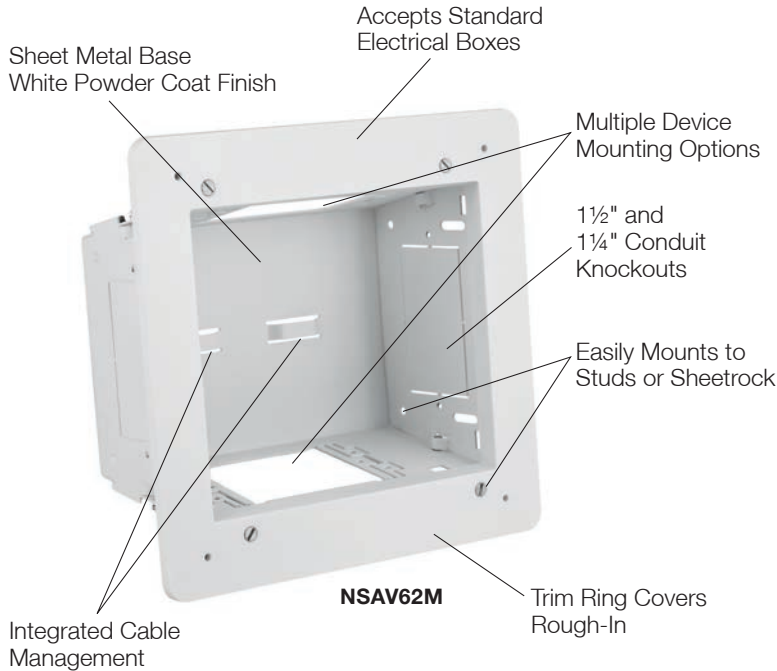

### FPTV Connection Enclosure

Description	Color	Catalog Number
2-Gang In-Wall Enclosure	White	<b>NSAV62M</b>
Steel Cover with Cable Exit	White	<b>NSAV6C</b>
Blank Steel Cover	White	<b>NSAV6CB</b>
Block Wall Adaptor	White	<b>NSAV6BW</b>
New Work Stud Bracket	White	<b>NSAV6NW</b>

### Accessories

#### Power Kits

Description	Color	Catalog Number
Standard Power Kit	White	<b>NSOKPTR</b>
Surge Protected Power Kit	Blue	<b>NSOKPS</b>

#### Unloaded Plates and Frames

1-Gang Blank Plate	White	<b>NP14W</b>
1-Gang Decorator Plate	White	<b>NP26W</b>
1-Gang Hubbell iSTATION Plate	White	<b>IMF1W</b>
1-Gang 4-Port Keystone Plate	White	<b>NSP14W</b>

#### AV Connectors and Plates

1-Port HDMI Frame	White	<b>NS801W</b>
2-Port HDMI Frame	White	<b>NS802W</b>
HDMI Snap Fit	White	<b>SFHC14W</b>
F-Connector Snap Fit	White	<b>NSF70W</b>
USB A-to-B Snap Fit	White	<b>SFUSBABW</b>
Cat 6 Snap Fit Jack	White	<b>NSJ6W</b>

Note: See page W-22 for snap fit multimedia jacks and AV connectors.



The AV Ceiling Enclosure is designed to work with active AV devices to integrate AV distribution, data connections and power in one location, providing a direct connection to a projector or a display device. An additional AV/data kit can be added or customized to address all connector, mounting and patching needs, reducing multiple pieces on site.

- Manage multiple applications inside one enclosure
- Flush mounted, white enclosure for consistent look when mounted in the ceiling
- Loaded with two Hubbell 20A duplex receptacles and a 2-gang back box
- All steel rugged construction provides the ultimate strength for installation



**AVCE1H**


**AV Ceiling Enclosure**

Description	Height Inches (mm)	Width Inches (mm)	Depth Inches (mm)	Color	Catalog Number
AV Ceiling Enclosure	12" (305)	24" (610)	8" (203)	White	<b>AVCE1H</b>

Note: Enclosure includes two 20 amp duplex receptacles and 2-gang back box.

netSELECT® HDMI Decorator Frames deliver uncompromising digital audio and video wherever you need it. Unleash the full potential of your high definition display and audio installations.


- Third party tested for 1080p resolutions
- UL Listed - Communications Circuit Accessory and CSA Certified

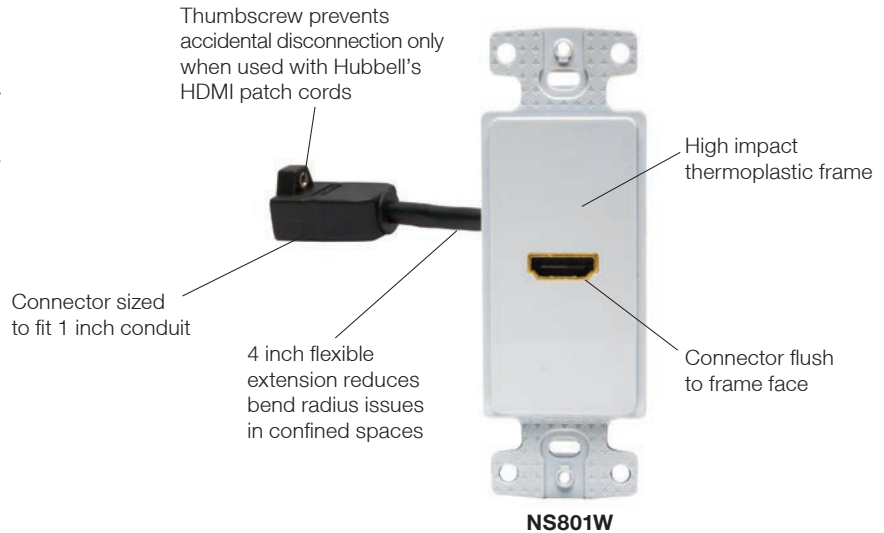

**NS801W**

**HDMI Products**

Description	Color	1-Gang, 1-Port	1-Gang, 2-Port
HDMI, Decorator Frame, Female to Female	Black	<b>NS801BK</b>	<b>NS802BK</b>
	Gray	<b>NS801GY</b>	<b>NS802GY</b>
	Ivory	<b>NS801I</b>	<b>NS802I</b>
	Light Almond	<b>NS801LA</b>	<b>NS802LA</b>
	Office White	<b>NS801OW</b>	<b>NS802OW</b>
	White	<b>NS801W</b>	<b>NS802W</b>

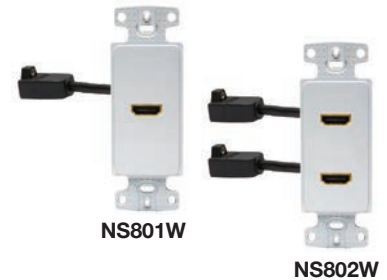

**NS801W**

**NS802W**

**HDMI Patch Cords, 24 AWG**

Length	HDMI Device Patch Cords	Length	Horizontal Cords (Connector to Connector)	Length	Link Cords (Connector to Device)	Length	Coupler Cords (Coupler to Device)
3 ft.	<b>HDPC03BK</b>	10 to 30 ft.	<b>HDHyyBK</b>	10 to 30 ft.	<b>HDLyyBK</b>	10 to 30 ft.	<b>HDCyyBK</b>
6 ft.	<b>HDPC06BK</b>						

Note: yy = Length in feet. 10 (10'), 15 (15'), 20 (20'), 25 (25'), 30 (30'). Black and non-plenum only. Black and Non-Plenum only.




## Connect Your Home to Internet, Voice and Video Services


netSELECT® is an innovative network solution that's perfect for any home or small office. Specifically positioned as the voice/data segment for the Residential brand, the netSELECT® System satisfies the need for a dependable, flexible system that can accommodate all of today's fast-changing voice, data and video requirements.

This cost-effective solution incorporates all the quality you'd expect from Hubbell. Built-in flexibility makes it easy to upgrade and keep pace with evolving technologies.

- Share single analog, cable or DSL internet connection
- Local file access
- Shared peripherals
- Multiple telephone distribution
- Call handling (PBX)
- Video distribution
- Play games that allow multi-users
- Control home automation systems

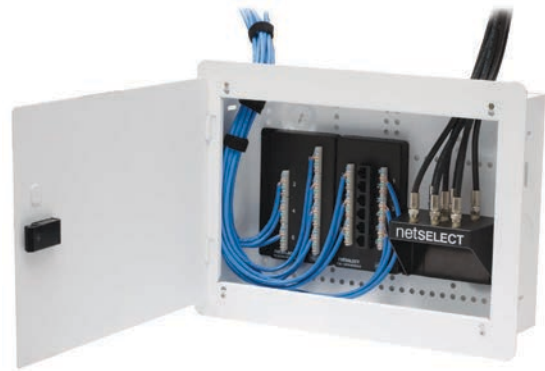

## Today's Communications Entail A Lot More Than Just Talking. netSELECT® Keeps You Connected—Internet, Voice, Data and Entertainment

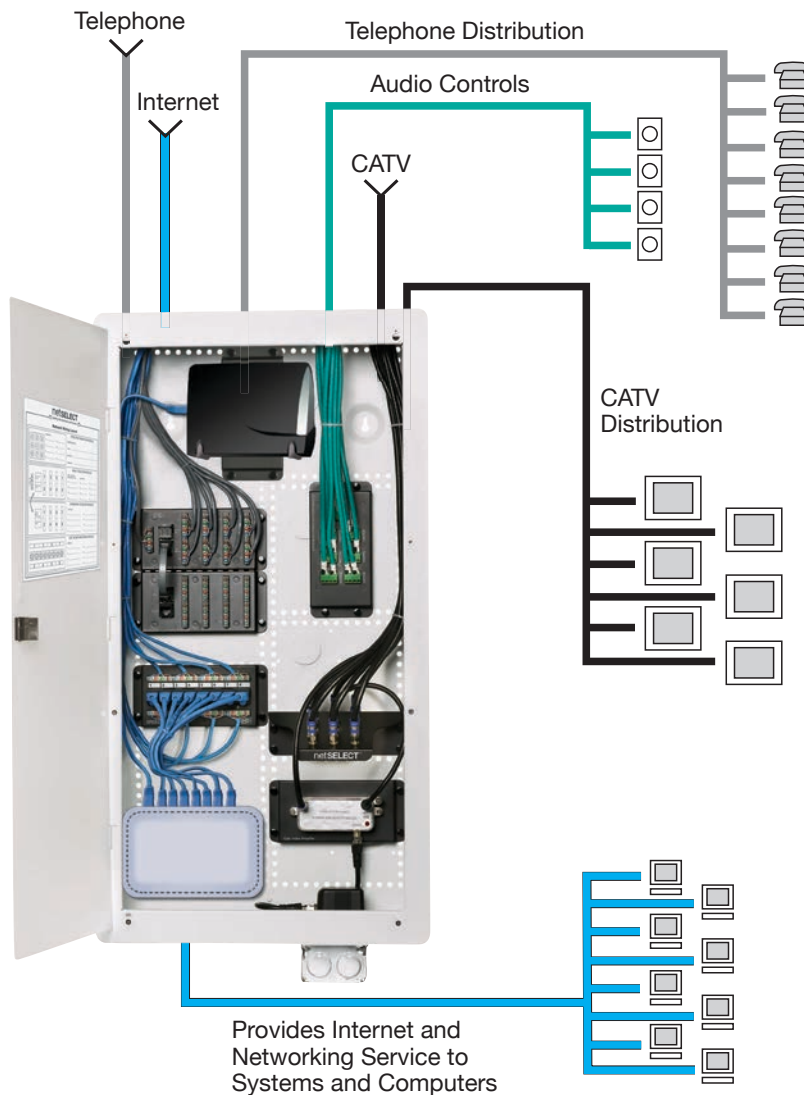



- Flush or surface mount enclosure (hardware provided)
- Hinged cover can be mounted to swing from either side
- Integral trim ring hides rough-in hole in sheet rock providing a finished appearance (except NSOBOX48)
- Horizontal and vertical module mounting holes for maximum flexibility
- Unique 89D bracket mounting holes allow easy mounting of 66 blocks and peripherals
- Provisions to mount optional duplex power and lock kit available
- Integral cable management slots and tie-wraps provided to help dress cable runs
- Additional nylon push pins provided to assist module mounting
- Material: 20-18 gauge steel
- Finish: white, powder coat
- UL and cULus Listed 1863

## Network Enclosures

### Pre-Configured Network System

Description	No. of Module Placement	Catalog Number
Pre-Configured Network System	–	<b>NSOBNK14</b>
Basic home network kit includes:		
One box with hinged cover NSOBOX14,		
One primary 8-port telephone module NSOPTM8,		
One four way coaxial splitter module NSOVM4		



**NSOBOX10**

### 10 Inch Network Enclosure for MDU and Modular Applications

Description	Height Inches (mm)	Width Inches (mm)	Depth Inches (mm)	No. of Module Placement	Catalog Number
With Hinged Cover	11.55" (293)	15.65" (398)	4.08" (104)	3	<b>NSOBOX10</b>
With Panel Cover	11.07" (281)	–	4.08" (104)	3	<b>NSOBOX10BC</b>
10"H Box only	10.07" (256)	14.38" (365)	3.96" (101)	3	<b>NSOBOX10B</b>
Hinged Door	11.55" (293)	15.65" (398)	0.58" (15)	–	<b>NSOBOX10D</b>
Panel Cover	11.07" (281)	15.50" (594)	0.20" (5)	–	<b>NSOBOX10C</b>



**NSOBOX14**

### 14 Inch Network Enclosure

With Hinged Cover	15.55" (395)	15.65" (398)	4.08" (104)	5	<b>NSOBOX14</b>
With Panel Cover	15.10" (384)	15.54" (395)	4.08" (104)	5	<b>NSOBOX14BC</b>
14"H Box only	14.00" (356)	14.38" (365)	3.96" (101)	5	<b>NSOBOX14B</b>
Hinged Door	15.55" (395)	15.65" (398)	0.33" (8)	–	<b>NSOBOX14D</b>
Vented Door (Louver)	15.55" (395)	15.65" (398)	0.52" (15)	–	<b>NSOBOX14DL</b>
Panel Cover	15.11" (384)	15.54" (395)	0.20" (5)	–	<b>NSOBOX14C</b>
2"D Extension Bracket with ventilation and WiFi KOs	15.30" (389)	15.57" (395)	2.00" (51)	–	<b>NSOBOX14X2</b>

### 28 Inch Network Enclosure

With Hinged Cover	29.55" (751)	–	–	11	<b>NSOBOX28</b>
With Panel Cover	29.13" (740)	15.54" (395)	4.08" (104)	11	<b>NSOBOX28BC</b>
28"H Box only	28.00" (711)	14.38" (365)	3.96" (101)	11	<b>NSOBOX28B</b>
Hinged Door	29.55" (751)	15.65" (398)	0.33" (8)	–	<b>NSOBOX28D</b>
Vented Door* (Louver)	29.55" (751)	15.65" (398)	0.52" (15)	–	<b>NSOBOX28DL</b>
Panel Cover	29.29" (744)	15.54" (395)	0.20" (5)	–	<b>NSOBOX28C</b>
2"D Extension Bracket with ventilation and WiFi KOs	29.3" (744)	15.57" (395)	2.00" (51)	–	<b>NSOBOX28X2</b>



**NSOBOX28**

### 48 Inch Network Enclosure

With Hinged Cover	48.94" (1243)	14.94" (379)	4.07" (103)	21	<b>NSOBOX48*</b>
-------------------	---------------	--------------	-------------	----	------------------

Note: \*Door covers rough-in, no trim ring provided.



netSELECT® Modular Components enable the designer to select performance requirements specifically for the application. Modules snap horizontally or vertically into the enclosures for maximum flexibility and optimum space usage.

- Dimensions: 6.47 in. W x 2.95 in. H, except NSOMTM24 6.47 in. W x 6.00 in. H
- Meets FCC Part 68 standard
- Material: High impact plastic
- UL and cULus Listed 1863
- All data and phone modules 568A wired

## Network Modules

Description	Units	Catalog Number
<p>Combo Module</p> <p>Complete Home Network Combo Module 6-Port Telephone Panel and 6-Port Coaxial Splitter with Optional 6-Port Cat. 5e Panel Provides voice, video, and data distribution in a space efficient package. Perfect for use with NSOBOX10 and NS790xx plates to quickly establish a comprehensive home network.</p>		
<p>6-Port Telephone and Video</p> <p>6-Port Telephone, Video and Category 5e</p> <p>6-Port Category 5e Data Upgrade Kit</p>	3	<b>NSOTVM6</b>
	3	<b>NSOTVDM6</b>
	3	<b>NSODK6</b>
<p>Primary Telephone Module, 8-Port</p> <p>Supports 8 phone outlets with up to 4 incoming lines for voice, fax or modem applications in a protected PCB module. Pre-mounted push pins snap the module quickly into place. RJ31X interface jack included for security system connection. RJ45 jack interfaces with optional NSOETM8 Telephone Expansion module for additional extensions.</p>	1	<b>NSOPTM8</b>
<p>Expansion Telephone Module, 8-Port</p> <p>Adds an additional 8 phone outlets with up to 4 incoming lines when used with the primary telephone module. Pre-mounted push pins snap the module quickly into place. Includes RJ45 jumper cord to connect with NSOPTM8 Primary Telephone module.</p>	1	<b>NSOETM8</b>
<p>Category 5e Data Module, 8-Port</p> <p>Supports Gigabit Ethernet for up to 8 Category 5e data lines with front 110 Punch-Down terminations in a protected PCB module. Pre-mounted push pins snap the module quickly into place.</p>	1	<b>NSODM8</b>
<p>Category 6 Data Module, 8-Port</p> <p>Supports enhanced transmission speeds beyond gigabit ethernet. Future proof for tomorrows applications.</p>	1	<b>NSODM8C6</b>
<p>Multiport Patchable Telecom Module</p> <p>Terminates lines via modular plug to accommodate flexibility, by changing plug locations. Reconfigure where phone lines go at the panel level. Allows data lines to be converted to voice, with the move of a patch cord. Includes nine RJ45 jumper cords.</p>	2	<b>NSOMTM24</b>
<p>Combination Module</p> <p>6-Port Telephone and 1-Port Data</p> <p>Provides basic telephone and data delivery in a small package. Allows data lines to be converted to voice, with the move of a patch cord.</p>	1	<b>NSO6P1DM</b>



**NSOTVDM6**



**NSOPTM8**



**NSOETM8**



**NSODM8**



**NSOMTM24**



**NSO6P1DM**

netSELECT® Video Modules support bidirectional signal by splitting to 4, 6, or 8 separate work areas. Pre-mounted push pins snap the module quickly into place.

- Dimensions for VAMP, AM8 and BM: 6.47 in. W x 2.95 in. H
- Dimensions for video splitters: 6.47 in. W x 2.09 in. H x 3.20 in. D
- Material: High impact plastic
- UL and cULus Listed 1863

### Audio/Video Modules

Description	Units	Catalog Number
4-Way Coaxial Splitter Modules, One Incoming Line, Four Outgoing 1 Ghz, Basic Unit 2.3 Ghz, Enhanced Capability	1 1	<b>NSOVM4</b> <b>NSOVM42G</b>
6-Way Coaxial Splitter Modules, One Incoming Line, Six Outgoing 1 Ghz, Basic Unit 2.3 Ghz, Enhanced Capability	1 1	<b>NSOVM6</b> <b>NSOVM62G</b>
8-Way Coaxial Splitter Modules, One Incoming Line, Eight Outgoing 1 Ghz, Basic Unit 2.3 Ghz, Enhanced Capability	1 1	<b>NSOVM8</b> <b>NSOVM82G</b>
Fixed Video Amplifier Module, 10dB 120 volt rated	1	<b>NSOVAMP</b>
Provides video signal amplification for incoming cable feeds recommended for use when more than four outputs are installed or when signal level is low. Provides 10dB forward path gain and supports current digital cable systems and modems with a passive return. Pre-mounted push pins snap the module quickly into place. Includes RG-59 cable jumper to connect amplifier to passive video splitter.		
8 Room Audio Module, Distributes audio from an amplifier to matching volume controllers. Supports up to eight rooms of audio. Power handling - 200W RMS@20° C. Requires impedance matching volume controls, see page W-21.	1	<b>NSOAM8</b>
Blank Module Plate Allows mounting of active components (i.e. switches, routers) or other devices (66 blocks, audio components) onto a modular platform. Can be custom drilled or used with two self-adhesive VELCRO® strips included to mount components onto module. Pre-mounted push pins snap the module quickly into place.	1	<b>NSOBM</b>



**NSOVM4**



**NSOVM6**



**NSOVM8**



**NSOVAMP**



**NSOAM8**



**NSOBM**

VELCRO® is a registered trademark of Velcro Industries B.V.



netSELECT® Patch Panels are excellent for designing rack systems for telephone, data and AV systems. Consolidation Blocks are ideal for small user count configurations that mount in or on the wall.

- Meets ANSI/TIA - Category 6 and Category 5e standards
- cULus Listed

**Universal Consolidation Blocks and Patch Panels**

Description	Catalog Number
Category 5e 12-Port Universal Consolidation Block, 89D Bracket Mount	<b>NS5E12U</b>
Category 6 12-Port Universal Consolidation Block, 89D Bracket Mount	<b>NS612U</b>
Category 5e Universal Patch Panel 24-port, 1.75 inch H, 1 Rack Unit 48-port, 3.50 inch H, 2 Rack Units	<b>NS5E24U</b> <b>NS5E48U</b>
Category 6 Universal Patch Panel 24-port, 1.75 inch H, 1 Rack Unit 48-port, 3.50 inch H, 2 Rack Units	<b>NS624U</b> <b>NS648U</b>



**NS5E12U**



**NS612U**



**NS5E24U**



**NS5E48U**



**NS624U**





**NS648U**

netSELECT® Patch Cords allow for quick change of voice/data lines with insertion of modular plugs.

- Meets and exceeds ANSI/TIA - Category 6 and Category 5e standards
- UL and cUL Listed

**Universal Patch Cords, Category 6 and Category 5e**

Description	Color	1-Foot	3-Foot	5-Foot	7-Foot	10-Foot	15-Foot	20-Foot	25-Foot
Cat. 5e Patch Cord 	Blue	<b>HC5EB01</b>	<b>HC5EB03</b>	<b>HC5EB05</b>	<b>HC5EB07</b>	<b>HC5EB10</b>	<b>HC5EB15</b>	<b>HC5EB20</b>	<b>HC5EB25</b>
	Gray	<b>HC5EGY01</b>	<b>HC5EGY03</b>	<b>HC5EGY05</b>	<b>HC5EGY07</b>	<b>HC5EGY10</b>	<b>HC5EGY15</b>	<b>HC5EGY20</b>	<b>HC5EGY25</b>
	Yellow	<b>HC5EY01</b>	<b>HC5EY03</b>	<b>HC5EY05</b>	<b>HC5EY07</b>	<b>HC5EY10</b>	<b>HC5EY15</b>	<b>HC5EY20</b>	<b>HC5EY25</b>
	Red	<b>HC5ER01</b>	<b>HC5ER03</b>	<b>HC5ER05</b>	<b>HC5ER07</b>	<b>HC5ER10</b>	<b>HC5ER15</b>	<b>HC5ER20</b>	<b>HC5ER25</b>
Cat. 6 Patch Cord 	Blue	<b>HC6B01</b>	<b>HC6B03</b>	<b>HC6B05</b>	<b>HC6B07</b>	<b>HC6B10</b>	<b>HC6B15</b>	<b>HC6B20</b>	<b>HC6B25</b>
	Gray	<b>HC6GY01</b>	<b>HC6GY03</b>	<b>HC6GY05</b>	<b>HC6GY07</b>	<b>HC6GY10</b>	<b>HC6GY15</b>	<b>HC6GY20</b>	<b>HC6GY25</b>
	Yellow	<b>HC6Y01</b>	<b>HC6Y03</b>	<b>HC6Y05</b>	<b>HC6Y07</b>	<b>HC6Y10</b>	<b>HC6Y15</b>	<b>HC6Y20</b>	<b>HC6Y25</b>
	Red	<b>HC6R01</b>	<b>HC6R03</b>	<b>HC6R05</b>	<b>HC6R07</b>	<b>HC6R10</b>	<b>HC6R15</b>	<b>HC6R20</b>	<b>HC6R25</b>





netSELECT® Accessories enhance system capabilities. Volume controls expand home audio applications. Cabinet mounted receptacle kits provide convenience power to the enclosure.

- Audio controls available in slide or rotary
- Receptacles available in surge and standard kits

**Accessories**

Description	Color	Catalog Number
Slide Audio Volume Controller, Decorator Styling, Power handling - 70W RMS@20° C. Impedance matching for up to 8 pairs of speakers. Includes both ivory and white slides and frames.	Ivory/White	<b>NSOSAVC</b>
Rotary Audio Volume Controller Power handling - 70W RMS@20° C. Impedance matching for up to 8 pairs of speakers. Includes both ivory and white knobs and frames.	Ivory/White	<b>NSORAVC</b>
Standard Power Kit, Includes tamper-resistant duplex receptacle 15A 125V NEMA 5-15R, electrical steel box and wallplate.		<b>NSOKPTR</b>
Surge Suppression Power Kit, Includes surge receptacle 15A 125V NEMA 5-15R, 240 Joules/15,000A protection per mode, electrical steel box and wallplate.		<b>NSOKPS</b>
Chromed Steel Lock Kit, Includes two keys. Eliminates unwanted tampering.		<b>FLOCK1</b>
Panel Bracket Adapter, For use with Adapter Panels shown below, and FSP series modules. Snap mounts into structured cabling enclosures.		<b>NSOFSB</b>
F-Connector Adapter Panel, with Six Populated Coaxial Connectors.		<b>FSPFP6X</b>
Keystone Adapter Panel, with Six Blank Openings for jacks and snap fits.		<b>FSPHD6X</b>
WiFi Antenna Kit, Use with X2 extensions to assure maximum WiFi coverage.		<b>NSOKA</b>



**NSOSAVC**



**NSORAVC**



**NSOKPS**



**FLOCK1**



**NSOFSB**



**FSPFP6X**




**FSPHD6X**



**NSOKA**



Customize the jack selections and look

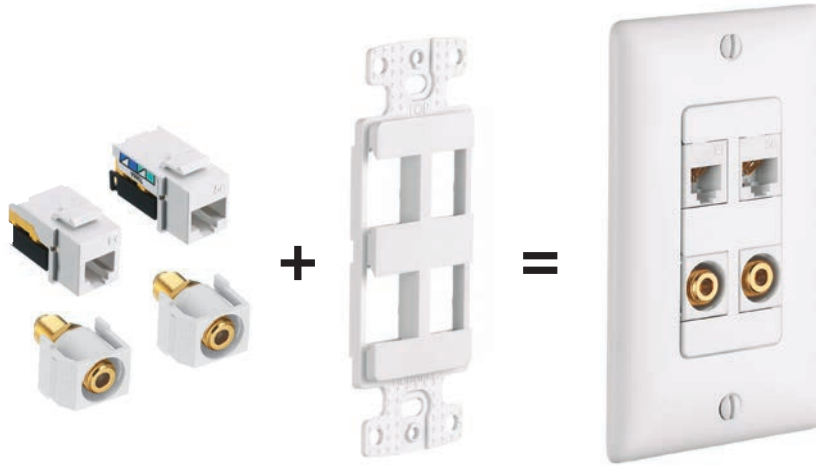

**Molded-In Voice/Low-Speed Data - Modular Snap Fit**

Color	Category 6 Jack		Category 5e Jack		USOC Jack (single)
	(single)	(25 pack)	(single)	(25 pack)	
Black	NSJ6BK	NSJ6BK25	NSJ5EBK	NSJ5EBK25	NSJUBK
Blue	NSJ6B	NSJ6B25	NSJ5EB	NSJ5EB25	NSJUB
Gray	NSJ6GY	NSJ6GY25	NSJ5EGY	NSJ5EGY25	NSJUGY
Green	NSJ6GN	NSJ6GN25	NSJ5EGN	NSJ5EGN25	NSJUGN
Ivory	NSJ6I	NSJ6I25	NSJ5EI	NSJ5EI25	NSJUI
Light Almond	NSJ6LA	NSJ6LA25	NSJ5ELA	NSJ5ELA25	NSJULA
Orange	NSJ6OR	NSJ6OR25	NSJ5EOR	NSJ5EOR25	NSJUOR
Red	NSJ6R	NSJ6R25	NSJ5ER	NSJ5ER25	NSJUR
White	NSJ6W	NSJ6W25	NSJ5EW	NSJ5EW25	NSJUW
Yellow	NSJ6Y	NSJ6Y25	NSJ5EY	NSJ5EY25	NSJUY

**Audio/Video Connectors - Standard Bulkhead**

Color	Nickel F-Type Coupler Bulkhead, Female to Female	Gold F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass Through, Female to Female, Red Interior	RCA Gold Pass Through, Female to Female, White Interior	RCA Gold Pass Through, Female to Female, Yellow Interior	RCA Gold Pass Through, Female to Female, Blue Interior	RCA Gold Pass Through, Female to Female, Green Interior
Black	NSF70BK	SFFGBK	SFRCRFFBK	SFRCWFFBK	SFRCYFFBK	SFRCBFFBK	SFRCGNFFBK
Gray	NSF70GY	SFFGGY	SFRCRFFGY	SFRCWFFGY	SFRCYFFGY	SFRCBFFGY	SFRCGNFFGY
Ivory	NSF70I	SFFGEI	SFRCRFFEI	SFRCWFFEI	SFRCYFFEI	SFRCBFFEI	SFRCGNFFEI
Light Almond	NSF70LA	SFFGLA	SFRCRFFLA	SFRCWFFLA	SFRCYFFLA	SFRCBFFLA	SFRCGNFFLA
White	NSF70W	SFFGW	SFRCRFFW	SFRCWFFW	SFRCYFFW	SFRCBFFW	SFRCGNFFW

**Audio/Video Connectors - Recessed**

Color	Gold F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass Through, Female to Female, Red Interior	RCA Gold Pass Through, Female to Female, White Interior	RCA Gold Pass Through, Female to Female, Yellow Interior	RCA Gold Pass Through, Female to Female, Blue Interior	RCA Gold Pass Through, Female to Female, Green Interior	Blank Insert
Black	SFGRFBK	SFRCRRBK	SFRCWRBK	SFRCYRBK	SFRCBRBK	SFRCGNRBK	SFSBBK10*
Gray	SFGRFGY	SFRCRRGY	SFRCWRGY	SFRCYRGY	SFRCBRGY	SFRCGNRGY	SFSBGY10*
Ivory	SFGRFEI	SFRCRREI	SFRCWREI	SFRCYREI	SFRCBREI	SFRCGNREI	SFSBEI10*
Light Almond	SFGRFLA	SFRCRRLA	SFRCWRLA	SFRCYRLA	SFRCBRLA	SFRCGNRLA	SFSBLA10*
White	SFGRFW	SFRCRRW	SFRCWRW	SFRCYRW	SFRCBRW	SFRCGNRW	SFSBW10*

Note: \*Sold in a package of 10. Order 1 to receive a bag of 10 blanks.




## Features

Decorator frames provide a stylized look for that finishing touch. This allows all devices to match. Multimedia jacks insert into frame for custom configuration.

- Elongated strap for better wall box mounting
- High impact-resistant thermoplastic frame
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified

## Decorator Frames

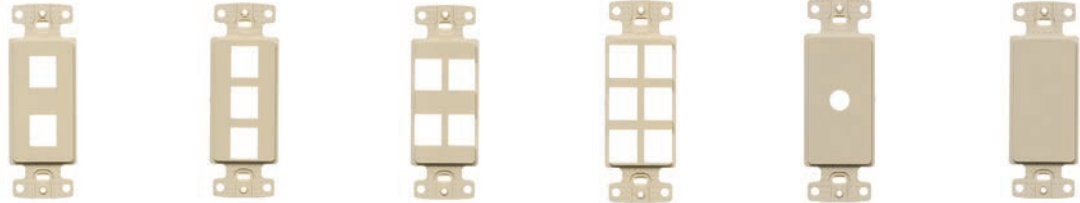

Color	1-Gang, 2-Port	1-Gang, 3-Port	1-Gang, 4-Port	1-Gang, 6-Port	1-Gang, Adapter .406" (10.30 Dia. Hole*)	1-Gang, Adapter Blank**
Black	<b>NS612BK</b>	<b>NS613BK</b>	<b>NS614BK</b>	<b>NS616BK</b>	<b>NS621BK</b>	<b>NS620BK</b>
Gray	<b>NS612GY</b>	<b>NS613GY</b>	<b>NS614GY</b>	<b>NS616GY</b>	<b>NS621GY</b>	<b>NS620GY</b>
Ivory	<b>NS612I</b>	<b>NS613I</b>	<b>NS614I</b>	<b>NS616I</b>	<b>NS621I</b>	<b>NS620I</b>
Light Almond	<b>NS612LA</b>	<b>NS613LA</b>	<b>NS614LA</b>	<b>NS616LA</b>	<b>NS621LA</b>	<b>NS620LA</b>
White	<b>NS612W</b>	<b>NS613W</b>	<b>NS614W</b>	<b>NS616W</b>	<b>NS621W</b>	<b>NS620W</b>

Note: \*For use with rotary dimmers or to pull through AV or telephone cable.  
 \*\*To fill an extra decorator opening or to create customized openings.

## Multimedia Face Plates



Description	1-Gang, 1-Port Plate		1-Gang, 2-Port Plate		1-Gang, 3-Port Plate	
	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")
Black	<b>NSP11BK</b>	<b>NSP101BK</b>	<b>NSP12BK</b>	<b>NSP102BK</b>	<b>NSP13BK</b>	<b>NSP103BK</b>
Gray	<b>NSP11GY</b>	<b>NSP101GY</b>	<b>NSP12GY</b>	<b>NSP102GY</b>	<b>NSP13GY</b>	<b>NSP103GY</b>
Ivory	<b>NSP11I</b>	<b>NSP101I</b>	<b>NSP12I</b>	<b>NSP102I</b>	<b>NSP13I</b>	<b>NSP103I</b>
Light Almond	<b>NSP11LA</b>	<b>NSP101LA</b>	<b>NSP12LA</b>	<b>NSP102LA</b>	<b>NSP13LA</b>	<b>NSP103LA</b>
White	<b>NSP11W</b>	<b>NSP101W</b>	<b>NSP12W</b>	<b>NSP102W</b>	<b>NSP13W</b>	<b>NSP103W</b>



Description	1-Gang, 4-Port Plate		1-Gang, 6-Port Plate		2-Gang, 4-Port Plate	2-Gang, 6-Port Plate
	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 4.69")	Standard (4.63" x 4.69")
Black	<b>NSP14BK</b>	<b>NSP104BK</b>	<b>NSP16BK</b>	<b>NSP106BK</b>	<b>NSP24BK</b>	<b>NSP26BK</b>
Gray	<b>NSP14GY</b>	<b>NSP104GY</b>	<b>NSP16GY</b>	<b>NSP106GY</b>	<b>NSP24GY</b>	<b>NSP26GY</b>
Ivory	<b>NSP14I</b>	<b>NSP104I</b>	<b>NSP16I</b>	<b>NSP106I</b>	<b>NSP24I</b>	<b>NSP26I</b>
Light Almond	<b>NSP14LA</b>	<b>NSP104LA</b>	<b>NSP16LA</b>	<b>NSP106LA</b>	<b>NSP24LA</b>	<b>NSP26LA</b>
White	<b>NSP14W</b>	<b>NSP104W</b>	<b>NSP16W</b>	<b>NSP106W</b>	<b>NSP24W</b>	<b>NSP26W</b>




### Features

Designed to complement decorator styling, these jacks offer voice and Cat. 5e devices to fit within a decorator wallplate.

- High impact-resistant thermoplastic frame
- Meets FCC part 68
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified

### Molded-In Voice/Low-Speed Data

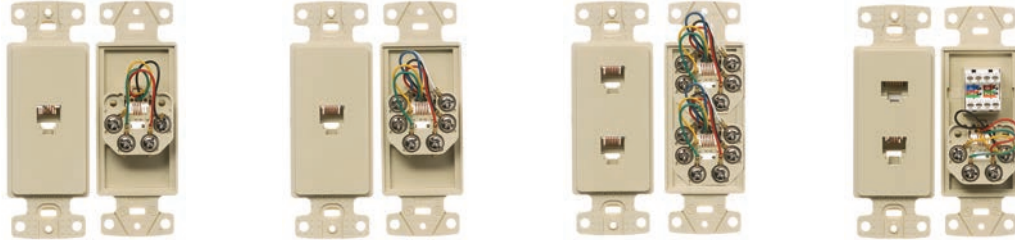


Description	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor	Decorator Frame, One RJ11 Jack, 6-Position, 6-Conductor	Decorator Frame, Duplex RJ11 Jacks, 6-Position, 6-Conductor	Decorator Frame, One Cat. 5e 110 Punch-Down, One RJ11 Jack, 6-Position, 4-Conductor
Color	Screw Terminations	Screw Terminations	Screw Terminations	Screw Terminations
Black	<b>NS770BK</b>	—	—	<b>NS784BK</b>
Brown	<b>NS770</b>	<b>NS771</b>	—	<b>NS784</b>
Gray	<b>NS770GY</b>	—	—	<b>NS784GY</b>
Ivory	<b>NS770I</b>	<b>NS771I</b>	<b>NS772I</b>	<b>NS784I</b>
Light Almond	<b>NS770LA</b>	<b>NS771LA</b>	<b>NS772LA</b>	<b>NS784LA</b>
White	<b>NS770W</b>	<b>NS771W</b>	<b>NS772W</b>	<b>NS784W</b>

### Features

Coaxial video and combination jacks complement multimedia needs in a 1-gang decorator opening.

- High impact-resistant thermoplastic frame
- Jacks meet FCC part 68
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified

### Molded-In Voice/Low-Speed Data

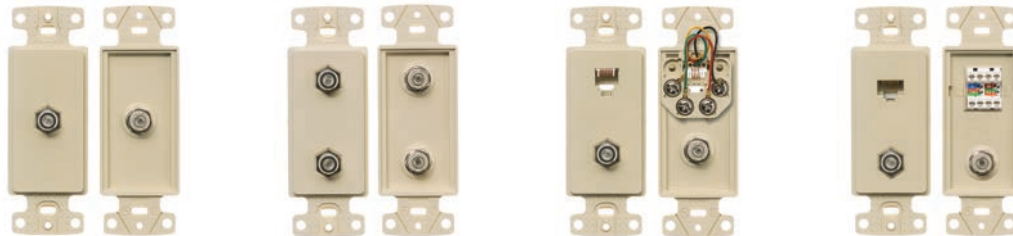

Description	Decorator Frame, Single F-Type Coupler Bulkhead, Female to Female	Decorator Frame, Duplex F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor, One F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One Cat. 5e 110 Punch-Down, One F-Type Coupler Bulkhead, Female to Female
Color	Screw Terminations	Screw Terminations	Screw Terminations	Screw Terminations
Black	—	—	—	<b>NS785BK</b>
Brown	—	—	—	<b>NS785</b>
Gray	—	—	—	<b>NS785GY</b>
Ivory	<b>NS780I</b>	<b>NS782I</b>	<b>NS783I</b>	<b>NS785I</b>
Light Almond	<b>NS780LA</b>	<b>NS782LA</b>	<b>NS783LA</b>	<b>NS785LA</b>
White	<b>NS780W</b>	<b>NS782W</b>	<b>NS783W</b>	<b>NS785W</b>



**Features**

Designed for voice, these devices provide an economical alternative to wall phone outlet placement.

- High impact-resistant thermoplastic plate
- Convenient screw down terminals
- Meets FCC part 68
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified

**Molded-In Plates for Voice**



1-Gang Plate,  
One RJ11 Jack,  
6-Position, 4-Conductor,  
Screw Terminations



1-Gang Plate,  
One RJ11 Jack,  
6-Position, 6-Conductor,  
Screw Terminations



1-Gang Plate,  
Duplex RJ11 Jacks,  
6-Position, 4-Conductor,  
Screw Terminations



1-Gang Plate,  
Duplex RJ11 Jacks,  
6-Position, 6-Conductor,  
Screw Terminations

Description	1-Gang Plate, One RJ11 Jack, 6-Position, 4-Conductor, Screw Terminations		1-Gang Plate, One RJ11 Jack, 6-Position, 6-Conductor, Screw Terminations		1-Gang Plate, Duplex RJ11 Jacks, 6-Position, 4-Conductor, Screw Terminations		1-Gang Plate, Duplex RJ11 Jacks, 6-Position, 6-Conductor, Screw Terminations	
Color	Standard	Mid-Size	Standard	Standard	Mid-Size	Standard	Mid-Size	Standard
Brown	<b>NS730</b>	<b>NS735</b>	<b>NS732</b>	—	—	—	—	—
Ivory	<b>NS730I</b>	<b>NS735I</b>	<b>NS732I</b>	<b>NS742I</b>	<b>NS745I</b>	<b>NS744I</b>	—	—
Light Almond	<b>NS730LA</b>	<b>NS735LA</b>	<b>NS732LA</b>	<b>NS742LA</b>	—	—	—	—
White	<b>NS730W</b>	<b>NS735W</b>	<b>NS732W</b>	<b>NS742W</b>	<b>NS745W</b>	<b>NS744W</b>	—	<b>NS744W</b>

**Molded-In Plates for Voice and CATV/Satellite**



1-Gang Plate,  
One F-Type Coupler Bulkhead,  
Female to Female,  
One RJ11 Jack,  
6-Position, 6-Conductor



1-Gang Plate,  
One F-Type Coupler Bulkhead,  
Female to Female,  
One RJ11 Jack,  
6-Position, 4-Conductor



1-Gang Plate,  
One F-Type Coupler Bulkhead,  
Female to Female



1-Gang Plate,  
Duplex F-Type Coupler Bulkhead,  
Female to Female

Description	1-Gang Plate, One F-Type Coupler Bulkhead, Female to Female, One RJ11 Jack, 6-Position, 6-Conductor		1-Gang Plate, One F-Type Coupler Bulkhead, Female to Female, One RJ11 Jack, 6-Position, 4-Conductor		1-Gang Plate, One F-Type Coupler Bulkhead, Female to Female		1-Gang Plate, Duplex F-Type Coupler Bulkhead, Female to Female	
Color	Standard	Mid-Size	Standard	Standard	Mid-Size	Standard	Mid-Size	Standard
Ivory	<b>NS748I</b>	<b>NS755I</b>	<b>NS747I</b>	<b>NS750I</b>	<b>NS751I</b>	<b>NS752I</b>	—	—
Light Almond	<b>NS748LA</b>	<b>NS755LA</b>	<b>NS747LA</b>	<b>NS750LA</b>	<b>NS751LA</b>	<b>NS752LA</b>	—	—
White	<b>NS748W</b>	<b>NS755W</b>	<b>NS747W</b>	<b>NS750W</b>	<b>NS751W</b>	<b>NS752W</b>	—	—



1-Gang Plate,  
One Cat. 5e 110 Punch-Down  
One RJ11 Jack,  
6-Position, 4-Conductor  
One F-Type Coupler Bulkhead,  
Female to Female

Description	1-Gang Plate, One Cat. 5e 110 Punch-Down, One RJ11 Jack, 6-Position, 4-Conductor, One F-Type Coupler Bulkhead, Female to Female	
Color	Standard	
Black	<b>NS790BK</b>	
Brown	<b>NS790</b>	
Gray	<b>NS790GY</b>	
Ivory	<b>NS790I</b>	
Light Almond	<b>NS790LA</b>	
White	<b>NS790W</b>	





## Features

Designed for voice applications, these jacks provide an economical alternative to basic wall mount and performance needs.

- Available in high impact-resistant thermoplastic or stainless steel
- Meets FCC part 68
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified

## Telephone Wall Jacks





			
Description	Wall Phone Jack Quick Connect, 6-Position, 4-Conductor, Punch-Down Termination Tool Included	Wall Phone Jack, 6-Position, 4-Conductor, Screw Terminations	Wall Phone Jack, 6-Position, 6-Conductor, Screw Terminations
Ivory	<b>NS721I</b>	<b>NS722I</b>	<b>NS725I</b>
Light Almond	—	—	<b>NS725LA</b>
White	<b>NS721W</b>	<b>NS722W</b>	<b>NS725W</b>
			
Description	Wall Phone Jack Quick Connect, 6-Position, 4-Conductor, Punch-Down Termination Tool Included	Wall Phone Jack, 6-Position, 4-Conductor, Screw Terminations	
Stainless Steel	<b>NS723SS</b>	<b>NS726SS</b>	

## Features

Telephone surface mount jacks are available in 4- or 6-conductor configurations for voice. Alternatively, multimedia surface mount boxes can be custom loaded for computer and media use.

- High impact-resistant thermoplastic
- Mounts using screws or double sided tape (both included)
- Meets FCC part 68
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified

## Telephone Wall Jacks

				
Description	Telephone Surface Mount Jack, 6-Position, 4-Conductor, Screw Terminations	Telephone Surface Mount Jack, 6-Position, 6-Conductor, Screw Terminations	Multimedia 1-Port Surface Mount Box, Jack Not Included	Multimedia 2-Port Surface Mount Box, Jacks Not Included
Ivory	<b>NS760I</b>	<b>NS761I</b>	<b>ISB1E1*</b>	<b>ISB2E1*</b>
White	<b>NS760W</b>	<b>NS761W</b>	<b>ISB1W*</b>	<b>ISB2W*</b>

Note: \*cULus Listed 1863 - Communication Circuit Accessory.  
 See page W-22 for snap fit multimedia jacks and AV connectors.