



# trade**SELECT**™



Boxes ♦ Fittings ♦ Devices ♦ Surge ♦ Weatherproof ♦ Covers ♦ Wallplates



# TABLE OF CONTENTS

## I-III GENERAL INFORMATION

General Information.....	ii
Electrical Code Requirements.....	iii-iv

## A METAL BOXES, COVERS AND ACCESSORIES

Device Boxes.....	A1-A5
Octagon Boxes.....	A6-A7
Square Boxes And Covers.....	A8-A12
Utility Boxes And Covers.....	A13-A14
Steel Stud Boxes.....	A15-A20
347 Volt Boxes And Covers.....	A21-A22
Standard Masonry Boxes.....	A23
Concrete Rings.....	A24
Preganged Boxes And Covers.....	A25
Vapour/Air Barriers.....	A26
Door Switches And Boxes.....	A26
Bar Hangers.....	A27
Accessories.....	A27

## B NON-METALLIC BOXES

Standard Non-Metallic Boxes.....	B1-B2
Vapour/Air Barrier Non-Metallic Boxes.....	B3-B4

## C WALL PLATES

General Information.....	C1
Standard Wall Plates.....	C2-C5
347 Volt Wall Plates.....	C6
King Size Wall Plates.....	C7
Wall Plate Accessories.....	C7
Custom Wall Plate Information.....	C8
Technical Data.....	C9-C10

## D FITTINGS

Non-Metallic Sheathed Cable.....	D1-D2
Armoured Cable.....	D3-D4
Liquidtight Conduit.....	D5-D6
Emt.....	D7-D9
Conduit Bodies.....	D10
Conduit Nipples.....	D11
Rigid Straps.....	D12
Bushings.....	D13
Metal Bushings.....	D14
Threaded Hubs.....	D15
Knock-Outs.....	D16
Jack Chain.....	D17
Service Entrance Head.....	D18

## E WIRE MANAGEMENT

Straight Male Connectors.....	E1-E3
45° Male Cord Connectors.....	E4
90° Male Cord Connectors.....	E5
Straight Female Connectors.....	E6
Low Profile Connectors.....	E7
Accessories.....	E8
Hubbell Junior® Nylon Cord Connectors.....	E9
Polytuff® Liquidtight Conduit.....	E10
Polytuff® Liquidtight Tubing.....	E11
Polytuff® Liquidtight Fittings.....	E12

## F tradeSELECT™ and netSELECT®

### tradeSELECT™

Rocker Switches.....	F1-F3
Weather Resistant, Tamper Resistant & Standard Receptacles.....	F4
Wallplates.....	F5-F6
Decorator Frames.....	F7
Snap Fit Jacks.....	F8
Molded-in Jacks.....	F9

## F tradeSELECT™ and netSELECT® (continued)

Toggle Switches.....	F10-F11
Combination Switches/Devices.....	F12
Duplex, Single & GFCI Receptacles.....	F13-F15
Range & Dryer Receptacles & Plugs.....	F16
Special Use Products.....	F17
Dimmer & Fan Controls.....	F18-F19
Sensors.....	F20
Floor Boxes.....	F21-F22
Under Cabinet Power Distribution.....	F23
JLoad® Multimedia Outlet.....	F24
Decorator Switches.....	F25

### netSELECT®

In-Wall A/V Delivery.....	F26
HDMI Products.....	F27
Structured Wiring.....	F28
Network Enclosures.....	F29
Network Modules.....	F30
Audio/Video Modules.....	F31
Universal Consolidation Blocks, Patch Panels and Patch Cords.....	F32
Accessories.....	F33
Modular Snap Fit Jacks.....	F34
Decorator Frames.....	F35
Molded-In Voice/Data/Video.....	F36
Molded-In Plates.....	F37
Telephone Wall Jacks.....	F38

## G 347V SWITCHES

347V Switches.....	G1
HMOSS™ 347V Wall Switches.....	G2
347V Wallplates.....	G3

## H WEATHERPROOF BOXES, COVERS & LIGHTING

### BELL®

Single-Gang Boxes, Extensions and Adapters.....	H1-H3
Two-Gang Boxes.....	H4-H5
Multi-Gang Boxes and Extensions.....	H6
Round Splice Boxes, Extension Adapters and Covers.....	H7
Specialty Covers.....	H8
Rayntite® Single-Gang Boxes and Covers.....	H9-H10
Rayntite® Two-Gang Boxes and Covers.....	H11-H12
Rayntite® Single-Gang Device Covers.....	H13
Rayntite® Two-Gang Device Covers.....	H14
Single-Gang Device Covers.....	H15
Generator Kits.....	H16
Single-Gang Device Covers.....	H17
Single-Gang Blank Covers and Mini-Plate.....	H18
Two-Gang Device Covers.....	H19
Two And Three-Gang Device Covers.....	H20
Single-Gang Lever Switch Covers.....	H21
Two-Gang Lever Switch Covers.....	H22
Three-Gang Lever Switch Cover & Replacement Switch.....	H23
Cluster Covers.....	H24
Lampholders & Lampholder Combinations.....	H25-H27
Light Kits.....	H28-H29
Garden Lights.....	H30
Replacement Globes.....	H30
Accessories.....	H31-H32

## I SPECIALTY SWITCHES

RACO® Specialty Type Switches.....	I1-I5
------------------------------------	-------

## J SURGE PROTECTION DEVICES

Wired-In Surge Protective Devices.....	J1
Whole House Surge Protection.....	J1
Surge Strips.....	J2-J3

# GENERAL INFORMATION

## MATERIALS

All tradeSELECT boxes and covers are manufactured from galvanized steel, unless otherwise stated.

## CERTIFICATION

All tradeSELECT products are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File NUMBERS are available on request.

## GENERAL INQUIRIES/CUSTOMER SERVICE

For all General Inquiries or Customer Service Requests, please call us at 1-877-233-8324.

## TECHNICAL DATA

CAD drawings are available upon request.

For more information call us at 1-877-233-8324

## USING THIS CATALOGUE

TABLE HEADING	ABBREVIATION	EXPLANATION
Brackets	B	Side bracket, nailing style with picks.
	FBA	Flanged vapour barrier.
	MS	Mounting strap, nailing style with picks.
	MSB	Conventional steel stud bracket, with required additional support.
	MSB-1	Conventional steel stud bracket, 3" to 6" stud set back 1' for double drywall.
	MSBS	Smaller stud bracket facilitates 1-5/8" - 3" stud. <i>Please note 3102/1102 MSB series utilize the MSBS bracket.</i>
	BAR	Item is barcoded.
	RW	Rework bracket.
	SB	Side bracket.
	SBS	Side bracket shallow. Facilitates wall applications less than 2" thick.
Ears	Flush	Plaster ears are mounted flush with the face of the box.
	Recessed	Plaster ears are recessed 1/2" from the face of the box.
Knockouts*	K	Concentric knockout, a combination 1/2 and 3/4 trade size knockout. <i>Actual diameters are 7/8" and 1 3/32"</i>
	1/2 (16)	1/2 trade size knockout. Actual diameter is 7/8".
	3/4 (21)	3/4 trade size knockout. Actual diameter is 1 3/32".
	1 (27)	1 trade size knockout. Actual diameter is 1 3/8".
Cable Clamps	L	Clamps for non metallic cable (NMD90).
	A	Clamps for armoured cable (AC90).
	U	Universal Cable Clamp.

\* The NUMBER in brackets following each type of knockout represents the NUMBER of knockouts of that type featured in the product. For example, 1/2 (16) (4) means that there are 4 knockouts of the 1/2 (16) trade size featured in the product.

A selection of Canadian Electrical Code requirements are listed below along with Hubbell product information.

## **CEC CLAUSE 12-3010, OUTLET BOX SUPPORTS**

- (4) Where boxes are mounted on metal studs, additional support shall be provided to prevent the movement of the boxes after the drywall is installed.

All Hubbell steel stud boxes provide this additional support.

- (5) Mounting nails or screws shall not pass through the interior of an outlet box.

Hubbell non-metallic ceiling outlet boxes are not manufactured from PVC material and CEC CLAUSE 30-302 does not apply. Non-metallic boxes are certified to support fixture/luminaire of a maximum weight of 23 kg. (50 lb.) Installer should follow instructions supplied by luminaire manufacturer. All of Hubbell boxes non-metallic and metallic boxes are tested and certified to support 23 kg. (50 lb.).

## **CEC CLAUSE 12-3030, CONDUCTORS IN BOXES, CABINETS OR FITTINGS**

- (1) Conductors which are connected to different power or distribution transformers or other different sources of voltage shall not be installed in the same box, cabinet or fitting unless:
  - (a) A barrier of sheet steel not less than 1.3 mm thick or a flame-retardant nonmetallic insulating material not less than 1.6 mm in thickness is used to divide the space into separate compartments for the conductors of each system;

Hubbell offers a NUMBER of partitions (barriers) which meet this requirement. The 1104-P can be used with the 1104 and 2104 series boxes, and is installed in our power/communication boxes (4204 series); MBD-P and MBS-P are designed for use with our masonry boxes (MBD and MBS series); LVP is designed for use with our pre-ganged boxes (GSB series).



# ELECTRICAL CODE REQUIREMENTS

## MAXIMUM NUMBER OF CONDUCTORS IN A BOX

The table below, based on clause 12-3034 of the Canadian Electrical Code, lists the maximum NUMBER of conductors permitted in a box. It is assumed that the box contains no more than 1 wire connector, and no fixture studs, hickeyes or flush devices.

Capacity per gang in <sup>3</sup> (ml)	Box series	Maximum NUMBER of Conductors*			
		14 AWG	12 AWG	10 AWG	8 AWG
4.5 (73)	DS	3	2	2	-
5 (90)	56111, OBEX	3	2	2	1
8 (131)	1100	5	4	3	2
10 (163)	1102, 775, EZ101	6	5	4	3
11.5 (188)	2018	7	6	5	4
12 (196)	3102	8	6	5	4
12.5 (204)	1104, 2104, 4204	8	7	5	4
14 (229)	2020, MBS	9	8	6	5
15 (245)	1004, 1504, 54151, 55151	10	8	6	5
15.7 (257)	1204	10	8	6	5
16 (262)	3104	10	9	7	5
16.5 (270)	1110, 1111	11	9	7	6
18 (294)	1804, 54521, 3004	12	10	8	6
18.5 (303)	1151	12	10	8	6
20.25 (331)	MBS-HV	13	11	9	7
21 (334)	52151, 53151, 54171, 55171, MBD	14	12	9	7
22.25 (344)	MBD-HV	14	12	9	8
24 (393)	54531	16	13	10	8
30 (491)	52171, 53171, 54541, 72151, 73151	20	17	13	10
36 (589)	54551	24	20	16	13
42 (688)	54561, 72171, 73171	28	24	18	15

\* The maximum NUMBER of conductors is reduced in each of the following cases:

- One conductor if the box contains one or more fixture studs or hickeyes.
- One conductor for every pair of wire connectors (no deduction for one wire connector, deduct one connector for 2 or 3 wire connectors, two conductors for 4 or 5 wire connectors, etc.).
- Two conductors if the box contains one or more flush devices mounted on a single strap. If a flush device is greater than 1" thick, reduce the box capacity by 5 cubic inches X the thickness of the device.

The maximum NUMBER of conductors listed is per gang. Multiply the NUMBER listed by the NUMBER of gangs (where applicable) to obtain the maximum NUMBER of conductors in the box.

Refer to the Canadian Electrical Code for complete information.



# SINGLE GANG DEVICE BOXES

## APPLICATION

Device boxes are used to house wiring devices such as switches or receptacles.

## PRODUCT FEATURES

- Gangable device boxes offer the option of constructing a box to hold two or more devices
- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction



1100-LUBAR



1100-LLEUBAR



1100-LREU



1102BAR




1102-LUBAR




1102-LHUBAR



1102-LREU



1102-MSB



1102-MSBU



1102-SB

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
<b>2" x 3" Device Box - 1-1/2" Deep - Gangable</b>					
1100-LUBAR	8.0	-	Flush	-	U
1100-LLEUBAR	8.0	-	-	-	U
1100-LREU	8.0	-	Recessed	-	U
<b>2" x 3" Device Box - 2" Deep - Gangable</b>					
1102BAR	10.0	-	Recessed	1/2" (4)	U
1102-LUBAR	10.0	-	Flush	-	U
1102-LHUBAR	10.0	-	-	-	U
1102-LREU	10.0	-	Recessed	-	U
1102-MSB	10.0	MSBS	-	1/2" (4)	-
1102-MSBU	10.0	MSBS	-	-	U
1102-SB	10.0	SB	-	1/2" (4)	-




**APPLICATION**

Device boxes are used to house wiring devices such as switches or receptacles.

**PRODUCT FEATURES**

- Gangable device boxes offer the option of constructing a box to hold two or more devices
- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction

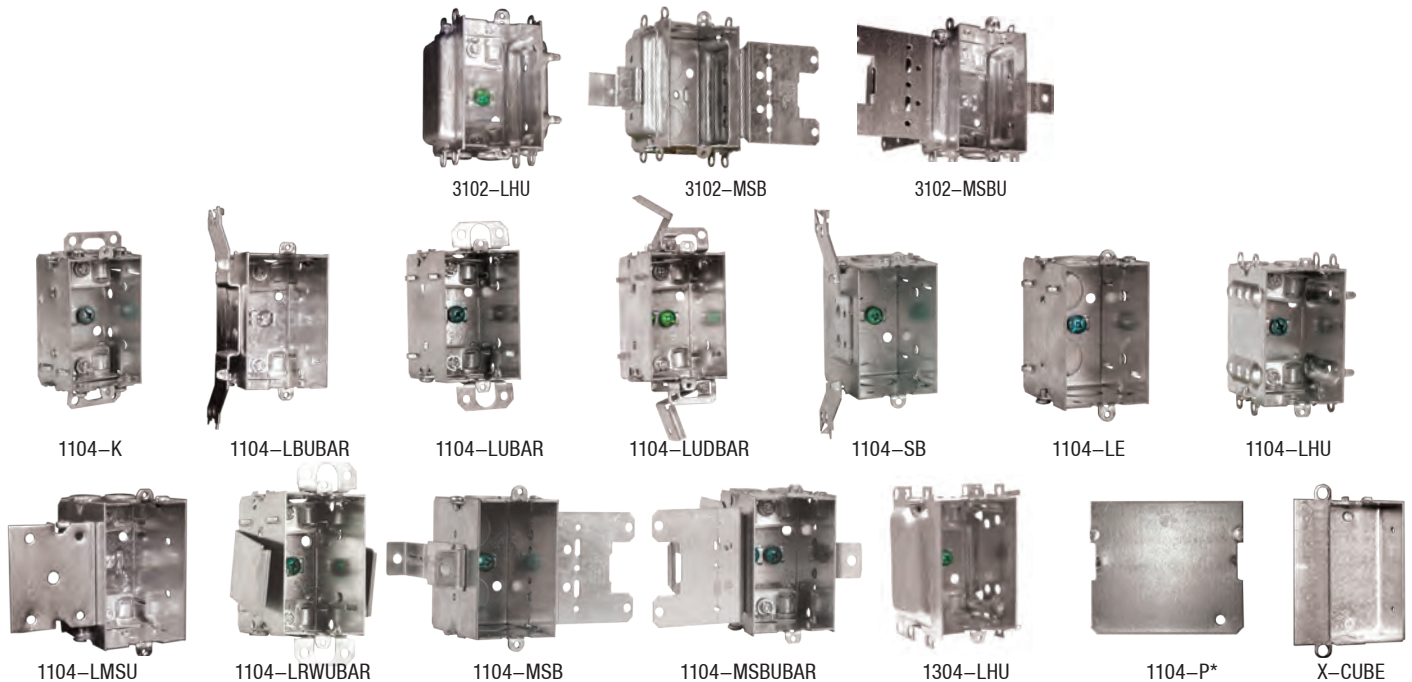

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
<b>2" x 3" Device Box - 2" Deep - Gangable</b>					
3102-LHU	12.0	-	-	-	U
3102-MSB	12.0	MSBS	-	1/2" (4)	-
3102-MSBU	12.0	MSBS	-	-	U
<b>2" x 3" Device Box - 2-1/2" Deep - Gangable</b>					
1104-K	12.5	-	Recessed	K(2), 1/2"(2)	-
1104-LBUBAR	12.5	-	-	-	U
1104-LUBAR	12.5	-	Flush	-	U
1104-LUDBAR	12.5	Rework	Flush	-	U
1104-SB	12.5	SB	-	K(2), 1/2"(2)	-
1104-LE	12.5	-	-	K(2), 1/2"(2)	-
1104-LHU	12.5	-	-	-	U
1104-LMSU	12.5	MS	-	-	U
1104-LRWUBAR	12.5	RW	Flush	-	U
1104-MSB	12.5	MSB	-	K(2), 1/2"(2)	-
1104-MSBUBAR	12.5	MSB	-	-	U
1304-LHU	14.5	-	-	-	U
1104-P*	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				
X-CUBE	Adds 5.5 Cu. In. For use with 1104 series metal boxes				

\*Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources WITHIN THE SAME BOX





# SINGLE GANG DEVICE BOXES

## APPLICATION

Device boxes are used to house wiring devices such as switches or receptacles.

## PRODUCT FEATURES

- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction



2104-LU



2104-LLEUBAR



2104-LNU



2104-MSBU



EZ-101BAR



KIT-201



2304-LLEU



1504-LLEUBAR



1504-MSBUBAR



1804-LHU



3104-LHU



3104-MSB



3104-MSBU

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
<b>2" x3" Device Box - 2-1/2" Deep</b>					
2104-LU	12.5	-	Flush	-	U
2104-LLEUBAR	12.5	-	-	-	U
2104-LNU	12.5	-	-	-	U
2104-MSBU	12.5	MSB	-	-	U
EZ-101BAR	12.5	-	Flush	1/2" (1)	U
KIT-201	12.5	Contains: One 2104LU & One pair of 820-D F-brackets			
2304-LLEU	14.5	-	-	-	U
1504-LLEUBAR	15.0	-	-	-	U
1504-MSBUBAR	15.0	MSB	-	-	U
1804-LHU	16.0	-	-	-	U
3104-LHU	16.0	-	-	-	U
3104-MSB	16.0	MSB	-	K(2), 1/2"(2)	-
3104-MSB-1*	16.0	MSB	-	K(2), 1/2"(2)	-
3104-MSBU	16.0	MSB	-	-	U
3104-MSBU-1*	16.0	MSB	-	-	U

\* Brackets set back for two layers of 1/2" drywall



**APPLICATION**

Device boxes are used to house wiring devices such as switches or receptacles.

**PRODUCT FEATURES**

- Gangable device boxes offer the option of constructing a box to hold two or more devices
- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction



1004-H



1004-LUBAR



1004-LBU



1004-LHU



3004-LHU



3004-MSB



3004-MSB-1\*



3004-MSBU



3004-MSBU-1\*

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
<b>2" x 3" Device Box - 3" Deep - Gangable</b>					
1004-H	15.0	-	Recessed	1/2"(4)	-
1004-LUBAR	15.0	-	Flush	-	U
1004-LBU	15.0	B	-	-	U
1004-LHU	15.0	-	-	-	U
3004-LHU	18.0	-	-	-	U
3004-MSB	18.0	MSB	-	1/2"(4)	-
3004-MSB-1*	18.0	MSB	-	1/2"(4)	-
3004-MSBU	18.0	MSB	-	-	U
3004-MSBU-1*	18.0	MSB	-	-	U

\* Brackets set back for two layers of 1/2" drywall



# MULTI-GANG DEVICE BOXES

## APPLICATION

Device boxes are used to house wiring devices such as switches or receptacles.

## PRODUCT FEATURES

- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction



2104-LU-2



2104-LLEU-2



2104-MSBU-2



2304-LLEU-2



4204-MSB



4204-MSBU



2104-LLEU-3BAR



2104-MSBU-3



2304-LLEU-3



2104-LLEU-4BAR



2104-MSBU-4



2304-LLEU-4



1104-P\*

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
<b>2" x 3" Device Box - 2-1/2" Deep - 2-gang</b>					
2104-LU-2	12.5	-	Flush	-	U
2104-LLEU-2	25.0	-	-	-	U
2104-MSBU-2	25.0	MSB	-	-	U
2304-LLEU-2	29.0	-	-	-	U
<b>2" x 3" Device Box - 2-1/2" Deep - 2-gang (Power/Communication)</b>					
4204-MSB	12.5	MSB	-	K(4), 1/2"(4)	-
4204-MSBU	12.5	MSB	-	K(2), 1/2"(2)	U
<b>2" x 3" Device Box - 2-1/2" Deep - 3-gang</b>					
2104-LLEU-3BAR	37.5	-	-	-	U
2104-MSBU-3	37.5	MSB	-	-	U
2304-LLEU-3	43.5	-	-	-	U
<b>2" x 3" Device Box - 2-1/2" Deep - 4-gang</b>					
2104-LLEU-4BAR	50.0	-	-	-	U
2104-MSBU-4	50.0	MSB	-	-	U
2304-LLEU-4	58.0	-	-	-	U
1104-P*	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				

\*Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box




**APPLICATION**

Octagon boxes can be used in the installation of ceiling or wall lighting fixtures. Extension rings provide a means for adding additional cubic capacity.

**PRODUCT FEATURES**

- Combination screw heads provide for faster installation
- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction

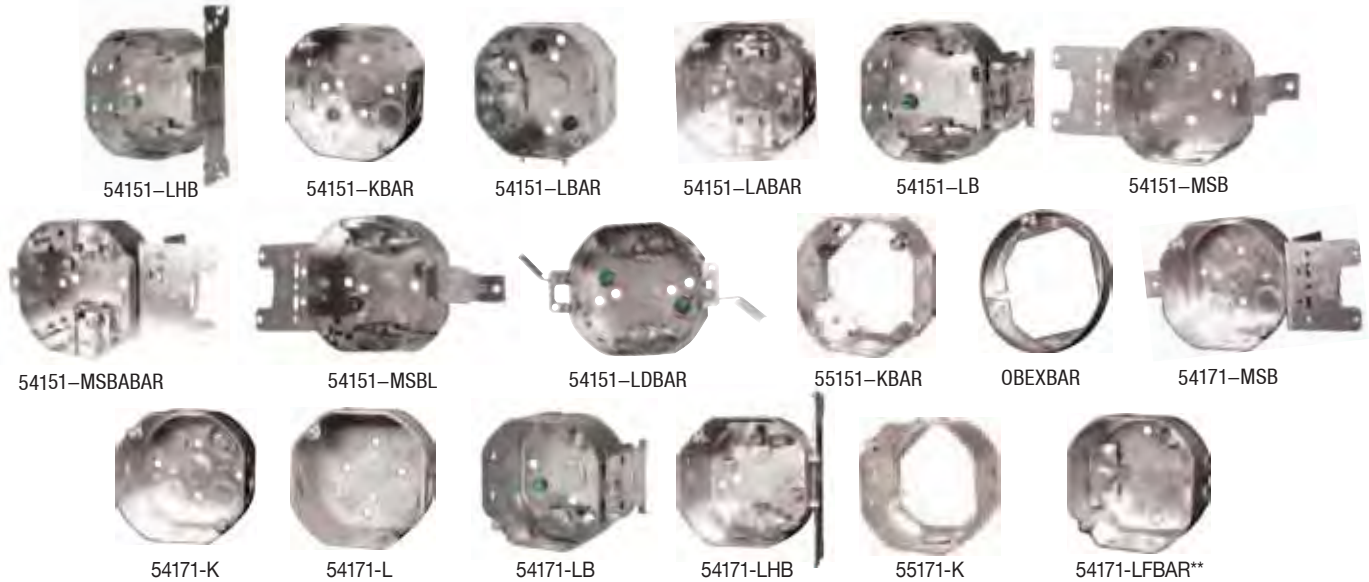

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS	CABLE CLAMPS
<b>4" Octagon Box - 1-1/2" Deep</b>					
54151-LHB	15.0	SB	no	1/2"(2)	L
54151-KBAR	15.0	-	yes	K(6), 1/2"(2)	-
54151-LBAR	15.0	-	no	1/2"(3)	L
54151-LABAR	15.0	-	no	1/2"(3)	A
54151-LB	15.0	B	no	1/2"(2)	L
54151-MSB	15.0	MSB	yes	K(4), 1/2"(2)	-
54151-MSBABAR	15.0	MSB	no	1/2"(1)	A
54151-MSBL	15.0	MSB	no	1/2"(1)	L
54151-LDBAR	15.0	Rework	no	-	-
55151-KBAR	15.0	Ext. Ring	-	K(4)	-
OBEXBAR	5.0	Ext. Ring	-	-	-
<b>4" Octagon Box - 2-1/8" Deep</b>					
54171-MSB	21.0	MSB	yes	K(4), 1/2"(4)	-
54171-MSB-1*	21.0	MSB	yes	K(4), 1/2"(4)	-
54171-K	21.0	-	yes	K(4), 1/2"(4)	-
54171-L	21.0	-	no	1/2"(3)	L
54171-LB	21.0	B	no	1/2"(2)	L
54171-LHB	21.0	SB	no	1/2"(2)	L
55171-K	21.0	Ext. Ring 21.0	-	K(2), 1/2"(2)	-
<b>4" Ceiling Fan - 2-1/8" Deep - Max Load Capacity: 35 lb (15.6 kg)</b>					
54171-LFBAR**	21.0	-	no	1/2"(3)	L

\* Brackets set back for two layers of 1/2" drywall

\*\* supplied with two No. 10-32 machine screws and washers




# 4" OCTAGON BOX COVERS

## APPLICATION

Covers are used to close an outlet box. Switches or receptacles may be installed into octagon boxes by using covers 54-C-62, 54-C-64, 54-C-65 or 54-C-94.

## PRODUCT FEATURES

- Rugged metallic construction

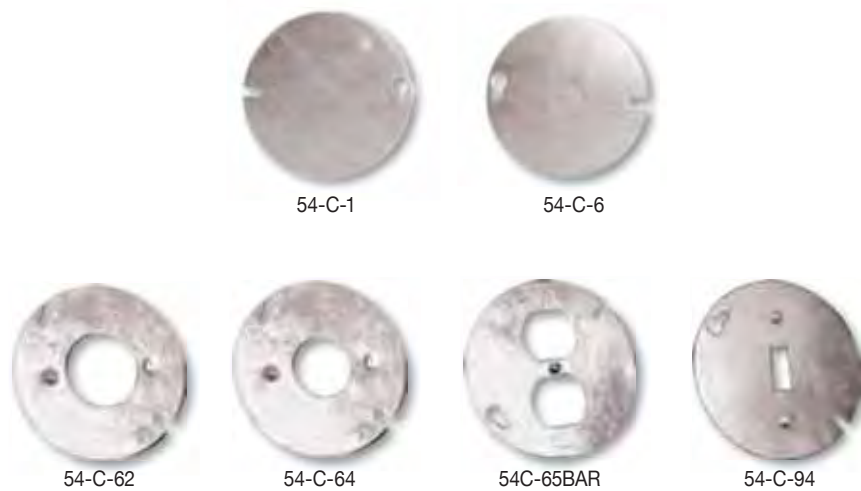

CATALOGUE NUMBER	DESCRIPTION	OPENING	KNOCKOUTS
<b>4" Round Covers</b>			
54-C-1	Flat Cover	Blank	-
54-C-6	Flat Cover	-	1/2"(1)
54-C-62	Flat Cover	1.62" Receptacle	-
54-C-64	Flat Cover	1.40" Receptacle	-
54C-65BAR	Flat Cover	Duplex Receptacle	-
54-C-94	Flat Cover	Toggle Switch	-



# 4" SQUARE BOXES

## APPLICATION

Boxes are installed in ceiling or wall junctions. Square boxes are used where multiple conductor runs are split into two or more directions to bring power to a number of electrical devices.

## PRODUCT FEATURES

- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction



52151-KBAR



52151-KSB



52151-MSB



52151-MSBS



53151-K



52171-1



52171-KBAR



52171-KSB



52171-MSB



521711-MSB



53171-K

CATALOGUE NUMBER	CAPACITY (CU. IN)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS
<b>4" x 4" Square Boxes - 1-1/2" Deep</b>				
52151-KBAR	21.0	-	yes (2)	K(6), 1/2"(6), 3/4"(2)
52151-KSB	21.0	SB	yes (2)	K(4), 1/2"(6), 3/4"(2)
52151-MSB	21.0	MSB	yes (2)	K(2), 1/2"(6), 3/4"(2)
52151-MSBS	21.0	MSBS	yes (2)	K(2), 1/2"(6), 3/4"(2)
53151-K	21.0	Ext. Ring	yes (2)	K(6), 1/2"(4)
<b>4" x 4" Square Boxes - 2-1/8" Deep</b>				
52171-1	30.0	-	yes (2)	1/2"(2), 3/4"(2), 1"(4)
52171-KBAR	30.0	-	yes (2)	K(6), 1/2"(6), 3/4"(2)
52171-KSB	30.0	SB	yes (2)	K(4), 1/2"(6), 3/4"(2)
52171-MSB	30.0	MSB	yes (2)	K(2), 1/2"(6), 3/4"(2)
521711-MSB	30.0	MSB	yes (2)	K(3), 1/2"(2), 1"(2)
53171-K	30.0	Ext. Ring	yes (2)	K(6), 1/2"(4)




# 4" SQUARE COVERS

## APPLICATION

Covers are used to close an outlet box. Raised device covers are used for mounting switches or receptacles.

## PRODUCT FEATURES

- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction
- 52 series boxes are designed for use with 52 series boxes.

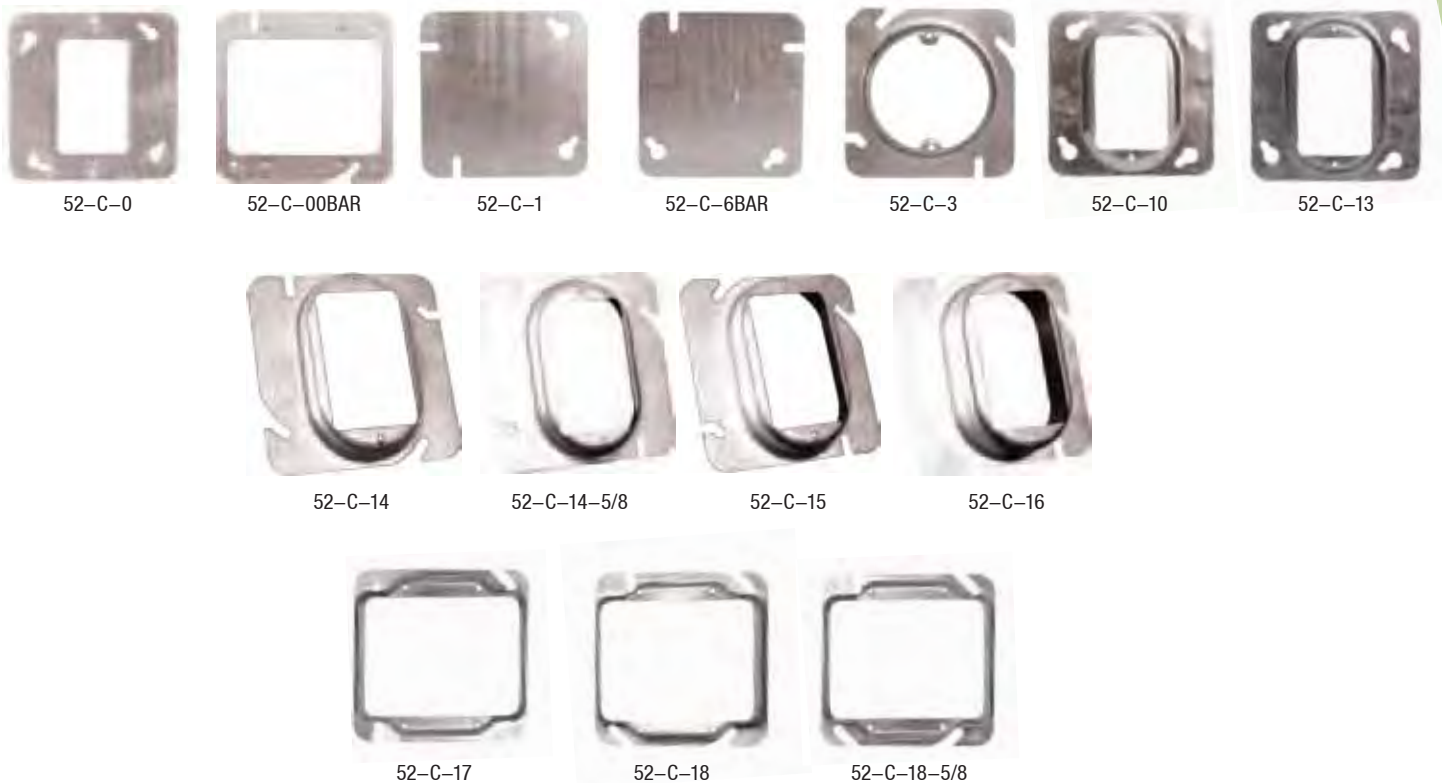

CATALOGUE NUMBER	DESCRIPTION	CAPACITY (CU. IN.)	OPENING	KNOCKOUTS
<b>4" x 4" Square Covers</b>				
52-C-0	flat	-	one device	-
52-C-00BAR	flat	-	two devices	-
52-C-1	flat	-	blank	-
52-C-6BAR	flat	-	-	1/2" (1)
52-C-3	raised 1/2"	3.7	one device	-
52-C-10	raised 3/16"	1.2	one device	-
52-C-13	raised 1/2"	3.5	one device	-
52-C-14	raised 3/4"	5.1	one device	-
52-C-14-5/8	raised 5/8"	4.3	one device	-
52-C-15	raised 7/8"	6.1	one device	-
52-C-16	raised 1-1/4"	8.5	one device	-
52-C-17	raised 1/2"	6.3	two devices	-
52-C-18	raised 3/4"	9.7	two devices	-
52-C-18-5/8	raised 5/8"	7.8	two devices	-
52-C-6214	raised 5/8"	7.8	one device	-




**APPLICATION**

Covers are used to close an outlet box. Raised device covers are used for mounting switches or receptacles.

**PRODUCT FEATURES**

- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction
- 52 series boxes are designed for use with 52 series boxes.

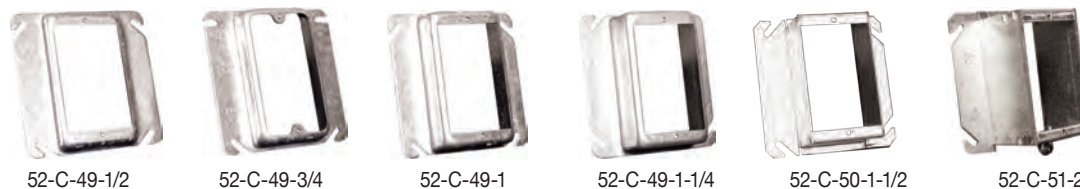

52-C-49-1/2

52-C-49-3/4

52-C-49-1

52-C-49-1-1/4

52-C-50-1-1/2

52-C-51-2



8361

8362


8363

8364

8365

8366

8367

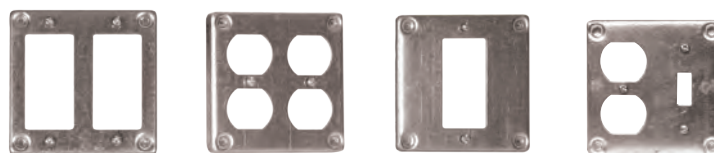

8368

8371

8372

8375

CATALOGUE NUMBER	DESCRIPTION	CAPACITY (CU. IN.)	OPENING	KNOCKOUTS
<b>4" x 4" Square Tile Covers</b>				
52-C-49-1/2	tile cover 1/2"	3.4	one device	-
52-C-49-3/4	tile cover 3/4"	5.3	one device	-
52-C-49-1	tile cover 1"	6.8	one device	-
52-C-49-1-1/4	tile cover 1-1/4"	8.6	one device	-
52-C-50-1-1/2	tile cover 1-1/2"	10.0	one device	-
52-C-51-2	tile cover 2"	14.0	one device	-
52-C-52-1/2	raised cover 1/2"	5.5	two device	-
52-C-52-5/8	raised cover 5/8"	7.3	two device	-
52-C-52-3/4	raised cover 3/4"	8.8	two device	-
52-C-52-1	raised cover 1"	12.0	two device	-
52-C-52-1-1/4	raised cover 1-1/4"	15.0	two device	-
52-C-53-1-1/2	raised cover 1-1/2"	15.5	two device	-
52-C-54-2	raised cover 2"	20.5	two device	-
<b>4" x 4" Square Surface Covers</b>				
8361	surface cover 3/8"	4.6	toggle switch	-
8362	surface cover 3/8"	4.6	2.625" receptacle	-
8363	surface cover 3/8"	4.6	1.40" receptacle	-
8364	surface cover 3/8"	4.6	1.625" receptacle	-
8365	surface cover 3/8"	4.6	duplex receptacle	-
8366	surface cover 3/8"	4.6	2.156" receptacle	-
8367	surface cover 3/8"	4.6	2 toggle switches	-
8368	surface cover 3/8"	4.6	2 GFCI/Styleline	-
8371	surface cover 3/8"	4.6	2 duplex receptacles	-
8372	surface cover 3/8"	4.6	1 GFCI	-
8375	surface cover 3/8"	4.6	1 toggle, 1 duplex	-





# 4 11/16" SQUARE BOXES

## APPLICATION

Boxes are installed in ceiling or wall junctions or stove & dryer receptacles. Square boxes are used where multiple conductor runs are split into two or more directions to bring power to a number of electrical devices.

## PRODUCT FEATURES

- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction



72151-K



73151-KBAR



72171-MSB



72171-KBAR



72171-KSB



72171-1



73171-KBAR

CATALOGUE NUMBER	CAPACITY (CU. IN)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS
<b>4-11/16" Square Boxes - 1-1/2" Deep</b>				
72151-K	30.0	-	yes	K(6), 1/2"(6), 3/4"(2)
73151-KBAR	42.0	Ext. Ring	-	K(6), 1/2"(4)
<b>4-11/16" Square Boxes - 1-1/8" Deep</b>				
72171-MSB	42.0	MSB	yes	1/2"(6), 3/4"(2), K(2)
72171-KBAR	42.0	-	yes	K(6), 1/2"(6), 3/4"(2)
72171-KSB	42.0	SB	yes	K(4), 1/2"(6), 3/4"(2)
72171-1	42.0	-	yes	1/2"(2), 3/4"(2), 1"(8)
73171-KBAR	42.0	Ext. Ring	-	K(6), 1/2"(4)



# 4-11/16" SQUARE COVERS

## APPLICATION

Covers are used to close an outlet box. Raised device covers are used for mounting switches or receptacles.

## PRODUCT FEATURES

- Rugged metallic construction
- 72 series covers are designed for use with 72 series boxes



72-C-1



72-C-6-K



72-C-10



72-C-13



72-C-14



72-C-15



72-C-17



72-C-18

CATALOGUE NUMBER	DESCRIPTION	CAPACITY (CU. IN.)	OPENING	KNOCKOUTS
<b>4-11/16" Covers</b>				
72-C-1	flat	-	blank	-
72-C-6-K	flat	-	concentric knockout	K(1)
72-C-10	raised cover 3/16"	1.2	one device	-
72-C-13	raised cover 1/2"	3.5	one device	-
72-C-14	raised cover 3/4"	5.1	one device	-
72-C-15	raised cover 7/8"	6.1	one device	-
72-C-17	raised cover 1/2"	6.3	two device	-
72-C-18	raised cover 3/4"	9.7	two device	-



## APPLICATION

Utility boxes are used for convenience outlets, switch boxes or small junction boxes. They are popular for exposed work applications (surface mounted wiring).

## PRODUCT FEATURES

- Raised ground screw provides easier access and prevents the ground screw from protruding beyond the bottom of the box when tightened
- Covers are designed to match the contours of the box
- Cover corners are rounded
- All covers have captive screws
- Self-tapping ground screws which virtually eliminate stripping
- Mounting screws are included with covers



CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS
<b>2-1/8" x 4" Utility Boxes - 1-1/2" Deep</b>				
2018	11.5	-	yes	1/2"(10)
2018-SB	11.5	SB	yes	1/2"(7)
<b>2-1/8" x 4" Utility Boxes - 1-7/8" Deep</b>				
2020-BAR	14.0	-	yes	1/2"(10)
2020-RBAR	14.0	Ext. Ring	-	1/2"(8)
2020-SB	14.0	SB	yes	1/2"(7)

## APPLICATION

Utility box covers are used to close a utility box. Covers may also be used as single-gang wall plates.

## PRODUCT FEATURES

- Covers are designed to match the contours of the box.
- All covers have captive screws.
- Self-tapping ground screws which virtually eliminate stripping.
- Mounting screws are included with covers.



CATALOGUE NUMBER	DESCRIPTION
<b>4" x 2-1/8" Utility Box Covers</b>	
20-C-1	duplex receptacle
20-C-3	1.40" receptacle
20-C-4BAR	blank
20-C-5	toggle switch






## APPLICATION


Utility boxes are used for convenience outlets, switch boxes or small junction boxes. They are popular for exposed work applications (surface mounted wiring).

## PRODUCT FEATURES


- Raised ground screw provides easier access and prevents the ground screw from protruding beyond the bottom of the box when tightened
- Covers are designed to match the contours of the box
- Cover corners are rounded
- All covers have captive screws
- Self-tapping ground screws which virtually eliminate stripping
- Mounting screws are included with covers

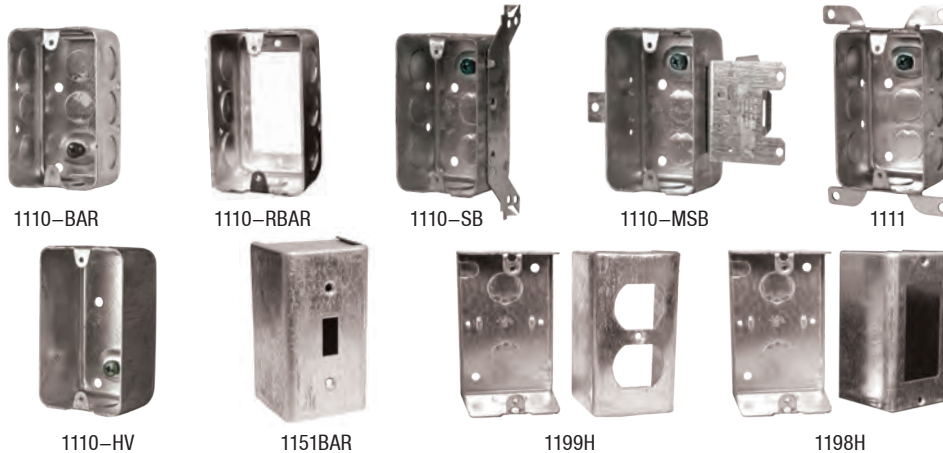

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS
<b>2-1/2" x 4" Utility Boxes - 1-7/8" Deep</b>				
1110-BAR	16.5	-	yes	1/2"(10)
1110-RBAR	16.5	Ext. Ring	yes	1/2"(8)
1110-SB	16.5	SB	-	1/2"(7)
1110-MSB	16.5	MSB	yes	1/2"(4)
1111	16.5	-	yes	1/2"(10)
<b>2-1/2" x 4" High Voltage (347V) Utility Boxes - 1-7/8" Deep</b>				
1110-HV	16.0	-	yes	1/2"(10)
<b>2-1/2" x 4" Utility Boxes - 2-1/8" Deep</b>				
1151BAR	18.5	-	no	1/2"(4)
1199H	18.5	-	no	1/2"(4)
1198H	18.5	-	no	1/2"(4)

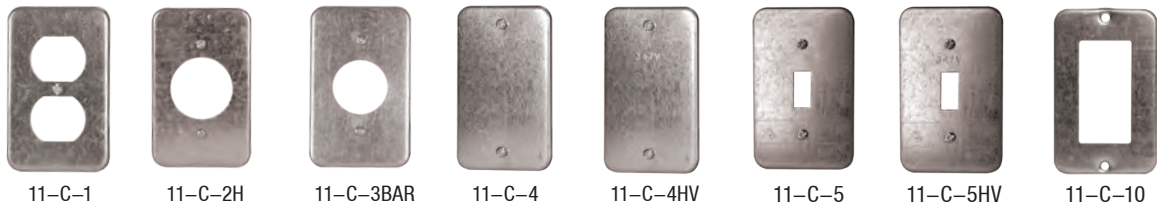

CATALOGUE NUMBER	DESCRIPTION
<b>4" x 2-1/2" Utility Box Covers</b>	
11-C-1	duplex receptacle
11-C-2H	1.625" receptacle
11-C-3BAR	1.40" receptacle
11-C-4	blank
11-C-4HV	blank (347V)
11-C-5	toggle switch
11-C-5HV	toggle switch (347V)
11-C-10	GFCI

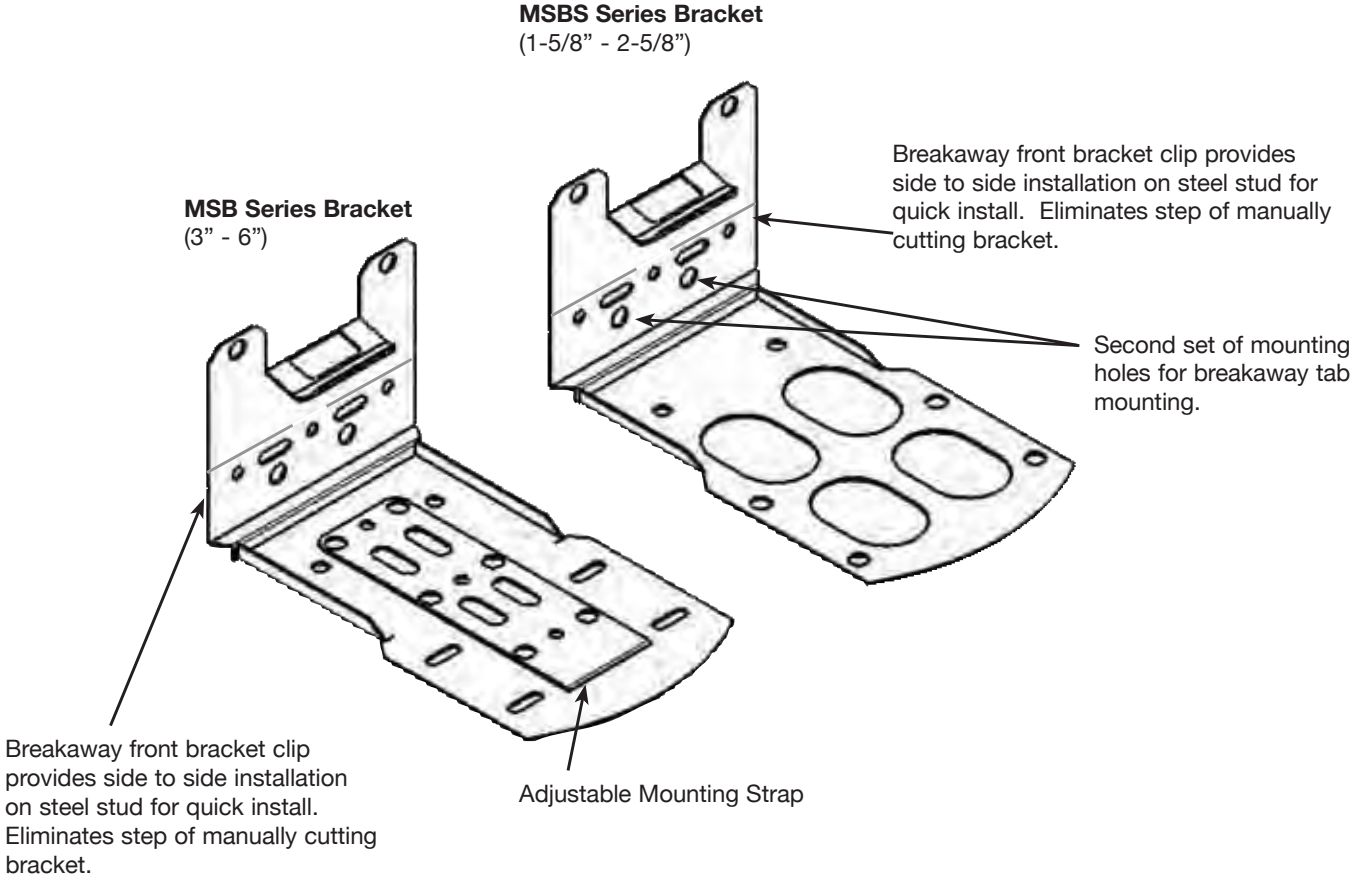

### ADJUSTABLE MOUNTING STRAP

**tradeSELECT** steel stud boxes feature a unique adjustable mounting strap and clip-on tab that makes it easier than ever to position and hold boxes in place.


**tradeSELECT** boxes are simply the fastest and easiest boxes to install on any size steel stud.



# STEEL STUD BOX INSTALLATION


- Bend out adjustable mounting strap at fold marks for either 3", 4" or 6" stud size.
- Position and attach the box on stud by pressing the clip-on tab to hold box in place.
- Use pliers for crimping or screw gun to fasten or screw box to stud for final installation.

3" Fold Position





Adjustable mounting strap

3" STUD

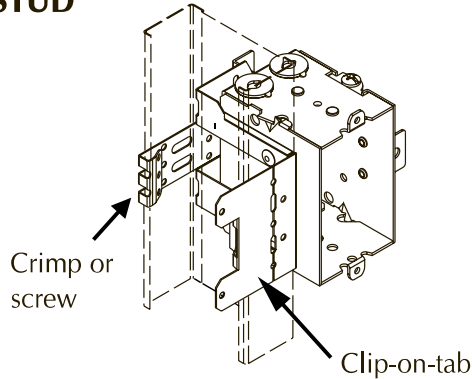


4" STUD

4" Fold Position

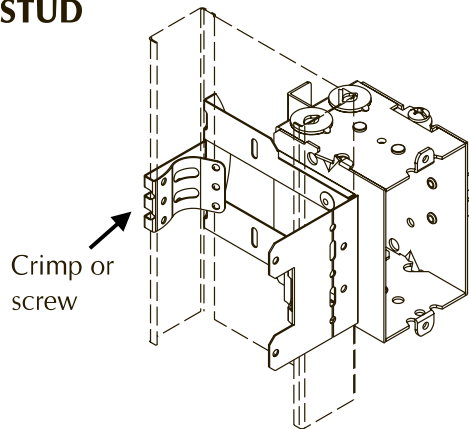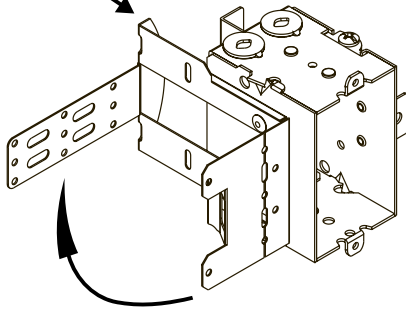


6" STUD

Add our extension foot #7902 to existing support

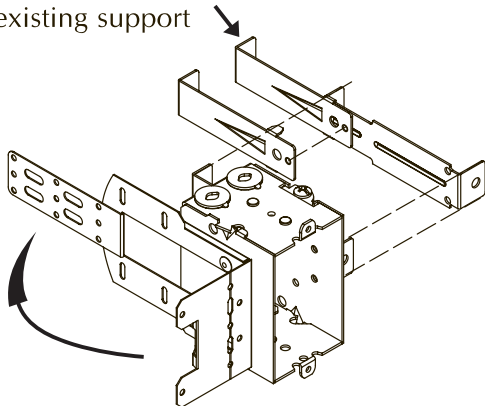


Open at 180°

6" Fold Position

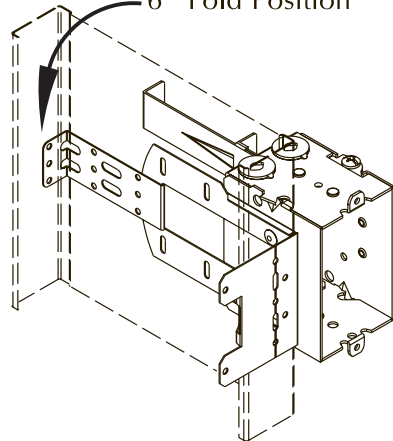

- Upturned edge provides more rigid installation to steel stud.

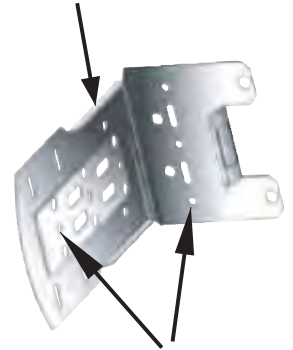

- Series of smaller mounting holes allow more choices in fastening box to the steel stud.



# STEEL STUD DEVICE BOXES

## APPLICATION

Steel stud boxes are used in Commercial, Residential and Industrial construction.

## PRODUCT FEATURES

- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning
- Gangable device boxes offer the option of constructing a box to hold two or more devices
- Rugged metallic construction



CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	STUD SIZES	KNOCKOUTS	CABLE CLAMPS
<b>2" x 3" Device Box - 2" Deep - Gangable</b>					
1102-MSB	10.0	MSBS	1-5/8", 2-3/8"	1/2"(4)	-
1102-MSBU	10.0	MSBS	1-5/8", 2-3/8"	-	U
3102-MSB	12.0	MSBS	1-5/8", 2-3/8"	1/2"(4)	-
3102-MSBU	12.0	MSBS	1-5/8", 2-3/8"	-	U
<b>2" x 3" Device Box - 2-1/2" Deep - Gangable</b>					
1104-MSB	12.5	MSB	2-3/8", 3-5/8"	K(2), 1/2"(2)	-
1104-MSBUBAR	12.5	MSB	2-3/8", 3-5/8"	-	U
<b>2" x 3" Device Box - 2-1/2" Deep Power /Communication Box - Gangable</b>					
4204-MSB	12.5	MSB	2-3/8", 3-5/8"	K(4), 1/2"(4)	-
4204-MSBU	12.5	MSB	2-3/8", 3-5/8"	K(2), 1/2"(2)	U
<b>2-1/4" x 3" Device Box - 2-1/2" Deep - Gangable</b>					
1504-MSBUBAR	15.0	MSB	2-3/8", 3-5/8"	-	U
<b>2-1/4" x 3" Device Box - 2-1/2" Deep 347V Box - Gangable</b>					
1204-MSB-HV	15.7	MSB	2-3/8", 3-5/8"	1/2"(2)	-
1104-P*	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				
7902**	Foot Extender				

\*Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box

\*\* Steel stud foot extender. Use with existing MSB foot to facilitate 6" steel stud installation



**APPLICATION**

Steel stud boxes are used in Commercial, Residential and Industrial construction.

**PRODUCT FEATURES**

- Raised ground screw provides easier access and prevents the ground screw from protruding beyond the bottom of the box when tightened.
- Rugged metallic construction



3104-MSB



3104-MSBU



3004-MSB



3004-MSBU



1104-P\*



7902\*\*\*

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	STUD SIZES	KNOCKOUTS	CABLE CLAMPS
<b>2" x 3" Device Box - 2-1/2" Deep - Gangable</b>					
3104-MSB	16.0	MSB	2-3/8", 3-5/8"	K(2), 1/2"(2)	-
3104-MSB-1*	16.0	MSB	2-3/8", 3-5/8"	K(2), 1/2"(2)	-
3104-MSBU	16.0	MSB	2-3/8", 3-5/8"	-	U
3104-MSBU-1*	16.0	MSB	2-3/8", 3-5/8"	-	U
<b>2" x 3" Device Box - 3" Deep - Gangable</b>					
3004-MSB	18.0	MSB	2-3/8", 3-5/8"	1/2"(4)	-
3004-MSBU	18.0	MSB	2-3/8", 3-5/8"	-	U
3004-MSBU-1*	18.0	MSB	2-3/8", 3-5/8"	-	U
1104-P**	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				
7902***	Foot Extender				

\* Brackets set back for two layers of 1/2" drywall

\*\* Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box

\*\*\* Steel stud foot extender. Use with existing MSB foot to facilitate 6" steel stud installation






# STEEL STUD DEVICE BOXES

## APPLICATION

Steel stud boxes are used in Commercial, Residential and Industrial construction.

## PRODUCT FEATURES

- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning
- Rugged metallic construction

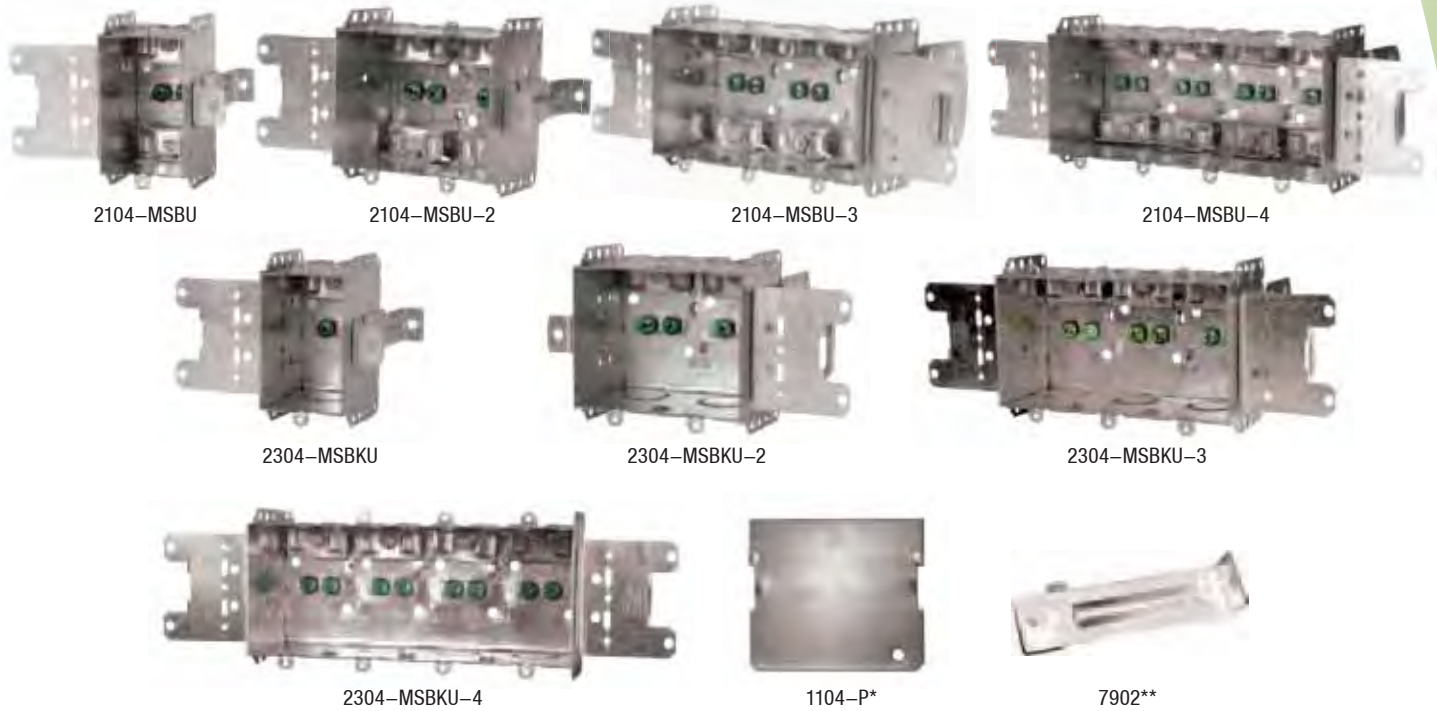

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	STUD SIZES	KNOCKOUTS	CABLE CLAMPS
<b>2" x 3" Device Box - 2-1/2" Deep</b>					
2104-MSBU	12.5	MSB	2-3/8", 3-5/8"	-	U
2104-MSBU-2	25.0	MSB	2-3/8", 3-5/8"	-	U
2104-MSBU-3	37.5	MSB	2-3/8", 3-5/8"	-	U
2104-MSBU-4	50.0	MSB	2-3/8", 3-5/8"	-	U
<b>2" x 3" Device Box - 2-1/2" Deep - Combination Box</b>					
2304-MSBKU	14.5	MSB	2-3/8", 3-5/8"	K(1)	U
2304-MSBKU-2	29.0	MSB	2-3/8", 3-5/8"	K(2)	U
2304-MSBKU-3	43.5	MSB	2-3/8", 3-5/8"	K(3)	U
2304-MSBKU-4	58.0	MSB	2-3/8", 3-5/8"	K(4)	U
1104-P*	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				
7902**	Foot Extender				

\* Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box

\*\* Steel stud foot extender. Use with existing MSB foot to facilitate 6" steel stud installation



# STEEL STUD 4" OCTAGON BOXES

## APPLICATION

Steel stud boxes are used in Commercial, Residential and Industrial construction.

## PRODUCT FEATURES

- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning
- Rugged metallic construction



CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	STUD SIZES	KNOCKOUTS	CABLE CLAMPS
<b>4" Octagon Box - 1-1/2" Deep</b>					
54151-MSB	15.0	MSB	2-3/8, 3-5/8"	K(4), 1/2"(2)	-
54151-MSBABAR	15.0	MSB	2-3/8, 3-5/8"	1/2"(1)	A
54151-MSBL	15.0	MSB	2-3/8, 3-5/8"	1/2"(1)	L
<b>4" Octagon Box - 2-1/8" Deep</b>					
54171-MSB	21.0	MSB	2-3/8, 3-5/8"	K(4), 1/2"(4)	-
54171-MSB-1	21.0	MSB	2-3/8, 3-5/8"	K(4), 1/2"(4)	-
7902**	Foot Extender				

\*\* Steel stud foot extender. Use with existing MSB foot to facilitate 6" steel stud installation.

# SQUARE STEEL STUD BOXES



CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	STUD SIZES	KNOCKOUTS	RAISED GROUND SCREW
<b>4" x 4" Square Boxes - 1-1/2" Deep</b>					
52151-MSB	21.0	MSB	2-3/8, 3-5/8"	K(2), 1/2"(6), 3/4(2)	yes
52151-MSBS	21.0	MSB	2-3/8, 3-5/8"	K(2), 1/2"(6), 3/4(2)	yes
<b>4" x 4" Square Boxes - 2-1/8" Deep</b>					
52171-MSB	30.0	MSB	2-3/8, 3-5/8"	K(2), 1/2"(6), 3/4(2)	yes
521711-MSB	30.0	MSB	2-3/8, 3-5/8"	K(3), 1/2"(2), 1"(2)	yes
<b>4-11/16" Square Boxes - 2-1/8" Deep</b>					
72171-MSB	42.0	MSB	2-3/8, 3-5/8"	K(2), 1/2"(2)	yes
7902**	Foot Extender				

\*\* Steel stud foot extender. Use with existing MSB foot to facilitate 6" steel stud installation.



# 347V BOXES AND COVERS

## APPLICATION

347 Volt boxes are used for the installation of 347 Volt switches for commercial and industrial lighting.

## PRODUCT FEATURES

- All 347 Volt boxes have tapped holes with vertical spacing of 3.531" to accommodate 347 Volt switches.
- 1204 series boxes feature 2.25" spacing between gangs. Use tradeSELECT wall plates with HV suffixes.
- HV version of MBD and MBS series boxes feature 1.812" spacing between gangs. Use tradeSELECT wall plates with HVR suffixes.



1204-1-HV



1204-2-HV



1204-MSB-HV



1204-HVP



1110-HV

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
<b>2-1/4" x 3" Device Box - 2-1/2" Deep - Gangable</b>					
1204-1-HV	15.7	-	Recessed	1/2"(2)	-
1204-2-HV	15.7	-	Recessed	1/2"(2)	-
1204-MSB-HV	15.7	MSB	-	1/2"(2)	-
1204-HVP	High Voltage Partition				
<b>2-1/4" x 3" Utility - 1-7/8" Deep</b>					
1110-HV	16.0	-	-	1/2"(2)	-



11-C-4-HV



11-C-5-HV

CATALOGUE NUMBER	DESCRIPTION
<b>2.665" x 4.275" Utility Box Covers</b>	
11-C-4-HV	Blank
11-C-5-HV	Toggle Switch



**APPLICATION**

347 Volt boxes are used for the installation of 347 Volt switches for commercial and industrial lighting.

**PRODUCT FEATURES**

- All 347 Volt boxes have tapped holes with vertical spacing of 3.531" to accommodate 347 Volt switches.
- 1204 series boxes feature 2.25" spacing between gangs. Use tradeSELECT wall plates with HV suffixes.
- HV version of MBD and MBS series boxes feature 1.812" spacing between gangs. Use tradeSELECT wall plates with HVR suffixes.



MBS-1-HV



MBS-2-HV



MBS-3-HV



MBS-4-HV



MBD-1-HV



MBD-2-HV



MBD-3-HV



MBD-4-HV

CATALOGUE NUMBER	CAPACITY (CU. IN.)	DESCRIPTION	KNOCKOUTS
<b>2-1/4" x 4" Masonry Boxes - 2-3/8" Deep</b>			
MBS-1-HV	20.3	1-gang Masonry Box	1/2"(2)
MBS-2-HV	40.5	2-gang Masonry Box	1/2"(4)
MBS-3-HV	60.8	3-gang Masonry Box	1/2"(6)
MBS-4-HV	81.0	4-gang Masonry Box	1/2"(8)
<b>2-1/4" x 4" Masonry Boxes - 3-3/8" Deep</b>			
MBD-1-HV	22.5	1-gang Masonry Box	1/2"(4)
MBD-2-HV	45.0	2-gang Masonry Box	1/2"(8)
MBD-3-HV	67.5	3-gang Masonry Box	1/2"(12)
MBD-4-HV	90.0	4-gang Masonry Box	1/2"(16)




## APPLICATION

Masonry boxes are used for the flush installation of devices in masonry construction.

## PRODUCT FEATURES

2, 3, and 4-gang masonry boxes allow for the installation of partitions. The following partitions are available:

- Partition MBS-P is designed for use with MBS-2, MBS-3 and MBS-4 boxes.
- Partition MBD-P is designed for use with MBD-2, MBD-3 and MBD-4 boxes.
- Once these partitions are installed, the masonry box meets Canadian Electrical Code requirements specified in clause 12-3034, allowing the installation of devices connected to different power sources within the same box.

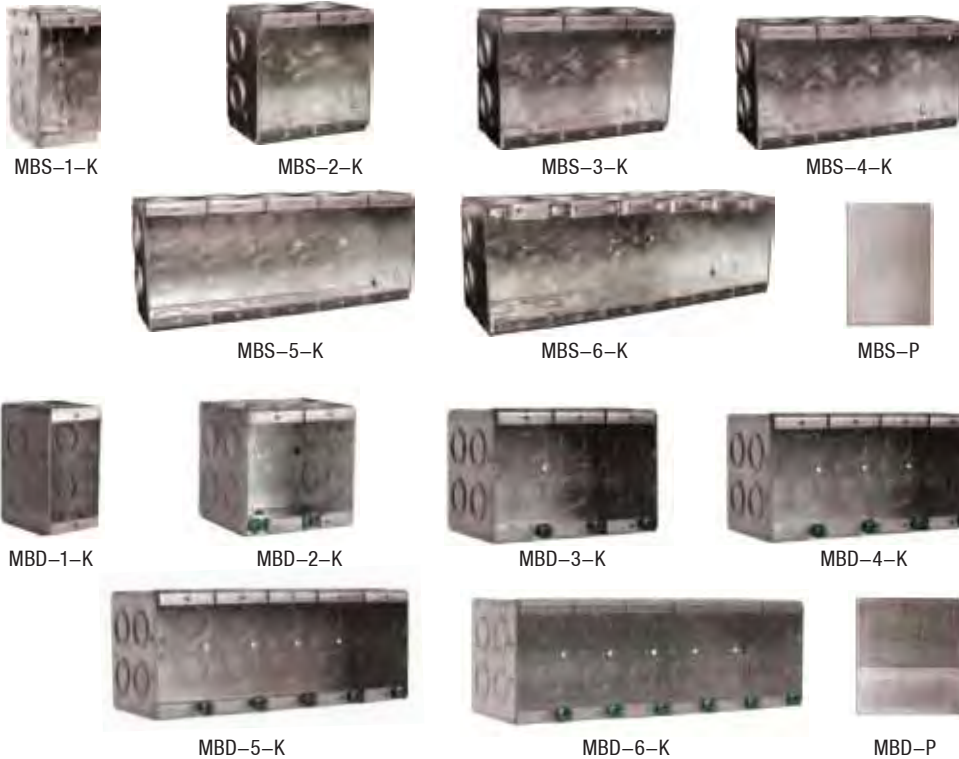

CATALOGUE NUMBER	CAPACITY (CU. IN.)	DESCRIPTION	WIDTH	HEIGHT	CONCENTRIC KNOCKOUTS	
					1/2", 3/4", 1"	1/2", 3/4"
<b>Masonry Boxes - 2-1/2" Deep</b>						
MBS-1-K	14.0	1-gang Masonry Box	2"	3-3/4"	1	7
MBS-2-K	28.0	2-gang Masonry Box	3-13/16"	3-3/4"	1	11
MBS-3-K	42.0	3-gang Masonry Box	5-10/16"	3-3/4"	1	15
MBS-4-K	56.0	4-gang Masonry Box	7-7/16"	3-3/4"	1	19
MBS-5-K	70.0	5-gang Masonry Box	9-1/4"	3-3/4"	1	23
MBS-6-K	84.0	6-gang Masonry Box	11-1/16"	3-3/4"	1	27
MBS-P	-	Partition	-	3-3/4"	-	-
<b>Masonry Boxes - 3-1/2" Deep</b>						
MBD-1-K	21.0	1-gang Masonry Box	2"	3-3/4"	1	9
MBD-2-K	42.0	2-gang Masonry Box	3-13/16"	3-3/4"	1	15
MBD-3-K	63.0	3-gang Masonry Box	5-10/16"	3-3/4"	1	21
MBD-4-K	84.0	4-gang Masonry Box	7-7/16"	3-3/4"	1	27
MBD-5-K	105.0	5-gang Masonry Box	9-1/4"	3-3/4"	1	33
MBD-6-K	126.0	6-gang Masonry Box	11-1/16"	3-3/4"	1	39
MBD-P	-	Partition	-	3-3/4"	-	-



**APPLICATION**

Concrete rings are used with poured deck (floor) in high-rise construction. These boxes are installed on wooden or steel concrete forms. After the forms are removed, the box is flush with the concrete.

**PRODUCT FEATURES**

- Flat sides provide excellent contact for locknuts
- External ears are used to nail the ring to the wood form
- Ears on inside of box are for fixtures.
- Waxed fixture ears prevent concrete from interfering with the threads
- The top-cover is removable for before-pour work.
- Rugged metallic construction



54521



54531



54541



54551



54561



54561-1/2



54571



54581



54591



54560



CBA



53171-ER

CATALOGUE NUMBER	CAPACITY (CU. IN.)	DEPTH	KNOCKOUTS
<b>4" Concrete Rings</b>			
54521	18.0	1-1/2"	1/2"(4), 3/4"(4)
54531	24.0	2"	1/2"(4), 3/4"(4)
54541	30.0	2-1/2"	1/2"(4), 3/4"(4)
54551	36.0	3"	1/2"(4), 3/4"(4)
54561	42.0	3-1/2"	1/2"(4), 3/4"(4)
54561-1/2	42.0	3-1/2"	1/2"(8)
54571	48.0	4"	1/2"(4), 3/4"(2), 1"(2)
54581	60.0	5"	1/2"(4), 3/4"(2), 1"(2)
54591	72.0	6"	1/2"(4), 3/4"(2), 1"(2)
54560	-	Concrete Cover	-
CBA*	-	Adaptor	-
53171-ER	30.0	Ext. Ring - concrete rings only	1/2"(4), K(6)

\*CBA Adapter - use for mounting and aligning octagonal extension rings.



# PREGANGED BOXES AND COVERS

## APPLICATION

Pre-ganged boxes are used for the installation of multiple devices.

## PRODUCT FEATURES

- GSB series boxes feature 1.812" spacing between gangs.
- All GBC covers have tapped holes with vertical spacing of 3.281" to accommodate standard devices.
- Rugged metallic construction



GSB-3



GBC-3

CATALOGUE NUMBER	CAPACITY (CU. IN.)	DESCRIPTION	WIDTH	1/2" KNOCKOUTS	USE WITH
Pre-Ganged Boxes - 4" x 2"					
GSB-2	52.0	2-gang Box	7"	16	GBC-2 or 3
GSB-3	66.0	3-gang Box	8-13/16"	18	GBC-3 or 4
GSB-4	80.0	4-gang Box	10-5/8"	24	GBC-4 or 5
GSB-5	93.0	5-gang Box	12-7/8"	26	GBC-5 or 6
GSB-6	107.0	6-gang Box	14-1/4"	28	GBC-6
LVP	-	Partition	-	-	-



**APPLICATION**


Vapour barriers prevent unwanted penetration of exterior air and help maintain the existing interior environment from elements outside of the structure.

**PRODUCT FEATURES**

- Made from durable polyethylene material.
- Designed to fit snugly into boxes for easy cable entry and sealing of openings.



CATALOGUE NUMBER	DESCRIPTION
<b>Vapour/Air Barrier - Low Density Polyethelene</b>	
HVB1BAR	For 2" x 3" device boxes
HVB2BAR	For 4" square and 2-gang device boxes
HVB3BAR	For 3-gang device boxes
HVBCBAR	For 4" octagonal boxes
HVBSDBAR	For 4-11/16" boxes

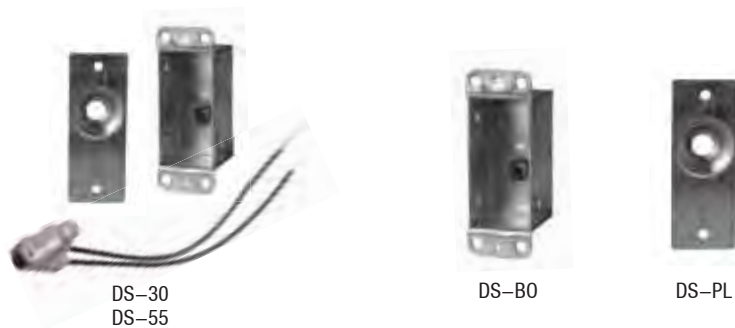**DOOR SWITCHES AND BOXES**

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATING	KNOCKOUTS
<b>Door Boxes &amp; Switches - 1-11/32" x 3-11/16" x 1-1/2"</b>			
DS-30	Box, Switch & Plate	3A, 125V AC N/O	1/2"(3)
DS-55	Box, Switch & Plate	3A, 125V AC N/C	1/2"(3)
DS-B0	Box Only	-	1/2"(3)
DS-PL	Plate Only	-	-
S-30	Switch Only	3A, 125V AC N/O	-
S-55	Switch Only	3A, 125V AC N/C	-





# BAR HANGERS

## APPLICATION

Adjustable bar hanger allows box to be placed between ceiling joists.

## PRODUCT FEATURES

- Boxes can be located anywhere along length of the bar



CATALOGUE NUMBER	DESCRIPTION	LOAD CAPACITY
<b>Bar Hangers - For Octagonal &amp; Square Boxes</b>		
1041BAR	Adjustable 11-1/2" to 18-1/2"	50 lbs.
1042BAR	Adjustable 16-1/2" to 26-1/2"	50 lbs up to 22-1/2", 25 lbs. up to 26-1/2"
1050	18" with 1/2 Offset	50 lbs
<b>Bar Hangers - For Device Boxes</b>		
1060	16" Bar grooved for box ears	-

# STEEL BOX ACCESSORIES



CATALOGUE NUMBER	DESCRIPTION
<b>Accessories</b>	
66	Protector plate. Meets requirements of CEC rule 12-616.
66SS	Protector plate for steel stud
820D	Device box supports
LRW	Rework bracket, for use with 2" x 3" device boxes with plaster ears
7901RW	Rework bracket, for use with octagonal boxes. Max load 10 lbs.
SBEXBAR	2" x 3" device box extension, adjustable depth up to 7/8"
7902	Steel stud foot extender, adds to MSB foot to facilitate 6" steel stud installation
9008	Low voltage mounting plate








# OCTAGON CEILING BOX

B1


NON-METALLIC BOXES



2027FBAR

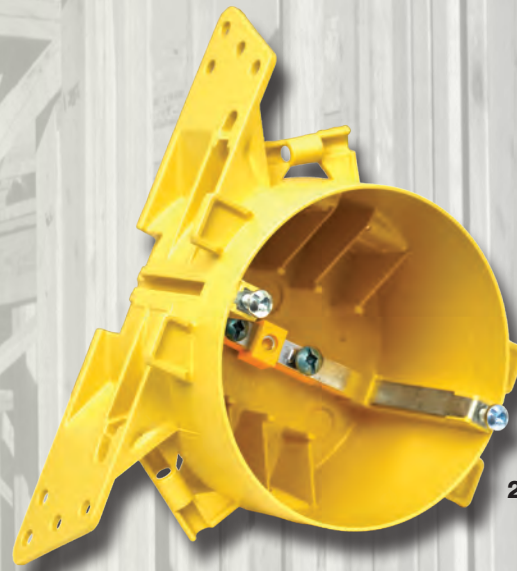

2027R

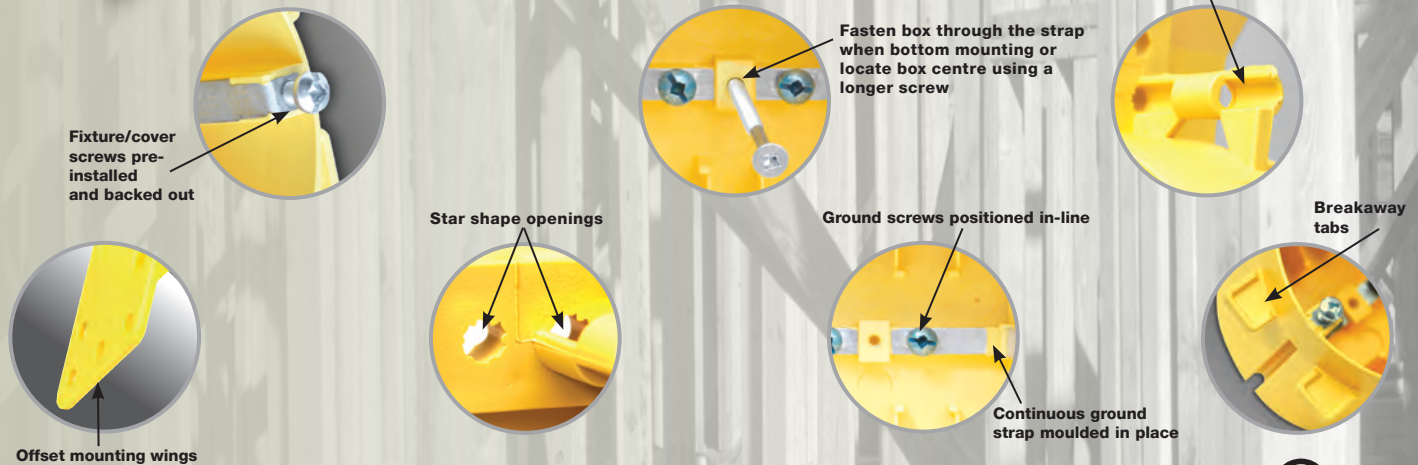

## KEY FEATURES



- Superior mounting methods to accommodate screws and/or nail installation. The box provides flexibility by offering universal mounting brackets, with screw and nail guides.
- Ground screw spacing positioned in line with wire entry. Easy to wrap ground wires with fingers or pliers.
- Advanced overmoulded ground strap retention for better support.
- A full 'u' shaped ground strap that improves mechanical performance and continuous ground.
- Engineered with pre-installed device mounting screws 2 of 8 - 3/2" x 1" allows quicker installations.
- Bottom ground screw location complete with two green ground screws to accommodate quick installation.
- Large cubic capacity – 27" cubic capacity allows ease to terminate and accommodate conductors, wire nuts and grounding.
- Centering V notches saves installation time by assuring consistent proper box positioning.
- 4 oversized 1/2" drywall breakaway tabs with score lines.
- 2 x 45° mounting holes are located inside and closed off giving the installer more mounting options.
- Star shape openings to secure and hold screws or nails in place while working overhead.

\*Patent Pending





**APPLICATION**


Accommodates wiring devices such as switches and receptacles.

**PRODUCT FEATURES**

- Self-clamping wire entry tabs

**STANDARD MATERIAL**

- Molded from high-strength plastic resin

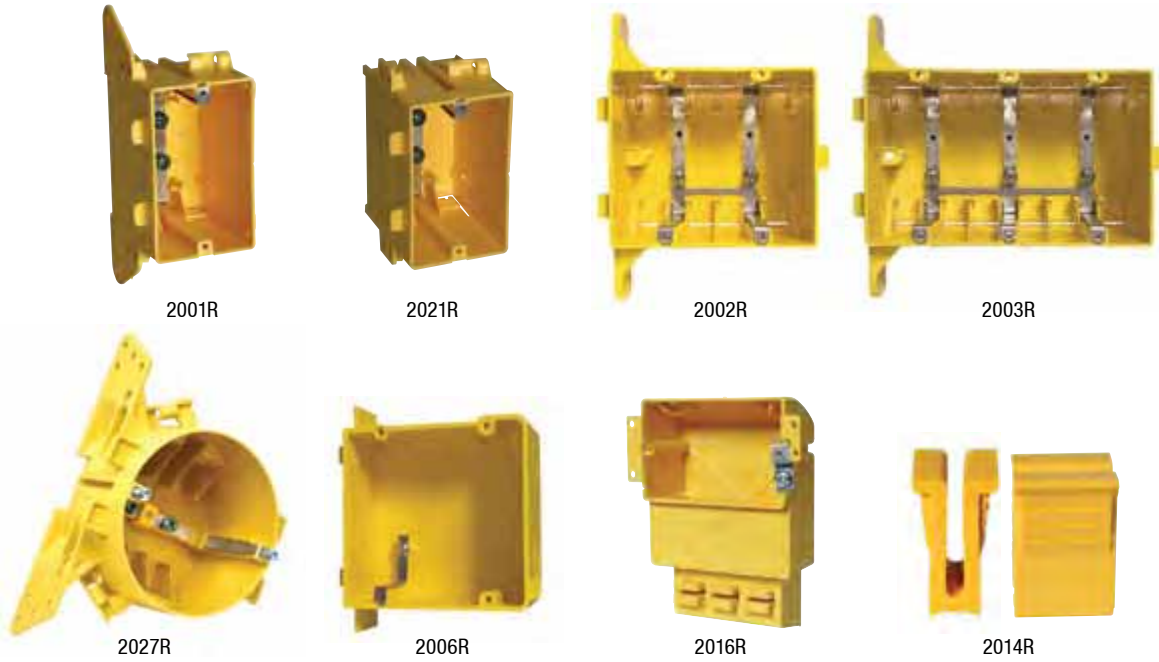

CATALOGUE NUMBER	CAPACITY (CU. IN)	DESCRIPTION	CABLE CLAMPS
<b>Device Boxes - For use with non-metallic sheathed cable</b>			
2001R	18.0	1-gang with flush bracket, 1/2" setback	4
2021R	18.0	1-gang with compact mounting bracket, 1/2" setback	4
2002R	37.0	2-gang with flush bracket, 1/2" setback	8
2003R	54.0	3-gang with flush bracket, 1/2" setback	12
<b>4" Round Ceiling Box - For use with non-metallic sheathed cable</b>			
2027R*	27.0	Round box with flush bracket, 1/2" setback	4
<b>Stove/Dryer Box - For use with non-metallic sheathed cable</b>			
2006R	42.0	stove/dryer box, 1/2" setback	1/2"(2), 3/4"(1)
<b>Trailer Box - For use with non-metallic sheathed cable</b>			
2016R	17.0	1-gang, Trailer Box	2014R
2014R	-	Fast Wire Clamp for Trailer Box	-

\*Patent Pending



# NON-METALLIC BOXES

## APPLICATION

Vapour barrier boxes prevent unwanted penetration of exterior air and help maintain the existing interior environment from elements outside of the structure. Accommodates wiring devices such as switches and receptacles.

## PRODUCT FEATURES

- Self-clamping wire entry tabs
- Vapour/air barrier flange and integral wire entry seal provides superior energy savings and quick installation.

## STANDARD MATERIAL

- Molded from high-strength plastic resin.



2011FBAR



2002FBAR



2003FBAR



2027FBAR\*



2006FBAR

CATALOGUE NUMBER		CAPACITY (CU. IN)	DESCRIPTION	CABLE CLAMPS
<b>Device Boxes - For use with non-metallic sheathed cable</b>				
Flanged w/ Vapour Barrier	Flanged Only			
2011FBAR	2011F	18.0	1-gang with flush bracket, 1/2" setback	4
2002FBAR	2002F	37.0	2-gang with flush bracket, 1/2" setback	8
2003FBAR	2003F	54.0	3-gang with flush bracket, 1/2" setback	12
<b>4" Round Ceiling Box - For use with non-metallic sheathed cable</b>				
Flanged w/ Vapour Barrier	Flanged Only			
2027FBAR*	2027F*	27.0	Round box with flush bracket, 1/2" setback	4
<b>Stove/Dryer Box - For use with non-metallic sheathed cable</b>				
Flanged w/ Vapour Barrier	Flanged Only			
2006FBAR	2006F	42.0	stove/dryer box, 1/2" setback	1/2"(2), 3/4"(1)

\*Patent Pending



**B4**

**NON-METALLIC BOXES**

## GENERAL INFORMATION

### MATERIALS

Stainless Steel - Type 430

0.031" nominal thickness. Contains 16% chrome. Corrosion resistant.

Horizontal brush finish (97 series).

For use in industrial, institutional, and commercial environments.

Solid Brass

0.040" nominal thickness. Contains 70% copper, 30% zinc alloy.

Lacquered to prevent corrosion.

Polished finish (PB series).

Painted Steel

0.031" nominal thickness.

Painted white (SW series).

### COMPLIANCE

All tradeSELECT wall plates are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

### PACKAGING

tradeSELECT wall plates are individually packed with chrome plated mounting screws, except solid brass wall plates which include brass plated mounting screws.

Wall plates can be bulk packed, with or without mounting screws, upon request.

Stainless Steel and Solid Brass wall plates are supplied with a plastic coating which protects the finish and should be removed once the plate is installed.

The packaging label includes the quantity, catalogue number, material type, bar code information, and a drawing of the product.

### SUFFIX DESIGNATIONS

HV 347 Volt wall plate, for use with 1204 style device boxes (unless otherwise stated).

HVR 347 Volt wall plate, for use with HV versions of MBD and MBS style device boxes.

KS King-size wall plate, 22% larger than standard wall plates.

KSHV King-size 347 Volt wall plate, for use with 1204 style device boxes (unless otherwise stated).

KSHVR King-size 347 Volt wall plate for use with HV versions of MBD and MBS style device boxes.

## STANDARD WALL PLATES



97071SS



97080SS



97402SS



97405SS



97001SS



97002SS

DESCRIPTION	STAINLESS STEEL TYPE 430	PAINTED STEEL WHITE	SOLID BRASS POLISHED
<b>Standard Wall Plates</b>			
1-gang, Toggle Switch	97071SS	SW071	PB071
2-gang, Toggle Switch	97072SS	SW072	PB072
3-gang, Toggle Switch	97073SS	-	PB073
4-gang, Toggle Switch	97074SS	-	PB074
5-gang, Toggle Switch	97075SS	-	PB075
6-gang, Toggle Switch	97076SS	-	PB076
7-gang, Toggle Switch	97077SS	-	PB077
8-gang, Toggle Switch	97078SS	-	PB078
9-gang, Toggle Switch	97079SS	-	PB079
10-gang, Toggle Switch	97080SS	-	PB080
1-gang, Decora or GFCI	97401SS	SW401	PB401
2-gang, Decora or GFCI	97402SS	SW402	PB402
3-gang, Decora or GFCI	97403SS	-	PB403
4-gang, Decora or GFCI	97404SS	-	PB404
5-gang, Decora or GFCI	97405SS	-	PB404
6-gang, Decora or GFCI	97406SS	-	PB406
2-gang, Decora or GFCI, centered opening	97001SS	SW001	PB001
GFCI conversion kit, 2-gang centered opening	97002SS	SW002	PB002





# STANDARD WALL PLATES

G3

WALLPLATES



97101SS



97125SS




97154SS

DESCRIPTION	STAINLESS STEEL TYPE 430	PAINTED STEEL WHITE	SOLID BRASS POLISHED
<b>Standard Wall Plates</b>			
1-gang, Duplex Receptacle	97101SS	SW101	PB101
2-gang, Duplex Receptacle	97102SS	SW102	PB102
3-gang, Duplex Receptacle	97103SS	-	PB103
4-gang, Duplex Receptacle	97104SS	-	PB104
5-gang, Duplex Receptacle	97105SS	-	-
1-gang, Blank, device mount 2.375"	97121SS	SW121	PB121
2-gang, Blank, device mount 2.375"	97122SS	SW122	PB122
3-gang, Blank, device mount 2.375"	97123SS	--	PB123
4-gang, Blank, device mount 2.375"	97124SS	-	PB124
5-gang, Blank, device mount 2.375"	97125SS	-	-
1-gang, blank box mount 3.281"	97151SS	SW151	PB151
2-gang, blank box mount 3.281"	97152SS	SW152	PB152
3-gang, blank box mount 3.281"	97153SS	-	PB153
4-gang, blank box mount 3.281"	97154SS	-	PB154
5-gang, blank box mount 3.281"	97155SS	-	-



## STANDARD WALL PLATES

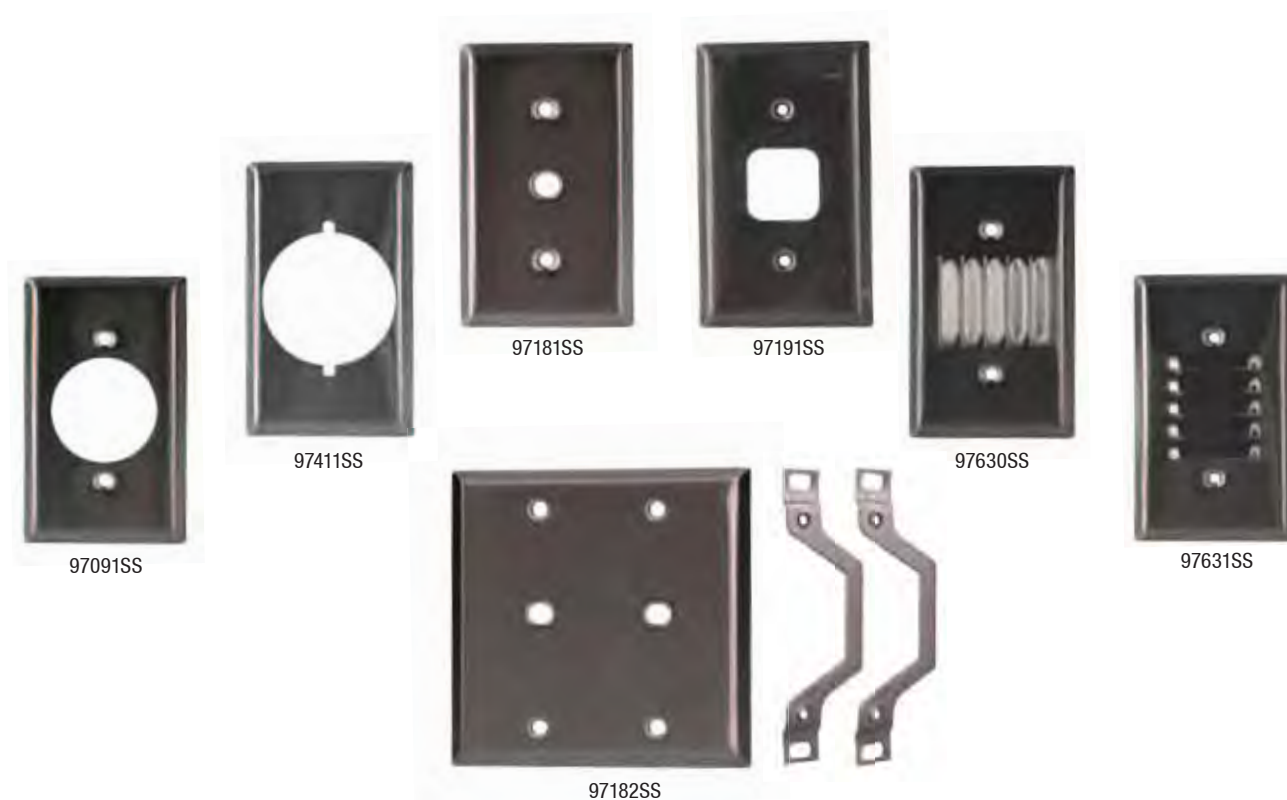


DESCRIPTION	STAINLESS STEEL TYPE 430	PAINTED STEEL WHITE	SOLID BRASS POLISHED
<b>Standard Wall Plates</b>			
1-gang, 1 single receptacle 1.40" opening	97091SS	SW091	PB091
2-gang, 2 single receptacle 1.40" opening	97092SS	SW092	PB092
1-gang, 1 single receptacle 1.625" opening	97111SS	SW111	PB111
1-gang, 1 single receptacle 1.750" opening	97211SS	SW211	PB211
2-gang, 1 single receptacle 2.156" opening	97411SS	SW411	PB411
2-gang, 1 single receptacle 2.156" opening	97421SS	SW421	PB411
2-gang, 1 single receptacle 2.625" opening	97521SS	SW521	PB521
1-gang, 1/2" bushed slot with 1 mounting bridge	97731SS	SW731	PB731
3-gang, 1/2" bushed slot with 2 mounting bridges	97730SS	-	PB730
1-gang, 3/8" telephone opening device mount 2.375"	97181SS	SW181	PB181
2-gang, 3/8" telephone opening device mount 2.375"	97182SS	SW182	PB182
1-gang, 5/8" telephone opening device mount 2.375"	97201SS	SW201	PB201
2-gang, 5/8" telephone opening device mount 2.375"	97202SS	SW202	PB202
1-gang, 1-1/8" square telephone opening device mount 2.375"	97191SS	SW191	PB191
1-gang, louvered, vertical device mount - 2.375"	97631SS	-	PB631
1-gang, louvered, horizontal device mount - 2.375"	97630SS	-	PB630



# STANDARD WALL PLATES

G5

WALLPLATES

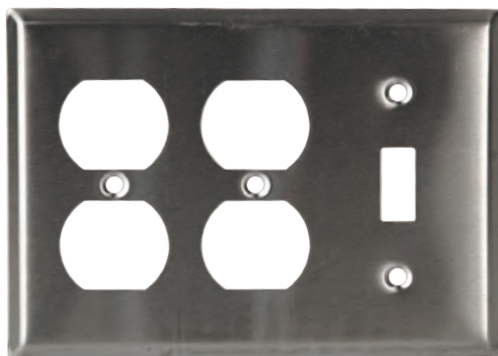

97213SS



97342SS



97392SS



97322SS

DESCRIPTION	STAINLESS STEEL TYPE 430	PAINTED STEEL WHITE	SOLID BRASS POLISHED
<b>Standard Wall Plates</b>			
2-gang, 1 toggle switch, 1 duplex receptacle	97532SS	SW532	PB532
3-gang, 2 toggle switch, 1 duplex receptacle	97543SS	-	PB543
4-gang, 3 toggle switch, 1 duplex receptacle	97553SS	-	PB553
5-gang, 4 toggle switch, 1 duplex receptacle	97563SS	-	PB563
6-gang, 5 toggle switch, 1 duplex receptacle	97573SS	-	SU573
3-gang, 2 toggle switch, and 1 blank device mount 2.375"	97233SS	-	-
2-gang, 1 toggle switch, and 1 blank device mount 2.375"	97502SS	SW502	PB502
3-gang, 1 toggle switch, and 2 blank device mount 2.375"	97223SS	-	-
3-gang, 2 duplex receptacle and 1 toggle switch	97213SS	-	-
2-gang, 1 duplex receptacle, 1 blank device mount 2.375"	97322SS	-	-
3-gang, 1 duplex receptacle, 2 blank device mount 2.375"	97323SS	-	-
2-gang, 1 duplex receptacle, 1 blank, box mount 3.281"	97352SS	-	-
3-gang, 1 duplex receptacle, 2 blank, box mount 3.281"	97353SS	-	-
2-gang, 1 toggle switch, 1 Decora	97242SS	-	-
2-gang, 1 duplex receptacle, 1 Decora	97342SS	-	-
2-gang, 1 toggle switch, and 1 single receptacle 1.40"	97512SS	SW512	PB512
2-gang, 1 duplex receptacle, and 1 single receptacle 1.40"	97392SS	-	-





97071HV



97074HV



97077HV



97151HV



97154HV



97401KSHV



97402KSHV



97404KSHV

DESCRIPTION	FOR USE WITH 1204 BOXES	FOR USE WITH 347V MBD OR MBS
<b>347V Wall Plates</b>		
1-gang, Toggle Switch 347V	97071HV	97071HV
2-gang, Toggle Switch 347V	97072HV	97072HVR
3-gang, Toggle Switch 347V	97073HV	97073HVR
4-gang, Toggle Switch 347V	97074HV	97074HVR
5-gang, Toggle Switch 347V	97075HV	97075HVR
6-gang, Toggle Switch 347V	97076HV	97076HVR
7-gang, Toggle Switch 347V	97077HV	97077HVR
1-gang, blank 347V box mount 3.531"	97151HV	97151HV
2-gang, blank 347V box mount 3.531"	97152HV	97152HVR
3-gang, blank 347V box mount 3.531"	97153HV	97153HVR
4-gang, blank 347V box mount 3.531"	97154HV	97154HVR
1-gang, toggle switch 347V king-size plate	97071KSHV	97071KSHV
1-gang, Decora 347V king-size plate	97401KSHV	97401KSHV
2-gang, Decora 347V box mount 3.531" king-size plate	97402KSHV	97402KSHVR
3-gang, Decora 347V box mount 3.531" king-size plate	97403KSHV	97403KSHVR
4-gang, Decora 347V box mount 3.531" king-size plate	97404KSHV	97404KSHVR



# KING SIZE WALL PLATES



97071KS



97074KS



97101KS



97124KS



DESCRIPTION	STAINLESS STEEL TYPE 430
<b>King Size Wall Plates</b>	
1-gang, toggle switch king-size plate	97071KS
2-gang, toggle switch king-size plate	97072KS
3-gang, toggle switch king-size plate	97073KS
4-gang, toggle switch king-size plate	97074KS
1-gang, Duplex Receptacle, king-size plate	97101KS
2-gang, Duplex Receptacle, king-size plate	97102KS
3-gang, Duplex Receptacle, king-size plate	97103KS
4-gang, Duplex Receptacle, king-size plate	97104KS
1-gang, Blank, king-size device mount 2.375"	97121KS
2-gang, Blank, king-size device mount 2.375"	97122KS
3-gang, Blank, king-size device mount 2.375"	97123KS
4-gang, Blank, king-size device mount 2.375"	97124KS
1-gang, blank, king-size box mount 3.281"	97151KS
2-gang, blank, king-size box mount 3.281"	97152KS
3-gang, blank, king-size box mount 3.281"	97153KS
4-gang, blank, king-size box mount 3.281"	97154KS



6851RF



6300H



WPS2

DESCRIPTION	STAINLESS STEEL TYPE 430
<b>Accessories</b>	
1-gang, toggle with FURNACE and ON/OFF markings, device mount - 2.375"	6851RF
Mounting bridge converts device mount 2.375" to box mount 3.281"	6300H
Wall plate Screws 6/32 oval head milled slot 1/2" long - Plated Steel Chrome	WPS2
Wall plate Screws 6/32 oval head milled slot 1/2" long - Plated Steel Brass	WPS3



# WALL PLATES CUSTOM

## CUSTOM WALL PLATES


Hubbell Canada LP is the leading manufacturer of custom stainless steel wall plates in Canada. tradeSELECT® custom wall plates are made from type 430 stainless steel and can be configured in a variety of combinations to meet your 120/227V, King Size, 347V and King Size High Voltage requirements.

## COMPLIANCE

All tradeSELECT® custom wall plates are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

## ORDERING PROCEDURE

1. Call [1-877-394-7464](tel:1-877-394-7464) with a description or fax [905-839-2649](tel:905-839-2649) with a sketch of the desired wall plate. Please include number of gangs, type of opening(s), and quantity required.
2. A technical drawing and a quotation will be forwarded to you.
3. To place your order, simply approve the drawing with your signature and date, then return it along with the quotation number and your purchase order.















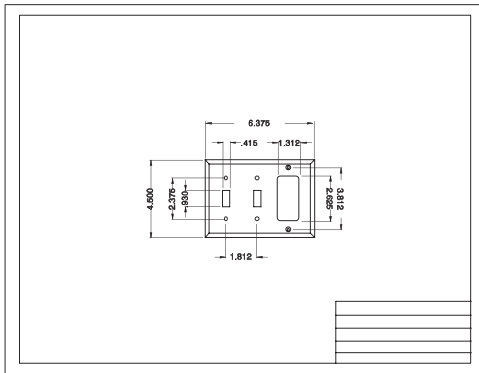


+

### Quotation





Customer  
Quote No.  
Product Description  
Price/100  
Delivery

## STANDARD WALL PLATES

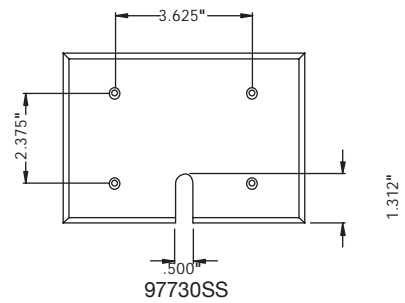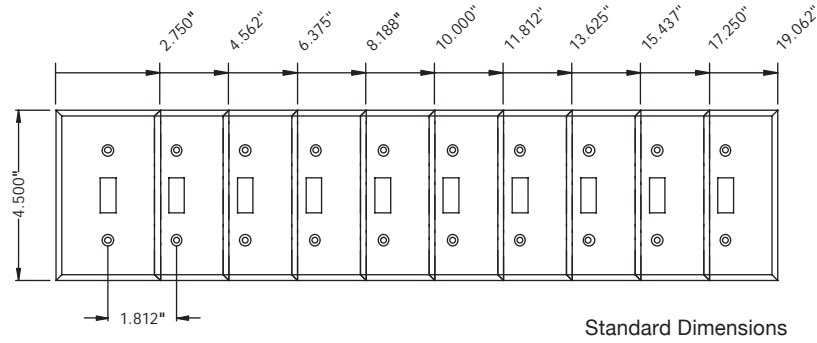


Dimensions are in inches.




347 VOLT WALL PLATES

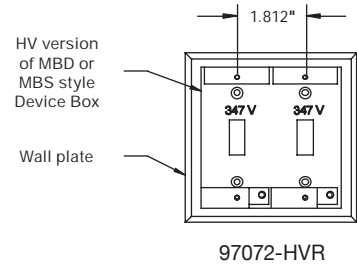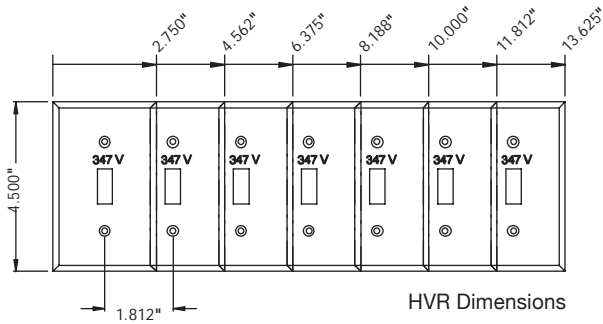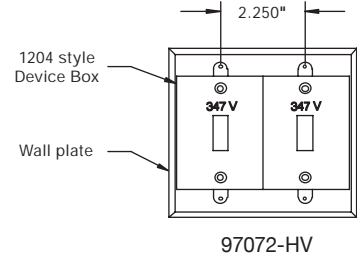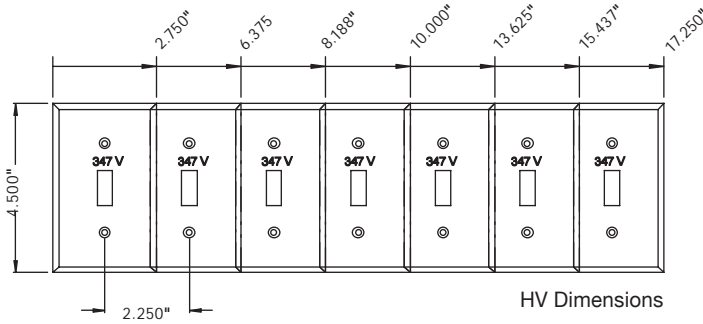

KINGSIZE WALL PLATES

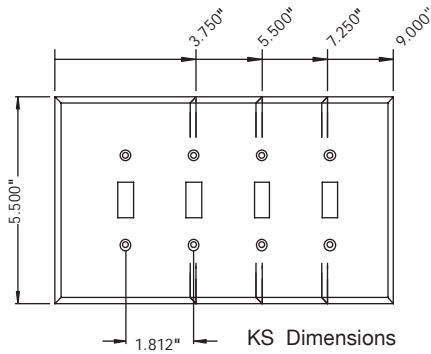

MOUNTING HOLE SPACINGS



Dimensions are in inches.





# CONNECTORS

## NON-METALLIC SHEATHED CABLE



NMS038



NMS038SF



NMC038



NMB038



DUP038



DUP038SF



NMSI050



NMPI050




NMSQ038

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>One Screw - Saddle Connector</b>				
NMS038	3/8" (12)	50	500	Zinc
NMS050	1/2" (16)	25	250	Zinc
NMS075	3/4" (21)	20	200	Zinc
NMS100	1" (27)	10	100	Zinc
<b>One Screw - Saddle Connector (Snap Fit)</b>				
NMS038SF	3/8" (12)	50	500	Zinc
<b>Two Screw - Saddle Connector</b>				
NMC038	3/8" (12)	100	1000	Zinc
NMC075	3/4" (21)	50	500	Zinc
NMC100	1" (27)	25	250	Zinc
NMC125	1-1/4" (35)	10	100	Zinc
NMC150	1-1/2" (41)	5	50	Zinc
NMC200	2" (53)	10	40	Zinc
<b>Two Piece Clamp Connector</b>				
NMB038	3/8" (12)	100	1000	Steel
NMB075	3/4" (21)	50	500	Steel
<b>Duplex Connector</b>				
DUP038	3/8" (12)	25	250	Zinc
<b>Duplex Connector (Snap Fit)</b>				
DUP038SF	3/8" (12)	25	250	Zinc
<b>Nonmetallic Push-In Connectors</b>				
NMPI050	1/2" (16)	100	1000	Plastic
NMPI050B (Bucket)	1/2" (16)	-	300	Plastic
NMPI075	3/4" (21)	50	500	Plastic
NMPI075B (Bucket)	3/4" (21)	-	150	Plastic
<b>Nonmetallic Snap-In Connector</b>				
NMSI050	1/2" (16)	50	500	Plastic
<b>Squeeze-In Connector</b>				
NMSQ038	3/8" (12)	100	1000	Steel



# ACCESSORIES

## NON-METALLIC SHEATHED CABLE



TES1



NSP050P



CS1



CSC10

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Cable Staples</b>				
TES1	14/2 - 12/2	500	5000	Galvanized Steel
TES1B (Bucket)	14/2 - 12/2	-	1500	Galvanized Steel
TES2	14/2-12/2, 14-3-12/3	500	5000	Galvanized Steel
TES2B (Bucket)	14/2-12/2, 14-3-12/3	-	1000	Galvanized Steel
TES3	10/2-8/2, 14/3-10/3	250	2500	Galvanized Steel
TES4	8/3-6/3	250	1000	Galvanized Steel
<b>Nailing Straps</b>				
NSP050P	14/2-12/2	500	5000	Polypropylene
NSP050B (Bucket)	14/2-12/2	-	1500	Polypropylene
NSP075P	14/2-8/2	400	4000	Polypropylene
NSP075B (Bucket)	14/2-8/2	-	1000	Polypropylene
<b>Cable Straps</b>				
CS1	14/2-10/3	250	5000	Aluminum
CS10	14/2	250	5000	Aluminum
CS11	12/2-10/2	250	5000	Aluminum
CS21	12/2-8/3	200	4000	Aluminum
CS3	10/2-6/3	100	2000	Aluminum
CS4	4/3	100	2000	Aluminum
CS50	3/3 - 2/3	100	1000	Aluminum
CSC10	14/2-10/3	250	5000	Aluminum



# CONNECTORS

## ARMoured CABLE / FLEX CONDUIT

D3

FITTINGS



SQ90038



SQ90038SF



DUP038



DUP038SF



EFK038



SF038



SF038SF



SFK050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>90 Degree Connectors</b>				
SQ90038	3/8"(12)	25	250	Zinc
SQ90050	1/2" (16)	25	250	Zinc
SQ90075	3/4" (21)	10	100	Zinc
SQ90100	1" (27)	5	50	Zinc
SQ90125	1-1/4" (35)	10	40	Zinc
SQ90150	1-1/2" (41)	-	5	Zinc
SQ90200	2" (53)	-	5	Zinc
SQ90250	2-1/2" (63)	-	1	Zinc
SQ90300	3" (78)	-	1	Zinc
SQ90350	3-1/2" (91)	-	1	Zinc
SQ90400	4" (103)	-	1	Zinc
<b>90 Degree Connectors (Snap Fit)</b>				
SQ90038SF	3/8"(12)	25	250	Zinc
SQ90050SF	1/2" (16)	25	250	Zinc
<b>Duplex Connector</b>				
DUP038	3/8"(12)	25	250	Zinc
<b>Duplex Connector (Snap Fit)</b>				
DUP038SF	3/8"(12)	25	250	Zinc
<b>EMT to Flex Couplings</b>				
EFK5038	1/2"-3/8"	50	500	Zinc
EFK5050	1/2"-1/2"	25	250	Zinc
EFK7575	3/4"-3/4"	25	250	Zinc
<b>EMT to Flex Connectors</b>				
SF038	3/8"(12)	50	500	Zinc
SF050	1/2" (16)	50	500	Zinc
<b>EMT to Flex Connectors (Snap Fit)</b>				
SF038SF	3/8"(12)	50	500	Zinc
SF050SF	1/2" (16)	50	500	Zinc
<b>Flex to Flex Coupling</b>				
SFK050	1/2" (16)	50	500	Zinc



# CONNECTORS

## ARMoured CABLE / FLEX CONDUIT



SQ038



S1F038

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Squeeze Connector</b>				
SQ038	3/8" (12)	50	500	Zinc
SQ050	1/2" (16)	25	250	Zinc
SQ075	3/4" (21)	25	250	Zinc
SQ100	1" (27)	10	100	Zinc
SQ125	1-1/4" (35)	10	100	Zinc
SQ150	1-1/2" (41)	5	50	Zinc
SQ200	2" (53)	10	40	Zinc
SQ250	2-1/2" (63)	-	10	Zinc
SQ300	3" (78)	-	5	Zinc
SQ350	3-1/2" (91)	-	2	Zinc
SQ400	4" (103)	-	1	Zinc
<b>One Hole Strap</b>				
S1F038	3/8" (12)	100	1000	Steel



# CONNECTORS

## LIQUID TIGHT CONDUIT



LTM I038



LTM I90038



LTM I45038



LTM 038



LTM 90038



LTM 45038

INSULATED	UNINSULATED	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Straight Liquid Tight Connector</b>					
LTM I038	LTM 038	3/8" (12)	50	200	Steel
LTM I050	LTM 050	1/2" (16)	50	200	Steel
LTM I075	LTM 075	3/4" (21)	25	100	Steel
LTM I100	LTM 100	1" (27)	-	10	Steel
LTM I125	LTM 125	1-1/4" (35)	-	10	Malleable Iron
LTM I150	LTM 150	1-1/2" (41)	-	5	Malleable Iron
LTM I200	LTM 200	2" (53)	-	5	Malleable Iron
LTM I250	LTM 250	2-1/2" (63)	-	1	Malleable Iron
LTM I300	LTM 300	3" (78)	-	1	Malleable Iron
LTM I400	LTM 400	4" (103)	-	1	Malleable Iron
<b>90 Degree Liquid Tight Connector</b>					
LTM I90038	LTM 90038	3/8" (12)	25	100	Malleable Iron
LTM I90050	LTM 90050	1/2" (16)	25	100	Malleable Iron
LTM I90075	LTM 90075	3/4" (21)	25	100	Malleable Iron
LTM I90100	LTM 90100	1" (27)	-	10	Malleable Iron
LTM I90125	LTM 90125	1-1/4" (35)	-	10	Malleable Iron
LTM I90150	LTM 90150	1-1/2" (41)	-	5	Malleable Iron
LTM I90200	LTM 90200	2" (53)	-	5	Malleable Iron
LTM I90250	LTM 90250	2-1/2" (63)	-	1	Malleable Iron
LTM I90300	LTM 90300	3" (78)	-	1	Malleable Iron
LTM I90400	LTM 90400	4" (103)	-	1	Malleable Iron
<b>45 Degree Liquid Tight Connector</b>					
LTM I45038	LTM 45038	3/8" (12)	-	25	Malleable Iron
LTM I45050	LTM 45050	1/2" (16)	-	25	Malleable Iron
LTM I45075	LTM 45075	3/4" (21)	-	25	Malleable Iron
LTM I45100	LTM 45100	1" (27)	-	10	Malleable Iron
LTM I45125	LTM 45125	1-1/4" (35)	-	10	Malleable Iron
LTM I45150	LTM 45150	1-1/2" (41)	-	5	Malleable Iron
LTM I45200	LTM 45200	2" (53)	-	5	Malleable Iron



# CONNECTORS

## LIQUIDTIGHT CONDUIT



LTZ038



LTZ90038

INSULATED	UNINSULATED	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Straight Liquid Tight Connector</b>					
LTZI038	LTZ038	3/8" (12)	20	200	Zinc
LTZI050	LTZ050	1/2" (16)	20	200	Zinc
LTZI075	LTZ075	3/4" (21)	10	100	Zinc
LTZI100	LTZ100	1" (27)	5	50	Zinc
LTZI125	LTZ125	1-1/4" (35)	5	50	Zinc
LTZI150	LTZ150	1-1/2" (41)	2	20	Zinc
LTZI200	LTZ200	2" (53)	2	20	Zinc
LTZI250	LTZ250	2-1/2" (63)	-	1	Zinc
LTZI300	LTZ300	3" (78)	-	1	Zinc
LTZI400	LTZ400	4" (103)	-	1	Zinc
<b>90 Degree Liquid Tight Connector</b>					
LTZI90038	LTZ90038	3/8" (12)	10	100	Zinc
LTZI90050	LTZ90050	1/2" (16)	10	100	Zinc
LTZI90075	LTZ90075	3/4" (21)	10	100	Zinc
LTZI90100	LTZ90100	1" (27)	5	50	Zinc
LTZI90125	LTZ90125	1-1/4" (35)	2	20	Zinc
LTZI90150	LTZ90150	1-1/2" (41)	2	20	Zinc
LTZI90200	LTZ90200	2" (53)	1	10	Zinc
LTZI90250	LTZ90250	2-1/2" (63)	-	1	Zinc
LTZI90300	LTZ90300	3" (78)	-	1	Zinc
LTZI90400	LTZ90400	4" (103)	-	1	Zinc



# EMT CONNECTORS



INSULATED	UNINSULATED	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>EMT COMPRESSION CONNECTOR</b>					
CCZI050	CCZ050	1/2" (16)	50	500	Zinc
CCZI075	CCZ075	3/4" (21)	25	250	Zinc
CCZI100	CCZ100	1" (27)	20	200	Zinc
CCZI125	CCZ125	1-1/4" (35)	25	100	Zinc
CCZI150	CCZ150	1-1/2" (41)	15	60	Zinc
CCZI200	CCZ200	2" (53)	10	40	Zinc
CCZI250	CCZ250	2-1/2" (63)	-	12	Zinc
CCZI300	CCZ300	3" (78)	-	12	Zinc
CCZI400	CCZ400	4" (103)	-	6	Zinc
CCSI050	CCS050	1/2" (16)	50	500	Steel
CCSI075	CCS075	3/4" (21)	25	250	Steel
CCSI100	CCS100	1" (27)	25	100	Steel
CCSI125	CCS125	1-1/4" (35)	5	25	Steel
CCSI150	CCS150	1-1/2" (41)	-	20	Steel
CCSI200	CCS200	2" (53)	-	20	Steel
CCSI250	CCS250	2-1/2" (63)	-	5	Steel
CCSI300	CCS300	3" (78)	-	1	Steel
CCSI400	CCS400	4" (103)	-	1	Steel
<b>EMT SET SCREW CONNECTOR</b>					
SCZI050	SCZ050	1/2" (16)	50	500	Zinc
SCZI075	SCZ075	3/4" (21)	25	250	Zinc
SCZI100	SCZ100	1" (27)	50	200	Zinc
SCZI125	SCZ125	1-1/4" (35)	25	100	Zinc
SCZI150	SCZ150	1-1/2" (41)	-	25	Zinc
SCZI200	SCZ200	2" (53)	-	20	Zinc
SCZI250	SCZ250	2-1/2" (63)	-	12	Zinc
SCZI300	SCZ300	3" (78)	-	12	Zinc
SCZI400	SCZ400	4" (103)	-	6	Zinc
SCSI050	SCS050	1/2" (16)	50	500	Steel
SCSI075	SCS075	3/4" (21)	25	250	Steel
SCSI100	SCS100	1" (27)	20	200	Steel
SCSI125	SCS125	1-1/4" (35)	-	100	Steel
SCSI150	SCS150	1-1/2" (41)	-	25	Steel
SCSI200	SCS200	2" (53)	-	20	Steel
SCSI250	SCS250	2-1/2" (63)	-	12	Steel
SCSI300	SCS300	3" (78)	-	12	Steel
SCSI400	SCS400	4" (103)	-	6	Steel



## EMT COUPLINGS



CKZ050



CKS050



SKZ050



SKS050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>EMT Compression Coupling</b>				
CKZ050	1/2" (16)	50	500	Zinc
CKZ075	3/4" (21)	25	250	Zinc
CKZ100	1" (27)	20	200	Zinc
CKZ125	1-1/4" (35)	25	100	Zinc
CKZ150	1-1/2" (41)	15	60	Zinc
CKZ200	2" (53)	10	40	Zinc
CKZ250	2-1/2" (63)	-	12	Zinc
CKZ300	3" (78)	-	12	Zinc
CKZ400	4" (103)	-	6	Zinc
CKS050	1/2" (16)	50	500	Steel
CKS075	3/4" (21)	25	250	Steel
CKS100	1" (27)	25	100	Steel
CKS125	1-1/4" (35)	5	25	Steel
CKS150	1-1/2" (41)	-	20	Steel
CKS200	2" (53)	-	20	Steel
CKS250	2-1/2" (63)	-	5	Steel
CKS300	3" (78)	-	1	Steel
CKS400	4" (103)	-	1	Steel
<b>EMT Set Screw Coupling</b>				
SKZ050	1/2" (16)	50	500	Zinc
SKZ075	3/4" (21)	25	250	Zinc
SKZ100	1" (27)	50	200	Zinc
SKZ125	1-1/4" (35)	25	100	Zinc
SKZ150	1-1/2" (41)	-	25	Zinc
SKZ200	2" (53)	-	20	Zinc
SKZ250	2-1/2" (63)	-	12	Zinc
SKZ300	3" (78)	-	12	Zinc
SKZ400	4" (103)	-	6	Zinc
SKS050	1/2" (16)	50	500	Steel
SKS075	3/4" (21)	25	250	Steel
SKS100	1" (27)	50	200	Steel
SKS125	1-1/4" (35)	25	100	Steel
SKS150	1-1/2" (41)	-	25	Steel
SKS200	2" (53)	-	20	Steel
SKS250	2-1/2" (63)	-	12	Steel
SKS300	3" (78)	-	12	Steel
SKS400	4" (103)	-	6	Steel





# EMT ACCESSORIES



PEEE050



PEEB050



E1S050



E2S050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>90 Degree Pull Elbow with Gasket</b>				
PEEB050	1/2" EMT to Box	10	100	Zinc
PEEB075	3/4" EMT to Box	5	50	Zinc
PEEB100	1" EMT to Box	-	25	Zinc
<b>90 Degree Pull Elbow with Gasket</b>				
PEEE050	1/2" EMT to EMT	10	100	Zinc
PEEE075	3/4" EMT to EMT	5	50	Zinc
PEEE100	1" EMT to EMT	-	25	Zinc
<b>One Hole Strap</b>				
E1S050	1/2" (16)	100	1000	Steel
E1S075	3/4" (21)	100	1000	Steel
E1S100	1" (27)	50	500	Steel
E1S125	1-1/4" (35)	25	250	Steel
E1S150	1-1/2" (41)	25	250	Steel
E1S200	2" (53)	20	200	Steel
<b>Two Hole Strap</b>				
E2S050	1/2" (16)	100	1000	Steel
E2S075	3/4" (21)	100	1000	Steel
E2S100	1" (27)	50	500	Steel
E2S125	1-1/4" (35)	-	200	Steel
E2S150	1-1/2" (41)	-	200	Steel
E2S200	2" (53)	-	200	Steel
E2S250	2-1/2" (63)	-	200	Steel
E2S300	3" (78)	-	100	Steel
E2S400	4" (103)	-	100	Steel



# CONDUIT BODIES



CBC50COM



CBLB50COM



CBLRL50COM



CBT50COM

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Type C Conduit Body - Combination Rigid/EMT</b>				
CBC50COM	1/2" (16)	10	100	Aluminum
CBC75COM	3/4" (21)	10	50	Aluminum
CBC100COM	1" (27)	5	25	Aluminum
CBC125COM	1-1/4" (35)	2	10	Aluminum
CBC150COM	1-1/2" (41)	2	10	Aluminum
CBC200COM	2" (53)	1	5	Aluminum
<b>Type LB Conduit Body - Combination Rigid/EMT</b>				
CBLB50COM	1/2" (16)	10	100	Aluminum
CBLB75COM	3/4" (21)	10	50	Aluminum
CBLB100COM	1" (27)	5	25	Aluminum
CBLB125COM	1-1/4" (35)	5	20	Aluminum
CBLB150COM	1-1/2" (41)	2	20	Aluminum
CBLB200COM	2" (53)	1	5	Aluminum
<b>Type LB Conduit Body - Rigid</b>				
CBLB250RIG	2-1/2" (63)	-	1	Aluminum
CBLB300RIG	3" (78)	-	1	Aluminum
CBLB400RIG	4" (103)	-	1	Aluminum
<b>Type LRL Conduit Body - Combination Rigid/EMT</b>				
CBLRL50COM	1/2" (16)	10	100	Aluminum
CBLRL75COM	3/4" (21)	10	50	Aluminum
CBLRL100COM	1" (27)	5	25	Aluminum
CBLRL125COM	1-1/4" (35)	2	20	Aluminum
CBLRL150COM	1-1/2" (41)	2	20	Aluminum
CBLRL200COM	2" (53)	1	5	Aluminum
<b>Type T Conduit Body - Combination Rigid/EMT</b>				
CBT50COM	1/2" (16)	10	100	Aluminum
CBT75COM	3/4" (21)	10	50	Aluminum
CBT100COM	1" (27)	5	25	Aluminum
CBT125COM	1-1/4" (35)	2	10	Aluminum
CBT150COM	1-1/2" (41)	2	10	Aluminum
CBT200COM	2" (53)	1	5	Aluminum



# CONDUIT NIPPLES



CN050



ON050



RB0705

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Conduit Nipples</b>				
CN050	1/2" (16)	100	1000	Zinc
CN075	3/4" (21)	50	500	Zinc
CN100	1" (27)	25	250	Zinc
CN125	1-1/4" (35)	25	250	Zinc
CN150	1-1/2" (41)	25	100	Zinc
CN200	2" (53)	10	40	Zinc
CN250	2-1/2" (63)	10	40	Zinc
CN300	3" (78)	10	40	Zinc
CN400	4" (103)	5	20	Zinc
<b>Offset Nipples</b>				
ON050	1/2" (16)	10	100	Zinc
ON075	3/4" (21)	10	100	Zinc
ON100	1" (27)	10	100	Zinc
ON125	1-1/4" (35)	5	50	Zinc
ON150	1-1/2" (41)	5	50	Zinc
ON200	2" (53)	2	20	Zinc
<b>Reducing Bushings</b>				
RB0705	3/4"-1/2"	-	100	Steel
RB1005	1"-1/2"	-	50	Steel
RB1007	1"-3/4"	-	50	Steel
RB1205	1-1/4"-1/2"	-	50	Steel
RB1207	1-1/4"-3/4"	-	50	Steel
RB1210	1-1/4"-1"	-	50	Steel
RB1505	1-1/2"-1/2"	-	50	Steel
RB1507	1-1/2"-3/4"	-	50	Steel
RB1510	1-1/2"-1"	-	50	Steel
RB1512	1-1/2"-1-1/4"	-	50	Steel
RB2005	2"-1/2"	-	25	Steel
RB2007	2"-3/4"	-	25	Steel
RB2010	2"-1"	-	25	Steel
RB2012	2"-1-1/4"	-	25	Steel
RB2015	2"-1-1/2"	-	25	Steel



## RIGID STRAPS



R1S050



R2S050



EK050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>One Hole Strap</b>				
R1S050	1/2" (16)	50	500	Steel
R1S075	3/4" (21)	50	500	Steel
R1S100	1" (27)	-	200	Steel
R1S125	1-1/4" (35)	-	200	Steel
R1S150	1-1/2" (41)	-	200	Steel
R1S200	2" (53)	-	100	Steel
R1S250	2-1/2" (63)	-	50	Steel
R1S300	3" (78)	-	50	Steel
R1S350	3-1/2" (91)	-	25	Steel
R1S400	4" (103)	-	25	Steel
<b>Two Hole Strap</b>				
R2S050	1/2" (16)	100	1000	Steel
R2S075	3/4" (21)	100	1000	Steel
R2S100	1" (27)	50	500	Steel
R2S125	1-1/4" (35)	-	200	Steel
R2S150	1-1/2" (41)	-	200	Steel
R2S200	2" (53)	-	200	Steel
R2S250	2-1/2" (63)	-	200	Steel
R2S300	3" (78)	-	100	Steel
R2S350	3-1/2" (91)	-	100	Steel
R2S400	4" (103)	-	100	Steel
<b>Three Piece Coupling</b>				
EK050	1/2" (16)	25	100	Malleable Iron
EK075	3/4" (21)	25	100	Malleable Iron
EK100	1" (27)	5	25	Malleable Iron
EK125	1-1/4" (35)	5	25	Malleable Iron
EK150	1-1/2" (41)	-	5	Malleable Iron
EK200	2" (53)	-	5	Malleable Iron
EK250	2-1/2" (63)	-	4	Malleable Iron
EK300	3" (78)	-	4	Malleable Iron
EK350	3-1/2" (91)	-	2	Malleable Iron
EK400	4" (103)	-	2	Malleable Iron
EK500	5" (129)	-	1	Malleable Iron
EK600	6" (155)	-	1	Malleable Iron



# BUSHINGS



BP050



BIG050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Non Metallic Insulated Bushings</b>				
BP050	1/2" (16)	100	2000	Polypropylene
BP075	3/4" (21)	100	2000	Polypropylene
BP100	1" (27)	50	500	Polypropylene
BP125	1-1/4" (35)	50	500	Polypropylene
BP150	1-1/2" (41)	-	200	Polypropylene
BP200	2" (53)	-	200	Polypropylene
BP250	2-1/2" (63)	-	100	Polypropylene
BP300	3" (78)	-	100	Polypropylene
BP350	3-1/2" (91)	-	100	Polypropylene
BP400	4" (103)	-	50	Polypropylene
BP500	5" (129)	-	5	Polypropylene
BP600	6" (155)	-	5	Polypropylene
<b>Insulated Grounding Bushing</b>				
BIG050	1/2" (16)	25	100	Zinc
BIG075	3/4" (21)	25	100	Zinc
BIG100	1" (27)	25	100	Zinc
BIG125	1-1/4" (35)	20	80	Zinc
BIG150	1-1/2" (41)	20	80	Zinc
BIG200	2" (53)	10	40	Zinc
BIG250	2-1/2" (63)	10	40	Zinc
BIG300	3" (78)	10	40	Zinc
BIG350	3-1/2" (91)	5	20	Zinc
BIG400	4" (103)	5	20	Zinc



## METALLIC BUSHINGS



BZI050



BMI050



BZ050



BM050

INSULATED	UNINSULATED	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Metallic Bushings</b>					
<b>BZI050</b>	<b>BZ050</b>	1/2" (16)	100	1000	Zinc
<b>BZI075</b>	<b>BZ075</b>	3/4" (21)	50	250	Zinc
<b>BZI100</b>	<b>BZ100</b>	1" (27)	50	250	Zinc
<b>BZI125</b>	<b>BZ125</b>	1-1/4" (35)	25	125	Zinc
<b>BZI150</b>	<b>BZ150</b>	1-1/2" (41)	25	125	Zinc
<b>BZI200</b>	<b>BZ200</b>	2" (53)	10	50	Zinc
<b>BZI250</b>	<b>BZ250</b>	2-1/2" (63)	-	10	Zinc
<b>BZI300</b>	<b>BZ300</b>	3" (78)	-	10	Zinc
<b>BZI350</b>	<b>BZ350</b>	3.50"	-	10	Zinc
<b>BZI400</b>	<b>BZ400</b>	4" (103)	-	10	Zinc
<b>BMI050</b>	<b>BM050</b>	1/2" (16)	-	100	Malleable Iron
<b>BMI075</b>	<b>BM075</b>	3/4" (21)	-	50	Malleable Iron
<b>BMI100</b>	<b>BM100</b>	1" (27)	-	25	Malleable Iron
<b>BMI125</b>	<b>BM125</b>	1-1/4" (35)	-	25	Malleable Iron
<b>BMI150</b>	<b>BM150</b>	1-1/2" (41)	-	25	Malleable Iron
<b>BMI200</b>	<b>BM200</b>	2" (53)	-	10	Malleable Iron
<b>BMI250</b>	<b>BM250</b>	2-1/2" (63)	-	10	Malleable Iron
<b>BMI300</b>	<b>BM300</b>	3" (78)	-	5	Malleable Iron
<b>BMI350</b>	<b>BM350</b>	3-1/2" (91)	-	5	Malleable Iron
<b>BMI400</b>	<b>BM400</b>	4" (103)	-	5	Malleable Iron



# THREADED HUBS



THI050



REK050



LNS050



PERR050



PERB050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Insulated Threaded Hubs</b>				
THI050	1/2" (16)	-	25	Zinc
THI075	3/4" (21)	-	25	Zinc
THI100	1" (27)	-	25	Zinc
THI125	1-1/4" (35)	-	10	Zinc
THI150	1-1/2" (41)	-	10	Zinc
THI200	2" (53)	-	10	Zinc
THI250	2-1/2" (63)	-	5	Zinc
THI300	3" (78)	-	2	Zinc
THI350	3-1/2" (91)	-	2	Zinc
THI400	4" (103)	-	2	Zinc
<b>Combination Couplings - Rigid to EMT</b>				
REK050	1/2" (16)	25	250	Steel
REK075	3/4" (21)	10	100	Steel
REK100	1" (27)	10	100	Steel
<b>Locknuts</b>				
LNS050	1/2" (16)	200	2000	Steel
LNS075	3/4" (21)	100	1000	Steel
LNS100	1" (27)	100	1000	Steel
LNS125	1-1/4" (35)	100	1000	Steel
LNS150	1-1/2" (41)	50	500	Steel
LNS200	2" (53)	50	500	Steel
LNS250	2-1/2" (63)	25	250	Steel
LNS300	3" (78)	-	10	Steel
LNS350	3-1/2" (91)	-	10	Steel
LNS400	4" (103)	-	10	Steel
LNS500	5" (129)	-	10	Steel
LNS600	6" (155)	-	10	Steel
<b>90 Degree Pull Elbow - Rigid to Rigid</b>				
PERR050	1/2" Rigid to Rigid	-	20	Zinc
PERR075	3/4" Rigid to Rigid	10	100	Zinc
PERR100	1" Rigid to Rigid	5	50	Zinc
PERR125	1-1/4" Rigid to Rigid	-	25	Zinc
<b>90 Degree Pull Elbow - Rigid to Box</b>				
PERB050	1/2" Rigid to Box	10	100	Zinc
PERB075	3/4" Rigid to Box	5	50	Zinc
PERB100	1" Rigid to Box	-	25	Zinc





K0050



BC100



RW0705

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Knockout Closures</b>				
KO050	1/2"	100	1000	Steel
KO075	3/4" (21)	100	1000	Steel
KO100	1" (27)	100	400	Steel
KO125	1-1/4" (35)	50	200	Steel
KO150	1-1/2" (41)	-	50	Steel
KO200	2" (53)	-	25	Steel
<b>Beam Clamps</b>				
BC100	1" (27)	-	100	Iron
BC200	2" (53)	-	50	Iron
BC250	2-1/2" (63)	-	25	Iron
<b>Reducing Washers</b>				
RW0705	3/4" x 1/2"	250	5000	Steel
RW1005	1" x 1/2"	250	5000	Steel
RW1007	1 x 3/4"	250	5000	Steel
RW1205	1-1/4" x 1/2"	200	2000	Steel
RW1207	1-1/4" x 3/4"	200	2000	Steel
RW1210	1-1/4" x 1"	200	2000	Steel
RW1505	1-1/2" x 1/2"	100	1000	Steel
RW1507	1-1/2" x 3/4"	100	1000	Steel
RW1510	1-1/2" x 1"	100	1000	Steel
RW1512	1-1/2" x 1-1/4"	100	1000	Steel
RW2005	2" x 1/2"	50	500	Steel
RW2007	2" x 3/4"	50	500	Steel
RW2010	2" x 1"	50	500	Steel
RW2012	2" x 1-1/4"	50	500	Steel
RW2015	2" x 1-1/2"	50	500	Steel
RW2505	2-1/2" x 1/2"	25	250	Steel
RW2507	2-1/2" x 3/4"	25	250	Steel
RW2510	2-1/2" x 1"	-	50	Steel
RW2512	2-1/2" x 1-1/4"	-	50	Steel
RW2515	2-1/2" x 1-1/2"	-	50	Steel
RW2520	2-1/2" x 2"	-	50	Steel
RW3010	3" x 1"	-	25	Steel
RW3020	3" x 2"	-	25	Steel
RW3025	3" x 2-1/2"	-	25	Steel





# JACK CHAIN

D17

FITTINGS



CH050



GCB0510



JC10



JC3



S105

CATALOGUE NUMBER	TRADE SIZE EMT	TRADE SIZE RIGID	CARTON QTY	CASE QTY	MATERIAL
<b>Conduit Hangers</b>					
CH050	1/2" (16)	1/2" (16)	100	400	Steel
CH075	3/4" (21)	3/4" (21)	100	400	Steel
CH100	1" (27)	1" (27)	100	400	Steel
CH125	1-1/4" (35)	N/S	-	100	Steel
CH150	1-1/2" (41)	1-1/4" (35)	-	100	Steel
CH150R	N/S	1-1/2" (41)	-	100	Steel
CH200	2" (53)	2" (53)	-	50	Steel
CH250	2-1/2" (63)	2-1/2" (63)	-	25	Steel
CH300	3" (78)	3" (78)	-	50	Steel
CH400	4" (103)	4" (103)	-	10	Steel
<b>Conduit Hangers</b>					
GCZ0510	1/2" (16)	1" (27)	25	250	Zinc
GCB0510	1/2" (16)	1" (27)	25	100	Brass
GCB1220	1-1/4" (35)	2" (53)	25	250	Brass
<b>Jack and Lion Chain</b>					
JC10	#10	-	100	43 lbs.	Zinc Plated Steel
JC10B	#10	-	250	43 lbs.	Zinc Plated Steel
LC3	#3	-	100	90 lbs.	Zinc Plated Steel
LC3B	#3	-	300	90 lbs.	Zinc Plated Steel
<b>S-Hooks</b>					
S105	#105	100	1000	90 lbs.	Zinc Plated Steel





CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
<b>Service Entrance Heads - Rigid/EMT Combo</b>				
2402	1/2" (16)	-	10	Aluminum
2403	3/4" (21)	-	10	Aluminum
2404	1" (27)	-	5	Aluminum
2405	1-1/4" (35)	-	10	Aluminum
2406	1-1/2" (41)	-	5	Aluminum
2408	2" (53)	-	5	Aluminum
2410	2-1/2" (63)	-	1	Aluminum
2412	3" (78)	-	1	Aluminum
2414	3-1/2" (91)	-	1	Aluminum
2416	4" (103)	-	1	Aluminum

# STRAIGHT MALE CORD CONNECTORS

IP66\*  
SUITABILITY



UL Listed to Type 4, 4X, 12  
and Type 13

## Straight Male

N.P.T. Hub Size	Cord Dia. Inches (mm)	Form Size	Colour Code	Machined Aluminum	Machined Zinc-Plated Steel	Stainless Steel	Nylon Gray	Nylon Black
1/4	.06"-.13" (1.6-3.2)	F1	Green	—	—	—	SHC1001CR	—
	.13"-.19" (3.2-4.7)		Orange	SHC1002	—	—	SHC1002CR	—
	.19"-.25" (4.7-6.3)		Red	SHC1003	—	SHC1003SS	SHC1003CR	—
	.25"-.31" (6.3-7.9)		Black	SHC1004	—	SHC1004SS	SHC1004CR	—
	.31"-.38" (7.9-9.5)		White	SHC1005**	—	—	SHC1005CR	SHC2005CR
	.38"-.44" (9.5-11)		Blue	—	—	—	SHC1006CR	—
	.06"-.13" (1.6-3.2)		Green	SHC1007	—	—	—	—
3/8	.13"-.19" (3.2-4.7)	F1	Orange	SHC1008	SHC1008ZP	—	SHC1008CR	SHC2008CR
	.19"-.25" (4.7-6.3)		Red	SHC1009	—	SHC1009SS	SHC1009CR	—
	.25"-.31" (6.3-7.9)		Black	SHC1010	SHC1010ZP	—	SHC1010CR	SHC2010CR
	.31"-.38" (7.9-9.5)		White	SHC1011	—	SHC1011SS	SHC1011CR	SHC2011CR
	.38"-.44" (9.5-11.0)		Blue	SHC1012	SHC1012ZP	SHC1012SS	SHC1012CR	SHC2012CR
	.19"-.25" (4.7-6.3)		Red	SHC1015	—	—	—	—
	.25"-.31" (6.3-7.9)		Black	SHC1016	—	—	—	—
1/2	.31"-.38" (7.9-9.5)	F1	White	SHC1017	—	—	—	—
	.38"-.44" (9.5-11.0)		Blue	SHC1018	—	—	—	—
	.06"-.13" (1.6-3.2)		Green	SHC1019	—	—	SHC1019CR	—
	.13"-.19" (3.2-4.7)		Orange	SHC1020	SHC1020ZP	SHC1020SS	SHC1020CR	—
	.19"-.25" (4.7-6.3)		Red	SHC1021	SHC1021ZP	SHC1021SS	SHC1021CR	SHC2021CR
	.25"-.38" (6.3-9.7)		White	SHC1022	SHC1022ZP	SHC1022SS	SHC1022CR	SHC2022CR
	.38"-.50" (9.7-12.7)		Blue	SHC1023	SHC1023ZP	SHC1023SS	SHC1023CR	SHC2023CR
1/2	.50"-.63" (12.7-15.9)	F2	Brown	SHC1024	SHC1024ZP	SHC1024SS	SHC1024CR**	SHC2024CR**
	.38"-.50" (9.7-12.7)		Blue	SHC1025	—	—	—	—
	.50"-.63" (12.7-15.9)		Brown	SHC1026	—	—	—	—
	.63"-.75" (15.9-19.0)		Yellow	SHC1027**	SHC1027ZP**	—	—	—
	.75"-.88" (19.0-22.2)		Orchid	SHC1028**	SHC1028ZP**	—	—	—

Note: \* IP66 Suitability when used with optional metal clad O-ring.

\*\* Cable jacket may have to be stripped to pass through connector body.



# STRAIGHT MALE CORD CONNECTORS

IP66\*  
SUITABILITY



UL Listed to Type 4,  
4X, 12 and Type 13

## Straight Male

N.P.T. Hub Size	Cord Dia. Inches (mm)	Form Size	Colour Code	Machined Aluminum	Machined Zinc-Plated Steel	Stainless Steel	Nylon Gray	Nylon Black
3/4	.06"-.13" (1.6-3.2)	F2	Green	SHC1029	-	-	-	-
	.13"-.19" (3.2-4.7)		Orange	SHC1030	SHC1030ZP	-	-	-
	.19"-.25" (4.7-6.3)		Red	SHC1031	SHC1031ZP	-	-	-
	.25"-.38" (6.3-9.7)		White	SHC1032	SHC1032ZP	-	-	-
	.38"-.50" (9.7-12.7)		Blue	SHC1033	SHC1033ZP	-	-	-
	.50"-.63" (12.7-15.9)		Brown	SHC1034	SHC1034ZP	-	-	-
	.38"-.50" (9.5-12.7)		Blue	-	SHC1035ZP	SHC1035SS	SHC1035CR	SHC2035CR
3/4	.50"-.63" (12.7-15.9)	F3	Brown	SHC1036	-	SHC1036SS	SHC1036CR	SHC2036CR
	.63"-.75" (15.9-19.0)		Yellow	SHC1037	SHC1037ZP	SHC1037SS	SHC1037CR	SHC2037CR
	.75"-.88" (19.0-22.2)		Orchid	SHC1038**	SHC1038ZP**	SHC1038SS**	SHC1038CR**	SHC2038CR**
	.50"-.63" (12.7-15.9)		Brown	-	SHC1097ZP	-	-	-
1	.63"-.75" (15.9-19.0)	F3	Yellow	-	SHC1098ZP	-	-	-
	.75"-.88" (19.0-22.2)		Orchid	-	SHC1099ZP	-	-	-
	.38"-.50" (9.7-12.7)		Blue	SHC1039	-	-	SHC1039CR	-
	.50"-.63" (12.7-15.9)		Brown	SHC1040	-	-	SHC1040CR	SHC2040CR
	.63"-.75" (15.9-19.0)		Yellow	SHC1041	-	SHC1041SS	SHC1041CR	SHC2041CR
1	.75"-.88" (19.0-22.2)	F4	Orchid	SHC1042	-	SHC1042SS	SHC1042CR	SHC2042CR
	.88"-.1.00" (22.2-25.4)		Gray	SHC1043	SHC1043ZP	-	SHC1043CR	SHC2043CR
	1.00"-1.13" (25.4-28.6)		Pink	SHC1044**	-	SHC1044SS**	SHC1044CR**	SHC2044CR**
	.38"-.50" (9.7-12.7)		Blue	SHC1039	-	-	SHC1039CR	-



Stainless Steel



Gray Nylon



Black Nylon

Note: \* IP66 Suitability when used with optional metal clad O-ring.

\*\* Cable jacket may have to be stripped to pass through connector body.

Form 4 aluminum and plated steel nuts are machined, bodies are cast aluminum.

# STRAIGHT MALE CORD CONNECTORS

IP66\*  
SUITABILITY



UL Listed to Type 4,  
4X, 12 and Type 13

## Straight Male

N.P.T. Hub Size	Cord Diameter Inches	(mm)	Form Size	Cast Aluminum	Malleable Iron
1	.88"-1.00"	(22.2-25.4)	F5	SHC1046	-
	1.00"-1.13"	(25.4-28.6)		SHC1047**	-
	1.13"-1.25"	(28.6-31.7)		SHC1048**	-
	1.25"-1.38"	(31.7-34.9)		SHC1049**	-
	.75"-.88"	(19.0-22.2)		SHC1050	-
1-1/4	.88"-1.00"	(22.2-25.4)	F5	SHC1051	-
	1.00"-1.13"	(25.4-28.6)		SHC1052	SHC1052ZP
	1.13"-1.25"	(28.6-31.7)		SHC1053	SHC1053ZP
1-1/2	1.25"-1.38"	(31.7-34.9)	F5	SHC1054**	SHC1054ZP
	.75"-.88"	(19.0-22.2)		SHC1055	-
	.88"-1.00"	(22.2-25.4)		SHC1056	-
	1.00"-1.13"	(25.4-28.6)		SHC1057	SHC1057ZP
	1.13"-1.25"	(28.6-31.7)		SHC1058	SHC1058ZP
1-1/2	1.25"-1.38"	(31.7-34.9)	F6	SHC1059	SHC1059ZP
	1.38"-1.50"	(34.9-38.1)		SHC1061	-
	1.50"-1.63"	(38.1-41.3)		SHC1062**	-
	1.63"-1.75"	(41.3-44.4)		SHC1063**	-
	1.75"-1.88"	(44.4-47.6)		SHC1064**	-
2	1.25"-1.38"	(31.7-34.9)	F6	SHC1065	-
	1.38"-1.50"	(34.9-38.1)		SHC1066	-
	1.50"-1.63"	(38.1-41.3)		SHC1067	-
	1.63"-1.75"	(41.3-44.4)		SHC1068	-
2	1.75"-1.88"	(44.4-47.6)	F7	SHC1069	-
	1.69"-1.81"	(42.9-46.0)		SHC1070	-
	1.81"-1.94"	(46.0-49.2)		SHC1071	-
	1.94"-2.06"	(49.2-52.4)		SHC1072**	-
2-1/2	2.06"-2.19"	(52.4-55.6)	F7	SHC1073**	-
	2.19"-2.31"	(55.6-58.7)		SHC1074**	-
	1.69"-1.81"	(42.9-46.0)		SHC1076	-
	1.81"-1.94"	(46.0-49.2)		SHC1077	-
	1.94"-2.06"	(49.2-52.4)		SHC1078	-
	2.06"-2.19"	(52.4-55.6)		SHC1079	-
3	2.19"-2.31"	(55.6-58.7)	F7	SHC1080	-
	2.31"-2.44"	(58.7-61.9)		SHC1081**	-
	1.69"-1.81"	(42.9-46.0)		SHC1086	-
	1.94"-2.06"	(49.2-52.4)		SHC1088	-
	2.06"-2.19"	(52.4-55.6)		SHC1089	-
3	2.19"-2.31"	(55.6-58.7)	F8	SHC1090	-
	2.31"-2.44"	(58.7-61.9)		SHC1091	-
	2.44"-2.63"	(61.9-66.7)		SHC1092	-
	2.63"-2.81"	(66.7-71.4)		SHC1093	-
	2.81"-3.00"	(71.4-76.2)		SHC1094	-
	3.00"-3.25"	(76.2-82.5)		SHC1095**	-

Note: \* IP66 Suitability when used with optional metal clad O-ring.

\*\* Cable jacket may have to be stripped to pass through connector body.

Form 4 aluminum and plated steel nuts are machined, bodies are cast aluminum. F5 and larger will not be colour coded.



Cast Aluminum



Cast Aluminum  
Malleable Iron

# 45° MALE CORD CONNECTORS

IP66\*  
SUITABILITY



UL Listed to Type 4,  
4X, 12 and Type 13

## 45° Male

N.P.T. Hub Size	Cord Diameter		Form Size	Colour Code	Machined Aluminum†	Machined Zinc-Plated SteelΔ	Cast Aluminum
	Inches	(mm)					
1/2	.19"-.25"	(4.7-6.3)	F2	Red	VHC1021	—	—
	.25"-.38"	(6.3-9.7)		White	VHC1022	VHC1022ZP	—
	.38"-.50"	(9.7-12.7)		Blue	VHC1023	VHC1023ZP	—
	.50"-.63"	(12.7-15.9)		Brown	VHC1024**	VHC1024ZP**	—
3/4	.38"-.50"	(9.7-12.7)	F3	Blue	VHC1035	—	—
	.50"-.63"	(12.7-15.9)		Brown	VHC1036	—	—
	.63"-.75"	(15.9-19.0)		Yellow	VHC1037**	—	—
1	.63"-.75"	(15.9-19.0)	F4	Yellow	VHC1041	—	—
	.75"-.88"	(19.0-22.2)		Orchid	VHC1042	—	—
1-1/4	1.00"-1.13"	(25.4-28.6)	F5		—	—	VHC1052
	1.13"-1.25"	(28.6-31.7)			—	—	VHC1053**

Note: \* IP66 Suitability when used with optional metal clad O-ring.

\*\* Cable jacket may have to be stripped to pass through connector body.

Form 4 aluminum and plated steel nuts are machined, bodies are cast aluminum.

† Nuts are machined aluminum and bodies are cast aluminum.

Δ Nuts are machined zinc-plated steel and bodies are malleable iron, cadmium plated.



Machined  
Aluminum †



Machined  
Zinc-Plated Steel Δ



Cast Aluminum

# 90° MALE CORD CONNECTORS

IP66\*  
SUITABILITY



UL Listed to Type 4,  
4X, 12 and Type 13



## 90° Male

N.P.T. Hub Size	Cord Diameter Inches	Cord Diameter (mm)	Form Size	Colour Code	Machined Aluminum†	Machined Zinc-Plated SteelΔ	Nylon Gray	Nylon Black	Cast Aluminum
3/8	.25"-.31"	(6.3-7.9)	F1	Black	NHC1010	-	-	-	-
	.31"-.38"	(7.9-9.5)		White	NHC1011	-	-	-	-
	.38"-.44"	(9.5-11.0)		Blue	NHC1012	-	-	-	-
1/2	.06"-.13"	(1.6-3.2)	F2	Green	-	-	-	-	-
	.13"-.19"	(3.2-4.7)		Orange	NHC1020	-	NHC1020CR	-	-
	.19"-.25"	(4.7-6.3)		Red	NHC1021	NHC1021ZP	NHC1021CR	-	-
	.25"-.38"	(6.3-9.7)		White	NHC1022	NHC1022ZP	NHC1022CR	NHC2022CR	-
	.38"-.50"	(9.7-12.7)		Blue	NHC1023	NHC1023ZP	NHC1023CR	NHC2023CR	-
	.50"-.63"	(12.7-15.9)		Brown	NHC1024**	NHC1024ZP**	NHC1024CR**	NHC2024CR**	-
	.63"-.75"	(15.9-19.0)		Yellow	NHC1025	NHC1025ZP	NHC1025CR	NHC2025CR	-
3/4	.38"-.50"	(9.7-12.7)	F3	Blue	NHC1035	NHC1035ZP	NHC1035CR	-	-
	.50"-.63"	(12.7-15.9)		Brown	NHC1036	NHC1036ZP	NHC1036CR	-	-
	.63"-.75"	(15.9-19.0)		Yellow	NHC1037	NHC1037ZP	NHC1037CR	-	-
	.75"-.88"	(19.0-22.2)		Orchid	NHC1038	NHC1038ZP	NHC1038CR	-	-
1	.50"-.63"	(12.7-15.9)	F4	Brown	NHC1040	-	-	-	-
	.63"-.75"	(15.9-19.0)		Yellow	NHC1041	NHC1041ZP	NHC1041CR	NHC2041CR	-
	.75"-.88"	(19.0-22.2)		Orchid	NHC1042	-	NHC1042CR	NHC2042CR**	-
	.88"-.1.00"	(22.2-25.4)		Gray	NHC1043**	-	NHC1043CR	NHC2043CR**	-
	1.00"-.1.13"	(25.4-28.7)		Pink	NHC1044**	-	-	-	-
1-1/4	.88"-.1.00"	(22.2-25.4)	F5	-	-	-	-	-	NHC1051
	1.00"-.1.13"	(25.4-28.6)		-	-	-	-	-	NHC1052
	1.13"-.1.25"	(28.6-31.7)		-	-	-	-	-	NHC1053**
	1.25"-.1.38"	(31.7-34.9)		-	-	-	-	-	NHC1054**
1-1/2	1.00"-.1.13"	(25.4-28.6)	F5	-	-	-	-	-	NHC1057
	1.13"-.1.25"	(28.6-31.7)		-	-	-	-	-	-
	1.25"-.1.38"	(31.7-34.9)		-	-	-	-	-	NHC1059
2	1.38"-.1.50"	(34.9-38.1)	F6	-	-	-	-	NHC1066	

Note: \* IP66 Suitability when used with optional metal clad O-ring.

\*\* Cable jacket may have to be stripped to pass through connector body.

† Nuts are machined aluminum and bodies are cast aluminum.

Δ Compression nuts are machined zinc-plated steel and bodies are zinc-plated malleable iron.



Machined Aluminum†



Machined Zinc-Plated SteelΔ



Gray Nylon



Black Nylon



Cast Aluminum



# STRAIGHT FEMALE, UNDERGROUND FEEDER AND METRIC CONNECTORS



## Straight Female

N.P.T. Hub Size	Cord Diameter Inches	(mm)	Form Size	Colour Code	Machined Aluminum
1/2	.25"-.38"	(6.3-9.7)	F2	White	<b>FHC1022</b>
	.38"-.50"	(9.7-12.7)		Blue	<b>FHC1023</b>
3/4	.38"-.50"	(9.7-12.7)	F2	Blue	<b>FHC1033</b>
	.50"-.63"	(12.7-15.9)		Brown	<b>FHC1034</b>
1	.75"-.88"	(19.0-22.2)	F4	Orchid	<b>FHC1042†</b>
	.88"-1.00"	(22.2-25.4)		Gray	<b>FHC1043†</b>

Note: \* Cable jacket may have to be stripped to pass through connector body.  
† Nuts are machined aluminum and bodies are cast aluminum.



Machined Aluminum



## Underground Feeder Connectors

**IP66\***  
SUITABILITY

N.P.T. Hub Size	Diameter Inches	(mm)	Wire Size	UF** Machined Aluminum	Zinc-Plated Steel	Machined Nylon Gray	Nylon Black
1/2	.2"x.4" min	(5.1 x 10.2)	2 # 14,	<b>UFC0001</b>	<b>UFC0001ZP</b>	<b>UFC0001CR</b>	<b>UFC2001CR</b>
	.25"-.55" max	(6.3 x 14.0)	2 # 12, 2 # 10.				
3/4	.2"x.4" min	(5.1x10.2)	2 # 14,	<b>UFC0002</b>	-	-	-
	.25"-.55" max	(6.3x14.0)	2 # 12, 2 # 10.				
3/4	.2"x.6" min	(5.1x15.2)	3 # 14,	<b>UFC0003</b>	-	<b>UFC0003CR</b>	<b>UFC2003CR</b>
	.26"x.78" max	(6.6x19.8)	3 # 12, 3 # 10.				

Note: \* IP66 Suitability when used with optional metal clad O-ring.

\*\* Wire sizes vary among manufacturers.



Machined Aluminum



Machined Zinc-Plated Steel



Gray Nylon



UL Listed to Type 4,  
4X, 12 and Type 13

## Metric Aluminum Cord Connectors

Hub Size	Cord Diameter Inches	(mm)	Form Size	Catalog Number
M16	.31"-.38"	(7.9-9.7)	F1	<b>SHCM161011</b>
M20	.31"-.38"	(7.9-9.7)	F1	<b>SHCM201017</b>
	.25"-.38"	(6.3-9.7)		<b>SHCM201022</b>
M20	.38"-.50"	(9.7-12.7)	F2	<b>SHCM201023</b>
	.50"-.62"	(12.7-15.8)		<b>SHCM201024</b>
M25	.38"-.50"	(9.7-12.7)	F2	<b>SHCM251033</b>
	.50"-.62"	(12.7-15.8)		<b>SHCM251034</b>
M30	.63"-.75"	(15.9-19.0)	F3	<b>SHCM301037</b>

Note: † When used with metal clad O-ring.  
Non-metallic Locknuts sold separately.



Machined Aluminum



# LOW PROFILE N.P.T., PG AND METRIC THREAD CONNECTORS

IP66\*  
SUITABILITY



SEC100BA

## Low Profile N.P.T. Cord Connectors

N.P.T. Hub Size	Inches	Cord Diameter (mm)	Colour	Catalog Number	Non-metallic Locknuts
3/8	.18"-.31"	(4.6-7.9)	Gray	SEC38GA*	31622002LPK50
3/8	.18"-.31"	(4.6-7.9)	Black	SEC38BA*	31622002LPK50
1/2	.17"-.45"	(4.3-11.4)	Gray	SEC50GA	31622003LPK50
1/2	.17"-.45"	(4.3-11.4)	Black	SEC50BA	31622003LPK50
3/4	.45"-.71"	(11.4-18.0)	Gray	SEC75GA	31622007LPK50
3/4	.45"-.71"	(11.4-18.0)	Black	SEC75BA	31622007LPK50
1	.59"-1.00"	(15-25.4)	Gray	SEC100GA	31622008LPK50
1	.59"-1.00"	(15-25.4)	Black	SEC100BA	31622008LPK50

Note: Catalog numbers with "PK50" suffix are bulk packed 50 pieces.



SECP29GA

## Low Profile PG $\Delta$ Cord Connectors

Hub Size	Cord Diameter Inches	Cord Diameter (mm)	Colour	Catalog Number	Non-metallic Locknuts
PG7	.11"-.25"	(2.9-6.4)	Gray	SECP7GA*	LNP7BPK100
PG7	.11"-.25"	(2.9-6.4)	Black	SECP7BA*	LNP7BPK100
PG9	.18"-.31"	(4.6-7.9)	Gray	SECP9GA*	LNP9BPK100
PG9	.18"-.31"	(4.6-7.9)	Black	SECP9BA*	LNP9BPK100
PG11	.23"-.40"	(5.8-10.0)	Gray	SECP11GA*	LNP11BPK100
PG11	.23"-.40"	(5.8-10.0)	Black	SECP11BA*	LNP11BPK100
PG13.5	.17"-.47"	(4.3-11.9)	Gray	SECP13GA	LNP13BPK100
PG13.5	.17"-.47"	(4.3-11.9)	Black	SECP13BA	LNP13BPK100
PG16	.23"-.53"	(5.8-13.5)	Gray	SECP16GA	LNP16BPK100
PG16	.23"-.53"	(5.8-13.5)	Black	SECP16BA	LNP16BPK100
PG21	.45"-.71"	(11.4-17.9)	Gray	SECP21GA	LNP21BPK100
PG21	.45"-.71"	(11.4-17.9)	Black	SECP21BA	LNP21BPK100
PG29	.59"-.99"	(15-25.2)	Gray	SECP29GA	LNP29BPK25
PG29	.59"-.99"	(15-25.2)	Black	SECP29BA	LNP29BPK25
PG36	.88"-1.30"	(22.2-32.0)	Gray	SECP36GA	LNP36BPK25
PG36	.88"-1.30"	(22.2-32.0)	Black	SECP36BA	LNP36BPK25



LNP29BPK25

## Low Profile Metric Cord Connectors

Hub Size	Cord Diameter Inches	Cord Diameter (mm)	Colour	Catalog Number	Non-metallic Locknuts
M12	.12"-.25"	(2.9-6.4)	Gray	SECM12G	LNM12BPK100
M12	.12"-.25"	(2.9-6.4)	Black	SECM12B	LNM12BPK100
M16	.11"-.31"	(2.7-7.9)	Gray	SECM16G	LNM16BPK100
M16	.11"-.31"	(2.7-7.9)	Black	SECM16B	LNM16BPK100
M20	.17"-.45"	(4.3-11.4)	Gray	SECM20G*	LNM20BPK100
M20	.17"-.45"	(4.3-11.4)	Black	SECM20B*	LNM20BPK100
M25	.49"-.71"	(12.3-18.0)	Gray	SECM25G*	LNM25BPK100
M25	.49"-.71"	(12.3-18.0)	Black	SECM25B*	LNM25BPK100
M32	.59"-1.00"	(15.0-25.4)	Gray	SECM32G*	LNM32BPK100
M32	.59"-1.00"	(15.0-25.4)	Black	SECM32B*	LNM32BPK100
M40	.87"-1.30"	(22.0-32.0)	Gray	SECM40G	LNM40BPK100
M40	.87"-1.30"	(22.0-32.0)	Black	SECM40B	LNM40BPK100

Note: Catalog numbers above with "PK100" suffix, i.e. LNP7BPK100, are bulk packed 100 per carton.

Catalog numbers above with "PK25" suffix, i.e. LNP29BPK25, are bulk packed 25 per carton.

\* Items indicated are UL recognized components.

$\Delta$  Panzergewinde.



# ACCESSORIES

## Locknuts – Non-Metallic

N.P.T. Hub Size	Catalog Number
1/4	31622001LPK50
3/8	31622002LPK50
1/2	31622003LPK50
3/4	31622007LPK50
1	31622008LPK50
1-1/4	—
1-1/2	—

Note: Catalog numbers above with "PK50" suffix are bulk packed 50 per carton.  
See page T-101 for additional technical data and dimensional drawings.



Non-Metallic Locknuts

## Metal Clad Sealing O-Rings

N.P.T. Hub Size	Catalog Number
1/2	20509001
3/4	20509002
1	20509003
1-1/4	20509004
1-1/2	20509005
2	20509006
2-1/2	20509007
3	20509008



Metal Clad  
Sealing O-Rings

# HUBBELL JUNIORS® MINIATURE NYLON CORD CONNECTORS

## Miniature Nylon Cord Connector

N.P.T. Hub Size	Cord Diameter Range		Gray	Black
	Inches	(mm)		
1/4	.08"-.14"	(1.9-3.4)	HJ1001GPK25	HJ1001BPK25
	.14"-.20"	(3.4-5.1)	HJ1002GPK25	HJ1002BPK25
	.20"-.27"	(5.1-6.7)	HJ1003GPK25	HJ1003BPK25
3/8	.15"-.21"	(3.7-5.3)	HJ1004GPK25	HJ1004BPK25
	.21"-.28"	(5.3-7.0)	HJ1005GPK25	HJ1005BPK25
	.28"-.34"	(7.0-8.6)	HJ1006GPK25	HJ1006BPK25
1/2	.06"-.13"	(1.6-3.2)	HJ1055GPK25	HJ1055BPK25
	.13"-.19"	(3.2-4.7)	HJ1056GPK25	HJ1056BPK25
	.19"-.25"	(4.7-6.3)	HJ1057GPK25	HJ1057BPK25
	.25"-.31"	(6.3-7.9)	HJ1058GPK25	HJ1058BPK25
	.31"-.38"	(7.9-9.5)	HJ1059GPK25	HJ1059BPK25
	.38"-.44"	(9.5-11.1)	HJ1060GPK25	HJ1060BPK25

## Miniature Nylon Cord Connector with Spiral

N.P.T. Hub Size	Cord Diameter Range		Gray	Black
	Inches	(mm)		
1/4	.08"-.14"	(1.9-3.4)	HJ1010GPK25	HJ1010BPK25
	.14"-.20"	(3.4-5.1)	HJ1011GPK25	HJ1011BPK25
	.20"-.27"	(5.1-6.7)	HJ1012GPK25	HJ1012BPK25
3/8	.15"-.21"	(3.7-5.3)	HJ1013GPK25	HJ1013BPK25
	.21"-.28"	(5.3-7.0)	HJ1014GPK25	HJ1014BPK25
	.28"-.34"	(7.0-8.6)	HJ1015GPK25	HJ1015BPK25
1/2	.13"-.19"	(3.2-4.7)	HJ1038GPK25	HJ1038BPK25
	.19"-.25"	(4.7-6.3)	HJ1039GPK25	HJ1039BPK25
	.25"-.31"	(6.3-7.9)	HJ1040GPK25	HJ1040BPK25
	.31"-.38"	(7.9-9.5)	HJ1041GPK25	HJ1041BPK25
	.38"-.44"	(9.5-11.1)	HJ1042GPK25	HJ1042BPK25
3/4	.25"-.49"	(6.4-12.3)	HJ1043GPK25*	HJ1043BPK25*
	.45"-.71"	(11.4-18.0)	HJ1044GPK25*	HJ1044BPK25*

## Miniature Nylon Snap-In Cord Connector with Spiral

Cord Diameter Range	For Chassis Thickness	Gray	Black
.22"-.27"	.10" (2.5) Max	HS1001GPK25	HS1001BPK25
.28"-.32"	.10" (2.5) Max	HS1002GPK25	HS1002BPK25
.30"-.36"	.13" (3.2) Max	HS1003GPK25	HS1003BPK25
.32"-.43"	.13" (3.2) Max	HS1004GPK25	HS1004BPK25

Note: Catalog numbers above with "PK25" suffix, i.e. HJ1001GPK25, are bulk packed 25 per carton.



Gray Cord Connector



Black Cord Connector



Gray Cord Connector with Spiral



Black Cord Connector with Spiral



Gray Snap-In Cord Connector



Black Snap-In Cord Connector



# POLYTUFF® I NON-METALLIC LIQUIDTIGHT CONDUIT


## PolyTuff® I Conduit-Gray

Rigid PVC core bonded to flexible PVC jacket

All nonmetallic construction ends metal fatigue and separation problems

UL Listed and CSA Certified

Cuts cleanly with a knife or PVC cutter so there are no jagged metal edges

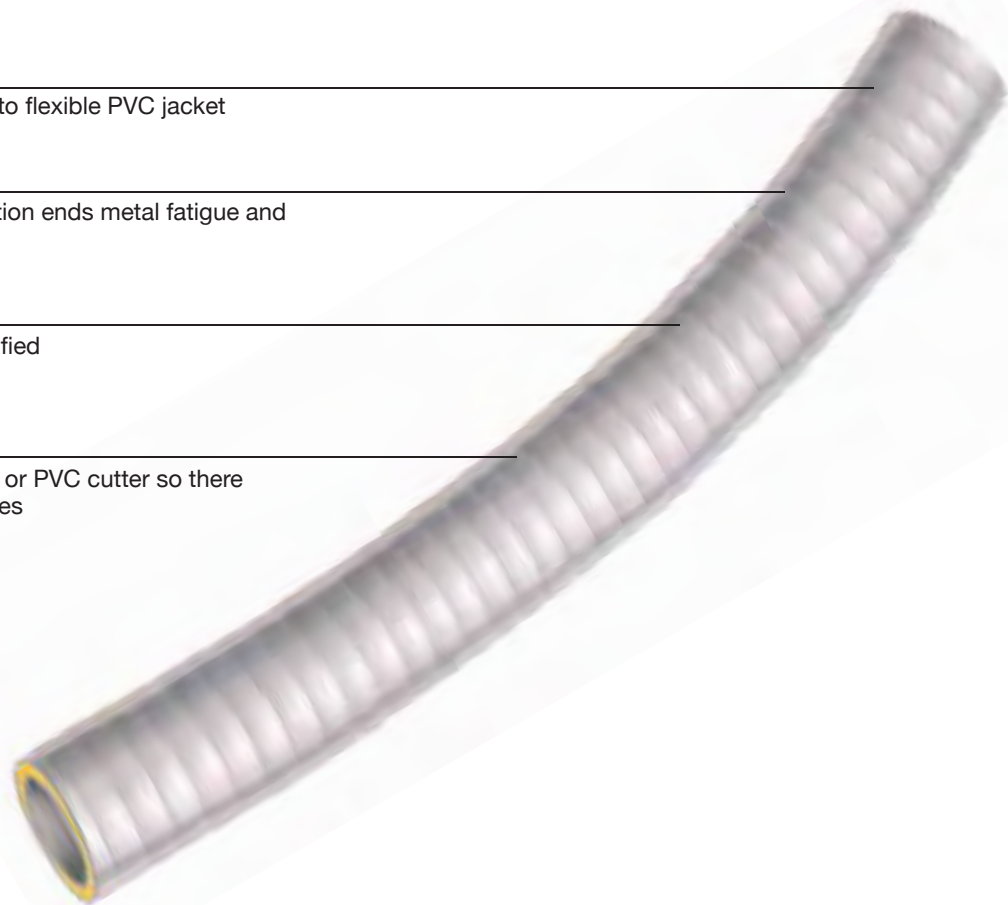

**IP66**  
SUITABILITY

### PolyTuff® I Conduit

Trade Size (metric designator)	Feet (m)	Catalog Number
3/8 (12)	100 (30.5)	G1038
1/2 (16)	100 (30.5)	G1050
3/4 (21)	100 (30.5)	G1075
1 (27)	100 (30.5)	G1100
1 1/4 (35)	100 (30.5)	G1125
1 1/2 (41)	50 (15.2)	G1150
2 (53)	50 (15.2)	G1200



# POLYTUFF® II NON-METALLIC LIQUIDTIGHT TUBING

## PolyTuff® II Tubing-Black

PVC core with corrugated walls bonded to PVC jacket

Handles twists, turns, bends, switchbacks and straightaways with ease

All nonmetallic construction ends fatigue and separation problems

Can be cut with a knife or PVC cutters

UL Recognized and CSA Certified



**IP66**  
SUITABILITY

### PolyTuff® II Tubing

Trade Size (metric designator)	Feet (m)	Catalog Number
¼ (10)	100 (30.5)	B2025
⅜ (12)	100 (30.5)	B2038
½ (16)	100 (30.5)	B2050
¾ (21)	100 (30.5)	B2075
1 (27)	100 (30.5)	B2100
1¼ (35)	100 (30.5)	B2125
1½ (41)	50 (15.2)	B2150
2 (53)	50 (15.2)	B2200



# POLYTUFF® II NON-METALLIC LIQUIDTIGHT FITTINGS



UL Listed to Type 4,  
4X, 12 and Type 13

## Straight with Male Non-Metallic Liquidtight Fittings

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
¼ (6)	F2025	—
⅜ (9)	P038NBKA	P038NGYA
½ (13)	P050NBKA	P050NGYA
¾ (19)	P075NBKA	P075NGYA
1 (25)	P100NBKA	P100NGYA
1¼ (32)	P125NBK	P125NGY
1½ (38)	P150NBK	P150NGY
2 (51)	P200NBK	P200NGY

Note: Fittings are to be used with PolyTuff I and PolyTuff II.

¾" Liquidtight conduit fitting have ½ N.P.T. male threads.



P075NGYA



P125NGY

## SwivelLok® Multi-Position with Male Non-Metallic Liquidtight Fittings

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
⅜ (9)	PS0389NBK	PS0389NGY
½ (13)	PS0509NBK	PS0509NGY
¾ (19)	PS0759NBK	PS0759NGY
1 (25)	PS1009NBK	PS1009NGY

Note: Fittings are to be used with PolyTuff I and PolyTuff II.

¾" Liquidtight conduit fitting have ½ N.P.T. male threads.



PS0509NGY – SwivelLok®

## Fixed 90° Fittings for Non-Metallic Conduit

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
¼ (6)	F20259	—
⅜ (9)	P0389NBK	P0389NGY
½ (13)	P0509NBK	P0509NGY
¾ (19)	P0759NBK	P0759NGY
1 (25)	P1009NBK	P1009NGY
1¼ (32)	P1259NBK	P1259NGY

Note: Fittings are to be used with PolyTuff I and PolyTuff II.

¾" Liquidtight conduit fitting have ½ N.P.T. male threads.



P1259NGY

## SwivelLok® Flexible Conduit Kit

Trade Size (metric designator)	Fitting and Conduit	Catalog Number
½ (13)	2 PS0509NGY, 6' G1050	PS05GYKIT
¾ (19)	2 PS0759NGY, 6' G1075	PS07GYKIT



PS05GYKIT

# DECORATOR QUIET ROCKER SWITCHES

F1

tradeSELECT™

*Smart Style, Good Looks.*

Residential Decorator Switches and Receptacles provide more than solid, dependable function alone. Indeed, they are fashion statements, masterfully complementing the look and feel of any room in any home.

## A PERFECT MATCH

Residential decorator devices and wallplates blend in beautifully with all kinds of wall coverings.

## EASY-ACTIVATE ROCKERS

Ideal for use in assisted-living environments—or any living environment.



## FLUSH AND CONTEMPORARY

Sleek, smart and appealing, Residential devices add beautiful, fashionable, highly-styled devices to any home.

## MINI-ROCKER SWITCHES

Take up less space and provide full function.



## SNAP-ON WALLPLATES

Snap-on wallplates offer a clean, elegant look that can be installed in seconds.

## Colour Selection



# DECORATOR QUIET ROCKER SWITCHES

## FEATURES

- Smooth, quiet rocker
- Self-grounding feature is standard
- Ultrasonically welded cover and base
- Operating temperature: -20°C to 60°C
- UL Listed E3896, CSA Certified

Single Pole Decorator Quiet Rocker Switches				
Description	Single Pole	Single Pole, Illuminated*	Single Pole, Pilot Light**	Single Pole with ON/OFF Marking
Termination	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire
Rating	15A 120-277V AC	15A 120V AC	15A 120V AC	15A 120-277V AC
Almond	RSD115AL	RSD115ILAL	RSD115PLAL	—
Black	RSD115BK	—	—	—
Brown	RSD115	—	—	—
Gray	RSD115GY	—	—	—
Ivory	RSD115I	RSD115ILI	RSD115PLI	RSD115IM
Light Almond	RSD115LA	RSD115ILLA	RSD115PLLA	RSD115LAM
White	RSD115W	RSD115ILW	RSD115PLW	RSD115WM

Note: \* Light glows through the top portion of the rocker when switch is in the off position. Does not require a neutral wire.

\*\* Light glows through the top portion of the rocker when switch is in the on position. Requires a neutral wire.



RSD115W



RSD115PLW




RSD115WM


Double-Pole, Three Way and Four-Way Decorator Quiet Rocker Switches				
Description	Double-Pole	Three Way	Three Way, Illuminated*	Four-Way
Termination	Self-Grounding, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Back and Side Wire
Rating	15A 120-277V AC	15A 120-277V AC	15A 120V AC	15A 120-277V AC
Almond	RSD215AL	RSD315AL	RSD315ILAL	RSD415AL
Black	RSD215BK	RSD315BK	—	RSD415BK
Brown	RSD215	RSD315	—	RSD415
Gray	RSD215GY	RSD315GY	—	RSD415GY
Ivory	RSD215I	RSD315I	RSD315ILI	RSD415I
Light Almond	RSD215LA	RSD315LA	RSD315ILLA	RSD415LA
White	RSD215W	RSD315W	RSD315ILW	RSD415W

Note: \* Light glows through the top portion of the rocker when switch is in the off position. Does not require a neutral wire.

## Product Dimensions

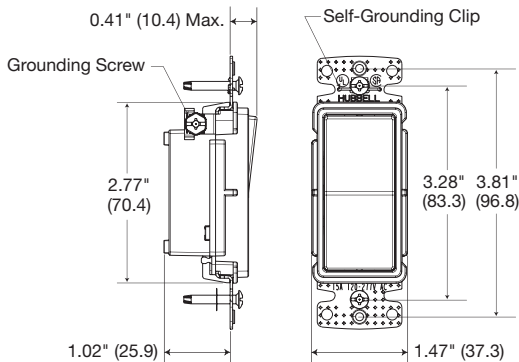

Single-Pole Decorator Switch

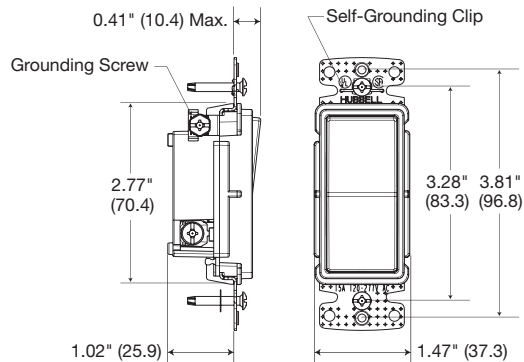

Three-Way Decorator Switch



RSD215W



# COMBINATION QUIET ROCKER SWITCHES/DEVICES

## FEATURES

- Low profile, less than 1 inch deep
- Self-grounding feature is standard
- Operating temperature: -20°C to 60°C.
- UL Listed E3896, CSA Certified.



RCD111W



RCD101W



RCD108W




RCD109W



Combination Quiet Rocker Switches/Devices						
Description	Three (3) Single Pole Switches	Two (2) Single Pole Switches	Single Pole and Three Way Switch	Single Pole Switch, Tamper- Resistant, 2 Pole, 3 Wire, Receptacle	Single Pole Switch, 2 Pole, 3 Wire Receptacle	
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	
Rating	15A 120-277V AC	15A 120-277V AC	15A 120-277V AC	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V 15A 125V NEMA 5-15R	
	Almond Black Gray Ivory Light Almond White	RCD111AL RCD111BK — RCD111I RCD111LA RCD111W	RCD101AL RCD101BK RCD101GY RCD101I RCD101LA RCD101W	RCD103AL RCD103BK RCD103GY RCD103I RCD103LA RCD103W	RCD108ALTR RCD108BKTR RCD108GYTR RCD108ITR RCD108LATR RCD108WTR	RCD108AL RCD108BK RCD108GY RCD108I RCD108LA RCD108W

Description	Two (2) Three Way Switches	Three Way Switch, Tamper- Resistant, 2 Pole, 3 Wire, Receptacle	Three Way Switch, 2 Pole, 3 Wire Receptacle	Single Pole Switch, Pilot Light, Clear Lens, Amber Neon Bulb	Three Way Switch, Pilot Light, Clear Lens, Amber Neon Bulb
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 120-277V AC	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V	15A 120V
	Almond Black Gray Ivory Light Almond White	RCD303AL RCD303BK RCD303GY RCD303I RCD303LA RCD303W	RCD308ALTR RCD308BKTR RCD308GYTR RCD308ITR RCD308LA RCD308W	RCD109AL — — RCD109I RCD109LA RCD109W	RCD309AL — — RCD309I RCD309LA RCD309W

## Pilot Light Wiring Diagram

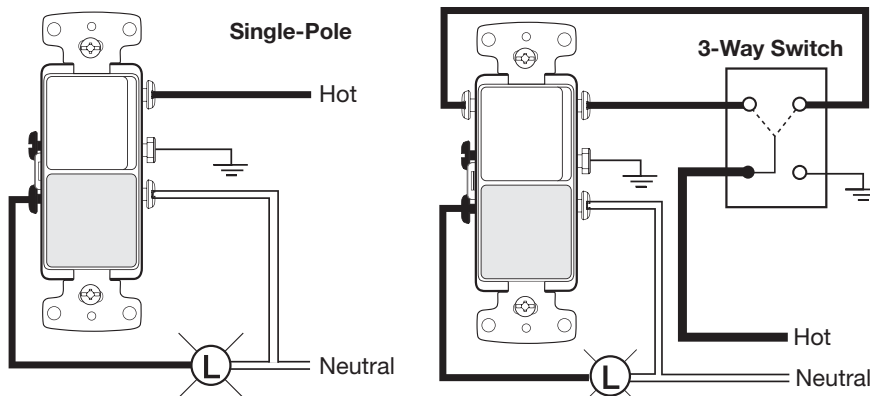

# WEATHER RESISTANT, TAMPER-RESISTANT AND STANDARD RECEPTACLES



Decorator Duplex Receptacles, 2 Pole, 3 Wire				
Description	 Weather and Tamper- Resistant	 Tamper- Resistant	Standard	Standard
Termination	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Push and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Almond	RRD15SALWRTR	RRD15SALTR	RRD15SAL	RRD15AL
Black	RRD15SBKWRTR	RRD15SBKTR	RRD15SBK	RRD15BK
Brown	RRD15SWRTR	RRD15STR	RRD15S	RRD15
Gray	RRD15SGYWRTR	RRD15SGYTR	RRD15SGY	RRD15GY
Ivory	RRD15SIWRTR	RRD15SITR	RRD15SI	RRD15I
Light Almond	RRD15SLAWRTR	RRD15SLATR	RRD15SLA	RRD15LA
White	RRD15SWRTR	RRD15SWTR	RRD15SW	RRD15W



RRD15SW



RRD15W



Description	 Tamper- Resistant	Standard	 Tamper- Resistant, Without Ears**	Standard, Without Ears**
Termination	Self-Grounding, Eight Push Wire Holes Only #14 AWG	Self-Grounding, Eight Push Wire Holes Only #14 AWG	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Almond	RRD15EALTR	RRD15EAL	RRD15KALTR	RRD15KAL
Black	RRD15EBKTR	RRD15EBK	RRD15KBKTR	RRD15KBK
Brown	RRD15ETR	RRD15E	RRD15KTR	RRD15K
Gray	RRD15EGYTR	RRD15EGY	RRD15KGYTR	RRD15KGY
Ivory	RRD15EITR	RRD15EI	RRD15KITR	RRD15KI
Light Almond	RRD15ELATR	RRD15ELA	RRD15KLATR	RRD15KLA
White	RRD15EWTR	RRD15EW	RRD15KWTR	RRD15KW



RRD15KW



RRD15W

Decorator Single Receptacles, 2 Pole, 3 Wire				
Description	 Tamper- Resistant	Standard	 Tamper- Resistant	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	20A 125V NEMA 5-20R	20A 125V NEMA 5-20R
Almond	RRD151ALTR	RRD151AL	RRD201ALTR	RRD201AL
Black	RRD151BKTR	RRD151BK	RRD201BKTR	RRD201BK
Brown	RRD151TR	RRD151	RRD201TR	RRD201
Gray	RRD151GYTR	RRD151GY	RRD201GYTR	RRD201GY
Ivory	RRD151ITR	RRD151I	RRD201ITR	RRD201I
Light Almond	RRD151LATR	RRD151LA	RRD201LATR	RRD201LA
White	RRD151WTR	RRD151W	RRD201WTR	RRD201W


Description	Standard	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 250V NEMA 6-15R	20A 250V NEMA 6-20R
Almond	RRD155AL	RRD205AL
Black	RRD155BK	RRD205BK
Brown	RRD155	RRD205
Gray	RRD155GY	RRD205GY
Ivory	RRD155I	RRD205I
Light Almond	RRD155LA	RRD205LA
White	RRD155W	RRD205W



RRD201W

Note: \*\* 100 per case, bulk packed. Mounting screws inserted into strap.

# SNAP-ON, NYLON AND METAL WALLPLATES







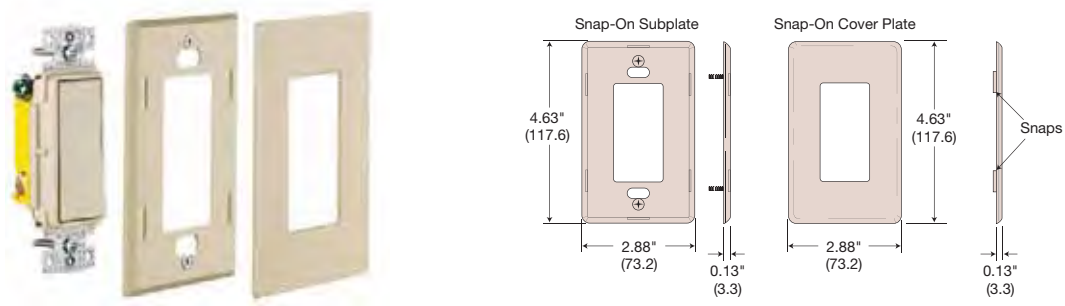


A subplate is fastened to the device, then a screwless snap-on cover plate is affixed. Four snaps securely hold the cover to the subplate.

Snap-On, Nylon, Two Piece Construction Wallplates						
Colour	1-gang, 1-Decorator	2-gang, 2-Decorator	3-gang, 3-Decorator	4-gang, 4-Decorator	5-gang, 5-Decorator	6-gang, 6-Decorator
Almond	RCW1AL	RCW2AL	RCW3AL	RCW4AL	RCW5AL	RCW6AL
Ivory	RCW1I	RCW2I	RCW3I	RCW4I	RCW5I	RCW6I
Light Almond	RCW1LA	RCW2LA	RCW3LA	RCW4LA	RCW5LA	RCW6LA
White	RCW1W	RCW2W	RCW3W	RCW4W	RCW5W	RCW6W
Decorator, Standard, Nylon Wallplates						
Colour	1-gang, 1-Decorator	2-gang, 2-Decorator	3-gang, 3-Decorator	4-gang, 4-Decorator	5-gang, 5-Decorator	6-gang, 6-Decorator
Almond	NP26AL	NP262AL	NP263AL	NP264AL	NP265AL	NP266AL
Black	NP26BK	NP262BK	NP263BK	NP264BK	NP265BK	NP266BK
Brown	NP26	NP262	NP263	NP264	NP265	NP266
Gray	NP26GY	NP262GY	NP263GY	NP264GY	NP265GY	NP266GY
Ivory	NP26I	NP262I	NP263I	NP264I	NP265I	NP266I
Light Almond	NP26LA	NP262LA	NP263LA	NP264LA	NP265LA	NP266LA
White	NP26W	NP262W	NP263W	NP264W	NP265W	NP266W
Decorator, Mid-Size, Nylon Wallplates						
Colour	1-gang, 1-Decorator	2-gang, 2-Decorator	3-gang, 3-Decorator	4-gang, 4-Decorator	5-gang, 5-Decorator	6-gang, 6-Decorator
Almond	NPJ26AL	NPJ262AL	NPJ263AL	NPJ264AL	—	—
Black	NPJ26BK	NPJ262BK	NPJ263BK	NPJ264BK	—	—
Brown	NPJ26	NPJ262	NPJ263	NPJ264	—	—
Gray	NPJ26GY	NPJ262GY	NPJ263GY	NPJ264GY	—	—
Ivory	NPJ26I	NPJ262I	NPJ263I	NPJ264I	—	—
Light Almond	NPJ26LA	NPJ262LA	NPJ263LA	NPJ264LA	—	—
White	NPJ26W	NPJ262W	NPJ263W	NPJ264W	—	—
Decorator, Mid-Size, Metal Wallplates						
Material	1-gang, 1-Decorator	2-gang, 2-Decorator	3-gang, 3-Decorator	4-gang, 4-Decorator	5-gang, 5-Decorator	6-gang, 6-Decorator
Brass	SB26	SB262	—	—	—	—
Brass Plated	SBP26	SBP262	SBP263	—	—	—
Chrome	SCH26	SCH262	—	—	—	—
S/S 302/304	SS26	SS262	SS263	SS264	SS265	SS266
S/S 430	SS26L	SS262L	—	—	—	—



# COMBINATION WALLPLATES

Combination, Nylon, Standard Wallplates							
							
Colour	2-gang, 1-Toggle 1-Decorator	2-gang, 1-Duplex, 1-Decorator	2-gang, 1-Blank Box Mount 1-Decorator	3-gang, 2-Toggle 1-Decorator	3-gang, 1-Toggle 2-Decorator	4-gang, 3-Toggle 1-Decorator	4-gang, 2-Toggle 2-Decorator
Almond	NP126AL	NP826AL	NP1326AL	NP226AL	NP1262AL	NP326AL	NP2262AL
Black	NP126BK	NP826BK	NP1326BK	NP226BK	NP1262BK	NP326BK	NP2262BK
Brown	NP126	NP826	NP1326	NP226	NP1262	NP326	NP2262
Gray	NP126GY	NP826GY	NP1326GY	NP226GY	NP1262GY	NP326GY	NP2262GY
Ivory	NP126I	NP826I	NP1326I	NP226I	NP1262I	NP326I	NP2262I
Light Almond	NP126LA	NP826LA	NP1326LA	NP226LA	NP1262LA	NP326LA	NP2262LA
White	NP126W	NP826W	NP1326W	NP226W	NP1262W	NP326W	NP2262W


  

Combination, Nylon, Mid-Size Wallplates							
Colour	2-gang, 1-Toggle 1-Decorator	2-gang, 1-Duplex, 1-Decorator	2-gang, 1-Blank Box Mount 1-Decorator	3-gang, 2-Toggle 1-Decorator	3-gang, 1-Toggle 2-Decorator	4-gang, 3-Toggle 1-Decorator	4-gang, 2-Toggle 2-Decorator
Almond	NPJ126AL	NPJ826AL	NPJ1326AL	NPJ226AL	—	—	—
Black	NPJ126BK	NPJ826BK	—	NPJ226BK	—	—	—
Brown	NPJ126	NPJ826	NPJ1326	NPJ226	—	—	—
Gray	NPJ126GY	NPJ826GY	—	NPJ226GY	—	—	—
Ivory	NPJ126I	NPJ826I	NPJ1326I	NPJ226I	—	—	—
Light Almond	NPJ126LA	NPJ826LA	NPJ1326LA	NPJ226LA	—	—	—
White	NPJ126W	NPJ826W	NPJ1326W	NPJ226W	—	—	—



  

Combination, Standard, Metal Wallplates							
Material	2-gang, 1-Toggle 1-Decorator	2-gang, 1-Duplex, 1-Decorator	2-gang, 1-Blank Strap Mount 1-Decorator	3-gang, 2-Toggle 1-Decorator	3-gang, 1-Toggle 2-Decorator	4-gang, 3-Toggle 1-Decorator	4-gang, 2-Toggle 2-Decorator
Brass	SB126	SB826	—	—	—	—	—
Brass Plated	SBP126	—	—	—	—	—	—
Chrome	—	—	—	—	—	—	—
SS 302/304	SS126	SS826	SS1426	SS226	—	SS326	—
SS 430	SS126L	—	—	—	—	—	—

## Product Dimensions



Reinforcement ribs provide extra strength.

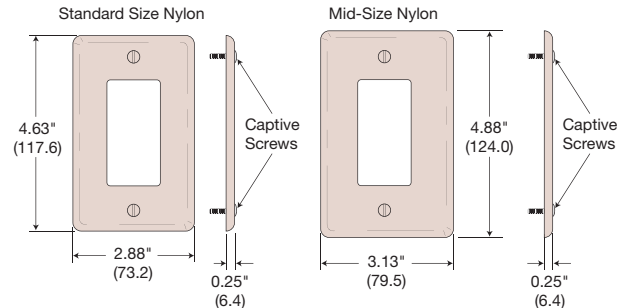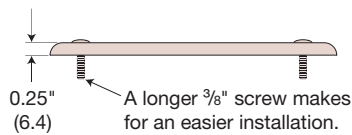


## FEATURES

Decorator frames provide a stylized look for that finishing touch. This allows all devices to match. Multimedia jacks insert into frame for custom configuration.

- Elongated strap for better wall box mounting.
- High impact-resistant thermoplastic frame.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Customize the jack selections and look.

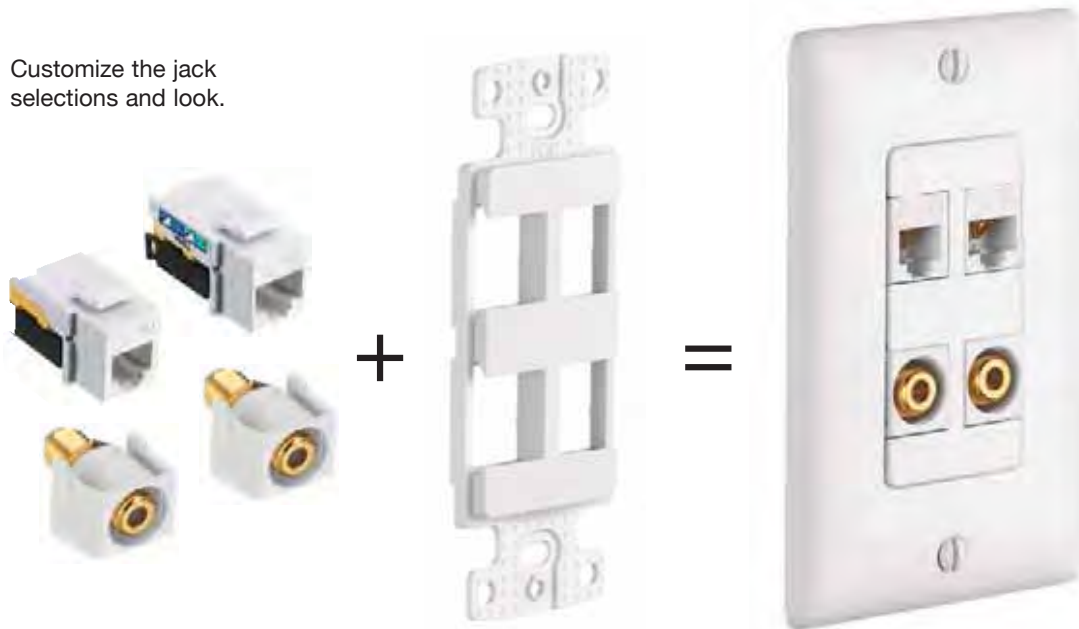

## Decorator Frames



Colour	1-gang, 2-Port	1-gang, 3-Port	1-gang, 4-Port	1-gang, 6-Port	1-gang, Adapter .406" (10.30) Dia. Hole*	1-gang, Adapter Blank**
Almond	NS612AL	NS613AL	NS614AL	NS616AL	NS621AL	NS620AL
Black	NS612BK	NS613BK	NS614BK	NS616BK	—	—
Gray	NS612GY	NS613GY	NS614GY	NS616GY	—	—
Ivory	NS612I	NS613I	NS614I	NS616I	NS621I	NS620I
Light Almond	NS612LA	NS613LA	NS614LA	NS616LA	NS621LA	NS620LA
White	NS612W	NS613W	NS614W	NS616W	NS621W	NS620W




Note: \* For use with rotary dimmers or to pull through AV or telephone cable.  
 \*\* To fill an extra decorator opening or to create customized openings.








# MODULAR SNAP FIT JACKS







## FEATURES

netSELECT® Voice/Data Jacks and AV Connectors allow custom creation of multimedia outlets and workstations while maintaining a decorative look.

- Quick and secure snap-in design.
- Use with multimedia plates and decorator frames(see pages F-7 and F-35).
- UL Listed and CSA Certified, or cULus Listed 1863 - Communication Circuit Accessory.

Molded-In Voice/Low-Speed Data			
Description	Modular Snap Fit Cat. 6 Jack	Modular Snap Fit Cat. 5e Jack	Modular Snap Fit USOC Jack
<b>Colour</b>			
Almond	NSJ6AL	NSJ5EAL	NSJUAL
Black	NSJ6BK	NSJ5EBK	NSJUBK
Blue	NSJ6B	NSJ5EB	NSJUB
Gray	NSJ6GY	NSJ5EGY	NSJUGY
Green	NSJ6GN	NSJ5EGN	NSJUGN
Ivory	NSJ6I	NSJ5EI	NSJUI
Light Almond	NSJ6LA	NSJ5ELA	NSJULA
Orange	NSJ6OR	NSJ5EOR	NSJUOR
Red	NSJ6R	NSJ5ER	NSJUR
White	NSJ6W	NSJ5EW	NSJUW
Yellow	NSJ6Y	NSJ5EY	NSJUY

Audio/Video Connectors - Standard Bulkhead							
Description	Gold F-Type Coupler Bulkhead, Female to Female	Nickel F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass Through, Female to Female, Red Interior	RCA Gold Pass Through, Female to Female, White Interior	RCA Gold Pass Through, Female to Female, Yellow Interior	RCA Gold Pass Through, Female to Female, Blue Interior	RCA Gold Pass Through, Female to Female, Green Interior
<b>Colour</b>							
Almond	SFFGAL	NSF70AL	SFRCRFAL	SFRCWFAL	SFRCYFAL	SFRCBFAL	SFRCGNFAL
Black	SFFGBK	NSF70BK	SFRCRFBK	SFRCWFBK	SFRCYFBK	SFRCBFBK	SFRCGNFBK
Gray	SFFGGY	NSF70GY	SFRCRFGY	SFRCWFGY	SFRCYFGY	SFRCBFGY	SFRCGNFGY
Ivory	SFFGEI	NSF70I	SFRCRFEI	SFRCWFEI	SFRCYFEI	SFRCBFEI	SFRCGNFEI
Light Almond	SFFGLA	NSF70LA	SFRCRFLA	SFRCWFLA	SFRCYFLA	SFRCBFLA	SFRCGNFLA
White	SFFGW	NSF70W	SFRCRFFW	SFRCWFFW	SFRCYFFW	SFRCBFFW	SFRCGNFFW





Audio/Video Connectors - Recessed						
Description	Gold F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass Through, Female, Red Interior	RCA Gold Pass Through, Female, White Interior	RCA Gold Pass Through, Female, Yellow Interior	RCA Gold Pass Through, Female, Blue Interior	RCA Gold Pass Through, Female, Green Interior
<b>Colour</b>						
Almond	SFGRFAL	SFRCRRAL	SFRCWRAL	SFRCYRAL	SFRCBRAL	SFRCGNRAL
Black	SFGRFBK	SFRCRRBK	SFRCWRBK	SFRCYRBK	SFRCBRBK	SFRCGNRBK
Gray	SFGRFGY	SFRCRRGY	SFRCWRGY	SFRCYRGY	SFRCBRGY	SFRCGNRGY
Ivory	SFGRFEI	SFRCRREI	SFRCWREI	SFRCYREI	SFRCBREI	SFRCGNREI
Light Almond	SFGRFLA	SFRCRRLA	SFRCWRLA	SFRCYRLA	SFRCBRLA	SFRCGNRLA
White	SFGRFW	SFRCRRW	SFRCWRW	SFRCYRW	SFRCBRW	SFRCGNRW

# MOLDED-IN VOICE/DATA/VIDEO

## FEATURES

Designed to complement decorator styling, these jacks offer voice and Cat. 5e devices to fit within a decorator wallplate.





- High impact-resistant thermoplastic frame.
- Meets FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Molded-In Voice/Low-Speed Data				
Description	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor	Decorator Frame, One RJ11 Jack, 6-Position, 6-Conductor	Decorator Frame, Duplex RJ11 Jacks, 6-Position, 6-Conductor	Decorator Frame, One Cat. 5e 110 Punch-Down, One RJ11 Jack, 6-Position, 4-Conductor
Termination	Screw Terminations	Screw Terminations	Screw Terminations	Screw Terminations
<b>Colour</b>				
Almond	NS770AL	NS771AL	NS772AL	NS784AL
Black	NS770BK	—	—	NS784BK
Brown	NS770	NS771	—	NS784
Gray	NS770GY	—	—	NS784GY
Ivory	NS770I	NS771I	NS772I	NS784I
Light Almond	NS770LA	NS771LA	NS772LA	NS784LA
White	NS770W	NS771W	NS772W	NS784W

## FEATURES

Coaxial video and combination jacks complement multimedia needs in a 1-gang decorator opening.

- High impact-resistant thermoplastic frame.
- Jacks meet FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Molded-In Voice/Low-Speed Data				
Description	Decorator Frame, Single F-Type Coupler Bulkhead, Female to Female	Decorator Frame, Duplex F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor, One F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One Cat. 5e 110 Punch-Down, One F-Type Coupler Bulkhead, Female to Female
Termination	Screw Terminations	Screw Terminations	Screw Terminations	Screw Terminations
<b>Colour</b>				
Almond	NS780AL	NS782AL	NS783AL	NS785AL
Black	—	—	—	NS785BK
Brown	—	—	—	NS785
Gray	—	—	—	NS785GY
Ivory	NS780I	NS782I	NS783I	NS785I
Light Almond	NS780LA	NS782LA	NS783LA	NS785LA
White	NS780W	NS782W	NS783W	NS785W


# TOGGLE SWITCHES AND COMBINATION SWITCHES/DEVICES

## FEATURES

Standard toggle switches provide the basic on/off control for home lighting and appliances.

- Tough thermoplastic with ultrasonically welded cover and base.

- Elongated strap for easier wall box mounting.
- Hi-visibility yellow base for easy installation.
- Operating temperature: -20°C to 60°C.
- UL Listed E3896, CSA Certified.

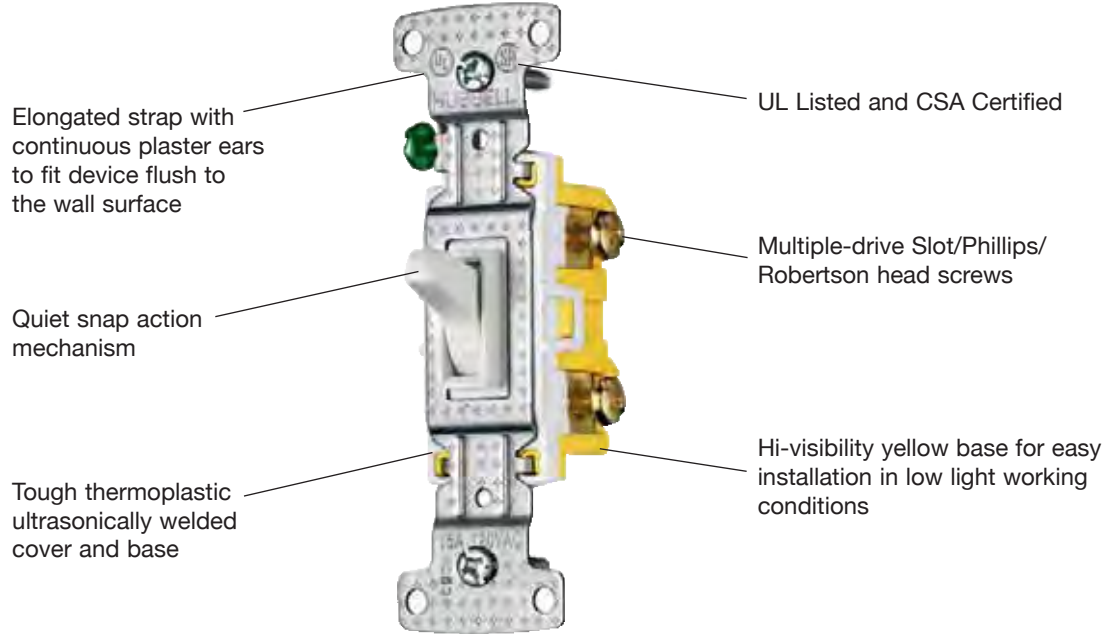


## FEATURES

Mini-toggles provide for multiple switches in a compact single gang. Maximize control while maintaining function and appearance.

- Low profile, less than 1 inch.

- Self-grounding feature is standard.
- Smooth toggle action.
- Operating temperature: -20°C to 60°C.
- UL Listed, CSA Certified.

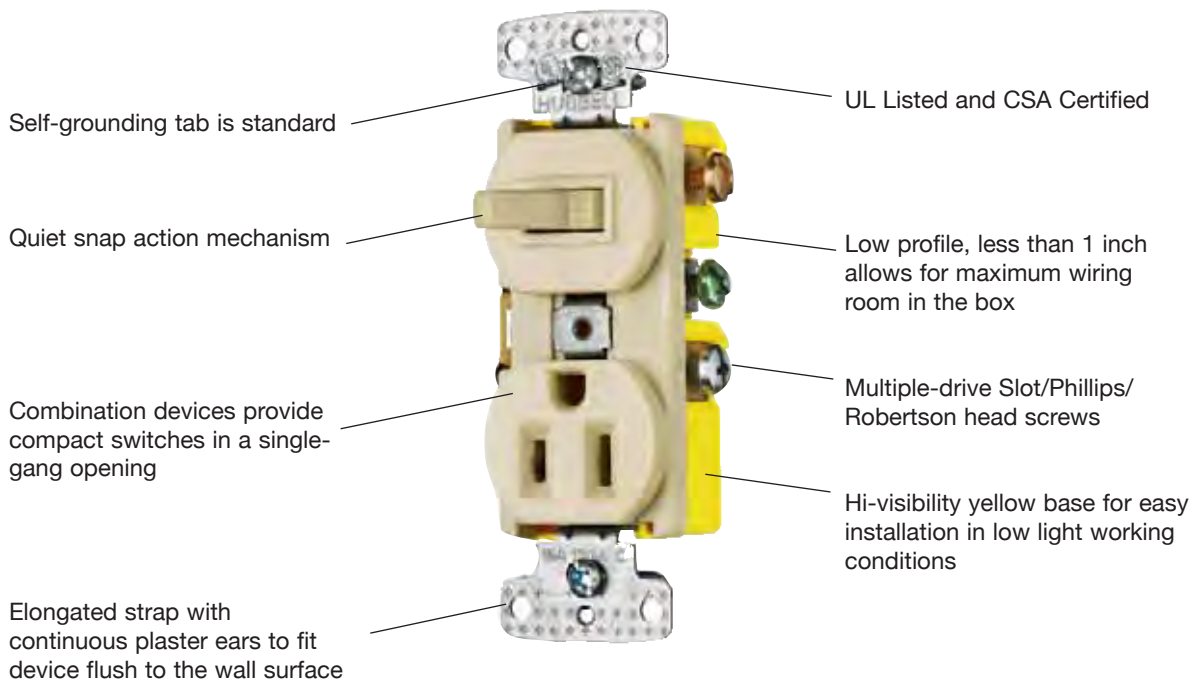







# TOGGLE SWITCHES






F11

tradeSELECT™

Single Pole Toggle Switches				
Description	Single Pole	Single Pole, Without Ears*	Single Pole	Single Pole, Illuminated**
Termination	Grounding, Push and Side Wire	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
Rating	15A 120V AC	15A 120V AC	15A 120V AC	15A 120V AC
<b>Colour</b>				
Clear	—	—	—	RS115ILC
Almond	RS115AL	RS115KAL	RS115SAL	RS115ILAL
Black	RS115BK	—	—	—
Brown	RS115	—	RS115S	—
Ivory	RS115I	RS115KI	RS115SI	RS115ILI
Light Almond	RS115LA	RS115KLA	RS115SLA	RS115ILLA
White	RS115W	RS115KW	RS115SW	RS115ILW

Note: \* 100 per case, bulk packed. Mounting screws inserted into strap.

\*\* Frame is clear and illuminates, toggle is coloured. Does not require a neutral wire.






Three- and Four-Way Toggle Switches					
Description	Three Way	Three Way, Without Ears*	Three Way	Three Way, Illuminated**	Four-Way
Termination	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Side Wire
Rating	15A 120V AC	15A 120V AC	15A 120V AC	15A 120V AC	15A 120V AC
<b>Colour</b>					
Clear	—	—	—	RS315ILC	—
Almond	RS315AL	RS315KAL	RS315SAL	RS315ILAL	RS415AL
Black	RS315BK	—	—	—	RS415BK
Brown	RS315	—	RS315S	—	RS415
Ivory	RS315I	RS315KI	RS315SI	RS315ILI	RS415I
Light Almond	RS315LA	RS315KLA	RS315SLA	RS315ILLA	RS415LA
White	RS315W	RS315KW	RS315SW	RS315ILW	RS415W

Note: \* 100 per case, bulk packed. Mounting screws inserted into strap.







\*\* Frame is clear and illuminates, toggle is coloured. Does not require a neutral wire.



# COMBINATION SWITCHES/DEVICES

Combination Toggle Switches/Devices				
<b>Description</b>	Two (2) Single Pole Switches	 Single Pole Switch, Tamper-Resistant, 2 Pole, 3 Wire, Receptacle	Single Pole Switch, 2 Pole, 3 Wire, Receptacle	Single Pole Switch, Pilot Light, Clear Lens, Amber Neon Bulb**
<b>Termination</b>	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
<b>Rating</b>	15A 120V AC	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V AC
<b>Colour</b>				
Almond Brown Ivory Light Almond White	RC101AL RC101 RC101I RC101LA RC101W	RC108ALTR RC108TR RC108ITR RC108LATR RC108WTR	RC108AL RC108 RC108I RC108LA RC108W	RC109AL RC109 RC109I RC109LA RC109W

Note:\*\* Neutral required for pilot light.

Combination Toggle Switches/Devices					
<b>Description</b>	Single Pole and Three Way Switch	Two (2) Three Way Switches	 Three Way Switch, Tamper-Resistant, 2 Pole, 3 Wire, Receptacle	Three Way Switch, 2 Pole, 3 Wire, Receptacle	Three Way Switch, Pilot Light, Clear Lens, Amber Neon Bulb**
<b>Termination</b>	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
<b>Rating</b>	15A 120V AC	15A 120V AC	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120V AC
<b>Colour</b>					
Almond Brown Ivory Light Almond White	RC103AL RC103 RC103I RC103LA RC103W	RC303AL RC303 RC303I RC303LA RC303W	RC308ALTR RC308TR RC308ITR — RC308WTR	RC308AL RC308 RC308I — RC308W	RC309AL RC309 RC309I — RC309W

Note: \*\* Neutral required for pilot light.

# DUPLEX QUICK THREAD RECEPTACLES

## QUICK AND EASY DOES IT.


Residential exclusive “Quick Thread” makes installation of wallplates and receptacles quicker and easier.



Provides branch circuit convenience power in duplex and single configurations.

- Smooth indented face appearance.
- Terminal screws accepts up to #12 AWG.
- Duplex ultrasonically welded.
- Push wire designed for #14 AWG solid copper wire only.
- Operating temperature: -20°C to 60°C.
- UL Listed E2186, CSA Certified.

## ONE PUSH FOR A SNUG FIT

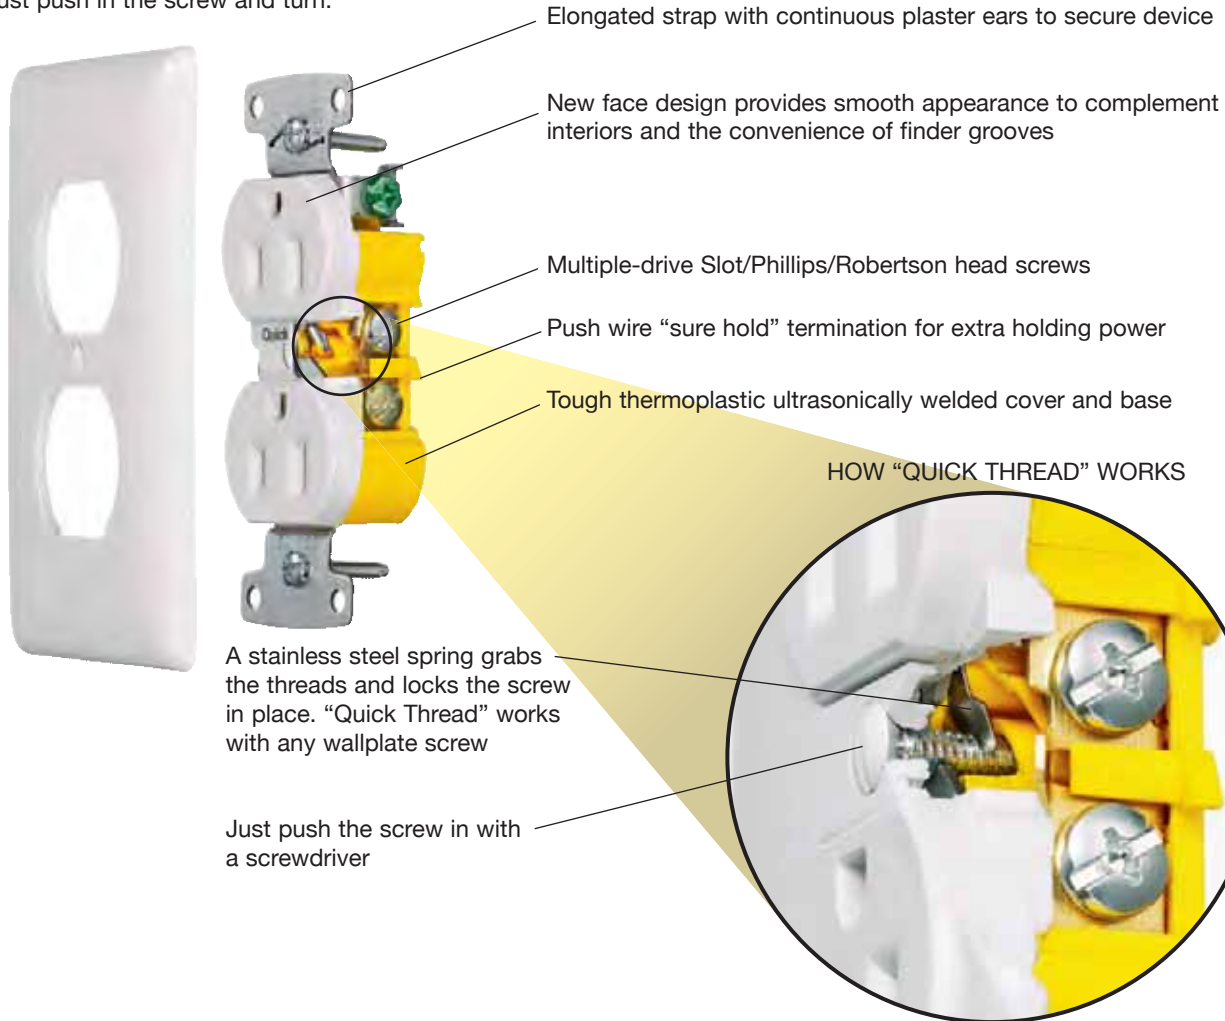Just push in the screw and turn.





Duplex Quick Thread Receptacles, 2-Pole, 3 Wire				
Description	 Tamper- Resistant, Quick Thread	Standard, Quick Thread	 Tamper- Resistant, Quick Thread	Standard, Quick Thread
Termination	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Eight Push Wire Holes Only #14 AWG	Eight Push Wire Holes Only #14 AWG
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Almond	RR15QALTR	RR15QAL	RR15EQALTR	RR15EQAL
Black	RR15QBKTR	RR15QBK	RR15EQBKTR	RR15EQBK
Brown	RR15QTR	RR15Q	RR15EQTR	RR15EQ
Ivory	RR15QITR	RR15QI	RR15EQITR	RR15EQI
Light Almond	RR15QLATR	RR15QLA	RR15EQLATR	RR15EQLA
White	RR15QWTR	RR15QW	RR15EQWTR	RR15EQW



# DUPLEX AND SINGLE RECEPTACLES

## Duplex Receptacles, 2 Pole, 3 Wire

Description				
	Standard	Weather and Tamper-Resistant	Tamper-Resistant	Standard
<b>Termination</b>	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
<b>Rating</b>	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Almond	RR15AL	RR15SALWRTR	RR15SALTR	RR15SAL
Black	RR15BK	RR15SBKWRTR	RR15SBKTR	RR15SBK
Brown	RR15	RR15SWRTR	RR15STR	RR15S
Ivory	RR15I	RR15SIWRTR	RR15SITR	RR15SI
Light Almond	RR15LA	RR15SLAWRTR	RR15SLATR	RR15SLA
White	RR15W	RR15SWWRTR	RR15SWTR	RR15SW






RR15W

Description				
	Tamper-Resistant, Without Ears	Standard, Without Ears	Tamper-Resistant, Without Ears**	Standard, Without Ears**
<b>Termination</b>	Eight Push Wire Holes Only #14 AWG	Eight Push Wire Holes Only #14 AWG	Eight Push Wire Holes Only #14 AWG	Eight Push Wire Holes Only #14 AWG
<b>Rating</b>	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Almond	RR15EALTR	RR15EAL	RR15KALTR	RR15KAL
Black	RR15EBKTR	RR15EBK	—	—
Brown	RR15ETR	RR15E	RR15KTR	RR15K
Gray	RR15EGYTR	RR15EGY	—	—
Ivory	RR15EITR	RR15EI	RR15KITR	RR15KI
Light Almond	RR15ELATR	RR15ELA	RR15KLATR	RR15KLA
White	RR15EWTR	RR15EW	RR15KWTR	RR15KW






RR15KW

## Single Receptacles, 2 Pole, 3 Wire

Description						
	Weather and Tamper-Resistant	Tamper-Resistant	Standard	Weather Resistant	Standard	
<b>Termination</b>	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	
<b>Rating</b>	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 250V NEMA 6-15R	15A 250V NEMA 6-15R	
Almond	RR151ALWRTR	RR151ALTR	RR151AL	RR155ALWR	RR155AL	
Black	RR151BKWRTR	RR151BKTR	RR151BK	RR155BKWR	RR155BK	
Brown	RR151WRTR	RR151TR	RR151	RR155WR	RR155	
Gray	RR151GYWRTR	RR151GYTR	RR151GY	RR155GYWR	RR155GY	
Ivory	RR151IWRTR	RR151ITR	RR151I	RR155IWR	RR155I	
Light Almond	RR151LAWRTR	RR151LATR	RR151LA	RR155LAWR	RR155LA	
White	RR151WWRTR	RR151WTR	RR151W	RR155WWR	RR155W	



RR151W

Description						
	Weather and Tamper-Resistant	Tamper-Resistant	Standard	Weather Resistant	Standard	
<b>Termination</b>	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	
<b>Rating</b>	20A 125V NEMA 5-20R	20A 125V NEMA 5-20R	20A 125V NEMA 5-20R	20A 250V NEMA 6-20R	20A 250V NEMA 6-20R	
Almond	RR201ALWRTR	RR201ALTR	RR201AL	RR205ALWR	RR205AL	
Black	RR201BKWRTR	RR201BKTR	RR201BK	RR205BKWR	RR205BK	
Brown	RR201WRTR	RR201TR	RR201	RR205WR	RR205	
Gray	RR201GYWRTR	RR201GYTR	RR201GY	RR205GYWR	RR205GY	
Ivory	RR201IWRTR	RR201ITR	RR201I	RR205IWR	RR205I	
Light Almond	RR201LAWRTR	RR201LATR	RR201LA	RR205LAWR	RR205LA	
White	RR201WWRTR	RR201WTR	RR201W	RR205WWR	RR205W	




RR201W

Note: \*\* 100 per case, bulk packed. Mounting screws inserted into strap.

# GFCI RECEPTACLES

F15

**SAFETY AND ECONOMY.**

 Meets UL Standard 943  
Class A GFCI



GF151LA

10kA Short Circuit Current Rating

Comprehensive diagnostics

- When test button is actuated, both the electronic components and mechanical trip mechanism are functionally tested

Ground fault indicator

- Flashing **RED** indicates device has lost capability to provide protection

No power at face if reverse wired

- Open circuit condition eliminates false assumption of protection at face

Installation ease

- Internal back wiring
- Automatic grounding feature
- Captive mounting screws

tradeSELECT™

## GFCI Duplex Receptacles, Flush Nylon Face, Matching Nylon Wallplate Included







GFTR20I



GF151LA



GFBF20ILA

Description	 Tamper-Resistant Weather Resistant	 Tamper-Resistant Weather Resistant	 15A 125V NEMA 5-15R UL/CSA	 20A 125V NEMA 5-20R UL/CSA
	Self-Grounding, Back and Side Wire	Self-Grounding, Back and Side Wire	Standard	Standard
<b>Termination</b>	Self-Grounding, Back and Side Wire	Self-Grounding, Back and Side Wire	Self-Grounding, Back and Side Wire	Self-Grounding, Back and Side Wire
<b>Rating</b>	15A 125V AC NEMA 5-15R	20A 125V AC NEMA 5-20R	15A 125V AC NEMA 5-15R	20A 125V AC NEMA 5-20R
Almond	GFTR15AL	GFTR20AL	GF15ALLA	GF20ALLA
Black	GFTR15BK	GFTR20BK	GF15BKLA	GF20BKLA
Brown	GFTR15	GFTR20	GF15LA	GF20LA
Gray	GFTR15GY	GFTR20GY	GF15GYLA	GF20GYLA
Ivory	GFTR15I	GFTR20I	GF15ILA	GF20ILA
Light Almond	GFTR15LA	GFTR20LA	GF15LALA	GF20LALA
Red	GFTR15R	GFTR20R	GF15RLA	GF20RLA
White	GFTR15W	GFTR20W	GF15WLA	GF20WLA







## GFCI Duplex Receptacles, Flush Nylon Face, Matching Nylon Wallplate Included

Description	Circuit Guard® Faceless
<b>Termination</b>	Self-Grounding, Back and Side Wire
<b>Rating</b>	20A 125V NEMA 5-20R
Almond	GFBF20ALLA
Black	GFBF20BKLA
Brown	GFBF20LA
Gray	GFBF20GYLA
Ivory	GFBF20ILA
Light Almond	GFBF20LALA
Red	GFBF20RLA
White	GFBF20WLA



# RANGE AND DRYER POWER RECEPTACLES AND PLUGS

## Range and Dryer Power Receptacles

	 30A 125/250V NEMA 14-30R UL/CSA <b>Flush Mount for</b>	 50A 125/250V NEMA 14-50R UL/CSA <b>Flush Mount for</b>	 30A 125/250V NEMA 14-30R UL/CSA <b>Flush Mount</b>	 50A 125/250V NEMA 14-50R UL/CSA <b>Flush Mount</b>	 30A 125/250V NEMA 10-30R UL/CSA <b>Flush Mount</b>	 50A 125/250V NEMA 10-50R UL/CSA <b>Flush Mount</b>
<b>Description</b>	4 <sup>11</sup> / <sub>16</sub> " Sq. Box	4 <sup>11</sup> / <sub>16</sub> " Sq. Box	for 1 or 2-gang box	for 1 or 2-gang box	for 1 or 2-gang box	for 1 or 2-gang box
<b>Rating</b>	30A 125/250V 3 Pole, 4 Wire, with Ground, Integrated Wallplate Cover	50A 125/250V 3 Pole, 4 Wire, with Ground, Integrated Wallplate Cover	30A 125/250V 3 Pole, 4 Wire with Ground	50A 125/250V 3 Pole, 4 Wire with Ground	30A 125/250V 3 Pole, 3 Wire without Ground	50A 125/250V 3 Pole, 3 Wire without Ground
Black	RR430WIPCN	RR450WIPCN	RR430F	RR450F	RR330F*	RR350F*
White	RR430WIPCN	RR450WIPCN	RR430FW	RR450FW	—	—



RR430WIPCN



RR430FW



RR450







RR430PM

<b>Description</b>	Surface Mount	Surface Mount	Surface Mount	Surface Mount
<b>Rating</b>	30A 125/250V 3 Pole, 4 Wire with Ground	50A 125/250V 3 Pole, 4 Wire with Ground	30A 125/250V 3 Pole, 3 Wire without Ground	50A 125/250V 3 Pole, 3 Wire without Ground
Black	RR430	RR450	RR330*	RR350*

<b>Description</b>	Panel Mount	Panel Mount
<b>Rating</b>	30A 125/250V 3 Pole, 4 Wire with Ground	50A 125/250V 3 Pole, 4 Wire with Ground
Black	RR430PM	RR450PM
White	—	—

Note: \* For replacement use only.

## Range and Dryer Power Angled Plugs

	 30A 125/250V NEMA 14-30R UL/CSA <b>With Interchangeable Blades</b>	 50A 125/250V NEMA 14-50R UL/CSA <b>for 30 or 50 Amp</b>	 30A 125/250V NEMA 10-30R UL/CSA <b>With Interchangeable Blades</b>	 50A 125/250V NEMA 10-50R UL/CSA <b>for 30 or 50 Amp</b>
<b>Description</b>	30/50A 125/250V 3 Pole, 4 Wire with Ground		30/50A 125/250V 3 Pole, 4 Wire without Ground	
<b>Rating</b>	30/50A 125/250V 3 Pole, 4 Wire with Ground		30/50A 125/250V 3 Pole, 4 Wire without Ground	
Black	RR435P		RR335P	



RR435P

## Wallplates, Surface Mount, 2.15" Diameter Single Hole

	1-gang Standard	1-gang Mid size	2-gang Standard	2-gang Mid size
Ivory	NP724I	NPJ724I	NP703I	NPJ703I
White	NP724W	NPJ724W	NP703W	NPJ703W
Chrome	SCH723	—	—	—
Stainless Steel	SS723	—	SS703	—



NP724W



NP703W



## Special Use Products



RR151CHW



RJ650BK



RJ600



RDS50



RS100W



RS101W

Description	Colour	Tamper Resistant	Standard	Tamper Resistant	Standard
Clock Hanger/Recessed Receptacle, 2 Pole, 3 Wire, Grounding, Side Wire Terminations	Brass	RR151CHBSTR	RR151CHBS	RR201CHBSTR	RR201CHBS
	Stainless Steel	RR151CHSSTR	RR151CHSS	RR201CHSSTR	RR201CHSS
	Ivory (Nylon)	RR151CHITR	RR151CHI	RR201CHITR	RR201CHI
	White (Nylon)	RR151CHWTR	RR151CHW	RR201CHWTR	RR201CHW
JLOAD® Multimedia Outlet Provides power, Cat. 5e and coaxial in a single gang box. Requires RJ600 Box. Includes decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage divider.	Almond	RJ650ALTR	RJ650AL	RJ620ALTR	RJ620AL
	Black	RJ650BKTR	RJ650BK	RJ620BKTR	RJ620BK
	Gray	RJ650GYTR	RJ650GY	RJ620GYTR	RJ620GY
	Ivory	RJ650ITR	RJ650I	RJ620ITR	RJ620I
	Light Almond	RJ650LATR	RJ650LA	RJ620LATR	RJ620LA
JLOAD® Multimedia Outlet Includes decorator frame with two open ports for custom configuration and one power receptacle 125V with voltage divider.	Almond	RJ65ALTR	RJ65AL	RJ62ALTR	RJ62AL
	Black	RJ65BKTR	RJ65BK	RJ62BKTR	RJ62BK
	Gray	RJ65GYTR	RJ65GY	RJ62GYTR	RJ62GY
	Ivory	RJ65ITR	RJ65I	RJ62ITR	RJ62I
	Light Almond	RJ65LATR	RJ65LA	RJ62LATR	RJ62LA
JLOAD® Multimedia Box 3 inches deep with seven ½-inch knockouts, non-metallic sheathed cable clamps on each side. Screw in mounting to stud.	Steel	RJ600	RJ600	RJ600	RJ600


Note: See pages F21 to F24 for floor and under cabinet box options.

## Door Switch with Cover Plate and Box

Description	"ON" when Door is Open	"OFF" when Door is Open
Rating	3A 125V AC	3A 125V AC
Zinc Plated Steel	RDS50**	RDS30**

Note: \*\* Not UL Listed.

## Product Dimensions

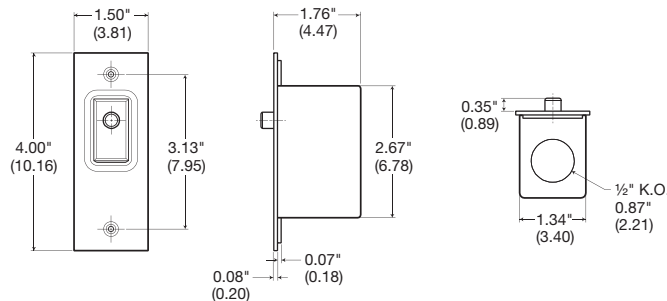

## In-Line Cord Switches

Description	Mini For Use with Flat Lamp Cord	Heavy Duty
Rating	6A 125V AC	6A 125V AC 1/6 HP
Wire	#18 AWG SPT 1 and SPT 2	#18 to #16 AWG SPT 1 and SPT 2
Ivory White	— RS100W	RS101 RS101W





## Rocker Decorator Dimmers, Preset with Night Light

Description	Side Slide Adjustment, Incandescent	Side Slide Adjustment, Incandescent	Side Slide Adjustment, Incandescent	Side Slide Adjustment, Incandescent
<b>Termination</b>	Single Pole	Three Way	Single Pole	Three Way
<b>Rating</b>	1000W 120V AC	1000W 120V AC	600W 120V AC	600W 120V AC
Almond	RDV10PAL	RDV103PAL	RDV600PAL	RDV603PAL
Ivory	RDV10PI	RDV103PI	RDV600PI	RDV603PI
Light Almond	RDV10PLA	RDV103PLA	RDV600PLA	RDV603PLA
White	RDV10PW	RDV103PW	RDV600PW	RDV603PW



RDV600PW

Description	Magnetic Low Voltage	Magnetic Low Voltage	Electronic Low Voltage	Electronic Low Voltage Requires Neutral
<b>Termination</b>	Single Pole	Three Way	Single Pole	Three Way
<b>Rating</b>	600VA (450W) 120V AC	600VA (450W) 120V AC	300W 120V AC	300W 120V AC
Almond	RDVLV600PAL	RDVLV603PAL	RDVELV300PAL	RDVELV303PAL
Ivory	RDVLV600PI	RDVLV603PI	RDVELV300PI	RDVELV303PI
Light Almond	RDVLV600PLA	RDVLV603PLA	RDVELV300PLA	RDVELV303PLA
White	RDVLV600PW	RDVLV603PW	RDVELV300PW	RDVELV303PW



RS600PW

## Slide Dimmers, Preset with On/Off Switch

Description	Incandescent	Incandescent	Incandescent	Incandescent
<b>Termination</b>	Single Pole	Three Way	Single Pole	Three Way
<b>Rating</b>	1000W 120V AC	1000W 120V AC	600W 120V AC	600W 120V AC
Almond	RS10PAL	RS103PAL	RS600PAL	RS603PAL
Ivory	RS10PI	RS103PI	RS600PI	RS603PI
Light Almond	RS10PLA	RS103PLA	RS600PLA	RS603PLA
White	RS10PW	RS103PW	RS600PW	RS603PW



RS613W

Description	Magnetic Low Voltage	Magnetic Low Voltage	Electronic Low Voltage	Electronic Low Voltage Requires Neutral
<b>Termination</b>	Single Pole	Three Way	Single Pole	Three Way
<b>Rating</b>	600VA (450W) 120V AC	600VA (450W) 120V AC	300W 120V AC	300W 120V AC
Almond	RSLV600PAL	RSLV603PAL	RSELV300PAL	RSELV303PAL
Ivory	RSLV600PI	RSLV603PI	RSELV300PI	RSELV303PI
Light Almond	RSLV600PLA	RSLV603PLA	RSELV300PLA	RSELV303PLA
White	RSLV600PW	RSLV603PW	RSELV300PW	RSELV303PW



RS600W

## Slide Dimmers, Specialty


Description	Incandescent Slide to Off	Incandescent Omni Slide Button
<b>Termination</b>	Single Pole	Single Pole/Three Way
<b>Rating</b>	600W 120V AC	600W 120V AC
Ivory	RS600I	RS613PI
Light Almond	RS600LA	RS613PLA
White	RS600W	RS613PW



RS2LFSQW

## Fan Speed Controls, 3 Speed and Replacement Knobs

Description	Rocker Slide Adjustment	Slide Control Slide to Off	Combination Slide Dimmer, Incandescent	Replacement Knob
<b>Termination</b>	Single Pole/Three Way	Single Pole	Single Pole	—
<b>Rating</b>	1.5A 120V AC	1.5A 120V AC	300W 1.5 A 120V AC	—
Almond	RDVFSQFAL	RSFSQFAL	RS2LFSQAL	RSKAL
Ivory	RDVFSQFI	RSFSQFI	RS2LFSQI	RSKI
Light Almond	RDVFSQFLA	RSFSQFLA	RS2LFSQLA	RSKLA
White	RDVFSQFW	RSFSQFW	RS2LFSQW	RSKW



RSKW

RSKI



# TOGGLE DIMMERS AND FAN SPEED CONTROLS

## Toggle Incandescent Preset Dimmers

Description	Side Slide Adjustment with Wire Leads	Side Slide Adjustment with Wire Leads	Side Slide Adjustment with Terminal Screws	Side Slide Adjustment with Terminal Screws
<b>Termination</b>	<b>Single Pole</b>	<b>Three Way</b>	<b>Single Pole</b>	<b>Three Way</b>
<b>Rating</b>	<b>1000W 120V AC</b>	<b>1000W 120V AC</b>	<b>600W 120V AC</b>	<b>600W 120V AC</b>
Almond	RAY10PAL	RAY103PAL	RAY600PAL	RAY603PAL
Ivory	RAY10PI	RAY103PI	RAY600PI	RAY603PI
Light Almond	RAY10PLA	RAY103PLA	RAY600PLA	RAY603PLA
White	RAY10PW	RAY103PW	RAY600PW	RAY603PW



RAY600PW



RD600RW



RRKDK

## Rotary Incandescent Dimmers and Replacement Knobs

Description	On/Off Dimmer	Push On/Off Dimmer Ivory and White Knobs Provided	Push On/Off Dimmer Ivory and White Knobs Provided	Replacement Knobs 2 Piece Kit
<b>Termination</b>	<b>Single Pole</b>	<b>Single Pole</b>	<b>Three Way</b>	—
<b>Rating</b>	<b>600W 120V AC</b>	<b>600W 120V AC</b>	<b>600W 120V AC</b>	—
Ivory	RD600RI	—	—	—
White	RD600RW	—	—	—
Ivory/White	—	RD600PDK	RD603PDK	RRKDK

## Fan Speed Controls

Description	Toggle 3-Speed	Combination Toggle 3-Speed/Dimmer	Rotary On/Off 3-Speed includes Ivory and White knobs	Rotary Variable Speed	Rotary Fan Control Replacement Knobs
<b>Termination</b>	<b>Single Pole or Three Way</b>	<b>Single Pole</b>	<b>Single Pole</b>	<b>Single Pole</b>	—
<b>Rating</b>	<b>1.5A 120V AC</b>	<b>300W 1.5A 120V AC</b>	<b>1.5A 120V AC</b>	<b>5A 120V AC</b>	—
Almond	RAYFSQFAL	RAY2LFSQAL	—	—	—
Ivory	RAYFSQFI	RAY2LFSQI	—	RFS5I	R28032406
Light Almond	RAYFSQFLA	RAY2LFSQLA	—	RFS5LA	—
White	RAYFSQFW	RAY2LFSQW	—	—	R28032401
Ivory/White	—	—	RFSQ2FDK	RFS5W	—



RAY2LFSQW



RFSQ2FDK



R28032401

R28032406



## Occupancy Sensors

Auto-on occupancy sensors turn on the load when motion is detected in an area. The device turns lights off when motion ceases and the time delay has expired.

Description	Occupancy Sensor Basic On/Off Control 150° View Standard	Occupancy Sensor Basic On/Off Control 150° View With Nightlight	Occupancy Sensor Dimming Control 150° View Standard	Occupancy Sensor Dimming Control 150° View With Nightlight
Termination	Single Pole Switch	Single Pole Switch	Single Pole Switch	Single Pole Switch
Rating	500W 120V AC Incandescent Only	500W 120V AC Incandescent Only	500W 120V AC Incandescent Only	500W 120V AC Incandescent Only
Almond	RMS101AL	RMS101LAL	RMS121AL	RMS121LAL
Ivory	RMS101I	RMS101ILI	RMS121I	RMS121ILI
Light Almond	RMS101LA	RMS101ILLA	RMS121LA	RMS121ILLA
White	RMS101W	RMS101ILW	RMS121W	RMS121ILW



RMS101W  
RMS100W

## Vacancy Sensors

Vacancy sensor switches are specifically designed for California Title 24 compliance. When a person enters an area, the manual switch must be pressed to turn on the light. The device turns lights off when motion ceases and the time delay has expired.

Description	Vacancy Sensor Basic On/Off Control 150° View Standard	Vacancy Sensor Basic On/Off Control 150° View With Nightlight	Vacancy Sensor Dimming Control 150° View Standard	Vacancy Sensor Dimming Control 150° View With Nightlight
Termination	Single Pole Switch	Single Pole Switch	Single Pole Switch	Single Pole Switch
Rating	500W 120V AC Incandescent Only	500W 120V AC Incandescent Only	500W 120V AC Incandescent Only	500W 120V AC Incandescent Only
Almond	RMS100AL	RMS100LAL	RMS120AL	RMS120LAL
Ivory	RMS100I	RMS100ILI	RMS120I	RMS120ILI
Light Almond	RMS100LA	RMS100ILLA	RMS120LA	RMS120ILLA
White	RMS100W	RMS100ILW	RMS120W	RMS120ILW



RMS121ILW  
RMS120ILW


## Heavy Duty Occupancy and Vacancy Sensors

Description	Occupancy Sensor 180° View	Vacancy Sensor 180° View
Termination	Single Pole	Single Pole
Rating	800W Inc., 1000W Fluor., 120V AC 1800W Fluor., 277V AC 1/6 HP 120V AC	800W Inc., 1000W Fluor., 120V AC 1800W Fluor., 277V AC 1/6 HP 120V AC
Almond	RMS141AL	RMS140AL
Ivory	RMS141I	RMS140I
White	RMS141W	RMS140W




RMS141W  
RMS140W

### Coverage for Occupancy and Vacancy Sensors

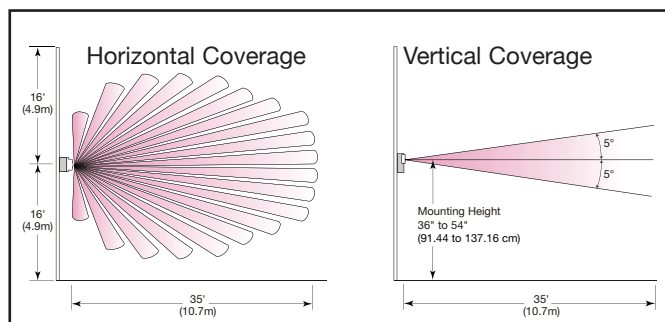


### Coverage for Heavy Duty Occupancy and Vacancy Sensors

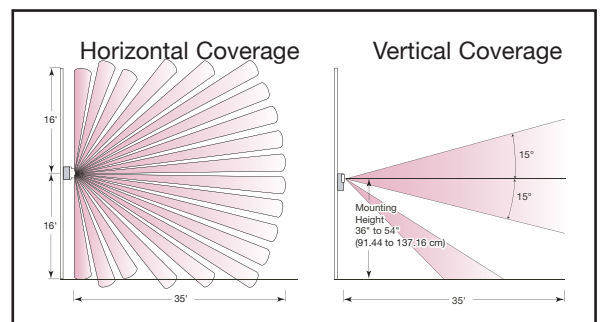

# FLOOR BOXES FOR WOOD FLOORS

Hubbell Wood Floor Boxes allow for the placement of electrical power or a combination of power and voice/data devices. Boxes easily mount into the floor and are height adjustable (up to ¾ inch) for optimal alignment and fit.

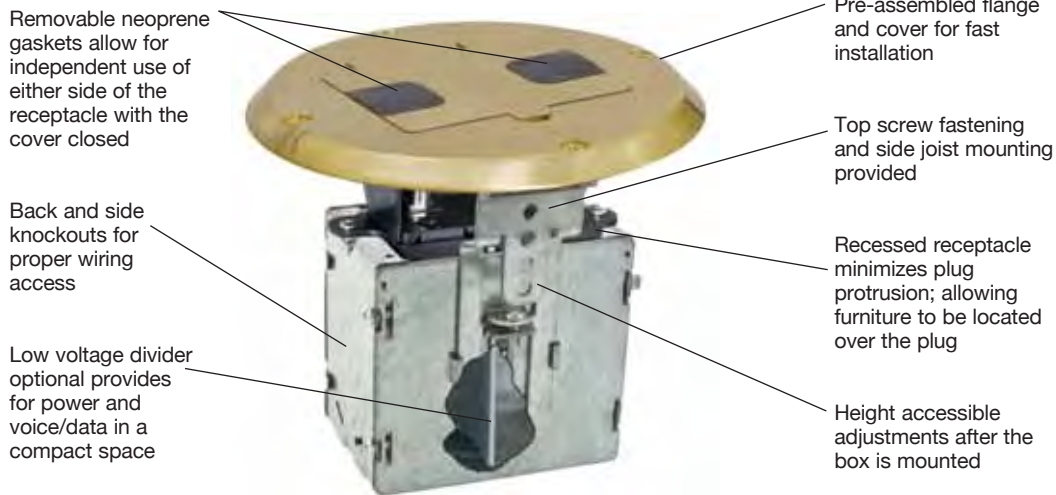

Note: Template cutout provided with instructions for proper installation.

## The Right Choice For That Perfect Finishing Touch!



Note: Not all configurations are available in all colours. See below for details.

### Floor Boxes For Structural Wood Floors



Description	Material	Finish	Cat. Number	Material	Finish	Cat. Number
Decorator duplex receptacle floor box kit; includes steel box, flange and hinged door cover assembly with 15A 125V tamper-resistant duplex receptacle; designed for installation in wood floors; mounts to sub-floor or joists.	Solid Brass	Clear Lacquer	<b>RF515BR</b>	Aluminum	Brass Plated	<b>RF515BP</b>
	Aluminum	Stainless Paint	<b>RF515SS</b>	Aluminum	Chrome Plated	<b>RF515CH</b>
	Aluminum	Almond Paint	<b>RF515AL</b>	Aluminum	Copper Plated	<b>RF515CU</b>
	Aluminum	Black Paint	<b>RF515BK</b>	Aluminum	Nickel Plated	<b>RF515NI</b>
	Aluminum	Chestnut Brown Paint	<b>RF515BN</b>			
Flush fit (same as above).	Solid Brass	Clear Lacquer	<b>RF509BR</b>			
Flange and hinged door cover assembly; includes tamper-resistant duplex receptacle; neoprene gaskets; for use with steel box RF500.	Solid Brass	Clear Lacquer	<b>RF506BR</b>	Aluminum	Brass Plated	<b>RF506BP</b>
	Aluminum	Stainless Paint	<b>RF506SS</b>	Aluminum	Chrome Plated	<b>RF506CH</b>
	Aluminum	Almond Paint	<b>RF506AL</b>	Aluminum	Copper Plated	<b>RF506CU</b>
	Aluminum	Black Paint	<b>RF506BK</b>	Aluminum	Nickel Plated	<b>RF506NI</b>
	Aluminum	Chestnut Brown Paint	<b>RF506BN</b>			
Adjustable floor box; 3 inch deep; three (3) ½ inch knockouts: one on bottom; one on each side; non-metallic sheathed cable clamps on each side.				Steel	—	<b>RF500</b>
Hinged Door Cover Only Replacement door for RF515, RF509 and RF506 series.	Solid Brass	Solid Brass	<b>RF507BR</b>	Aluminum	Brass Plated	<b>RF507BP</b>
	Aluminum	Stainless Finish	<b>RF507SS</b>	Aluminum	Chrome Plated	<b>RF507CH</b>
	Aluminum	Almond	<b>RF507AL</b>	Aluminum	Copper Plated	<b>RF507CU</b>
	Aluminum	Black	<b>RF507BK</b>	Aluminum	Nickel Plated	<b>RF507NI</b>
	Aluminum	Chestnut Brown Paint	<b>RF507BN</b>			



# FLOOR BOXES FOR WOOD FLOORS

Duplex floor receptacles provide ample connections to service lighting, entertainment equipment and computers for family rooms and offices. Single receptacle configurations available for minimum requirements.

- Metal covers feature electrostatic powder coating that resists wear and provides a distinctive finish.
- Recessed GFCI/Decorator opening.
- Cut out template provided to assure proper sub-flooring preparation.

## Floor Boxes For Wood Floors

Description	Material	15A 125V NEMA 5-15R UL/CSA		20A 125V NEMA 5-20R UL/CSA	
		Tamper Resistant	Standard	Tamper Resistant	Standard
Duplex Receptacle Floor Box Rated Includes steel box, duplex TR receptacle and cover.		RF6500BR	—	—	—
Single Receptacle Floor Box Rated Includes steel box, single receptacle and cover.	Brass	RF151TR	RF151	—	—
Single Receptacle Display Rated Receptacle and cover only, excludes box.	Brass	—	RF151D	—	—




RF151



RF151D

Product Dimensions Inches (mm)

### Wood Floor Boxes

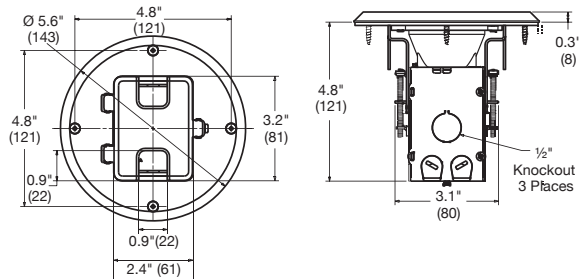

# UNDER CABINET/COUNTER POWER DISTRIBUTION


These boxes comply with the NEC® for kitchen receptacles, with placement not more than 20 inches above the counter surface. They can also be placed under counter islands, not lower than 15 inches from the surface.

- Available with nylon or metal cover.
- Custom configurable, accepts any decorator style device.
- Mounting hardware included.
- UL Listed E31999 and CSA Certified under cabinet boxes.




## Under Cabinet/Counter Power Distribution

Description	Slim Box Catalogue Number	GFCI Fit Box Catalogue Number
Stainless Steel	RU100SS	RU200SS
White Metal	RU100W	RU200W
White Nylon	RU170W*	RU270W*

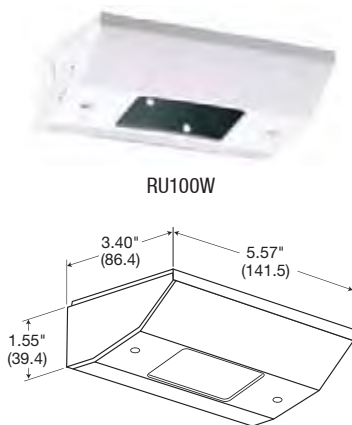


RU100W

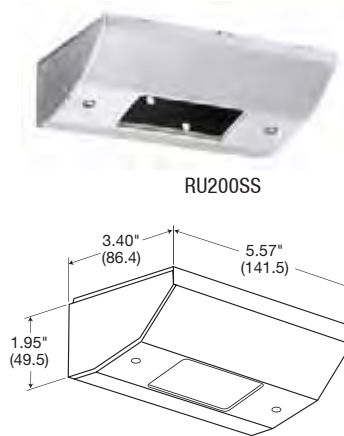


RU200SS

Note: \* Steel box with nylon cover.

### Vertical Mount

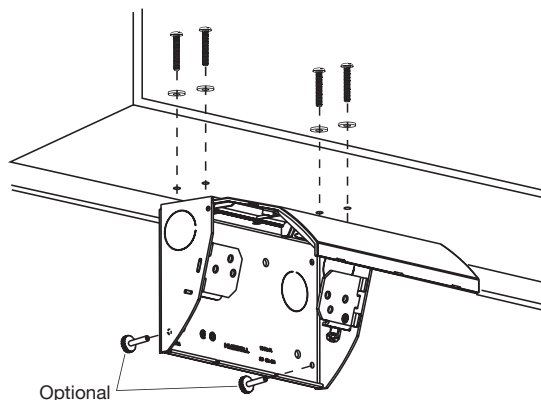

### Horizontal Mount

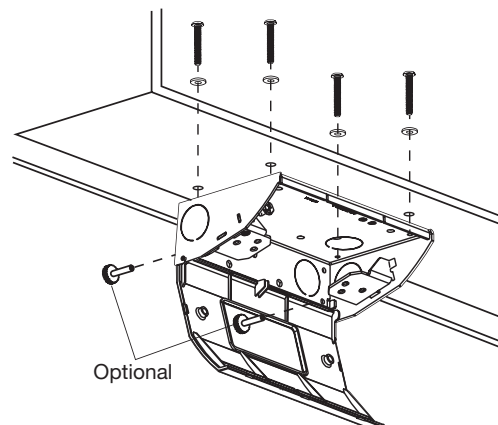


NEC® is a registered trademark of the National Fire Protection Association (NFPA).


# JLOAD® MULTIMEDIA OUTLET

**MAKE THE MOST OF A PERFECT LOCATION.**

Install receptacles and voice/data devices exactly where they are needed, in the smallest space possible.

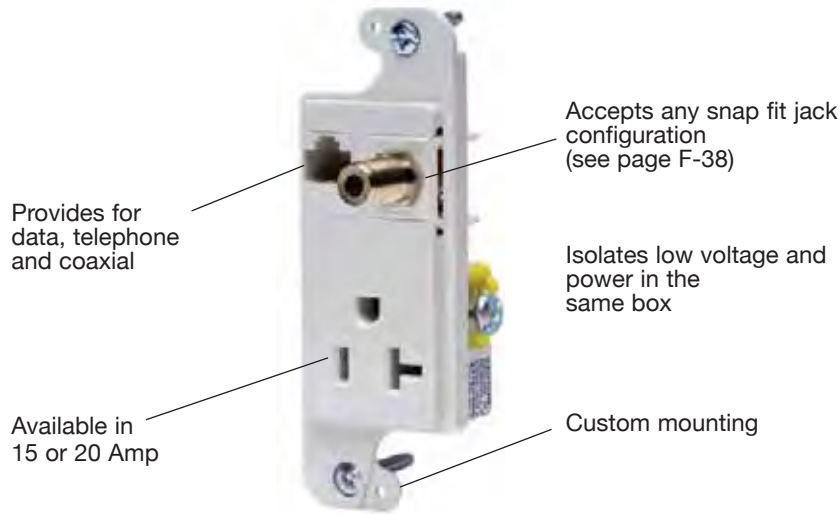

Note: Requires unique box shown below.




## JLOAD® Multimedia Outlet

Description	Colour	15A 125V NEMA 5-15R UL/CSA		20A 125V NEMA 5-20R UL/CSA	
		Tamper Resistant	Standard	Tamper Resistant	Standard
JLOAD® Multimedia Outlet, specifically designed to provide power, Cat. 5e and coaxial in a single gang box. Requires JLOAD® Multimedia Box RJ600. Perfect for HDTV and computer use where a combination of power and data are needed. Includes decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage divider.	Almond	RJ650ALTR	RJ650AL	RJ620ALTR	RJ620AL
	Black	RJ650BKTR	RJ650BK	RJ620BKTR	RJ620BK
	Gray	RJ650GYTR	RJ650GY	RJ620GYTR	RJ620GY
	Ivory	RJ650ITR	RJ650I	RJ620ITR	RJ620I
	Light Almond	RJ650LATR	RJ650LA	RJ620LATR	RJ620LA
White	RJ650WTR	RJ650W	RJ620WTR	RJ620W	
JLOAD® Multimedia Outlet, includes decorator frame with two open ports for custom configuration and one power receptacle 125V with voltage divider.	Almond	RJ65ALTR	RJ65AL	RJ62ALTR	RJ62AL
	Black	RJ65BKTR	RJ65BK	RJ62BKTR	RJ62BK
	Gray	RJ65GYTR	RJ65GY	RJ62GYTR	RJ62GY
	Ivory	RJ65ITR	RJ65I	RJ62ITR	RJ62I
	Light Almond	RJ65LATR	RJ65LA	RJ62LATR	RJ62LA
White	RJ65WTR	RJ65W	RJ62WTR	RJ62W	
JLOAD® Multimedia Box, 3 inches deep with seven ½-inch knockouts, non-metallic sheathed cable clamps on each side. Screw in mounting to stud.	Steel	RJ600	RJ600	RJ600	RJ600



## JLOAD® Dimensions Inches (mm)

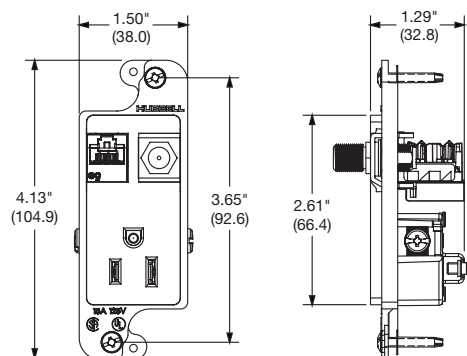


- Smooth, quiet rocker action
- Self-grounding feature standard
- Ultrasonically welded cover and base provides maximum strength
- Push, back and side wiring
- Available colours: Almond, Black, Brown, Gray, Ivory, Light Almond and White



RSD115W

## Product Dimensions Inches (mm)

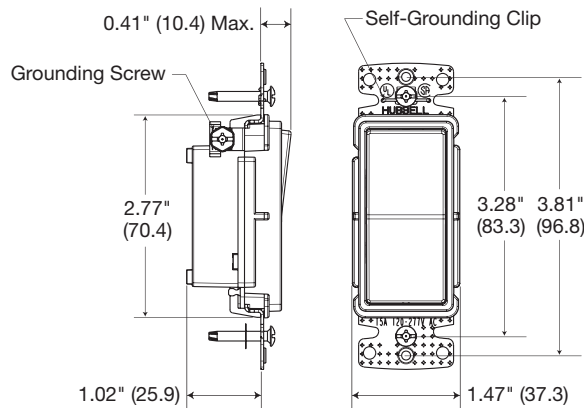

Single-Pole Decorator Switch

## Specifications

### Switches

Typical Specification — Catalogue Number RSD115\*  
 Description — Decorator series rocker switch  
 Type — Single Pole  
 Rating — 15A, 120-277V AC

Note: \* Designates colour: AL = Almond, BK = Black, Blank = Brown, GY = Gray, I = Ivory, LA = Light Almond, W = White

### Certification

- Listed to UL Standard 20
- CSA Certified

### Components

### Materials

Base and body	PVC
Rocker	Polycarbonate
Terminals	Brass
Mounting strap	Galvanized steel
Contacts	Silver alloy
Movable contact arm	Copper alloy
Terminal screws	Steel

## Performance

### Electrical

Dielectric voltage	Withstands 1,500V AC minimum for 1 minute
Max. working voltage	120V
Overload	1.5 times rating
Endurance	30,000 cycles minimum

### Mechanical

Terminal accommodation	Back and side wire: #14 AWG min. - #12 AWG max. solid and stranded copper wire only; push wire: #14 AWG solid copper wire only
------------------------	--------------------------------------------------------------------------------------------------------------------------------

### Environmental


Flammability	UL V0
Operating temperatures	Maximum continuous 60°C; minimum -20°C (without impact)



Hubbell's netSELECT® Flat Panel Television (FPTV) connection enclosure delivers high-density connectivity and power in the wall. This allows flat panel displays and interactive "smart" boards to sit flush against walls with no dangling cords. It quickly installs to studs or drywall without additional components or hardware.

- 18 Gauge white powder coated rugged steel base.
- 2-gang enclosure with 2 additional 3-Unit Hubbell iSTATION mounting locations
- Stud or sheetrock mounting integrated.
- Supplied ABS trim ring quickly cleans up drywall rough-in.
- Optional screw on cover reduces tampering
- cULus 1863 Listed.

Rugged 18 Gauge Sheet Metal Base White Powder Coat Finish

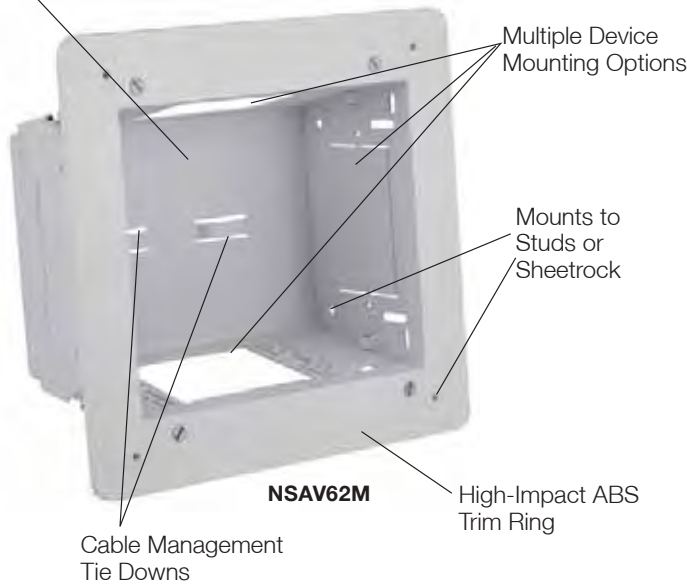

**NSAV62M**



**NSAV6C**



**NSOKPS**



**NS801W**



**NSJ6W**

### FPTV Connection Enclosure

Description	Colour	Catalogue Number
2-gang In-Wall Enclosure	White	<b>NSAV62M</b>
Steel Cover for NSAV6 series	White	<b>NSAV6C</b>

### Power Kits

Description	Colour	Catalogue Number
Standard Power Kit	White	<b>NSOKP</b>
Surge Protected Power Kit	White	<b>NSOKPS</b>
1-G Decorator Plate	White	<b>NP26W</b>
1-G Hubbell iSTATION Plate	White	<b>IMF1W</b>
1-G 4-Port Keystone Plate	White	<b>NSP14W</b>


### A/V Connectors and Plates

Description	Colour	Catalogue Number
1-Port HDMI Frame	White	<b>NS801W</b>
2-Port HDMI Frame	White	<b>NS802W</b>
HDMI Snap Fit	Black	<b>SFHCBK</b>
F-Connector Snap Fit	White	<b>NSF70W</b>
USB A-to-B Snap Fit	White	<b>SFUSBABW</b>
Cat 6 Snap Fit Jack	White	<b>NSJ6W</b>



netSELECT® HDMI Decorator Frames deliver uncompromising digital audio and video wherever you need it. Unleash the full potential of your high definition display and audio installations.

- Third party tested for 1080p resolutions.
- UL Listed - Communications Circuit Accessory and CSA Certified.

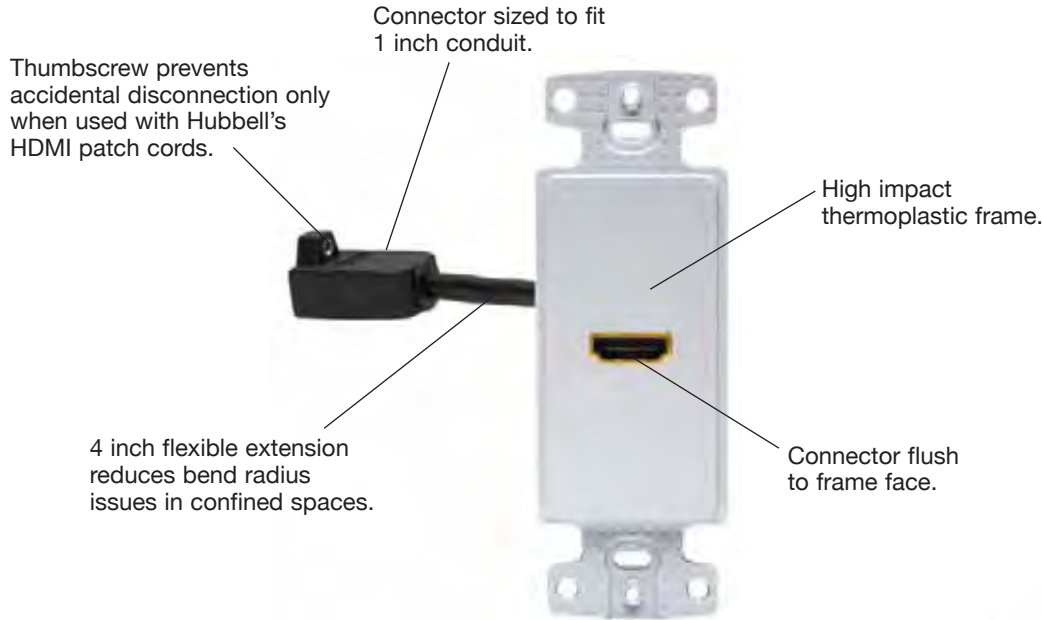

## HDMI Products

Description	Colour	Catalogue Number
1-gang, 1-Port HDMI, Decorator Frame, Female to Female	Almond	NS801AL
	Black	NS801BK
	Gray	NS801GY
	Ivory	NS801I
	Light Almond	NS801LA
	White	NS801W
1-gang, 2-Port HDMI, Decorator Frame, Female to Female	Almond	NS802AL
	Black	NS802BK
	Gray	NS802GY
	Ivory	NS802I
	Light Almond	NS802LA
	White	NS802W



## HDMI Cords

HDMI Device Patch Cords	
HDMI (24 AWG)	Catalogue Number
3 ft.	HDPC03BK
6 ft.	HDPC06BK
Link Cords (Connector to Device)	
HDMI (24 AWG)	Catalogue Number
XX ft.	HDLXXBK

Horizontal Cords (Connector to Connector)	
HDMI (24 AWG)	Catalogue Number
XX ft.	HDHXXBK
Coupler Cords (Coupler to Device)	
HDMI (24 AWG)	Catalogue Number
XX ft.	HDCXXBK



Note: XX = Length in feet. '10' = 10 ft., '15' = 15 ft., '20' = 20 ft., '25' = 25 ft., '30' = 30 ft., Black and Non-Plenum only.

# STRUCTURED WIRING

## Advantages and Wiring Layout


- Share single analog, cable or DSL internet connection.
- Local file access.
- Shared peripherals.
- Multiple telephone distribution.
- Call handling (PBX).
- Video distribution.
- Play games that allow multi-users.
- Control home automation systems.

### ***Connect Your Home to Internet, Voice And Video Services.***

netSELECT® is an innovative network solution that's perfect for any home or small office. Specifically positioned as the voice/data segment for the Residential brand, the netSELECT® System satisfies the need for a dependable, flexible system that can accommodate all of today's fast-changing voice, data and video requirements. This cost-effective solution incorporates all the quality you'd expect from Hubbell. Built-in flexibility makes it easy to upgrade and keep pace with evolving technologies.



### ***Today's Communications Entail A Lot More Than Just Talking. netSELECT® Keeps You Connected—Internet, Voice, Data and Entertainment***

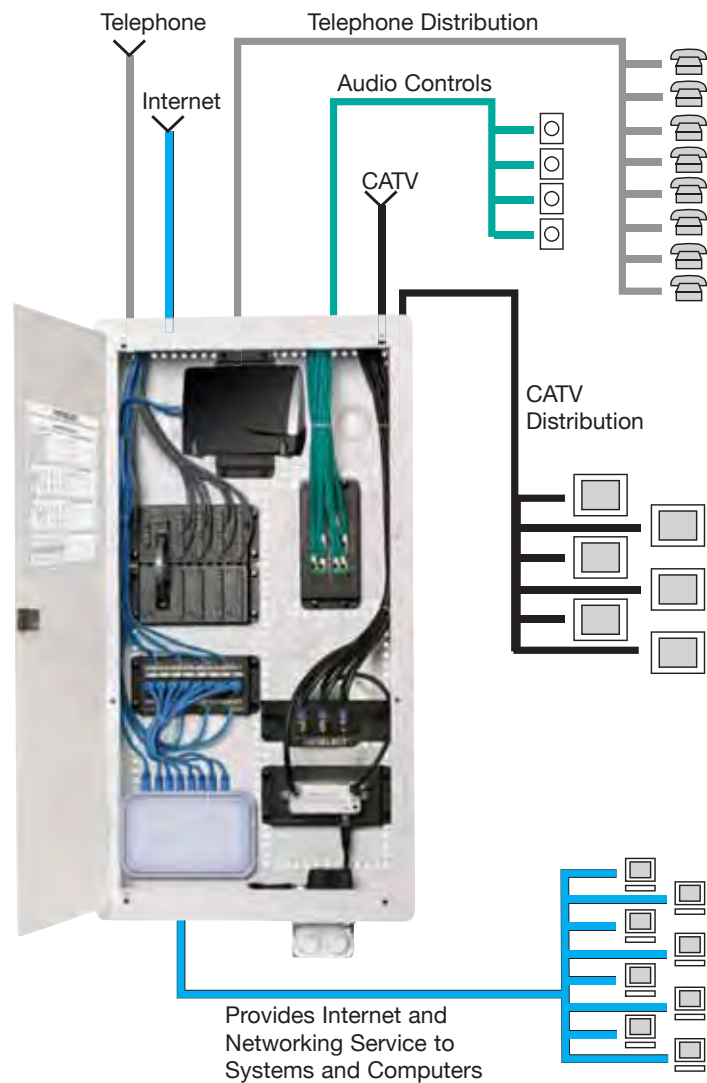



## FEATURES

- Flush or surface mount enclosure (hardware provided).
- Hinged cover can be mounted to swing from either side.
- Integral trim ring hides rough-in hole in except NSOBOX48. sheet rock providing a finished appearance.
- Horizontal and vertical module mounting holes for maximum flexibility.
- Unique 89D bracket mounting holes allow easy mounting of 66 blocks and peripherals.
- Provisions to mount optional duplex power and lock kit available.
- Integral cable management slots and tie-wraps provided to help dress cable runs.
- Additional nylon push pins provided to assist module mounting.
- Material: 20-18 gauge steel.
- Finish: white, powder coat.
- UL and cULus Listed 1863.

## Network Enclosures

Description		Number of Module Placement	Cat. Number
<b>Pre-configured Network System</b> Basic home network kit includes: One box with hinged cover NSOBOX14, One primary 8-port telephone module NSOPTM8, One four-way coaxial splitter module NSOVDM4		—	NSOBNK14
<b>10 Inch Network Enclosure for MDU and Modular Applications</b>  <b>Dimensions:</b> 14.38 in. W x 10.0 in. H x 3.96 in. D <b>Knock-outs:</b> Top: four 1½ in. N.P.T. or completely open combo; Bottom: four 1½ in. N.P.T. or completely open combo; Back: none	with Hinged Cover with Panel Cover 10"H Box only Hinged Door Panel Cover	3	NSOBOX10 NSOBOX10BC NSOBOX10B NSOBOX10D NSOBOX10C
<b>14 Inch Network Enclosure</b>  <b>Dimensions:</b> 14.38 in. W x 14 in. H x 3.96 in. D <b>Knock-outs:</b> Top: two 1 in. Dia. and three 1½ in. N.P.T. combo; Bottom: one 1 in. Dia. and one 1½ in. N.P.T. combo; Back: two ¾ in. N.P.T.	with Hinged Cover with Panel Cover 14"H Box only Hinged Door Vertical Door Panel Cover 2"D Extension Bracket with ventilation and WiFi KOs	5	NSOBOX14 NSOBOX14BC NSOBOX14B NSOBOX14D NSOBOX14DL NSOBOX14C NSOBOX14X2
<b>28 Inch Network Enclosure</b>  <b>Dimensions:</b> 14.38 in. W x 28 in. H x 3.96 in. D <b>Knock-outs:</b> Top: five 1½ in. N.P.T.; Bottom: two power kit knockouts; Back: four ¾ in. N.P.T.	with Hinged Cover with Panel Cover 28"H Box only Hinged Door Vertical Door* Panel Cover 2"D Extension Bracket with ventilation and WiFi KOs	11	NSOBOX28 NSOBOX28BC NSOBOX28B NSOBOX28D NSOBOX28DL NSOBOX28C NSOBOX28X2
<b>48 Inch Network Enclosure</b>  <b>Dimensions:</b> 14.38 in. W x 48 in. H x 3.96 in. D <b>Knock-outs:</b> Top: five 1½ in. N.P.T.; Bottom: two power kit knockouts; Back: none	with Hinged Cover	21	NSOBOX48



NSOBOX10



NSOBOX14



NSOBOX28

Note: For custom installs, REKHS is also available.  
\* Door covers rough-in, no trim ring provided.





## FEATURES

netSELECT® Modular Components enable the designer to select performance requirements specifically for the application. Modules snap horizontally or vertically into the enclosures for maximum flexibility and optimum space usage.

- Dimensions: 6.47 inch W x 2.95 inch H, except NSOMTM24 6.47 inch W x 6.00 inch H.
- Meets FCC Part 68 standard.
- Finish: black, powder coat.
- Material: 18 gauge steel or high impact plastic.
- UL and cULus Listed 1863
- All data and phone modules 568A wired.

## Network Modules



NSOTVM6



NSOPTM8



NSOETM8



NSODM8



NSOMTM24



NSO6P1DM

Description	Units	Catalogue Number
<b>Combo Module</b> Complete Home Network Combo Module 6-Port Telephone Panel and 6-Port Coaxial Splitter with Optional 6-Port Cat. 5e Panel Provides voice, video, and data distribution in a space efficient package. Perfect for use with NSOBOX10 and NS790xx plates to quickly establish a comprehensive home network.	3	
<b>6-Port Telephone and Video</b> 6-Port Telephone, Video and Category 5e 6-Port Category 5e Data Upgrade Kit		NSOTVM6 NSOTVDM6 NSODK6
<b>Primary Telephone Module, 8-Port</b> Supports 8 phone outlets with up to 4 incoming lines for voice, fax or modem applications in a protected PCB module. Pre-mounted push pins snap the module quickly into place. RJ31X interface jack included for security system connection. RJ45 jack interfaces with optional NSOETM8 Telephone Expansion module for additional extensions.	1	NSOPTM8
<b>Expansion Telephone Module, 8-Port</b> Adds an additional 8 phone outlets with up to 4 incoming lines when used with the primary telephone module. Pre-mounted push pins snap the module quickly into place. Includes RJ45 jumper cord to connect with NSOPTM8 Primary Telephone module.	1	NSOETM8
<b>Category 5e Data Module, 8-Port</b> Supports Gigabit Ethernet for up to 8 Category 5e data lines with front 110 Punch-Down terminations in a protected PCB module. Pre-mounted push pins snap the module quickly into place.	1	NSODM8
<b>Category 6 Data Module, 8-Port</b> Supports enhanced transmission speeds beyond gigabit ethernet. Future proof for tomorrows applications.		NSODM8C6
<b>Multiport Patchable Telecom Module</b> Terminates lines via modular plug to accommodate flexibility, by changing plug locations. Reconfigure where phone lines go at the panel level. Allows data lines to be converted to voice, with the move of a patch cord. Includes nine RJ45 jumper cords.	2	NSOMTM24
<b>Combination Module</b> 6-Port Telephone and 1-Port Data Provides basic telephone and data delivery in a small package. Allows data lines to be converted to voice, with the move of a patch cord.	1	NSO6P1DM



## FEATURES

netSELECT® Video Modules support bidirectional signal by splitting to 4, 6, or 8 separate work areas. Pre-mounted push pins snap the module quickly into place.

- Dimensions for VAMP, AM8 and BM: 6.47 in. W x 2.95 in. H.
- Dimensions for video splitters: 6.47 in. W x 2.09 in. H x 3.20 in. D.
- Finish: black, powder coat.
- UL and cULus Listed 1863.

## Audio/Video Modules

Description	Units	Catalogue Number
4-Way Coaxial Splitter Modules, One Incoming Line, Four Outgoing 1 Ghz, Basic Unit 2.3 Ghz, Enhanced Capability	1	<b>NSOVM4</b> <b>NSOVM42G</b>
6-Way Coaxial Splitter Modules, One Incoming Line, Six Outgoing 1 Ghz, Basic Unit 2.3 Ghz, Enhanced Capability	1	<b>NSOVM6</b> <b>NSOVM62G</b>
8-Way Coaxial Splitter Modules, One Incoming Line, Eight Outgoing 1 Ghz, Basic Unit 2.3 Ghz, Enhanced Capability	1	<b>NSOVM8</b> <b>NSOVM82G</b>
Fixed Video Amplifier Module, 10dB 120 volt rated. 240 volt rated.  Provides video signal amplification for incoming cable feeds recommended for use when more than four outputs are installed or when signal level is low. Provides 10dB forward path gain and supports current digital cable systems and modems with a passive return. Pre-mounted push pins snap the module quickly into place. Includes RG-59 cable jumper to connect amplifier to passive video splitter.	1	<b>NSOVAMP</b> <b>NSOVAMP240</b>
8 Room Audio Module Distributes audio from an amplifier to matching volume controllers. Supports up to eight rooms of audio. Power handling - 200W RMS@20° C. Requires impedance matching volume controls.	1	<b>NSOAM8</b>
Blank Module Plate Allows mounting of active components (i.e. switches, routers) or other devices (66 blocks, audio components) onto a modular platform. Can be custom drilled or used with two self-adhesive VELCRO® strips included to mount components onto module. Pre-mounted push pins snap the module quickly into place.	1	<b>NSOBM</b>



NSOVM4



NSOVM6



NSOVM8



NSOVAMP



NSOAM8



NSOBM



# UNIVERSAL CONSOLIDATION BLOCKS, PATCH PANELS AND PATCH CORDS




## FEATURES

netSELECT® Patch Panels are excellent for designing rack systems for telephone, data and AV systems. Consolidation Blocks are ideal for small user count configurations that mount in or on the wall.

- Meets ANSI/TIA - Category 6 and Category 5e standards.
- cULus Listed.

## Universal Consolidation Blocks and Patch Panels

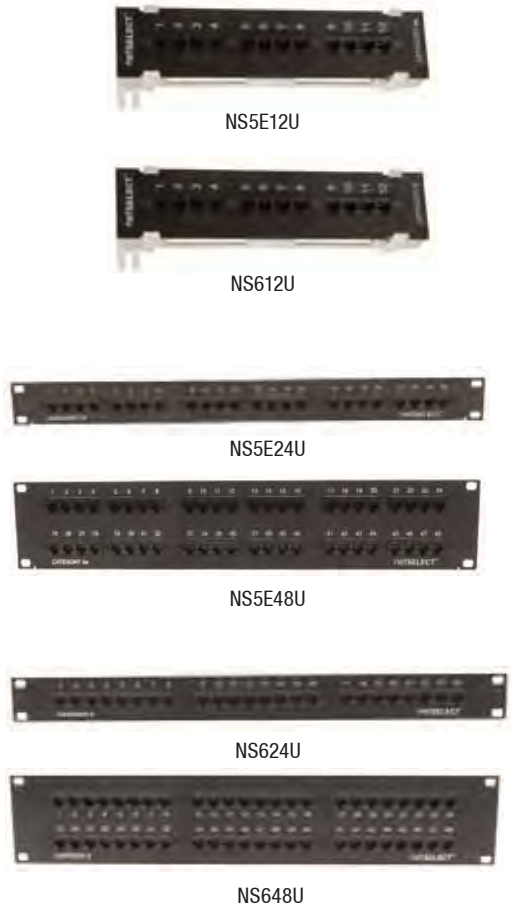



Description	Catalogue Number
Category 5e 12-Port Universal Consolidation Block, 89D Bracket Mount	NS5E12U
Category 6 12-Port Universal Consolidation Block, 89D Bracket Mount	NS612U
Category 5e Universal Patch Panel 24-port, 1.75 inch H, 1 Rack Unit 48-port, 3.50 inch H, 2 Rack Units	NS5E24U NS5E48U
Category 6 Universal Patch Panel 24-port, 1.75 inch H, 1 Rack Unit 48-port, 3.50 inch H, 2 Rack Units	NS624U NS648U

netSELECT® Patch Cords allow for quick change of voice/data lines with insertion of modular plugs.

- Meets and exceeds ANSI/TIA - Category 6 and Category 5e standards.
- UL and cUL Listed.

## Universal Patch Cords, Category 6 and Category 5e

Description	Colour	1-Foot	3-Foot	5-Foot	7-Foot	10-Foot	15-Foot	20-Foot	25-Foot
Cat. 5e Patch Cord 	Blue	HC5EB01	HC5EB03	HC5EB05	HC5EB07	HC5EB10	HC5EB15	HC5EB20	HC5EB25
	Gray	HC5EGY01	HC5EGY03	HC5EGY05	HC5EGY07	HC5EGY10	HC5EGY15	HC5EGY20	HC5EGY25
	Yellow	HC5EY01	HC5EY03	HC5EY05	HC5EY07	HC5EY10	HC5EY15	HC5EY20	HC5EY25
	Red	HC5ER01	HC5ER03	HC5ER05	HC5ER07	HC5ER10	HC5ER15	HC5ER20	HC5ER25
Cat. 6 Patch Cord 	Blue	HC6B01	HC6B03	HC6B05	HC6B07	HC6B10	HC6B15	HC6B20	HC6B25
	Gray	HC6GY01	HC6GY03	HC6GY05	HC6GY07	HC6GY10	HC6GY15	HC6GY20	HC6GY25
	Yellow	HC6Y01	HC6Y03	HC6Y05	HC6Y07	HC6Y10	HC6Y15	HC6Y20	HC6Y25
	Red	HC6R01	HC6R03	HC6R05	HC6R07	HC6R10	HC6R15	HC6R20	HC6R25



## FEATURES

netSELECT® Accessories enhance system capabilities. Volume controls expand home audio applications. Cabinet mounted receptacle kits provide convenience power to the enclosure.

- Audio controls available in slide or rotary.
- Receptacles available in surge and standard kits.

## Accessories

Description	Colour	Catalogue Number
Slide Audio Volume Controller, Decorator Styling, Power handling - 70W RMS@20° C. Impedance matching for up to 8 pairs of speakers. Includes both ivory and white slides and frames.	Ivory/White	NSOSAVC
Rotary Audio Volume Controller Power handling - 70W RMS@20° C. Impedance matching for up to 8 pairs of speakers. Includes both ivory and white knobs and frames.	Ivory/White	NSORAVC
Standard Power Kit, Includes duplex receptacle 15A 125V NEMA 5-15R, electrical steel box and wallplate.		NSOKP
Surge Suppression Power Kit, Includes surge receptacle 15A 125V NEMA 5-15R, 240 Joules/15,000A protection per mode, electrical steel box and wallplate.		NSOKPS
Chromed Steel Lock Kit, Includes two keys. Eliminates unwanted tampering.		FLOCK1
Panel Bracket Adapter, For use with Adapter Panels shown below, and FSP series modules in section P, page 16. Snap mounts into structured cabling enclosures.		NSOFSB
F-Connector Adapter Panel, with Six Populated Coaxial Connectors.		FSPFP6X
Keystone Adapter Panel, with Six Blank Openings for jacks and snap fits.		FSPHD6X
Antenna Kit.		NSOKA



NSOSAVC



NSORAVC



NSOKPS



FLOCK1



NSOFSB



FSPFP6X




FSPHD6X



NSOKA

# MODULAR SNAP FIT JACKS

Customize the jack selections and look.

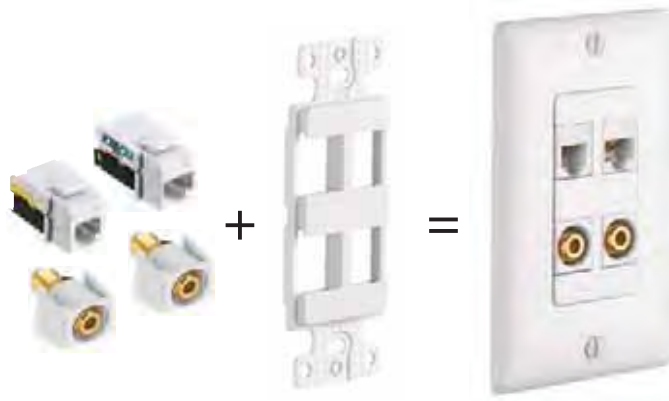

## Molded-In Voice/Low-Speed Data

Description	Modular Snap Fit Cat. 6 Jack	Modular Snap Fit Cat. 5e Jack	Modular Snap Fit USOC Jack	Blank Insert
<b>Colour</b>				
Almond	NSJ6AL	NSJ5EAL	NSJUAL	Almond SFSBAL10*
Black	NSJ6BK	NSJ5EBK	NSJUBK	Black SFSBBK10*
Blue	NSJ6B	NSJ5EB	NSJUB	Gray SFSFBGY10*
Gray	NSJ6GY	NSJ5EGY	NSJUGY	Ivory SFSBEI10*
Green	NSJ6GN	NSJ5EGN	NSJUGN	Light Almond SFSBLA10*
Ivory	NSJ6I	NSJ5EI	NSJUI	White SFSBW10*
Light Almond	NSJ6LA	NSJ5ELA	NSJULA	
Orange	NSJ6OR	NSJ5EOR	NSJUOR	
Red	NSJ6R	NSJ5ER	NSJUR	
White	NSJ6W	NSJ5EW	NSJUW	
Yellow	NSJ6Y	NSJ5EY	NSJUY	

Note: \*Sold in a package of 10. Order 1 to receive a bag of 10 blanks.

## Audio/Video Connectors - Standard Bulkhead

Description	Gold F-Type Coupler Bulkhead, Female to Female	Nickel F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass Through, Female to Female, Red Interior	RCA Gold Pass Through, Female to Female, White Interior	RCA Gold Pass Through, Female to Female, Yellow Interior	RCA Gold Pass Through, Female to Female, Blue Interior	RCA Gold Pass Through, Female to Female, Green Interior
<b>Colour</b>							
Almond	SFFGAL	NSF70AL	SFRCRFFAL	SFRCWFFAL	SFRCYFFAL	SFRCBFFAL	SFRCGNFFAL
Black	SFFGBK	NSF70BK	SFRCRFFBK	SFRCWFFBK	SFRCYFFBK	SFRCBFFBK	SFRCGNFFBK
Gray	SFFGGY	NSF70GY	SFRCRFFGY	SFRCWFFGY	SFRCYFFGY	SFRCBFFGY	SFRCGNFFGY
Ivory	SFFGEI	NSF70I	SFRCRFFEI	SFRCWFFEI	SFRCYFFEI	SFRCBFFEI	SFRCGNFFEI
Light Almond	SFFGLA	NSF70LA	SFRCRFFLA	SFRCWFFLA	SFRCYFFLA	SFRCBFFLA	SFRCGNFFLA
White	SFFGW	NSF70W	SFRCRFFW	SFRCWFFW	SFRCYFFW	SFRCBFFW	SFRCGNFFW

## Audio/Video Connectors - Recessed

Description	Gold F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass Through, Female to Female, Red Interior	RCA Gold Pass Through, Female to Female, White Interior	RCA Gold Pass Through, Female to Female, Yellow Interior	RCA Gold Pass Through, Female to Female, Blue Interior	RCA Gold Pass Through, Female to Female, Green Interior
<b>Colour</b>						
Almond	SFGRFAL	SFRCRRAL	SFRCWRAL	SFRCYRAL	SFRCBRAL	SFRCGNRAL
Black	SFGRFBK	SFRCRRBK	SFRCWRBK	SFRCYRBK	SFRCBRBK	SFRCGNRBK
Gray	SFGRFGY	SFRCRRGY	SFRCWRGY	SFRCYRGY	SFRCBRGY	SFRCGNRGY
Ivory	SFGRFEI	SFRCRRREI	SFRCWRREI	SFRCYREI	SFRCBREI	SFRCGNREI
Light Almond	SFGRFLA	SFRCRRLA	SFRCWRLA	SFRCYRLA	SFRCBRLA	SFRCGNRLA
White	SFGRFW	SFRCRRW	SFRCWRW	SFRCYRW	SFRCBRW	SFRCGNRW



## FEATURES

Decorator frames provide a stylized look for that finishing touch. This allows all devices to match. Multimedia jacks insert into frame for custom configuration.

- Elongated strap for better wall box mounting.
- High impact-resistant thermoplastic frame.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

## Decorator Frames



Colour	1-gang, 2-Port	1-gang, 3-Port	1-gang, 4-Port	1-gang, 6-Port	1-gang, Adapter .406" (10.30) Dia. Hole*	1-gang, Adapter Blank**
Almond	NS612AL	NS613AL	NS614AL	NS616AL	NS621AL	NS620AL
Black	NS612BK	NS613BK	NS614BK	NS616BK	—	—
Gray	NS612GY	NS613GY	NS614GY	NS616GY	—	—
Ivory	NS612I	NS613I	NS614I	NS616I	NS621I	NS620I
Light Almond	NS612LA	NS613LA	NS614LA	NS616LA	NS621LA	NS620LA
White	NS612W	NS613W	NS614W	NS616W	NS621W	NS620W

Note: \* For use with rotary dimmers or to pull through AV or telephone cable.  
 \*\* To fill an extra decorator opening or to create customized openings.

## Multimedia Face Plates

Description	1-gang, 1-Port Plate		1-gang, 2-Port Plate		1-gang, 3-Port Plate	
	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")
Almond	NSP11AL	NSP101AL	NSP12AL	NSP102AL	NSP13AL	NSP103AL
Black	NSP11BK	NSP101BK	NSP12BK	NSP102BK	NSP13BK	NSP103BK
Gray	NSP11GY	NSP101GY	NSP12GY	NSP102GY	NSP13GY	NSP103GY
Ivory	NSP11I	NSP101I	NSP12I	NSP102I	NSP13I	NSP103I
Light Almond	NSP11LA	NSP101LA	NSP12LA	NSP102LA	NSP13LA	NSP103LA
White	NSP11W	NSP101W	NSP12W	NSP102W	NSP13W	NSP103W

Description	1-gang, 4-Port Plate		1-gang, 6-Port Plate		2-gang, 4-Port Plate		2-gang, 6-Port Plate	
	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 4.69")	Standard (4.63" x 4.69")	Standard (4.63" x 4.69")	Standard (4.63" x 4.69")
Almond	NSP14AL	NSP104AL	NSP16AL	NSP106AL	NSP24AL	NSP26AL	NSP24AL	NSP26AL
Black	NSP14BK	NSP104BK	NSP16BK	NSP106BK	NSP24BK	NSP26BK	NSP24BK	NSP26BK
Gray	NSP14GY	NSP104GY	NSP16GY	NSP106GY	NSP24GY	NSP26GY	NSP24GY	NSP26GY
Ivory	NSP14I	NSP104I	NSP16I	NSP106I	NSP24I	NSP26I	NSP24I	NSP26I
Light Almond	NSP14LA	NSP104LA	NSP16LA	NSP106LA	NSP24LA	NSP26LA	NSP24LA	NSP26LA
White	NSP14W	NSP104W	NSP16W	NSP106W	NSP24W	NSP26W	NSP24W	NSP26W







## FEATURES

Designed to complement decorator styling, these jacks offer voice and Cat. 5e devices to fit within a decorator wallplate.

- High impact-resistant thermoplastic frame.
- Meets FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

### Molded-In Voice/Low-Speed Data

Description	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor	Decorator Frame, One RJ11 Jack, 6-Position, 6-Conductor	Decorator Frame, Duplex RJ11 Jacks, 6-Position, 6-Conductor	Decorator Frame, One Cat. 5e 110 Punch-Down, One RJ11 Jack, 6-Position, 4-Conductor
Termination	Screw Terminations	Screw Terminations	Screw Terminations	Screw Terminations
				
Colour				
Almond	NS770AL	NS771AL	NS772AL	NS784AL
Black	NS770BK	—	—	NS784BK
Brown	NS770	NS771	—	NS784
Gray	NS770GY	—	—	NS784GY
Ivory	NS770I	NS771I	NS772I	NS784I
Light Almond	NS770LA	NS771LA	NS772LA	NS784LA
White	NS770W	NS771W	NS772W	NS784W

## FEATURES

Coaxial video and combination jacks complement multimedia needs in a 1-gang decorator opening.

- High impact-resistant thermoplastic frame.
- Jacks meet FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

### Molded-In Voice/Low-Speed Data

Description	Decorator Frame, Single F-Type Coupler Bulkhead, Female to Female	Decorator Frame, Duplex F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor, One F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One Cat. 5e 110 Punch-Down, One F-Type Coupler Bulkhead, Female to Female
Termination	Screw Terminations	Screw Terminations	Screw Terminations	Screw Terminations
				
Colour				
Almond	NS780AL	NS782AL	NS783AL	NS785AL
Black	—	—	—	NS785BK
Brown	—	—	—	NS785
Gray	—	—	—	NS785GY
Ivory	NS780I	NS782I	NS783I	NS785I
Light Almond	NS780LA	NS782LA	NS783LA	NS785LA
White	NS780W	NS782W	NS783W	NS785W

## FEATURES

Designed for voice, these devices provide an economical alternative to wall phone outlet placement.

- High impact-resistant thermoplastic plate.
- Convenient screw down terminals.
- Meets FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

### Molded-In Plates for Voice

Description	1-Gang Plate, One Rj11 Jack, 6-Position, 4-Conductor, Screw Terminations		1-Gang Plate, One Rj11 Jack, 6-Position, 6-Conductor, Screw Terminations		1-Gang Plate, Duplex Rj11 Jacks, 6-Position, 4-Conductor, Screw Terminations		1-Gang Plate, Duplex Rj11 Jacks, 6-Position, 6-Conductor, Screw Terminations
	Standard	Mid-Size	Standard	Mid-Size	Standard	Mid-Size	Standard
Almond	NS730AL	NS735AL	NS732AL	NS742AL	—	—	NS744AL
Brown	NS730	NS735	NS732	—	—	—	—
Ivory	NS730I	NS735I	NS732I	NS742I	NS745I	—	NS744I
Light Almond	NS730LA	NS735LA	NS732LA	NS742LA	—	—	—
White	NS730W	NS735W	NS732W	NS742W	NS745W	—	NS744W

### Molded-In Plates for Voice and CATV/Satellite

Description	1-gang Plate, One F-Type Coupler Bulkhead, Female to Female, One RJ11 Jack, 6-Position, 6-Conductor		1-gang Plate, One F-Type Coupler Bulkhead, Female to Female, One RJ11 Jack, 6-Position, 4-Conductor		1-gang Plate, One F-Type Coupler Bulkhead, Female to Female		1-gang Plate, Duplex F-Type Coupler Bulkhead, Female to Female
	Standard	Mid-Size	Standard	Mid-Size	Standard	Mid-Size	Standard
Almond	NS748AL	NS755AL	NS747AL	NS750AL	NS751AL	—	NS752AL
Ivory	NS748I	NS755I	NS747I	NS750I	NS751I	—	NS752I
Light Almond	NS748LA	NS755LA	NS747LA	NS750LA	NS751LA	—	NS752LA
White	NS748W	NS755W	NS747W	NS750W	NS751W	—	NS752W

Description	1-gang Plate, One Cat. 5e 110 Punch-Down One RJ11 Jack, 6-Position, 4-Conductor One F-Type Coupler Bulkhead, Female to Female	
Colour	Standard	Mid-Size
Almond	NS790AL	—
Black	NS790BK	—
Brown	NS790	—
Gray	NS790GY	—
Ivory	NS790I	—
Light Almond	NS790LA	—
White	NS790W	—

Colour	Standard
Almond	NS790AL
Black	NS790BK
Brown	NS790
Gray	NS790GY
Ivory	NS790I
Light Almond	NS790LA
White	NS790W

# TELEPHONE WALL JACKS

## FEATURES

Designed for voice applications, these jacks provide an economical alternative to basic wall mount and performance needs.

- Available in high impact-resistant thermoplastic or stainless steel.
- Meets FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

### Telephone Wall Jacks

Description	Wall Phone Jack Quick Connect, 6-Position, 4-Conductor, Punch-Down Termination Tool Included	Wall Phone Jack, 6-Position, 4-Conductor, Screw Terminations	Wall Phone Jack, 6-Position, 6-Conductor, Screw Terminations
			
<b>Colour</b>			
Almond	NS721AL	NS722AL	NS725AL
Ivory	NS721I	NS722I	NS725I
Light Almond	—	—	NS725LA
White	NS721W	NS722W	NS725W






Description	Wall Phone Jack Quick Connect, 6-Position, 4-Conductor, Punch-Down Termination Tool Included	Wall Phone Jack, 6-Position, 4-Conductor, Screw Terminations
		
Stainless Steel	NS723SS	NS726SS

## FEATURES

Telephone surface mount jacks are available in 4- or 6-conductor configurations for voice. Alternatively, multimedia surface mount boxes can be custom loaded for computer and media use.

- High impact-resistant thermoplastic.
- Mounts using screws or double sided tape (both included).
- Meets FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

### Telephone Wall Jacks

Description	Telephone Surface Mount Jack, 6-Position, 4-Conductor, Screw Terminations	Telephone Surface Mount Jack, 6-Position, 6-Conductor, Screw Terminations	Multimedia 1-Port Surface Mount Box, Jack Not Included	Multimedia 2-Port Surface Mount Box, Jacks Not Included
				
Ivory	NS760I	NS761I	ISM1EI*	ISM2EI*
White	NS760W	NS761W	ISM1W*	ISM2W*

Note: \* cULus Listed 1863 - Communication Circuit Accessory. Use multimedia jacks and AV connectors.

# 347V SWITCHES

## PRODUCT FEATURES

- Silver cadmium oxide contacts
- Tri-drive mounting and termination screws
- One piece rivetless spring arm and terminal plate
- User ready termination with screws backed out
- Back and side wired
- Accepts #14 to #10 AWG

StyleLine® Switches - Specification Grade			
15A, 347V	Single Pole	3 Way	4 Way
White	HBL2101347W	HBL2103347W	-
Ivory	HBL2101347I	HBL2103347I	-
20A, 347V	Single Pole	3 Way	4 Way
White	HBL2121347W	HBL2123347W	HBL2124347W
Ivory	HBL2121347I	HBL2123347I	-
Black*	HBL2121347BK	HBL2123347BK	-
Red*	HBL2121347RD	HBL2123347RD	-

\* Minimum order quantities may apply.



Toggle Switches - Industrial Grade			
15A, 347V	Single Pole	3 Way	4 Way
Brown	HBL18201CN	HBL18203CN	-
Ivory	HBL2011CN	HBL18203ICN	HBL18204ICN
Locking	HBL18201LCN	HBL18203LCN	-
Key for locking switch	HBL1209*		
20A, 347V	Single Pole	3 Way	4 Way
Brown	HBL18221CN	HBL18223CN	-
Ivory	HBL18221ICN	HBL18223ICN	-



# HMOSS™ 347V WALL SWITCHES

## PRODUCT FEATURES

- Dual 120/277V AC operation 50/60 Hz
- Auto or manual "On" operating modes
- No minimum load requirements
- Hard lens (dual technology, passive infrared)
- Zero arc point switching
- Built in photocell with manual super saver mode for daylight harvesting
- Two relays for two level switching or dual load control (AD, AP AU1277x2, 2N series)
- C-UL US Listed

Adaptive Technology, Dual (Ultrasonic and Passive Infrared) 1000 sq. ft. coverage with photocell, 3470W Fluorescent at 347V AC			
Circuit	Button	Colour	347V
Single	1 Button for manual/auto control	Ivory	AD347I1
		White	AD347W1
Single	Auto control with no button	Ivory	AD347I1N
		White	AD347W1N
Dual	2 Buttons for manual/auto control	Ivory	AD347I2
		White	AD347W2
Dual	Auto control with no button	Ivory	AD347I2N
		White	AD347W2N

Sensors are available in three special order colours. To order special order colours, replace "I" or "W" with the following: LA (Light Almond), GY (Gray) or BK (Black). Note: Ultrasonic output is 40kHz.




AD347W1

AD347W1N  
AD347W2N

AD347W2

Adaptive Technology, Ultrasonic 400 sq. ft. coverage with photocell, 3470W Fluorescent at 347V AC			
Circuit	Button	Colour	347V
Single	1 Button for manual/auto control	Ivory	AU347I1
		White	AU347W1
Single	Auto control with no button	Ivory	AU347I1N
		White	AU347W1N
Dual	2 Buttons for manual/auto control	Ivory	AU347I2
		White	AU347W2
Dual	Auto control with no button	Ivory	AU347I2N
		White	AU347W2N


Sensors are available in three special order colours. To order special order colours, replace "I" or "W" with the following: LA (Light Almond), GY (Gray) or BK (Black). Note: Ultrasonic output is 40kHz.



AU347W1



AU347W1N



AU347W2N



AU347W2

Adaptive Technology, Passive Infrared 1000 sq. ft. coverage with photocell, 3470W Fluorescent at 347V AC			
Circuit	Button	Colour	347V
Single	1 Button for manual/auto control	Ivory	AP347I1
		White	AP347W1
Single	Auto control with no button	Ivory	AP347I1N
		White	AP347W1N
Dual	2 Buttons for manual/auto control	Ivory	AP347I2
		White	AP347W2
Dual	Auto control with no button	Ivory	AP347I2N
		White	AP347W2N

Sensors are available in three special order colours. To order special order colours, replace "I" or "W" with the following: LA (Light Almond), GY (Gray) or BK (Black).



AP347W1

AP347W1N  
AP347W2N


AP347W2

~ For additional sensors, please refer to our full-line Wiring Device-Kellems Catalogue ~


# 347V WALLPLATES



1-Gang



2-Gang



3-Gang

## Nylon 347V Wallplates

Nylon - Style Line®			
Colour	1 Gang	2 Gang	3 Gang
White	HPS1347W	HPS2347W	HPS3347W
Ivory	HPS1347I	HPS2347I	HPS3347I
Red*	HPS1347R	-	-
Black*	HPS1347BK	-	-

\* Minimum order quantities may apply.



97071HV



97074HV



97077HV



97151HV




97154HV



97401KSHV



97402KSHV



97404KSHV

## Stainless Steel Grade 403, 347V Wallplates

347V Wall Plates		
Description	For Use With 1204 Boxes	For Use With 347V MBD OR MBS
1-gang, Toggle Switch 347V	97071HV	97071HV
2-gang, Toggle Switch 347V	97072HV	97072HVR
3-gang, Toggle Switch 347V	97073HV	97073HVR
4-gang, Toggle Switch 347V	97074HV	97074HVR
5-gang, Toggle Switch 347V	97075HV	97075HVR
6-gang, Toggle Switch 347V	97076HV	97076HVR
7-gang, Toggle Switch 347V	97077HV	97077HVR
1-gang, blank 347V box mount 3.531"	97151HV	97151HV
2-gang, blank 347V box mount 3.531"	97152HV	97152HVR
3-gang, blank 347V box mount 3.531"	97153HV	97153HVR
4-gang, blank 347V box mount 3.531"	97154HV	97154HVR
1-gang, toggle switch 347V king-size plate	97071KSHV	97071KSHV
1-gang, Decora 347V king-size plate	97401KSHV	97401KSHV
2-gang, Decora 347V box mount 3.531" king-size plate	97402KSHV	97402KSHVR
3-gang, Decora 347V box mount 3.531" king-size plate	97403KSHV	97403KSHVR
4-gang, Decora 347V box mount 3.531" king-size plate	97404KSHV	97404KSHVR

~ For additional 347V stainless steel wallplates, see Section C ~



**G4**

**347V SWITCHES**



# SINGLE-GANG BOXES



## APPLICATIONS

For use in branch circuit wiring in wet, damp, or dry locations. May be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's.

## PRODUCT FEATURES

- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Two closure plugs included
- Ground screw installed
- Multi-lingual instructions in each package
- Internal threads on hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit
- die cast aluminum construction

## COMPLIANCES

-  – Standard 514A
-  – C22.2 No. 18
- NEMA 3R Rated



5320-0 to  
5320-2,  
5324-0

5321-0 to  
5321-2,  
5330-0

5322-0,  
5331-0


5323-0,  
5332-0

5385-0 to  
5387-0

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>2" Deep, With Lugs – Three Threaded Outlets – 4-1/2" x 2-3/4"</b>					
5320-0	18.3	Gray	3-1/2"	Shrink	20
5320-1	18.3	White	3-1/2"	Shrink	20
5320-2	18.3	Bronze	3-1/2"	Shrink	20
5324-0	18.3	Gray	3-3/4"	Shrink	20

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>2" Deep, With Lugs – Four Threaded Outlets – 4-1/2" x 2-3/4"</b>					
5321-0	18.3	Gray	4-1/2"	Shrink	20
5321-1	18.3	White	4-1/2"	Shrink	20
5321-2	18.3	Bronze	4-1/2"	Shrink	20
5330-0	18.3	Gray	4-3/4"	Shrink	20

## SINGLE-GANG BOXES: GENERAL DIMENSIONS

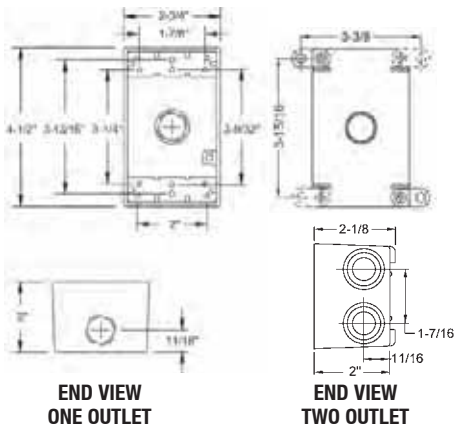

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>2" Deep, With Lugs – Five Threaded Outlets – 4-1/2" x 2-3/4"</b>					
5322-0	18.3	Gray	5-1/2"	Shrink	20
5331-0	18.3	Gray	5-3/4"	Shrink	20
5323-0	18.3	Gray	5-1/2"	Shrink	20
5332-0	18.3	Gray	5-3/4"	Shrink	20

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>2-5/8" Deep, With Lugs – Three Threaded Outlets – 4-1/2" x 2-3/4"</b>					
5385-0	22.5	Gray	3-1/2"	Shrink	15
5386-0	22.5	Gray	3-3/4"	Shrink	15
5387-0	22.5	Gray	3-1"	Shrink	15

# SINGLE-GANG EXTENSIONS AND ADAPTERS

## APPLICATIONS



Used to provide additional capacity needed for NEC box fill requirements.

Adapters allow installer to add "take-offs" to new boxes/devices.

## PRODUCT FEATURES


- Installation hardware, gasket, and ground screw provided
- Closure plugs provided for two and six outlet styles
- Internal threads and hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit
- die cast aluminum construction

## COMPLIANCES


-  - Standard 514A
-  - C22.2 No. 18
- NEMA 3R Rated

## EXTENSIONS


CAT. NO. 5406-0

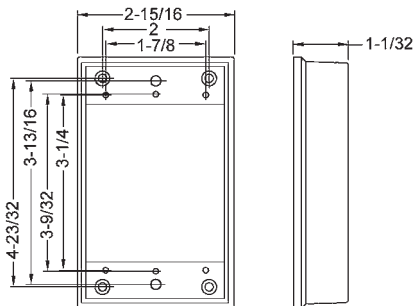

CAT. NO's. 5399-0, 5403-0

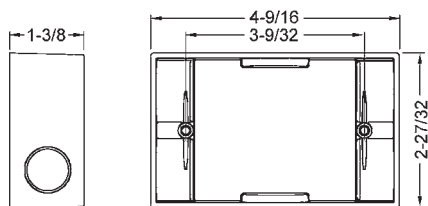

5400-0 SERIES

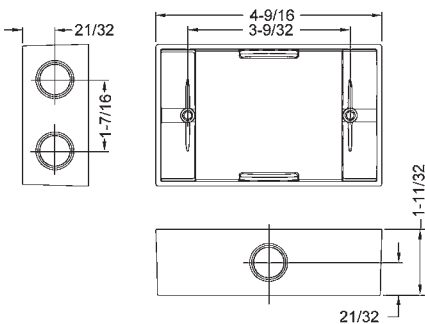

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>Single-Gang Extension – 4-1/2" x 2-3/4" x 1" Deep</b>					
5406-0	9.5	Gray	—	Shrink	25

o g o d c o i d d

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>Single-Gang – Extension Adapters – 5-1/4" x 3-1/2" x 1-1/2" Deep – Two Threaded Outlets</b>					
5399-0	9.5	Gray	2-1/2"	Shrink	20
5403-0	11.0	Gray	2-3/4"	Shrink	20

c d o c o g

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>Single-Gang – Extension Adapters – 5-1/4" x 3-1/2" x 1-1/2" Deep – Six Threaded Outlets</b>					
5400-0	9.5	Gray	6-1/2"	Shrink	20
5400-5	9.5	Gray	6-1/2"	Carded	6
5405-0	11.0	Gray	6-3/4"	Shrink	20

c d t c o g

# SINGLE-GANG EXTENSION ADAPTERS

H3

WEATHERPROOF BOXES,  
COVERS & LIGHTING

## APPLICATIONS



Used to provide additional capacity needed for NEC box fill requirements.

Allows installer to add "take-offs" to new boxes/devices.

## PRODUCT FEATURES

- Unique swing-arm design speeds installation by allowing the installer better visibility when lining up and threading fasteners
- Rugged die cast construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Installation hardware, ground screw and gasket provided
- Multi-lingual instructions in each package
- Internal threads and hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit
- die cast aluminum construction

## COMPLIANCES

-  - Standard 514A
-  - C22.2 No. 18
- NEMA 3R Rated



5412-0, 5413-0



5414-0, 5415-0

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>Swing-Arm - Extension Adapters - 5-1/4" x 3-1/2" x 1-1/2" Deep - Two Threaded Outlets</b>					
5412-0	13.8	Gray	2-1/2"	Shrink	10
5413-0	13.8	Gray	2-3/4"	Shrink	10



c d o c o g

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>Swing-Arm - Extension Adapters - 5-1/4" x 3-1/2" x 1-1/2" Deep - Six Threaded Outlets</b>					
5414-0	12.8	Gray	6-1/2"	Shrink	10
5415-0	12.8	Gray	6-3/4"	Shrink	10

c d t c o g

## SWING ARM EXTENSION ADAPTERS

CAT. NOS. 5412-0 TO 5415-0



# TWO-GANG BOXES

### APPLICATIONS



For use in branch circuit wiring in wet, damp, or dry locations.

Can be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's.


### PRODUCT FEATURES

- Seamless die cast aluminum construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Two closure plugs included
- Ground screws installed
- Multi-lingual instructions in each package
- Internal threads on hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit

### COMPLIANCES

-  - Standard 514A
-  - C22.2 No. 18
- NEMA 3R Rated

### TWO-GANG BOXES GENERAL DIMENSIONS

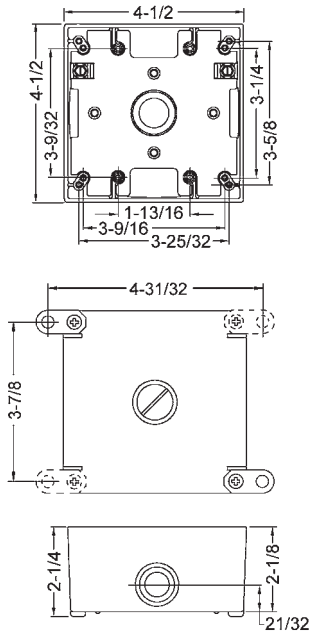


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>2" Deep, With Lugs – Three Threaded Outlets – 4-1/2" x 4-1/2"</b>					
5333-0			/ "	i	
5341-0			/4"	i	

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>2" Deep, With Lugs – Four Threaded Outlets – 4-1/2" x 4-1/2"</b>					
5335-0			4 / "	i	
5343-0			4 /4"	i	

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>2" Deep, With Lugs - Five Threaded Outlets - 4-1/2" x 4-1/2"</b>					
5337-0	31.0	Gray	5-1/2"	Shrink	12
5337-1	31.0	White	5-1/2"	Shrink	12
5345-0	31.0	Gray	5-3/4"	Shrink	12
5334-0	32.0	Gray	5-1/2"	Shrink	12
5342-0	32.0	Gray	5-3/4"	Shrink	12

END VIEW FOR STYLES WITH TWO OUTLETS ON ONE END



# TWO-GANG BOXES

## APPLICATIONS

For use in branch circuit wiring in wet, damp, or dry locations.

Can be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's.



5340-0, 5348-0



5338-0, 5346-0



5388-0, 5389-0

## PRODUCT FEATURES

- Seamless die cast aluminum construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with de-tachable plugs provided
- Two closure plugs included
- Ground screws installed
- Multi-lingual instructions in each package
- Internal threads and hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>2" Deep, With Lugs – Seven Threaded Outlets – 4-1/2" x 4-1/2"</b>					
5340-0			/ "	i	
5348-0			/4"	i	
5338-0			/ "	i	
5346-0			/4"	i	

c d t o c o g

## COMPLIANCES


- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>2-5/8" Deep, With Lugs – Five Threaded Outlets – 4-1/2" x 4-1/2"</b>					
5388-0			/4"	i	
5389-0			"	i	


c d t o c o g

### TWO-GANG BOXES WITH 7 OUTLETS

CAT. NOS. 5340-0, 5348-0

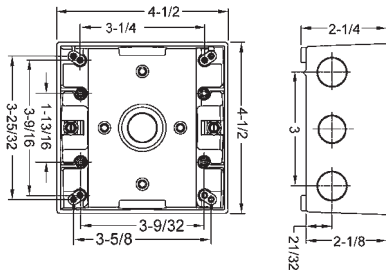


### CAT. NOS. 5338-0, 5346-0

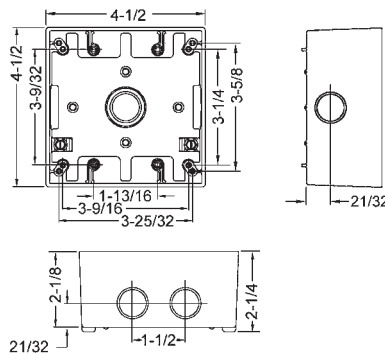

### TWO-GANG BOXES WITH 5 OUTLETS

CAT. NOS. 5388-0, 5389-0

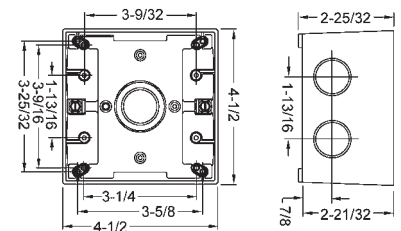

# MULTI-GANG BOXES AND EXTENSIONS



## TWO-GANG EXTENSION APPLICATION

Used to provide additional capacity needed for NEC box fill requirements.

## TWO-GANG EXTENSION PRODUCT FEATURES

- Seamless die cast aluminum construction
- State-of-the-art powder coat finish
- Installation hardware and gasket provided
- Multi-lingual instructions in each package

## TWO-GANG EXTENSION COMPLIANCES

-  – Standard 514A
-  – C22.2 No. 18
- NEMA 3R Rated

## THREE-GANG BOX APPLICATIONS



For use in branch circuit wiring in wet, damp, or dry locations.

Can be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's.

## THREE-GANG BOX PRODUCT FEATURES

- Seamless die cast aluminum construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Four closure plugs included
- Ground screws installed
- Multi-lingual instructions in each package
- Internal threads and hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit

## THREE-GANG BOX COMPLIANCES

-  – Standard 514A
-  – C22.2 No. 18
- NEMA 3R Rated



5407-0




5390-0

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>Two-Gang Extension – 4-21/32" x 4-21/32" x 1-1/32" Deep</b>					
5407-0	16.0	Gray	–	Shrink	10


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>Three-Gang Box – 2-5/8" Deep, With Lugs – Seven Threaded Outlets – 4-1/2" X 6-3/8"</b>					
5390-0	55.0	Gray	7-3/4"	Boxed	1

c d o c o g

TWO-GANG EXTENSION

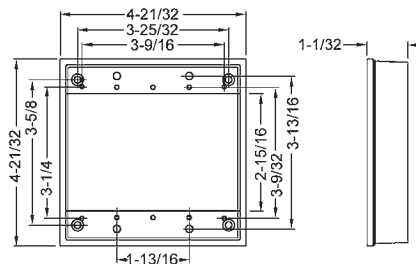

THREE-GANG BOX

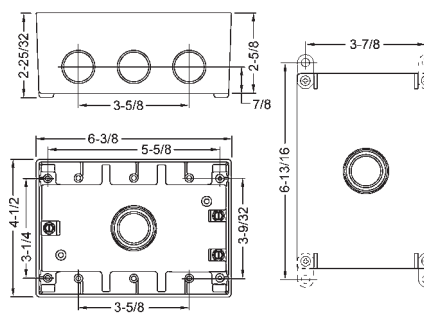

# ROUND SPLICE BOXES, EXTENSION ADAPTERS AND COVERS

## 4" ROUND SPLICE BOXES APPLICATIONS

For use in branch circuit wiring in wet, damp, or dry locations.

Designed for use as a weatherproof junction box, and may be used with Bell® round cluster covers and round lampholder combinations.



5361-0 to 5361-7,  
5372-0

5363-0

5374-0

## 4" ROUND SPLICE BOXES PRODUCT FEATURES

- Rugged die cast construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Cast-in mounting lugs provide fast, secure installation
- Includes four closure plugs, installed ground screw, and multi-lingual instructions

## 4" ROUND SPLICE BOXES COMPLIANCES

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

## 4" ROUND EXTENSION ADAPTERS APPLICATIONS

For use with 4" round splice boxes.

Extension adapters are used to in-crease box capacity and allow the installer to add "take-offs" to new boxes/devices.

## 4" ROUND EXTENSION ADAPTERS PRODUCT FEATURES

- Rugged die cast construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Includes installation hardware, closure plugs, gasket, and multi-lingual instructions

## 4" ROUND EXTENSION ADAPTERS COMPLIANCES

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>4" Round Splice Box – Five Threaded Outlets – 1-1/2" Deep</b>					
5361-0	16.0	Gray	5-1/2"	Shrink	16
5361-1	16.0	White	5-1/2"	Shrink	16
5361-2	16.0	Bronze	5-1/2"	Shrink	16
5372-0	16.0	Gray	5-3/4"	Shrink	16


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>4" Round Extension Adapter – Four Threaded Outlets – 1-1/2" Deep</b>					
5363-0	16.3	Gray	4-1/2"	Shrink	16

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>4" Round Splice Box &amp; Cover – Five Threaded Outlets – 1-1/2" Deep</b>					
5365-0	16.0	Gray	5-1/2"	Shrink	16
5375-0	16.0	Gray	5-3/4"	Shrink	16


CATALOGUE NUMBER	DESCRIPTION		PKG. TYPE	STD. PKG.
	COLOUR	OUTLETS		
<b>4" Round Cover</b>				
5374-0	Gray	Blank	Shrink	30

4" ROUND SPLICE BOXES

4" ROUND EXTENSION ADAPTERS

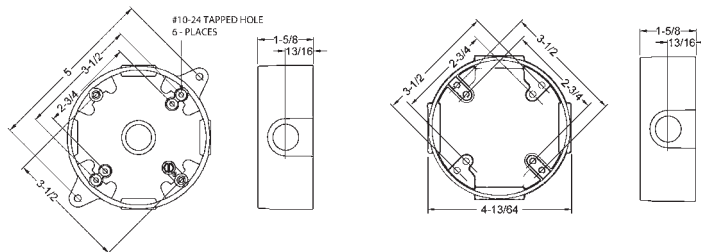

4" ROUND COVER



**MINI SNAP COVER AND RECEPTACLE APPLICATION**

For use when a convenience outlet is required in a small space.


**MINI SNAP COVER AND RECEPTACLE PRODUCT FEATURES**

- State-of-the-art powder coat finish provides for maximum weather-ability and scratch resistance
- Self-closing lid assures weatherproof protection when the receptacle is not in use



5185-0

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG TYPE	STD. PKG.
		COLOUR	OUTLETS		
<b>Mini Snap Cover And Receptacle - 3" x 2" x 1-1/8" Deep</b>					
5185-0	-	Gray	Cover & 125V 15A receptacle	Polybag	10

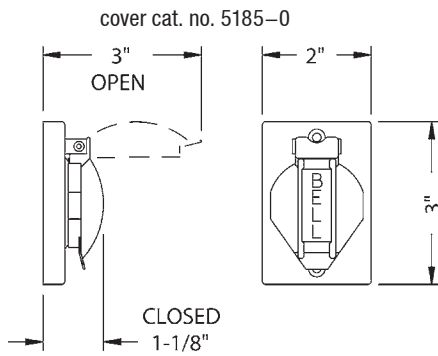



# RAYNTITE® SINGLE-GANG WEATHERPROOF-WHILE-IN-USE COVERS

## APPLICATION

Rayntite® covers are designed for use whenever weatherproof protection is required while an outlet is in use.

## PRODUCT FEATURES

- Modularity: 6 SKU's cover almost every application — no need to tie-up money and shelf space stocking multiple SKU's
- Unique snap fit design speeds installation. No more fumbling with open covers
- High-impact polycarbonate construction: Virtually indestructible
- No need to worry about rust and corrosion
- Tinted lid: Hides dust, dirt, and scratches
- Padlockable design: Prevents tampering and accidental disconnects
- Tri-lingual instructions: One product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 406.8 (B) requirements — no need to worry about code compliances




CATALOGUE NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Single-Gang – Standard Depth</b>			
<b>5730-0</b>	Single gang vertical cover with 4 plates included -for duplex, GFCI, toggle and single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.032 and 2.156 Dia.	Shrink	10
<b>5740-0</b>	Single gang horizontal cover with 4 plates included - for duplex, GFCI, toggle and single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.032 and 2.156 Dia.	Shrink	10

## COMPLIANCES

- UL
- NEMA 3R Rated
- Meets NEC 406.8 (B) Requirements

## REFERENCE DATA

- Canadian Patent 2,092, 516
- United States Patents  
5,981, 875  
5,533, 637  
5,456, 377  
5,228, 584

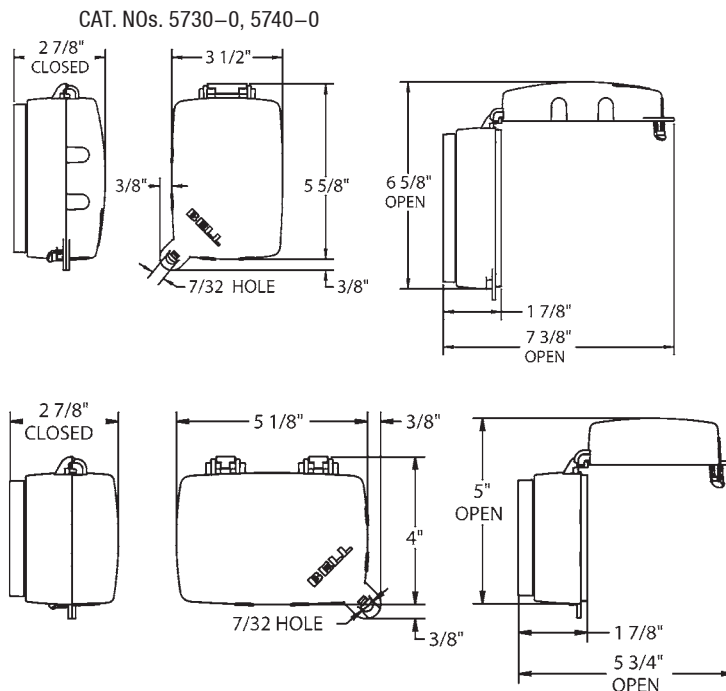

# RAYNTITE® SINGLE-GANG WEATHERPROOF-WHILE-IN-USE COVERS

## APPLICATION

Rayntite® covers are designed for use whenever weatherproof protection is required while an outlet is in use.


## PRODUCT FEATURES

- Modularity: 6 SKU's cover almost every application — no need to tie- up money and shelf space stocking multiple SKU's
- Unique snap fit design speeds installation. No more fumbling with open covers
- High-impact polycarbonate construction: Virtually indestructible
- No need to worry about rust and corrosion
- Tinted lid: Hides dust, dirt, and scratches
- Padlockable design: Prevents tampering and accidental disconnects
- Tri-lingual instructions: One product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 406.8 (B) requirements — no need to worry about code compliances



CATALOGUE NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Single-Gang – Deep</b>			
5735-0	Single gang vertical cover- Deep with 4 plates included - for duplex, GFCI, toggle and single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.032 and 2.156 Dia.	Shrink	6


## COMPLIANCES

-  UL
- NEMA 3R Rated
- Meets NEC 406.8 (B) Requirements

## REFERENCE DATA

- Canadian Patent 2,092, 516
- United States Patents  
5,981, 875  
5,533, 637  
5,456, 377  
5,228, 584

CAT. NO. 5735-0

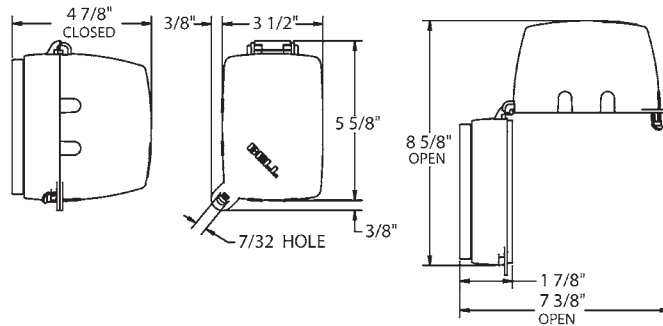

# RAYNTITE® TWO-GANG WEATHERPROOF-WHILE-IN-USE COVERS

H11

WEATHERPROOF BOXES, COVERS & LIGHTING


## APPLICATION

Rayntite® covers are designed for use whenever weatherproof protection is required while an outlet is in use.

## PRODUCT FEATURES


- Modularity: 6 SKU's cover almost every application — no need to tie- up money and shelf space stocking multiple SKU's
- Unique snap fit design speeds installation. No more fumbling with open covers
- Two-gang plates can be mounted vertically or horizontally
- High-impact polycarbonate construction: Virtually indestructible
- No need to worry about rust and corrosion
- Tinted lid: Hides dust, dirt, and scratches
- Padlockable design: Prevents tampering and accidental disconnects
- Tri-lingual instructions: One product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 406.8 (B) requirements — no need to worry about code compliances

## COMPLIANCES

-  UL
- NEMA 3R Rated
- Meets NEC 406.8 (B) Requirements

## REFERENCE DATA



- Canadian Patent 2,092, 516
- United States Patents  
5,981, 875  
5,533, 637  
5,456, 377  
5,228, 584

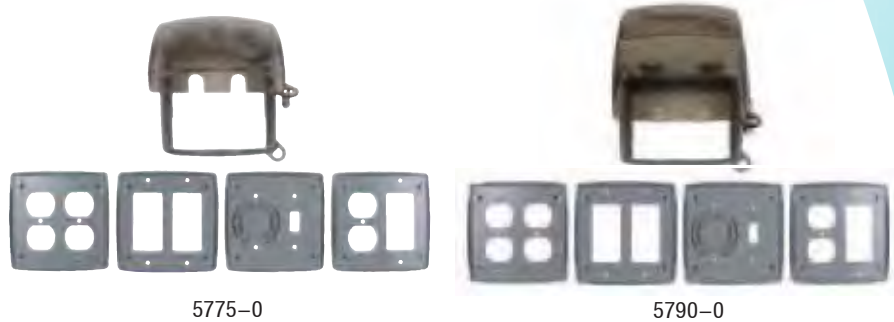

CATALOGUE NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Two-Gang – Standard Depth</b>			
5775-0	Two-gang vertical cover- with 4 plates included - for duplex, and single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.033 and 2.156 Dia.	Shrink	5

CATALOGUE NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Two-Gang – Deep</b>			
5790-0	Two-gang vertical cover- Deep with 4 plates included - for duplex, and single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.032 and 2.156 Dia.	Shrink	3

CAT. NOS. 5775-0, 5790-0

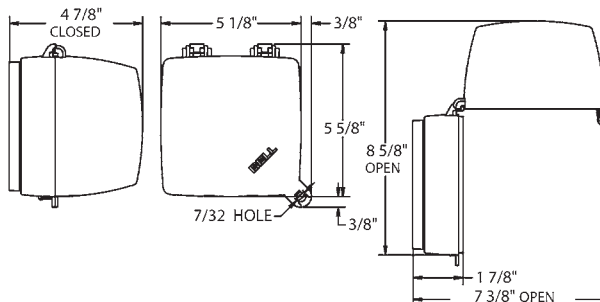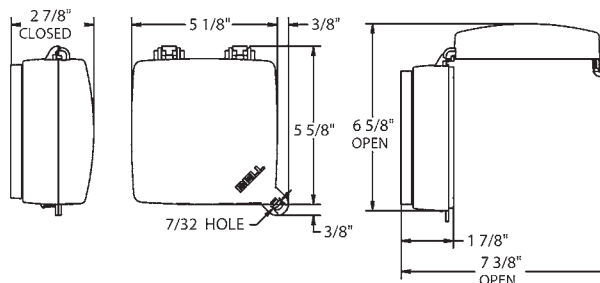

# RAYNTITE® TWO-GANG WEATHERPROOF-WHILE-IN-USE COVERS


**APPLICATION**

Rayntite® covers are designed for use whenever weatherproof protection is required while an outlet is in use.

**PRODUCT FEATURES**

- Modularity: 6 SKU's cover almost every application — no need to tie-up money and shelf space stocking multiple SKU's
- Unique snap fit design speeds installation. No more fumbling with open covers
- Two-gang plates can be mounted vertically or horizontally
- High-impact polycarbonate construction: Virtually indestructible
- No need to worry about rust and corrosion
- Tinted lid: Hides dust, dirt, and scratches
- Padlockable design: Prevents tampering and accidental disconnects
- Tri-lingual instructions: One product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 406.8 (B) requirements — no need to worry about code compliances

**COMPLIANCES**

-  NEMA 3R Rated
- Meets NEC 406.8 (B) Requirements


**REFERENCE DATA**

- Canadian Patent 2,092, 516
- United States Patents  
5,981, 875  
5,533, 637  
5,456, 377  
5,228, 584



5795-0

CATALOGUE NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Two-Gang – Deep</b>			
5795-0	Two-gang vertical cover-Deep with 2 plates included - for single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.032 and 2.156 Dia.	Shrink	3

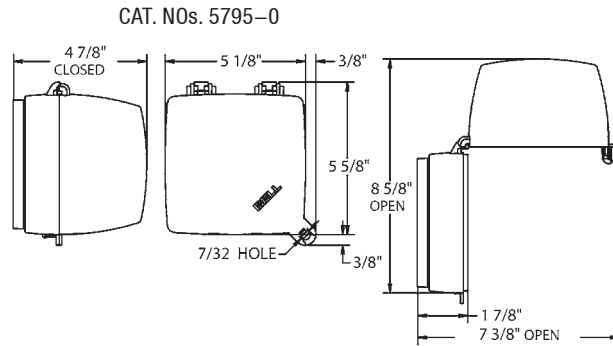

# RAYNTITE® SINGLE-GANG DEVICE COVERS

H13

WEATHERPROOF BOXES,  
COVERS & LIGHTING



## APPLICATION


For use whenever weatherproof protection is required for an outdoor receptacle.

## PRODUCT FEATURES

- Rugged die cast aluminum construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Vertical mount covers are padlockable
- May be mounted to box or device
- Includes installation hardware, gasket, and multi-lingual instructions

## COMPLIANCES


-  - Standard 514A
-  - C22.2 No. 18
- NEMA 3R Rated

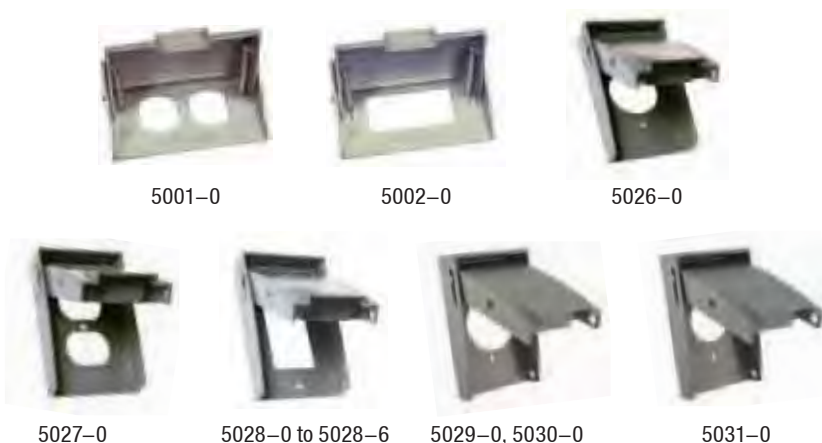


CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Horizontal Mount</b>				
5001-0	Gray	Duplex	Shrink	24
5002-0	Gray	GFCI	Shrink	24

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Vertical Mount – Padlockable</b>				
5026-0	Gray	Single, 1.593" diameter	Shrink	24
5027-0	Gray	Duplex	Shrink	24
5028-0	Gray	GFCI	Shrink	24
5028-6	White	GFCI	Carded	6
5029-0	Gray	20A, 1.710" diameter	Shrink	12
5030-0	Gray	30-50A, 2.150" diameter	Shrink	12
5031-0	Gray	Single, 1.406" diameter	Shrink	12

HORIZONTAL MOUNT COVERS

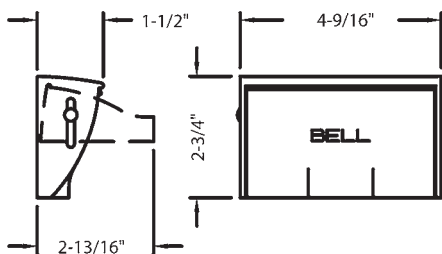

VERTICAL MOUNT COVERS

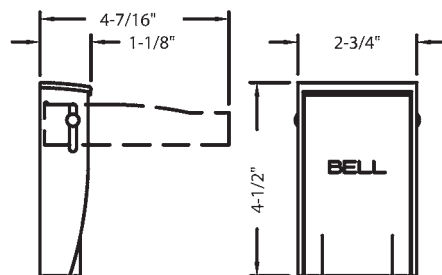

# RAYNTITE® TWO-GANG DEVICE COVERS

## APPLICATION

For use whenever weatherproof protection is required for an outdoor receptacle.

## PRODUCT FEATURES

- Rugged die cast aluminum construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Covers are padlockable, 1/4" dia. hole
- May be mounted to box or device
- Includes installation hardware, gasket, and multi-lingual instructions


## COMPLIANCES

-  - Standard 514A
-  - C22.2 No. 18
- NEMA 3R Rated



CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Vertical Mount - Padlockable</b>				
5032-0	Gray	(2) Duplex	Shrink	6
5033-0	Gray	(1) Duplex & (1) GFCI	Shrink	6
5034-0	Gray	(1) 30-50A Receptacle 2.625" diameter	Shrink	6
5036-0	Gray	(1) 30-50A Receptacle 2.156" diameter	Shrink	6
5038-0	Gray	(2) Receptacles, 1.406" diameter	Shrink	6
5040-0	Gray	(1) Single Receptacle, 1.406" diameter & (1) GFCI	Shrink	6
5041-0	Gray	(2) Toggle	Shrink	6
5042-0	Gray	(1) Toggle & (1) Duplex	Shrink	6
5043-0	Gray	(1) Toggle & (1) GFCI	Shrink	6
5045-0	Gray	(2) GFCI	Shrink	6

## TWO-GANG DEVICE COVERS

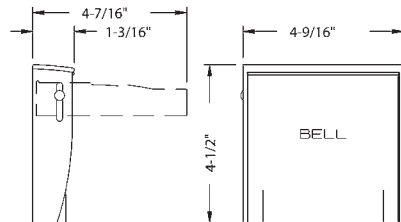

# SINGLE-GANG DEVICE COVERS

H15

WEATHERPROOF BOXES,  
COVERS & LIGHTING



## APPLICATION

For use whenever weatherproof protection is required for an outdoor receptacle.

## PRODUCT FEATURES


- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

## COMPLIANCES


-  - Standard 514A
-  - C22.2 No. 18
- NEMA 3R Rated




CAT. NOS. 5180-0 SERIES, 5712-5, 5094-0

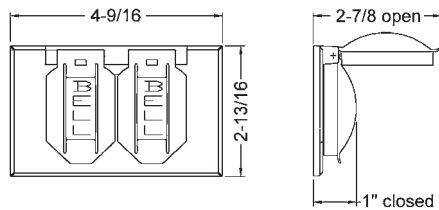


CAT. NO. 5101-0 SERIES

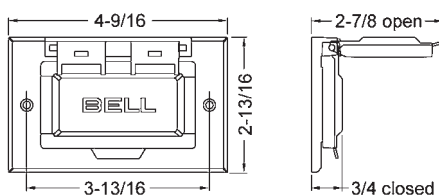


CAT. NO. 5152-0

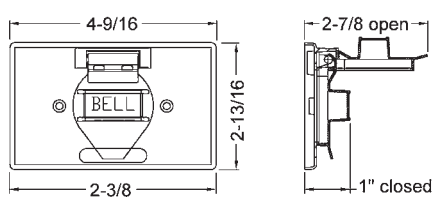


CAT. NO. 5102-0



CAT. NO. 5181-0



CAT. NO. 5153-0

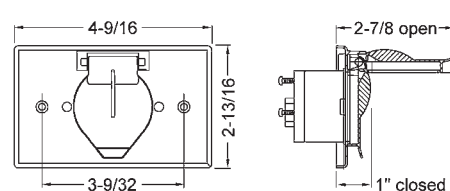

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Horizontal - Device Mount</b>				
5180-0	Gray	Duplex	Shrink	24
5180-1	White	Duplex	Shrink	24
5180-2	Bronze	Duplex	Shrink	24
5181-0	Gray	Duplex	Shrink	24
5101-0	Gray	GFCI	Shrink	24
5101-1	White	GFCI	Shrink	24
5101-2	Bronze	GFCI	Shrink	24
5102-0	Gray	GFCI	Shrink	24
5152-0	Gray	Single, 1.406" diameter	Shrink	24
5153-0	Gray	Motor plug base, 1.600" diameter, 125V, 15A wiring device included	Shrink	12
5712-5	Gray	125V, 15A Duplex receptacle included	Carded	6

/ i t d

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Horizontal - Box Mount</b>				
5094-0	Gray	Duplex	Shrink	24


**APPLICATIONS**

For temporary power back-ups following storms, on construction sites, with RV's or anywhere temporary power is needed.

**PRODUCT FEATURES**

- Extra-deep weatherproof box gives installers the room needed to wire the box efficiently.
- State-of-the-art powder-coated finish provides years of protection against the elements.
- Installation hardware, gasket, and ground screw is provided. No need to search for additional components.

**COMPLIANCES**

-  C22.2 NO. 18
- NEMA 3R RATED

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
58405	Gray	Generator Hook-up Box with 3-pole, 4 wire, 30A, 125/250V NEMA L14-30 male receptacle	Boxed	4
58355KIT	Gray	Generator Hook-up Box with 3 pole, 4 wire, 20A, 125/250V NEMA L14-20 male receptacle	Boxed	4



# SINGLE-GANG DEVICE COVERS

H17

WEATHERPROOF BOXES,  
COVERS & LIGHTING

## APPLICATION

For use whenever weatherproof protection is required for an outdoor receptacle.

## PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

## COMPLIANCES

-  US
- NEMA 3R Rated



5146-0 to 5146-1

5103-0 to 5103-2

5104-0

5147-0



5155-0 to 5155-2




5095-0




5091-0

## GFCI STYLE COVERS

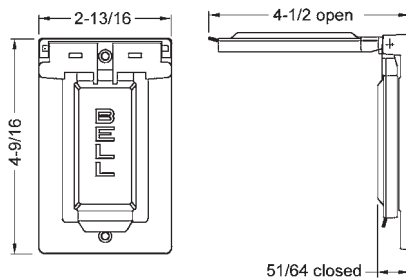


## SINGLE RECEPTACLE STYLE COVERS

NOTE: DIMENSIONS FOR DEVICE-MOUNT AND BOX-MOUNT COVERS ARE THE SAME

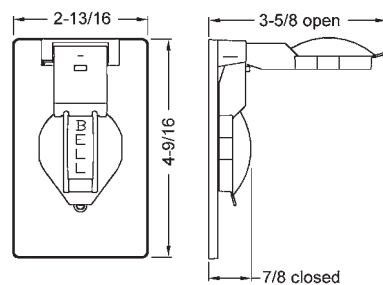


## DUPLEX STYLE COVER

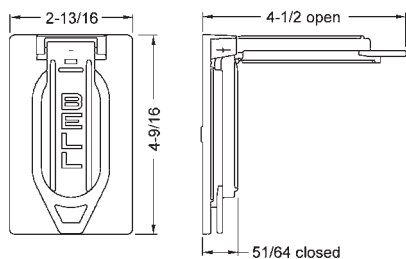

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Vertical – Device Mount</b>				
5146-0	Gray	Duplex	Shrink	24
5146-1	White	Duplex	Shrink	24
5103-0	Gray	GFCI	Shrink	24
5103-1	White	GFCI	Shrink	24
5103-2	Bronze	GFCI	Shrink	24
5104-0	Gray	GFCI	Shrink	24
5155-0	Gray	Single, 1.406" diameter	Shrink	24
5155-1	White	Single, 1.406" diameter	Shrink	24
5155-2	Bronze	Single, 1.406" diameter	Shrink	24

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Vertical – Box Mount</b>				
5095-0	Gray	Duplex	Shrink	24
5091-0	Gray	Single, 1.406" diameter	Shrink	24
5147-0	Gray	Duplex	Shrink	24

## CAT. NO. 5104-0, 5147-0



BELL®



# SINGLE-GANG BLANK COVERS AND MINI-PLATE

## BLANK COVERS APPLICATION

For use whenever weatherproof protection is required for a single-gang box.

## BLANK COVERS PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance

## BLANK COVERS COMPLIANCES

-  NEMA 3R Rated

## MINI-PLATE APPLICATIONS

For use with light poles. Provides a safe and convenient means of accessing power for holiday lighting, power tools, and the like.

## MINI-PLATE PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lid assures weatherproof protection when receptacle is not in use
- Includes installation hardware and receptacle



5173-0 to 5173-7



5174-0



5183-0


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Blank Covers – Device Mount</b>				
5173-0	Gray	Blank Cover	Shrink	50
5173-1	White	Blank Cover	Shrink	50
5173-7	Bronze	Blank Cover	Carded	12

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Blank Covers – Box Mount</b>				
5174-0	Gray	Blank Cover	Shrink	50


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Mini-Plate</b>				
5183-0	Black	Curved back, 1-1/2" radius - for 3" dia. pole mounting	Shrink	48

c d i c t c

## BLANK COVERS

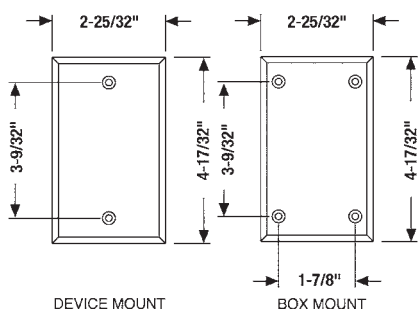

## MINI-PLATE

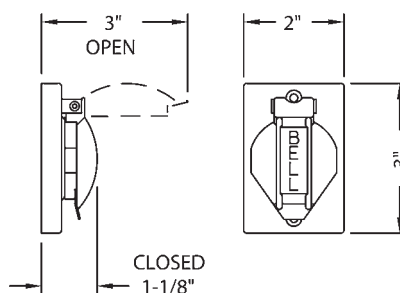

# TWO-GANG DEVICE COVERS

H19

WEATHERPROOF BOXES,  
COVERS & LIGHTING



## APPLICATION

For use whenever weatherproof protection is required for an outdoor receptacle.

## PRODUCT FEATURES


- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

## COMPLIANCES

-  - Standard 514A (5132 - 5145)
-  - C22.2 (5132 - 5145)
- NEMA 3R Rated




5157-0, 5092-0

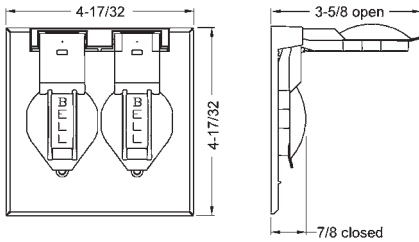


## TWO-GANG DEVICE COVERS


5148-0 SERIES, 5096-0, 5160-0, 5098-0

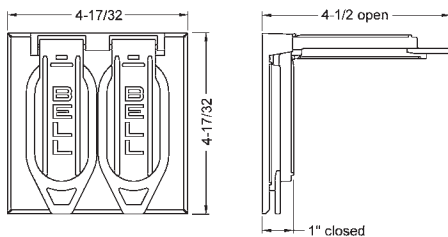


5132-0




5133-0



5138-0



5145-0



NOTE: DIMENSIONS ARE THE SAME FOR  
DEVICE MOUNT AND BOX MOUNT STYLES SHOWN.  
5157-0 SERIES, 5092-0

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Device Mount</b>				
5132-0	Gray	(2) Duplex	Shrink	10
5138-0	Gray	(2) Round, 1.406" Dia.	Shrink	10
5148-0	Gray	(2) Duplex	Shrink	18
5157-0	Gray	(2) Single, 1.406" dia.	Shrink	18
5160-0	Gray	(1) Duplex & (1) Single, 1.406" dia.	Shrink	12

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
<b>Box Mount</b>				
5096-0	Gray	(2) Duplex	Shrink	12
5092-0	Gray	(2) Single, 1.406" dia.	Shrink	12
5098-0	Gray	(1) Duplex & (1) Single, 1.406" dia.	Shrink	12
5133-0	Gray	(1) Duplex, (1) GFCI	Shrink	10
5145-0	Gray	(2) GFCI	Shrink	10

BELL®



# TWO AND THREE-GANG DEVICE COVERS


## APPLICATIONS

For use whenever weatherproof protection is required for an outdoor receptacle. Blank covers for use whenever weatherproof protection is required for a multi-gang box.

## PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

## COMPLIANCES

-  **UL**
- NEMA 3R Rated



5097-0



5093-0



5175-0 to 5175-2




5177-0


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Three-Gang Device Cover – Box Mount</b>				
5097-0	Gray	(3) Duplex	Boxed	1
5093-0	Gray	(3) Single, 1.406" dia.	Boxed	1

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Three-Gang Blank Cover – Box Mount</b>				
5177-0	Gray	Blank Cover	Boxed	10

## THREE-GANG DEVICE COVERS 5097-0 AND 5093-0

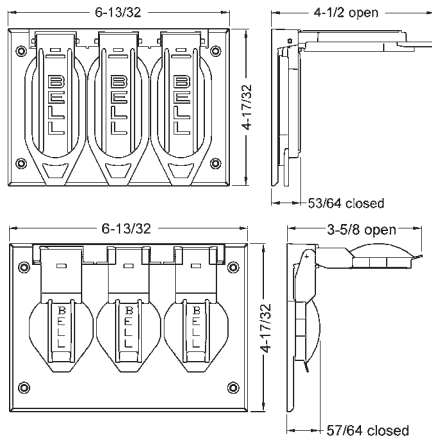

## BLANK COVERS 5177-0, 5175 SERIES



NOTE: DIMENSIONS ARE THE SAME FOR DEVICE MOUNT AND BOX MOUNT STYLES SHOWN.

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Two-Gang Blank Cover – Device Mount</b>				
5175-0	Gray	Blank Cover	Shrink	25
5175-1	White	Blank Cover	Shrink	25
5175-2	Bronze	Blank Cover	Shrink	25

# SINGLE-GANG LEVER SWITCH COVERS



## APPLICATION

For use whenever weatherproof protection is required for an "on-off" type switch.

## PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Includes installation hardware and multi-lingual instructions
- Single-gang covers are supplied with a switch — no need to purchase separate components
- Switch/cover units are supplied with the switch unassembled to the cover

## COMPLIANCES

-  – Standard 514A
-  – Certified
- NEMA 3R Rated



5121-0 to 5121-2  
5141-0, 5128-0, 5137-0


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Single-Gang Switch Covers – Vertical – Device Mounted</b>				
5121-0	Gray	SP 125V, 10A	Shrink	24
5121-1	White	SP 125V, 10A	Shrink	24
5121-2	Bronze	SP 125V, 10A	Shrink	24
5141-0	Gray	3-Way 125V, 6A or 250V, 3A	Shrink	8
5128-0	Gray	SP 120-277VAC, 20A	Shrink	20
5137-0	Gray	DP 120-277VAC, 20A	Shrink	20

## SINGLE-GANG

### 5121 SERIES

### 5141 SERIES

### CAT. NOS. 5128-0, 5137-0

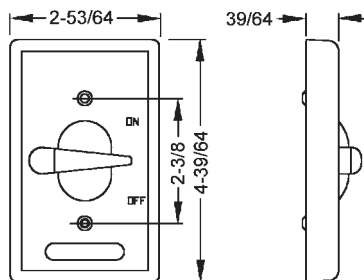

# TWO-GANG LEVER SWITCH COVERS

### APPLICATION

For use whenever weatherproof protection is required for an "on-off" type switch.

### PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Includes installation hardware and multi-lingual instructions
- Most units supplied with a switch — no need to purchase separate components
- Switch/cover units are supplied with the switch unassembled to the cover

### COMPLIANCES

-  - Standard 514A
-  - Certified
- NEMA 3R Rated



5124-0


5166-0

5125-0


5167-0

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Two-Gang Switch Covers – Device Mounted</b>				
5124-0	Gray	(2) SP 125V, 10A	Shrink	8
5125-0	Gray	Cover only	Shrink	8
5166-0	Gray	(1) SP 125V, 10A & (1) Duplex receptacle	Shrink	8
5167-0	Gray	2 Gang, Switch/GFCI Cover box mount	Shrink	8


### TWO-GANG CAT. NO. 5124-0, 5125 SERIES



### TWO-GANG 5167 SERIES



### TWO-GANG 5166 SERIES



# THREE-GANG LEVER SWITCH COVER & REPLACEMENT SWITCH

## THREE-GANG LEVER SWITCH COVER APPLICATION

For use whenever weatherproof protection is required for an "on-off" type switch.


## THREE-GANG LEVER SWITCH COVER PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Includes installation hardware and multi-lingual instructions
- Three-gang cover is supplied with switches — no need to purchase separate components
- Switch/cover units are supplied with the switch unassembled to the cover


## THREE-GANG LEVER SWITCH COVER COMPLIANCES

-  us
- NEMA 3R Rated (5126-0 only)

### THREE-GANG CAT. NO. 5126-0

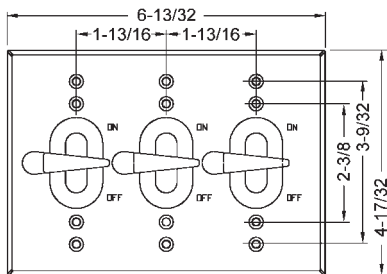

### TOGGLE SWITCH CAT. NOS. 5201-0



5126-0



5201-0

THREE-GANG SWITCH COVER – DEVICE MOUNT				
CAT. NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.
5126-0	Gray	(3) SP 125V, 10A	Boxed	1

LEVER SWITCH COVER – ACCESSORIES				
CAT. NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.
5201-0	—	SP 125V, 10A Toggle switch	Polybag	10

# CLUSTER COVERS

## APPLICATIONS

For use with Bell® single-gang rectangular or round weather-proof boxes. Cluster covers provide an easy means of mounting Bell® lampholders and other accessories.



## PRODUCT FEATURES

- Rugged die cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Includes installation hardware, gasket, and multi-lingual instructions
- Three-hole covers are supplied with two closure plugs

## COMPLIANCES

-  - Standard 514A
-  - Certified - C22.2 #18


### RECTANGULAR CLUSTER COVERS 5186 SERIES, 5189 SERIES



CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Rectangular Cluster - Covers</b>				
5186-0	Gray	1-1/2" Outlet	Shrink	20
5186-1	White	1-1/2" Outlet	Shrink	20
5186-2	Bronze	1-1/2" Outlet	Shrink	20
5189-0	Gray	3-1/2" Outlets	Shrink	20
5189-1	White	3-1/2" Outlets	Shrink	20
5189-2	Bronze	3-1/2" Outlets	Shrink	20

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>4" Round Cluster - Covers</b>				
5193-0	Gray	1-1/2" Outlet	Shrink	20
5193-1	White	1-1/2" Outlet	Shrink	20
5193-2	Bronze	1-1/2" Outlet	Shrink	20
5197-0	Gray	3-1/2" Outlets	Shrink	20
5197-1	White	3-1/2" Outlets	Shrink	20
5197-2	Bronze	3-1/2" Outlets	Shrink	20

### ROUND CLUSTER COVERS 5193 SERIES, 5197 SERIES

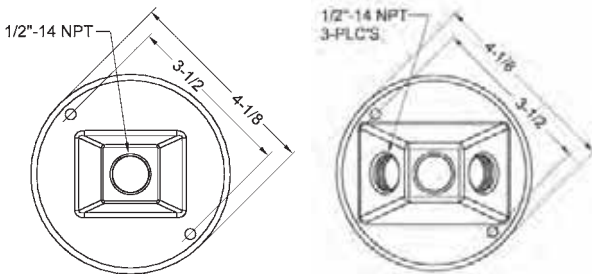



# LAMP HOLDERS

H25

WEATHERPROOF BOXES,  
COVERS & LIGHTING



## APPLICATIONS.

For outdoor or indoor lighting use. May be used with Bell® cluster covers and boxes.

## PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Locking swivel knuckle assures positive lamp positioning and provides pin-point directional aiming
- Extra long wire leads for easy hook-up
- Each lampholder supplied with a porcelain socket, inside gasket, 1/2" locknut and multi-lingual instructions

## COMPLIANCES

-  - Standard 1598
-  - Certified C22.2 No. 18



5606-0

5612-0


5611-0



5615-0


5613-0 to 5613-2

## 5613 SERIES

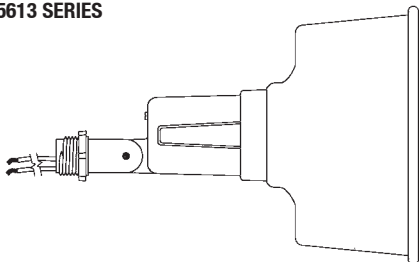

## LAMP HOLDERS


### 5606 SERIES, 5612-0

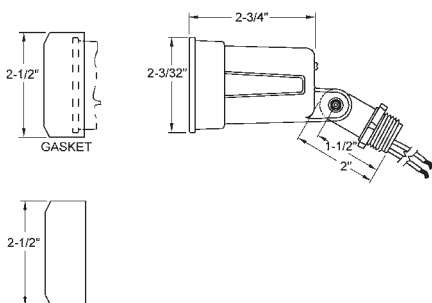




CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Lampholders And Accessories For 75-150 Watt Par 38 Lamps</b>				
5606-0	Gray	Lampholder	Shrink	30
5606-1	White	Lampholder	Shrink	30
5606-2	Bronze	Lampholder	Shrink	30
5612-0	Gray	Lampholder w/gasket	Shrink	30
5611-0	—	Outer gasket only, replacement gasket for 5612-0	Polybag	30
5615-0	—	Wire guard only	Shrink	5

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Architectural Lampholders For 75-150 Watt Par 38 Lamps</b>				
5613-0	Gray	Lampholder	Shrink	4
5613-1	White	Lampholder	Shrink	4
5613-2	Bronze	Lampholder	Shrink	4

### CAT. NO. 5611-0



### CAT. NO. 5615-0



**PORTABLE LAMPHOLDER APPLICATION**

For general outdoor lighting use.

**PORTABLE LAMPHOLDER PRODUCT FEATURES**

- Rugged die-cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Locking swivel knuckle assures positive lamp positioning and provides pin-point directional aiming

**PORTABLE LAMPHOLDER COMPLIANCES**



**BULLET LAMPHOLDER APPLICATION**

For general outdoor lighting use. May be used with BELL cluster covers and boxes

**BULLET LAMPHOLDER PRODUCT FEATURES**

- Rugged die cast
- Locking swivel knuckle
- Assure positive lamp positioning and provides pinpoint directional aiming
- Includes installation hardware and multilingual instructions

**BULLET LAMPHOLDER COMPLIANCES**



5792-0




5820-8


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Portable Lampholder Assembly</b>				
5792-0	Gray	Spike, 6 ft. cord & plug	Polybag	12

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Bullet Lampholders - For 75-150 Watt Par 38 And R-40 Lamps</b>				
5820-8	Green	Lampholder	Boxed	2

PORTABLE LAMPHOLDER ASSEMBLY 5792-0

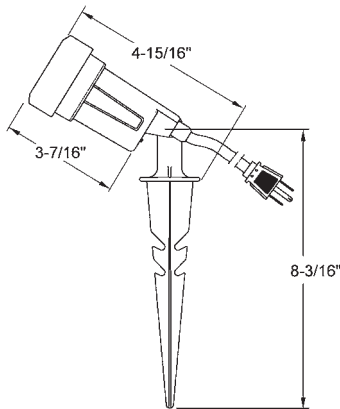

BULLET LAMPHOLDER ASSEMBLY 5820-8

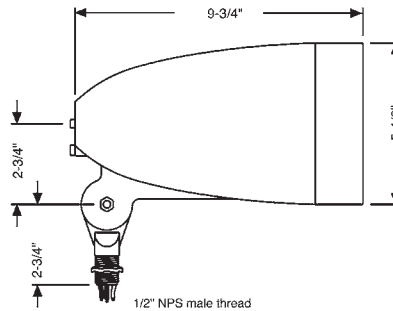

# LAMPHOLDER COMBINATIONS

H27

WEATHERPROOF BOXES,  
COVERS & LIGHTING



## APPLICATION

For use with Bell® single-gang rectangular or round weatherproof boxes.

## PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Each combination kit is a complete weatherproof installation — no need to purchase separate components
- Includes installation hardware, gasket, and multi-lingual instructions

## COMPLIANCES

-  – Standard 1598
-  – Certified C22.2 No. 18



5620-0

5624-0 to 5624-2


5621-0 to 5621-6

5625-0 to 5625-2

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Rectangular Cover – Combinations For 75-150 Watt Par 38 Lamps</b>				
5620-0	Gray	(1) Lampholder	Shrink	8
5621-0	Gray	(2) Lampholders	Shrink	8
5621-6	White	(2) Lampholders	Carded	4


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>4" Round Cover – Combinations For 75-150 Watt Par 38 Lamps</b>				
5624-0	Gray	(1) Lampholder	Shrink	8
5624-1	White	(1) Lampholder	Shrink	8
5624-2	Bronze	(1) Lampholder	Shrink	8
5625-0	Gray	(2) Lampholders	Shrink	8
5625-1	White	(2) Lampholders	Shrink	8
5625-2	Bronze	(2) Lampholders	Shrink	8

5620 SERIES




5621 SERIES

5624 SERIES



5625 SERIES

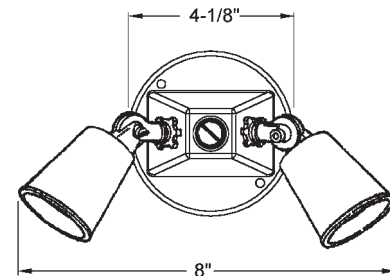



**APPLICATION**

For general use in wet, damp, or dry locations.

**PRODUCT FEATURES**

- Each kit is a complete weatherproof installation — no need to purchase separate components
- Each kit includes easy-to-follow multi-lingual instructions
- All kit components are described in the preceding pages

**COMPLIANCES**

-  - Standard 1598
-  - Certified C22.2 No.18



5883-5 to 5883-6



5818-5 to 5818-6

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD PKG.
<b>Rectangular Light Kits For 75-150 Watt Par 38 Lamps</b>				
5883-5	Gray	Box, cover, photocell & (2) lampholders	Boxed	4
5883-6	White	Box, cover, photocell & (2) lampholders	Boxed	4
5818-5	Gray	Box, cover & (2) lampholders	Boxed	4
5818-6	White	Box, cover & (2) lampholders	Boxed	4



## APPLICATION

For general use in wet, damp, or dry locations.

## PRODUCT FEATURES

- Each kit is a complete weatherproof installation — no need to purchase separate components
- Each kit includes easy-to-follow multi-lingual instructions
- All kit components are described in the preceding pages

## COMPLIANCES

-  – Standard 1598
-  – Certified C22.2 No. 18



5829-5 to 5829-6



5876-5 to 5876-6

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>4" Round Light Kits For 75-150 Watt Par 38 Lamps</b>				
5829-5	Gray	Box, cover & (2) lampholders	Boxed	4
5829-6	White	Box, cover & (2) lampholders	Boxed	4
5876-5	Gray	Box, cover & (2) architectural lampholders	Boxed	4
5876-6	White	Box, cover & (2) architectural lampholders	Boxed	4

**APPLICATION**

For accent lighting along walkways, driveways, terraces, porches and garden areas.


**PRODUCT FEATURES**

- Rugged die cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Includes screw-in clear glass globe, wire connectors, gasket, and multi-lingual instructions
- Three-tier lights accept 40W maximum lamps
- Four-tier lights accept 60W maximum lamps

**COMPLIANCES**



CAT. NO. 5884-8

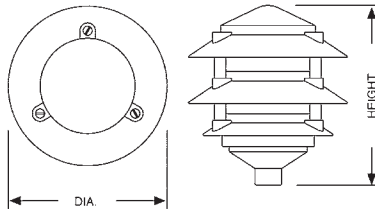

5884-8



5893-8

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Incandescent Type Threaded 1/2" Npt - 18" Leads				
5884-8	Green	3-Tier	Box	2
5893-8	Green	4-Tier	Box	2

CATALOGUE NUMBER	DIA.	HEIGHT
5884-8	6"	7"
5893-8	6"	8-3/4"


# REPLACEMENT GLOBES

**REPLACEMENT GLOBES**

**APPLICATION**

For use with Bell® garden lights.

**REPLACEMENT GLOBE**

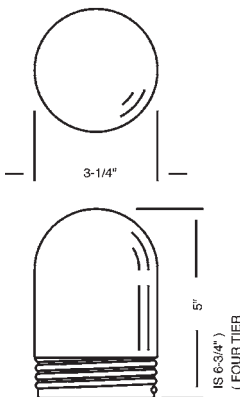

5694-0



5695-0

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Replacement Globes For Garden Lights				
5694-0	Clear	For 3-tier	Carton	4
5695-0	Clear	For 4-tier	Carton	4

# ACCESSORIES

## Closure Plugs

### CLOSURE PLUGS APPLICATION

For use with Bell® weatherproof boxes, extension adapters, cluster covers and round splice boxes to seal off unused outlets

### CLOSURE PLUGS PRODUCT FEATURES

- Gray closure plugs are zinc die cast
- White and bronze closure plugs are nonmetallic



5269-0 to 5269-9  
5270-0 to 5270-9, 5271-0

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Closure Plugs</b>				
5269-0	Gray	1/2" NPT	75 Polybags of 4	75 bags
5269-1	White	1/2" NPT	75 Polybags of 4	75 bags
5269-2	Bronze	1/2" NPT	75 Polybags of 4	75 bags
5269-5	Gray	1/2" NPT	12 Cards of 3	12 cards
5269-6	White	1/2" NPT	12 Cards of 3	12 cards
5269-7	Bronze	1/2" NPT	12 Cards of 3	12 cards
5269-9	Gray	1/2" NPT	Bulk	1000
5270-0	Gray	3/4" NPT	75 Polybags of 4	75 bags
5270-5	Gray	3/4" NPT	12 Cards of 3	12 cards
5270-9	Gray	3/4" NPT	Bulk	1000
5271-0	Gray	1" NPT	75 Polybags of 4	75 bags

d i t d d c g g t i t i o o t i c  
d i t d d c g c d t i t i o o t i c

# ACCESSORIES


## Replacement Gaskets

### APPLICATION


Replacement gaskets for Bell® weatherproof covers and lampholders.

### PRODUCT FEATURES


- Each gasket has cut outs for a toggle switch, duplex receptacle and 1.406" dia. round receptacle
- Remove the cut outs for the duplex and round receptacles for a GFCI receptacle opening



5019-0

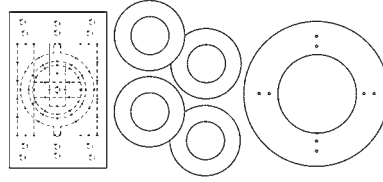


5017-0




5020-0


CAT. NO. 5019-0



CAT. NO. 5020-0



CAT. NO. 5017-0

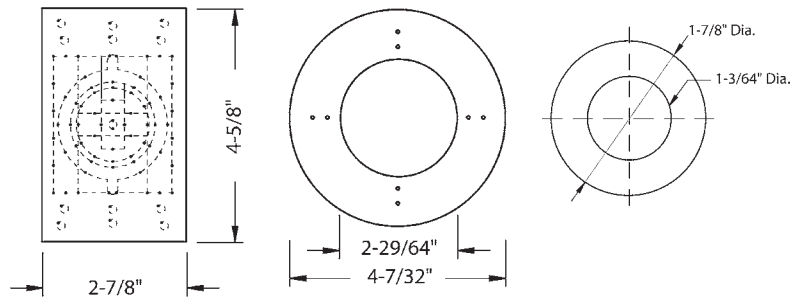

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
<b>Rectangular Box/Cover Gaskets</b>				
5019-0	Black	1-Gang	20 Cello bags of 2	20
5020-0	Black	2-Gang	20 Cello bags of 2	20
5017-0	Black	1 Gang cover gasket, 4 Lampholder gaskets & 1 Round cover gasket	20 Cello bags	20



# SPECIALTY TYPE SWITCHES

## APPLICATIONS

- Industrial
- Electronic instruments
- Automotive/marine equipment
- Power tools
- Home appliances
- Emergency lighting
- Vending machines



6401, 6354



6402, 6355



6403, 6404



6405



6436



6437

## PULL-CHAIN SWITCH PRODUCT FEATURES

- Plastic body and nipple
- Nipple 3/8" – UNS 27 x 5/16" long
- Aluminum knurled nut, brass or nickel finish

## VARIABLE-SPEED PULL-CHAIN SWITCH PRODUCT FEATURES

- Plastic body and nipple
- Brass knurled nut
- Nipple 3/8" – UNS 27 x 3/8" long

## ALL-ANGLE PULL-CHAIN SWITCH PRODUCT FEATURES

- Plastic body and metal nipple
- Nipple 15/32" – UNS 32
- Steel lockout

## PULL-CHAIN AND VARIABLE-SPEED PULL-CHAIN SWITCHES AND ALL-ANGLE PULL-CHAIN SWITCHES COMPLIANCES

- 
- 

## SNAP-IN ROCKER SWITCHES PRODUCT FEATURES

- Nylon body and rocker
- Polycarbonate rocker (#6437)
- Contacts – silver-plated copper-alloy
- .250 quick connect tabs
- Fits cutout 17/32" x 1-1/8"

## SNAP IN ROCKER SWITCHES COMPLIANCES

- 
- 

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Pull-Chain Switches – For Lamps And Ceiling Fixtures</b>			
6401	SPST, on-off 6" leads, brass finish Carded	6 amp, 125V AC 3 amp, 250V AC 6 amp, 125V L	5
6354	SPST, on-off 6" leads, brass finish Bulk Poly Bag	6 amp, 125V AC 3 amp, 250V AC 6 amp, 125V L	25
6402	SPST, on-off 6" leads, nickel finish Carded	6 amp, 125V AC 3 amp, 250V AC 6 amp, 125V L	5
6355	SPST, on-off 6" leads, nickel finish Bulk Poly Bag	6 amp, 125V AC 3 amp, 250V AC 6 amp, 125V L	25

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Variable-Speed Pull-Chain Switches – For Ceiling Fans</b>			
6403	2-speed, off-on-on Stab connections, brass finish Carded	6 amp, 125V AC 3 amp, 250V AC 6 amp, 125V L	5
6404	3-speed, off-on-on-on, Stab connections, brass finish, Carded	6 amp, 125V AC 3 amp, 250V AC	5

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>All-Angle Pull-Chain – For Ceiling Fixtures</b>			
6405	All angle, on-off 3"leads, SPST, Carded	6 amp, 125V AC 3 amp, 250V AC	5

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Snap-In Rocker Switches – For Range Hood And Appliances</b>			
6436	Rocker, SPST, on-off Opening 17/32" x 1-1/8" Carded	16 amp, 250V AC 1 HP, 250V AC 1/2 HP, 125V AC	5
6437	Lighted rocker SPST, on-off Opening 17/32" x 1-1/8" Carded	110V Lamp 16 amp, 250V AC 15 amp, 1 HP, 250V AC 1/2 HP, 125V AC	5

# SPECIALTY TYPE SWITCHES

## APPLICATIONS

- Industrial
- Electronic instruments
- Automotive/marine equipment
- Power tools
- Home appliances
- Emergency lighting
- Vending machines

## CANOPY SWITCH COMPLIANCES

- 
- 



6445



6446



6356, 6357



6447



6448RAC



6424, 6352



6425, 6353

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Rotary Canopy Switch - For Lamps And Appliances</b>			
6445	Rotary, canopy, SPST, Off-on-on-on plastic knob Carded	2 amp, 250V AC 4 amp, 125V AC 1 amp, 125V DC	5
6446	Rotary, canopy, SPST, On-off, 6" leads, plastic knob Carded	1 amp, 250V AC 3 amp, 120V AC 1 amp, 125V ACL	5
6356	Rotary, canopy, SPST, On-off, 6" leads, plastic knob Bulk Poly Bag	1 amp, 250V AC 3 amp, 120V AC 1 amp, 125V ACL	25
6447	Rotary, canopy, SPST, On-off, 6" leads, brass knob Carded	1 amp, 250V AC 3 amp, 120V AC 1 amp, 125V ACL	5
6448RAC	Rotary, canopy, 2-circuit, Off-on-on-on, 6" leads Brass knob, Carded	1 amp, 250V AC 3 amp, 125V ACL	5
6357	Rotary, canopy, 2-circuit, Off-on-on-on, 6" leads Brass knob, Bulk Poly Bag	1 amp, 250V AC 3 amp, 125V ACL	25

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Maintained Contact Push-Button Canopy Switch - For Lamps And Appliances</b>			
6424	c o o d d d		
6352	c o o d B o B g		
6425	c o o d ic d d		
6353	c o o d ic B o B g		

# SPECIALTY TYPE SWITCHES

## PUSH-BUTTON SWITCH PRODUCT FEATURES

- Plastic case
- Nickel-plated brass nipple, knurled nut, hex nut
- Nipple 15/32" – 32 x 1/2" long

## COMPLIANCES

- 
- 



6431



6426



6428



6427



6358

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Maintained Contact Slide Switch – For Lamps And Appliances</b>			
6431	id o o i g / x / d d		

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Momentary Contact Push-Button Switches – For Bells And Buzzers</b>			
6426	o t co t ct o o o o B c c t i d d	4	
6428	o t co t ct o o o o R d c t i d d		
6427	tto o o d d d	4 /	

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Push Button Switch - For Lamps And Appliances</b>			
6358	o t d o o i d B o B g		

# SPECIALTY TYPE SWITCHES

## PRODUCT FEATURES

- Impact-resistant thermoplastic body
- Silver cadmium oxide contacts
- Knurled nut, hex and strap all nickel-plated
- Keyed brass bushing
- #6-32 screw-type terminals
- Nickel-plated brass toggle
- Suitable for 12V DC use at rated amperage

## COMPLIANCES

- 
- 



CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Extra Heavy-Duty Bat Handle Toggle Switch</b>			
6415	DPST, on-off, Screw terminals, Carded	10 amp, 277V AC, 20 amp, 125V AC 1-1/2 HP, 125V/250V AC	5
6419	DPDT, on-on, Screw terminals, Carded	10 amp, 277V AC, 20 amp, 125V AC 1-1/2 HP, 125V/250V AC	5
6416	DPDT, on-off-on, Screw terminals, Carded	20 amp, 125V AC 1-1/2 HP, 125V/250V AC	5

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Heavy-Duty Bat Handle Toggle Switch</b>			
6410RAC	SPST, on-off Screw terminals Carded	12 amp, 250V AC 20 amp, 125V AC 1 HP, 120V/240V AC	5
6413	SPDT, on-on Screw terminals Carded	10 amp, 250V AC 20 amp, 125V AC 3/4 HP, 125V/250V AC	5
6411	SPDT, on-off-on Screw terminals	10 amp, 250V AC 20 amp, 125V AC 3/4 HP, 125V AC	5
6420	SPST, on-off Screw terminals Carded	10 amp, 250V AC 20 amp, 125V AC 3/4 HP, 125V/250V AC	5

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Extra Heavy-Duty Bat Handle Toggle Switch</b>			
6417	SPST, on-off Screw terminals Nonmetallic, Carded	20 amp, 125V/277V AC 1-1/2 HP, 125V AC 2 HP, 250V AC	5
6418	DPDT, on-off-on Screw terminals Nonmetallic, Carded	20 amp, 125V/277V AC 2 HP, 250V AC 1-1/2 HP, 125V AC	5

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
<b>Medium-Duty Bat Handle Toggle Switch</b>			
6414	SPST, on-off Screw terminals Carded	15 amp, 120V AC 10 amp, 240V AC	5

# SPECIALTY TYPE SWITCHES

## PRODUCT FEATURES

- Impact-resistant thermoplastic body
- Silver cadmium oxide contacts
- Knurled nut, hex and strap all nickel-plated
- Keyed brass bushing
- #6-32 screw-type terminals
- Nickel-plated brass toggle
- Suitable for 12V DC use at rated amperage



6412



6351



6409RAC



6441

## TOGGLE BOOT PRODUCT FEATURES

- Fits standard bat handle toggle switches
- Made of silicone rubber
- Fits nipples with 15/32" – 32 thread
- Packed two per card

## COMPLIANCES

- 
- 

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Medium-Duty Bat Handle Toggle Switch With Wire Leads			
6412	o o d d d	4  /	

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Medium-Duty Ball Handle Toggle Switch With Wire Leads			
6351	o o B d ogg o o too i c o t ic it i d B o B g		

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Medium-Duty Ball Toggle			
6409RAC	o o c t i d d	4	

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Toggle Boot			
6441	R co t o togg itc d d		



# WIRED-IN SURGE PROTECTIVE DEVICES

## APPLICATION

Single phase wired-in surge protective devices feature a compact design making them ideally suited for residential installations where space around the electrical panel may be limited. They can be mounted directly to the panel through a chase nipple connection to reduce lead length and impedance.

## PRODUCT FEATURES

- 50,000 and 100,000 Peak Amperage Capacity
- up to 200kA Short Circuit Current Rated

## COMPLIANCES

- UL 1449 3rd edition
- NEMA 4X housing
- cUL



HBL3W100C



HBL3W50

CATALOGUE NUMBER	CONFIGURATION	PEAK AMP CAPACITY	MOUNTING METHOD
<b>120/240VAC Single Phase Wired-In Surge Protective Devices (Type 1 / Type 2 SPD)</b>			
HBL3W100C	1Phase 3-Wire + Ground	100kA	Bottom Nipple Mount
HBL3W50	1Phase 3-Wire + Ground	50kA	Side Nipple Mount

# WHOLE HOUSE SURGE PROTECTION

## APPLICATION

Hubbell's Whole Home Surge panel offers home owners the ability to protect their entire house with one unit! The HBLWH80 offers power, telephone, and COAX protection in one location and can be flush or surface mounted to suit the application.

## PRODUCT FEATURES

- Power module provides 80kA Peak Amperage Capacity
- Telephone module protects up to 4 phone lines
- Two independent COAX modules

## COMPLIANCES

- UL 1449 3rd edition
- NEMA 1 enclosure



HBLWH80

CATALOGUE NUMBER	SERVICE VOLTAGE	CONFIGURATION	PEAK AMP CAPACITY
<b>Whole House Surge Protection (Type 2 Spd – HBLWH80 Only)</b>			
HBLWH80	120/240 Single Phase	1Phase 3-Wire + Ground	80Ka



# NON-METALLIC SURGE STRIPS

## PRODUCT FEATURES

- Transformer spaced outlet(s)
- 15A resettable push on/off circuit breaker switch
- Power and ground indicating LED's
- Available with Fax/Modem, Fax/Modem/CATV and Fax/Modem/CATV/DSS protection



CATALOGUE NUMBER	DESCRIPTION	# OF OUTLETS	JOULE RATING	PEAK AMP RATING	CORD LENGTH	COLOUR	DOWN LINE WARRANTY*
HBL6PPS	Power Strip (No surge protection)	6	N/A	N/A	6'	Office White	N/A
HBL6PS350A	SPD	6	350	6.5 kA	6'	Office White	\$2,500
HBL6PS35015A	SPD	6	350	6.5 kA	15'	Office White	\$2,500
HBL6PS1050MA	SPD w/Fax/Modem	6	1,050	19.5 kA	6'	Office White	\$2,500
HBL7PS1050A	SPD	7	1,050	19.5 kA	6'	Office White	\$10,000
HBL7PS1050MA	SPD w/Fax/Modem	7	1,050	19.5 kA	6'	Office White	\$10,000
HBL7PS105015A	SPD	7	1,050	19.5 kA	15'	Office White	\$10,000
HBL8PS2100MA	SPD w/Fax/Modem/CATV	8	2,100	39 kA	6'	Office White	\$25,000
HBL8PS2100DA	SPD w/Fax/Modem/CATV/DSS	8	2,100	39 kA	6'	Office White	\$25,000

\*See warranty information inside product box for details.



HBL6PS350A



HBL8PS2100MA



## ENERGY SAVING SURGE STRIP PRODUCT FEATURES

- Shuts down power to peripherals when the item plugged into the master is turned off
- Three uncontrolled transformer spaced outlets
- Six foot power cord
- 1050 joules / 19.5 kA rating
- \$10,000 down line protection warranty\*



## SURGE STRIP WITH USB PORTS PRODUCT FEATURES

- Two USB ports for charging cameras, GPS, or MP3 players
- Four transformer spaced outlets
- Black non-metallic housing with six foot cord and lighted power on switch
- Power and ground indicating LED's
- 1050 joules/19.5kA rating
- \$10,000 down line protection warranty\*



## SURGE STRIP WITH REMOTE PRODUCT FEATURES

- Four outlets controlled by transmitter
- Remote switch operated with keychain transmitter
- Two transformer spaced outlets
- Power and ground indicating LED's
- 2100 joules/39kA rating
- \$25,000 down line protection warranty\*



CATALOGUE NUMBER	DESCRIPTION	# OF OUTLETS	JOULE RATING	PEAK AMP RATING	CORD LENGTH	COLOUR	DOWN LINE WARRANTY*
<b>Surge Strip with USB Port</b>							
HBL4PS1050USB	Non-metallic SPD with two USB ports	4	1,050	19.5 kA	6'	Black	\$10,000
<b>Surge Strip with Remote Switch</b>							
HBL6RSPS2100	Non-metallic remote switch SPD with one keychain control	6	2,100	39 kA	6'	Office White	\$25,000
<b>Energy Saving Surge Strip</b>							
HBL8ESPS1050M	Energy Saving SPD with master/slave design with fax/modem	8	1,050	19.5 kA	6'	Office White	\$10,000
HBL8ESPS1050C	Energy Saving SPD master/slave design with CATV protection	8	1,050	19.5 kA	6'	Office White	\$10,000
<b>Cable TV Protection Cube</b>							
HBLCATC	Cable TV protection cube	N/A	N/A	N/A	N/A	Office White	N/A



HBL4PS1050USB



HBL6RSPS2100



HBL8ESPS1050M



HBLCATC

\*See warranty information inside product box for details.





# INDEX

K1

NUMERICAL INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
66	A27	20509004	E8	1504-MSBUBAR	A3
1050	A27	20509005	E8	1504-MSBUBAR	A17
1060	A27	20509006	E8	1804-LHU	A3
1111	A14	20509007	E8	2001R	B2
2018	A13	20509008	E8	2002F	B3
2402	D18	LNM12BPK100	E7	2002FBAR	B3
2403	D18	LNM16BPK100	E7	2002R	B2
2404	D18	LNM20BPK100	E7	2003F	B3
2405	D18	LNM25BPK100	E7	2003FBAR	B3
2406	D18	LNM32BPK100	E7	2003R	B2
2408	D18	LNM40BPK100	E7	2006F	B3
2410	D18	LNP11BPK100	E7	2006FBAR	B3
2412	D18	LNP13BPK100	E7	2006R	B2
2414	D18	LNP16BPK100	E7	2011F	B3
2416	D18	LNP21BPK100	E7	2011FBAR	B3
6351	I5	LNP29BPK25	E7	2014R	B2
6352	I2	LNP36BPK25	E7	2016R	B2
6353	I2	LNP7BPK100	E7	2018-SB	A13
6354	I1	LNP9BPK100	E7	2020-BAR	A13
6355	I1	1004-H	A4	2020-RBAR	A13
6356	I2	1004-LBU	A4	2020-SB	A13
6357	I2	1004-LHU	A4	2021R	B2
6358	I3	1004-LUBAR	A4	2027F	B3
6401	I1	1041BAR	A27	2027FBAR	B3
6402	I1	1042BAR	A27	2027R	B2
6403	I1	1100-LLEUBAR	A1	2104-LLEU-2	A5
6404	I1	1100-LREU	A1	2104-LLEU-3BAR	A5
6405	I1	1100-LUBAR	A1	2104-LLEU-4BAR	A5
6411	I4	1102BAR	A1	2104-LLEUBAR	A3
6412	I5	1102-LHUBAR	A1	2104-LNU	A3
6413	I4	1102-LREU	A1	2104-LU	A3
6414	I4	1102-LUBAR	A1	2104-LU-2	A5
6417	I4	1102-MSB	A1	2104-MSBU	A3
6418	I4	1102-MSB	A17	2104-MSBU	A19
6420	I4	1102-MSBU	A1	2104-MSBU-2	A5
6424	I2	1102-MSBU	A17	2104-MSBU-2	A19
6425	I2	1102-SB	A1	2104-MSBU-3	A5
6426	I3	1104-K	A2	2104-MSBU-3	A19
6427	I3	1104-LBUBAR	A2	2104-MSBU-4	A5
6428	I3	1104-LE	A2	2104-MSBU-4	A19
6431	I3	1104-LHU	A2	2304-LLEU	A3
6436	I1	1104-LMSU	A2	2304-LLEU-2	A5
6437	I1	1104-LRWUBAR	A2	2304-LLEU-3	A5
6441	I5	1104-LUBAR	A2	2304-LLEU-4	A5
6445	I2	1104-LUDBAR	A2	2304-LLEU-4	A5
6446	I2	1104-MSB	A2	2304-MSBKU	A19
6447	I2	1104-MSB	A17	2304-MSBKU-2	A19
7902	A27	1104-MSB	A17	2304-MSBKU-3	A19
8361	A10	1104-MSBUBAR	A2	2304-MSBKU-4	A19
8362	A10	1104-MSBUBAR	A17	3004-LHU	A4
8363	A10	1104-P	A2	3004-MSB	A4
8364	A10	1104-P	A5	3004-MSB	A18
8365	A10	1104-P	A17	3004-MSB-1	A4
8366	A10	1104-P	A19	3004-MSB	A4
8367	A10	1104-P	A18	3004-MSBU	A18
8368	A10	1104-SB	A2	3004-MSBU-1	A4
8371	A10	1110-BAR	A14	3004-MSBU-1	A18
8372	A10	1110-HV	A14	3102-LHU	A2
8375	A10	1110-HV	A21	3102-MSB	A2
9008	A27	1110-MSB	A14	3102-MSB	A17
54521	A24	1110-RBAR	A14	3102-MSBU	A2
54531	A24	1110-SB	A14	3102-MSBU	A17
54541	A24	1151BAR	A14	3104-LHU	A3
54551	A24	1198H	A14	3104-MSB	A3
54560	A24	1199H	A14	3104-MSB	A18
54561	A24	11-C-4-HV	A21	3104-MSB-1	A3
54571	A24	11-C-5-HV	A21	3104-MSB-1	A18
54581	A24	1204-1-HV	A21	3104-MSBU	A3
54591	A24	1204-2-HV	A21	3104-MSBU	A18
58405	H16	1204-HVP	A21	3104-MSBU-1	A3
20509001	E8	1204-MSB-HV	A17	3104-MSBU-1	A18
20509002	E8	1204-MSB-HV	A21	31622001LPK50	E8
20509003	E8	1304-LHU	A2	31622002LPK50	E7,E8
		1504-LLEUBAR	A3	31622003LPK50	E7,E8



## INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
31622007LPK50	E7,E8	5174-0	H18	52-C-54-2	A10
31622008LPK50	E7,E8	5175-0	H20	52-C-6214	A9
4204-MSB	A5	5175-1	H20	52-C-6BAR	A9
4204-MSB	A17	5175-2	H20	53151-K	A8
4204-MSBU	A5	5177-0	H20	53171-ER	A24
4204-MSBU	A17	5180-0	H15	53171-K	A8
5001-0	H13	5180-1	H15	5320-0	H1
5002-0	H13	5180-2	H15	5320-1	H1
5017-0	H32	5181-0	H15	5320-2	H1
5019-0	H32	5183-0	H18	5321-0	H1
5020-0	H32	5185-0	H8	5321-1	H1
5026-0	H13	5186-0	H24	5321-2	H1
5027-0	H13	5186-1	H24	5322-0	H1
5028-0	H13	5186-2	H24	5323-0	H1
5028-6	H13	5189-0	H24	5324-0	H1
5029-0	H13	5189-1	H24	5330-0	H1
5030-0	H13	5189-2	H24	5331-0	H1
5031-0	H13	5193-0	H24	5332-0	H1
5032-0	H14	5193-1	H24	5333-0	H4
5033-0	H14	5193-2	H24	5334-0	H4
5034-0	H14	5197-0	H24	5335-0	H4
5036-0	H14	5197-1	H24	5337-0	H4
5038-0	H14	5197-2	H24	5337-1	H4
5040-0	H14	5201-0	H23	5338-0	H5
5041-0	H14	52151-KBAR	A8	5340-0	H5
5042-0	H14	52151-KSB	A8	5341-0	H4
5043-0	H14	52151-MSB	A8	5342-0	H4
5045-0	H14	52151-MSB	A20	5343-0	H4
5091-0	H17	52151-MSBS	A8	5345-0	H4
5092-0	H19	52151-MSBS	A20	5346-0	H5
5093-0	H20	52171-1	A8	5348-0	H5
5094-0	H15	521711-MSB	A8	5361-0	H7
5095-0	H17	521711-MSB	A20	5361-1	H7
5096-0	H19	52171-KBAR	A8	5361-2	H7
5097-0	H20	52171-KSB	A8	5363-0	H7
5098-0	H19	52171-MSB	A8	5365-0	H7
5101-0	H15	52171-MSB	A20	5372-0	H7
5101-1	H15	5269-0	H31	5374-0	H7
5101-2	H15	5269-1	H31	5375-0	H7
5102-0	H15	5269-2	H31	5385-0	H1
5103-0	H17	5269-5	H31	5386-0	H1
5103-1	H17	5269-6	H31	5387-0	H1
5103-2	H17	5269-7	H31	5388-0	H5
5104-0	H17	5269-9	H31	5389-0	H5
5121-0	H21	5270-0	H31	5390-0	H6
5121-1	H21	5270-5	H31	5399-0	H2
5121-2	H21	5270-9	H31	5400-0	H2
5124-0	H22	5271-0	H31	5400-5	H2
5125-0	H22	52-C-0	A9	5403-0	H2
5126-0	H23	52-C-00BAR	A9	5405-0	H2
5128-0	H21	52-C-1	A9	5406-0	H2
5132-0	H19	52-C-10	A9	5407-0	H6
5133-0	H19	52-C-13	A9	5412-0	H3
5137-0	H21	52-C-14	A9	5413-0	H3
5138-0	H19	52-C-14-5/8	A9	5414-0	H3
5141-0	H21	52-C-15	A9	5415-0	H3
5145-0	H19	52-C-16	A9	54151-KBAR	A6
5146-0	H17	52-C-17	A9	54151-LABAR	A6
5146-1	H17	52-C-18	A9	54151-LB	A6
5147-0	H17	52-C-18-5/8	A9	54151-LBAR	A6
5148-0	H19	52-C-3	A9	54151-LDBAR	A6
5152-0	H15	52-C-49-1	A10	54151-LHB	A6
5153-0	H15	52-C-49-1/2	A10	54151-MSB	A6
5155-0	H17	52-C-49-1-1/4	A10	54151-MSB	A20
5155-1	H17	52-C-49-3/4	A10	54151-MSBABAR	A6
5155-2	H17	52-C-50-1-1/2	A10	54151-MSBABAR	A20
5157-0	H19	52-C-51-2	A10	54151-MSBL	A6
5160-0	H19	52-C-52-1	A10	54151-MSBL	A20
5166-0	H22	52-C-52-1/2	A10	54171-K	A6
5167-0	H22	52-C-52-1-1/4	A10	54171-L	A6
5173-0	H18	52-C-52-3/4	A10	54171-LB	A6
5173-1	H18	52-C-52-5/8	A10	54171-LFBAR	A6
5173-7	H18	52-C-53-1-1/2	A10	54171-LHB	A6

# INDEX

K3

NUMERICAL INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
54171-MSB	A6	72-C-18	A12	97122KS	C7
54171-MSB	A20	72-C-6-K	A12	97122SS	C3
54171-MSB-1	A20	73151-KBAR	A11	97123KS	C7
54171-MSB-1	A6	73171-KBAR	A11	97123SS	C3
54561-1/2	A24	7901RW	A27	97124KS	C7
54-C-1	A7	7902	A17	97124SS	C3
54-C-6	A7	7902	A19	97125SS	C3
54-C-62	A7	7902	A20	97151HV	C6
54-C-64	A7	7902	A20	97151HV	C6
54C-65BAR	A7	7902	A18	97151HV	G3
54-C-94	A7	820D	A27	97151KS	C7
55151-KBAR	A6	97001SS	C2	97151SS	C3
55171-K	A6	97002SS	C2	97152HV	C6
5606-0	H25	97071HV	C6	97152HV	G3
5606-1	H25	97071HV	C6	97152HVR	C6
5606-2	H25	97071HV	G3	97152HVR	G3
5611-0	H25	97071HV	G3	97152KS	C7
5612-0	H25	97071KS	C7	97152SS	C3
5613-0	H25	97071KSHV	C6	97153HV	C6
5613-1	H25	97071KSHV	C6	97153HV	G3
5613-2	H25	97071KSHV	G3	97153HVR	C6
5615-0	H25	97071KSHV	G3	97153HVR	G3
5620-0	H27	97071SS	C2	97153KS	C7
5621-0	H27	97072HV	C6	97153SS	C3
5621-6	H27	97072HV	G3	97154HV	C6
5624-0	H27	97072HVR	C6	97154HV	G3
5624-1	H27	97072HVR	G3	97154HVR	C6
5624-2	H27	97072KS	C7	97154HVR	G3
5625-0	H27	97072SS	C2	97154KS	C7
5625-1	H27	97073HV	C6	97154SS	C3
5625-2	H27	97073HV	G3	97155SS	C3
5694-0	H30	97073HVR	C6	97181SS	C4
5695-0	H30	97073HVR	G3	97182SS	C4
5712-5	H15	97073KS	C7	97191SS	C4
5730-0	H9	97073SS	C2	97201SS	C4
5735-0	H10	97074HV	C6	97202SS	C4
5740-0	H9	97074HV	G3	97211SS	C4
5775-0	H11	97074HVR	C6	97213SS	C5
5790-0	H11	97074HVR	G3	97223SS	C5
5792-0	H26	97074KS	C7	97233SS	C5
5795-0	H12	97074SS	C2	97242SS	C5
5818-5	H28	97075HV	C6	97322SS	C5
5818-6	H28	97075HV	G3	97323SS	C5
5820-8	H26	97075HVR	C6	97342SS	C5
5829-5	H29	97075HVR	G3	97352SS	C5
5829-6	H29	97075SS	C2	97353SS	C5
58355KIT	H16	97076HV	C6	97392SS	C5
5876-5	H29	97076HV	G3	97401KSHV	C6
5876-6	H29	97076HVR	C6	97401KSHV	C6
5883-5	H28	97076HVR	G3	97401KSHV	G3
5883-6	H28	97076SS	C2	97401SS	C2
5884-8	H30	97077HV	C6	97402KSHV	C6
5884-8	H30	97077HV	G3	97402KSHV	G3
5893-8	H30	97077HVR	C6	97402KSHVR	C6
5893-8	H30	97077HVR	G3	97402KSHVR	G3
6300H	C7	97077SS	C2	97402SS	C2
6409RAC	I5	97078SS	C2	97403KSHV	C6
6410RAC	I4	97079SS	C2	97403KSHV	G3
6448RAC	I2	97080SS	C2	97403KSHVR	C6
66SS	A27	97091SS	C4	97403KSHVR	G3
6851RF	C7	97092SS	C4	97403SS	C2
72151-K	A11	97101KS	C7	97404KSHV	C6
72171-1	A11	97101SS	C3	97404KSHV	G3
72171-KBAR	A11	97102KS	C7	97404KSHVR	C6
72171-KSB	A11	97102SS	C3	97404KSHVR	G3
72171-MSB	A11	97103KS	C7	97404SS	C2
72171-MSB	A20	97103SS	C3	97405SS	C2
72-C-1	A12	97104KS	C7	97406SS	C2
72-C-10	A12	97104SS	C3	97411SS	C4
72-C-13	A12	97105SS	C3	97421SS	C4
72-C-14	A12	97111SS	C4	97502SS	C5
72-C-15	A12	97121KS	C7	97512SS	C5
72-C-17	A12	97121SS	C3	97521SS	C4



## INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
97532SS	C5	BZ1050	D14	CCZI400	D7
97543SS	C5	BZ1075	D14	CH050	D17
97553SS	C5	BZ1100	D14	CH075	D17
97563SS	C5	BZ1125	D14	CH100	D17
97573SS	C5	BZ1150	D14	CH125	D17
97630SS	C4	BZ1200	D14	CH150	D17
97631SS	C4	BZ1250	D14	CH150R	D17
97730SS	C4	BZ1300	D14	CH200	D17
97731SS	C4	BZ1350	D14	CH250	D17
AD347H1	G2	BZ1400	D14	CH300	D17
AD347H1N	G2	CBA	A24	CH400	D17
AD347I2	G2	CBC100COM	D10	CKS050	D8
AD347I2N	G2	CBC125COM	D10	CKS075	D8
AD347W1	G2	CBC150COM	D10	CKS100	D8
AD347W1N	G2	CBC200COM	D10	CKS125	D8
AD347W2	G2	CBC50COM	D10	CKS150	D8
AD347W2N	G2	CBC75COM	D10	CKS200	D8
AP347H1	G2	CBLB100COM	D10	CKS250	D8
AP347H1N	G2	CBLB125COM	D10	CKS300	D8
AP347I2	G2	CBLB150COM	D10	CKS400	D8
AP347I2N	G2	CBLB200COM	D10	CKZ050	D8
AP347W1	G2	CBLB250RIG	D10	CKZ075	D8
AP347W1N	G2	CBLB300RIG	D10	CKZ100	D8
AP347W2	G2	CBLB400RIG	D10	CKZ125	D8
AP347W2N	G2	CBLB50COM	D10	CKZ150	D8
AU347H1	G2	CBLB75COM	D10	CKZ200	D8
AU347H1N	G2	CBLRL100COM	D10	CKZ250	D8
AU347I2	G2	CBLRL125COM	D10	CKZ300	D8
AU347I2N	G2	CBLRL150COM	D10	CKZ400	D8
AU347W1	G2	CBLRL200COM	D10	CN050	D11
AU347W1N	G2	CBLRL50COM	D10	CN075	D11
AU347W2	G2	CBLRL75COM	D10	CN100	D11
AU347W2N	G2	CBT100COM	D10	CN125	D11
B2025	E11	CBT125COM	D10	CN150	D11
B2038	E11	CBT150COM	D10	CN200	D11
B2050	E11	CBT200COM	D10	CN250	D11
B2075	E11	CBT50COM	D10	CN300	D11
B2100	E11	CBT75COM	D10	CN400	D11
B2125	E11	CCS050	D7	CS1	D2
B2150	E11	CCS075	D7	CS10	D2
B2200	E11	CCS100	D7	CS11	D2
BIG050	D13	CCS125	D7	CS21	D2
BIG075	D13	CCS150	D7	CS3	D2
BIG100	D13	CCS200	D7	CS4	D2
BIG125	D13	CCS250	D7	CS50	D2
BIG150	D13	CCS300	D7	CSC10	D2
BIG200	D13	CCS400	D7	DS-30	A26
BIG250	D13	CCSI050	D7	DS-55	A26
BIG300	D13	CCSI075	D7	DS-BO	A26
BIG350	D13	CCSI100	D7	DS-PL	A26
BIG400	D13	CCSI125	D7	DUP038	D1
BMI050	D14	CCSI150	D7	DUP038	D3
BMI075	D14	CCSI200	D7	DUP038SF	D1
BMI100	D14	CCSI250	D7	DUP038SF	D3
BMI125	D14	CCSI300	D7	E1S050	D9
BMI150	D14	CCSI400	D7	E1S075	D9
BMI200	D14	CCZ050	D7	E1S100	D9
BMI250	D14	CCZ075	D7	E1S125	D9
BMI300	D14	CCZ100	D7	E1S150	D9
BMI350	D14	CCZ125	D7	E1S200	D9
BMI400	D14	CCZ150	D7	E2S050	D9
BP050	D13	CCZ200	D7	E2S075	D9
BP075	D13	CCZ250	D7	E2S100	D9
BP100	D13	CCZ300	D7	E2S125	D9
BP125	D13	CCZ400	D7	E2S150	D9
BP150	D13	CCZI050	D7	E2S200	D9
BP200	D13	CCZI075	D7	E2S250	D9
BP250	D13	CCZI100	D7	E2S300	D9
BP300	D13	CCZI125	D7	E2S400	D9
BP350	D13	CCZI150	D7	EFK5038	D3
BP400	D13	CCZI200	D7	EFK5050	D3
BP500	D13	CCZI250	D7	EFK7575	D3
BP600	D13	CCZI300	D7	EK050	D12

# INDEX

K5

NUMERICAL INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
EK075	D12	GSB-2	A25	HC5EY05	F32
EK100	D12	GSB-3	A25	HC5EY07	F32
EK125	D12	GSB-4	A25	HC5EY10	F32
EK150	D12	GSB-5	A25	HC5EY15	F32
EK200	D12	GSB-6	A25	HC5EY20	F32
EK250	D12	HBL1209	G1	HC5EY25	F32
EK300	D12	HBL18201CN	G1	HC6B01	F32
EK350	D12	HBL18201LCN	G1	HC6B03	F32
EK400	D12	HBL18203CN	G1	HC6B05	F32
EK500	D12	HBL18203ICN	G1	HC6B07	F32
EK600	D12	HBL18203LCN	G1	HC6B10	F32
EZ-101BAR	A3	HBL18204ICN	G1	HC6B15	F32
F2025	E12	HBL18221CN	G1	HC6B20	F32
F20259	E12	HBL18221ICN	G1	HC6B25	F32
FHC1022	E6	HBL18223CN	G1	HC6GY01	F32
FHC1023	E6	HBL18223ICN	G1	HC6GY03	F32
FHC1033	E6	HBL201ICN	G1	HC6GY05	F32
FHC1034	E6	HBL2101347I	G1	HC6GY07	F32
FHC1042	E6	HBL2101347W	G1	HC6GY10	F32
FHC1043	E6	HBL2103347I	G1	HC6GY15	F32
FLOCK1	F33	HBL2103347W	G1	HC6GY20	F32
FSPFP6X	F33	HBL2121347BK	G1	HC6GY25	F32
FSPHD6X	F33	HBL2121347I	G1	HC6R01	F32
G1038	E10	HBL2121347RD	G1	HC6R03	F32
G1050	E10	HBL2121347W	G1	HC6R05	F32
G1075	E10	HBL2123347BK	G1	HC6R07	F32
G1100	E10	HBL2123347I	G1	HC6R10	F32
G1125	E10	HBL2123347RD	G1	HC6R15	F32
G1150	E10	HBL2123347W	G1	HC6R20	F32
G1200	E10	HBL2124347W	G1	HC6R25	F32
GCB0510	D17	HBL3W100C	J1	HC6Y01	F32
GCB1220	D17	HBL3W50	J1	HC6Y03	F32
GCZ0510	D17	HBL4PS1050USB	J3	HC6Y05	F32
GF15ALLA	F15	HBL6PPS	J2	HC6Y07	F32
GF15BKLA	F15	HBL6PS1050MA	J2	HC6Y10	F32
GF15GYLA	F15	HBL6PS35015A	J2	HC6Y15	F32
GF15ILA	F15	HBL6PS350A	J2	HC6Y20	F32
GF15LA	F15	HBL6RSPS2100	J3	HC6Y25	F32
GF15LALA	F15	HBL7PS105015A	J2	HDPC03BK	F27
GF15RLA	F15	HBL7PS1050A	J2	HDPC06BK	F27
GF15WLA	F15	HBL7PS1050MA	J2	HJ1001BPK25	E9
GF20ALLA	F15	HBL8ESPS1050C	J3	HJ1001GPK25	E9
GF20BKLA	F15	HBL8ESPS1050M	J3	HJ1002BPK25	E9
GF20GYLA	F15	HBL8PS2100DA	J2	HJ1002GPK25	E9
GF20ILA	F15	HBL8PS2100MA	J2	HJ1003BPK25	E9
GF20LA	F15	HBLCATC	J3	HJ1003GPK25	E9
GF20LALA	F15	HBLWH80	J1	HJ1004BPK25	E9
GF20RLA	F15	HC5EB01	F32	HJ1004GPK25	E9
GF20WLA	F15	HC5EB03	F32	HJ1005BPK25	E9
GFBF20ALLA	F15	HC5EB05	F32	HJ1005GPK25	E9
GFBF20BKLA	F15	HC5EB07	F32	HJ1006BPK25	E9
GFBF20GYLA	F15	HC5EB10	F32	HJ1006GPK25	E9
GFBF20ILA	F15	HC5EB15	F32	HJ1010BPK25	E9
GFBF20LA	F15	HC5EB20	F32	HJ1010GPK25	E9
GFBF20LALA	F15	HC5EB25	F32	HJ1011BPK25	E9
GFBF20RLA	F15	HC5EGY01	F32	HJ1011GPK25	E9
GFBF20WLA	F15	HC5EGY03	F32	HJ1012BPK25	E9
GFTR15	F15	HC5EGY05	F32	HJ1012GPK25	E9
GFTR15AL	F15	HC5EGY07	F32	HJ1013BPK25	E9
GFTR15BK	F15	HC5EGY10	F32	HJ1013GPK25	E9
GFTR15GY	F15	HC5EGY15	F32	HJ1014BPK25	E9
GFTR15I	F15	HC5EGY20	F32	HJ1014GPK25	E9
GFTR15LA	F15	HC5EGY25	F32	HJ1015BPK25	E9
GFTR15R	F15	HC5ER01	F32	HJ1015GPK25	E9
GFTR15W	F15	HC5ER03	F32	HJ1038BPK25	E9
GFTR20	F15	HC5ER05	F32	HJ1038GPK25	E9
GFTR20AL	F15	HC5ER07	F32	HJ1039BPK25	E9
GFTR20BK	F15	HC5ER10	F32	HJ1039GPK25	E9
GFTR20GY	F15	HC5ER15	F32	HJ1040BPK25	E9
GFTR20I	F15	HC5ER20	F32	HJ1040GPK25	E9
GFTR20LA	F15	HC5ER25	F32	HJ1041BPK25	E9
GFTR20R	F15	HC5EY01	F32	HJ1041GPK25	E9
GFTR20W	F15	HC5EY03	F32	HJ1042BPK25	E9



## INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
HJ1042GPK25	E9	LTM200	D5	LTZ1150	D6
HJ1043BPK25	E9	LTM250	D5	LTZ1200	D6
HJ1043GPK25	E9	LTM300	D5	LTZ1250	D6
HJ1044BPK25	E9	LTM400	D5	LTZ1300	D6
HJ1044GPK25	E9	LTM45038	D5	LTZ1400	D6
HJ1055BPK25	E9	LTM45050	D5	LTZ190038	D6
HJ1055GPK25	E9	LTM45075	D5	LTZ190050	D6
HJ1056BPK25	E9	LTM45100	D5	LTZ190075	D6
HJ1056GPK25	E9	LTM45125	D5	LTZ190100	D6
HJ1057BPK25	E9	LTM45150	D5	LTZ190125	D6
HJ1057GPK25	E9	LTM45200	D5	LTZ190150	D6
HJ1058BPK25	E9	LTM90038	D5	LTZ190200	D6
HJ1058GPK25	E9	LTM90050	D5	LTZ190250	D6
HJ1059BPK25	E9	LTM90075	D5	LTZ190300	D6
HJ1059GPK25	E9	LTM90100	D5	LTZ190400	D6
HJ1060BPK25	E9	LTM90125	D5	LVP	A25
HJ1060GPK25	E9	LTM90150	D5	MBD-1-HV	A22
HPS1347BK	G3	LTM90200	D5	MBD-1-K	A23
HPS1347I	G3	LTM90250	D5	MBD-2-HV	A22
HPS1347R	G3	LTM90300	D5	MBD-2-K	A23
HPS1347W	G3	LTM90400	D5	MBD-3-HV	A22
HPS2347I	G3	LTM1038	D5	MBD-3-K	A23
HPS2347W	G3	LTM1050	D5	MBD-4-HV	A22
HPS3347I	G3	LTM1075	D5	MBD-4-K	A23
HPS3347W	G3	LTM1100	D5	MBD-5-K	A23
HS1001BPK25	E9	LTM1125	D5	MBD-6-K	A23
HS1001GPK25	E9	LTM1150	D5	MBD-P	A23
HS1002BPK25	E9	LTM1200	D5	MBS-1-HV	A22
HS1002GPK25	E9	LTM1250	D5	MBS-1-K	A23
HS1003BPK25	E9	LTM1300	D5	MBS-2-HV	A22
HS1003GPK25	E9	LTM1400	D5	MBS-2-K	A23
HS1004BPK25	E9	LTM145038	D5	MBS-3-HV	A22
HS1004GPK25	E9	LTM145050	D5	MBS-3-K	A23
HVB1BAR	A26	LTM145075	D5	MBS-4-HV	A22
HVB2BAR	A26	LTM145100	D5	MBS-4-K	A23
HVB3BAR	A26	LTM145125	D5	MBS-5-K	A23
HVBCBAR	A26	LTM145150	D5	MBS-6-K	A23
HVBSDBAR	A26	LTM145200	D5	MBS-P	A23
IMF1W	F26	LTM190038	D5	NHC1010	E5
ISM1EI	F38	LTM190050	D5	NHC1011	E5
ISM1W	F38	LTM190075	D5	NHC1012	E5
ISM2EI	F38	LTM190100	D5	NHC1020	E5
ISM2W	F38	LTM190125	D5	NHC1020CR	E5
JC10	D17	LTM190150	D5	NHC1021	E5
JC10B	D17	LTM190200	D5	NHC1021CR	E5
KIT-201	A3	LTM190250	D5	NHC1021ZP	E5
KO050	D16	LTM190300	D5	NHC1022	E5
KO075	D16	LTM190400	D5	NHC1022CR	E5
KO100	D16	LTZ038	D6	NHC1022ZP	E5
KO125	D16	LTZ050	D6	NHC1023	E5
KO150	D16	LTZ075	D6	NHC1023CR	E5
KO200	D16	LTZ100	D6	NHC1023ZP	E5
LC3	D17	LTZ125	D6	NHC1024	E5
LC3B	D17	LTZ150	D6	NHC1024CR	E5
LNS050	D15	LTZ200	D6	NHC1024ZP	E5
LNS075	D15	LTZ250	D6	NHC1035	E5
LNS100	D15	LTZ300	D6	NHC1035CR	E5
LNS125	D15	LTZ400	D6	NHC1035ZP	E5
LNS150	D15	LTZ90038	D6	NHC1036	E5
LNS200	D15	LTZ90050	D6	NHC1036CR	E5
LNS250	D15	LTZ90075	D6	NHC1036ZP	E5
LNS300	D15	LTZ90100	D6	NHC1037	E5
LNS350	D15	LTZ90125	D6	NHC1037CR	E5
LNS400	D15	LTZ90150	D6	NHC1037ZP	E5
LNS500	D15	LTZ90200	D6	NHC1038	E5
LNS600	D15	LTZ90250	D6	NHC1038CR	E5
LRW	A27	LTZ90300	D6	NHC1038ZP	E5
LTM038	D5	LTZ90400	D6	NHC1040	E5
LTM050	D5	LTZ1038	D6	NHC1041	E5
LTM075	D5	LTZ1050	D6	NHC1041CR	E5
LTM100	D5	LTZ1075	D6	NHC1041ZP	E5
LTM125	D5	LTZ1100	D6	NHC1042	E5
LTM150	D5	LTZ1125	D6	NHC1042CR	E5



# INDEX

K7

NUMERICAL INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
NHC1043	E5	NP262BK	F5	NPJ226GY	F6
NHC1043CR	E5	NP262GY	F5	NPJ226I	F6
NHC1044	E5	NP262I	F5	NPJ226LA	F6
NHC1051	E5	NP262LA	F5	NPJ226W	F6
NHC1052	E5	NP262W	F5	NPJ26	F5
NHC1053	E5	NP263	F5	NPJ262	F5
NHC1054	E5	NP263AL	F5	NPJ262AL	F5
NHC1057	E5	NP263BK	F5	NPJ262BK	F5
NHC1059	E5	NP263GY	F5	NPJ262GY	F5
NHC1066	E5	NP263I	F5	NPJ262I	F5
NHC2022CR	E5	NP263LA	F5	NPJ262LA	F5
NHC2023CR	E5	NP263W	F5	NPJ262W	F5
NHC2024CR	E5	NP264	F5	NPJ263	F5
NHC2041CR	E5	NP264AL	F5	NPJ263AL	F5
NHC2042CR	E5	NP264BK	F5	NPJ263BK	F5
NHC2043CR	E5	NP264GY	F5	NPJ263GY	F5
NMB038	D1	NP264I	F5	NPJ263I	F5
NMB075	D1	NP264LA	F5	NPJ263LA	F5
NMC038	D1	NP264W	F5	NPJ263W	F5
NMC075	D1	NP265	F5	NPJ264	F5
NMC100	D1	NP265AL	F5	NPJ264AL	F5
NMC125	D1	NP265BK	F5	NPJ264BK	F5
NMC150	D1	NP265GY	F5	NPJ264GY	F5
NMC200	D1	NP265I	F5	NPJ264I	F5
NMPI050	D1	NP265LA	F5	NPJ264LA	F5
NMPI050B(BUCKET)	D1	NP265W	F5	NPJ264W	F5
NMPI075	D1	NP266	F5	NPJ26AL	F5
NMPI075B(BUCKET)	D1	NP266AL	F5	NPJ26BK	F5
NMS038	D1	NP266BK	F5	NPJ26GY	F5
NMS038SF	D1	NP266GY	F5	NPJ26I	F5
NMS050	D1	NP266I	F5	NPJ26LA	F5
NMS075	D1	NP266LA	F5	NPJ26W	F5
NMS100	D1	NP266W	F5	NPJ703I	F16
NMSI050	D1	NP26AL	F5	NPJ703W	F16
NMSQ038	D1	NP26BK	F5	NPJ724I	F16
NP126	F6	NP26GY	F5	NPJ724W	F16
NP1262	F6	NP26I	F5	NPJ826	F6
NP1262AL	F6	NP26LA	F5	NPJ826AL	F6
NP1262BK	F6	NP26W	F5	NPJ826BK	F6
NP1262GY	F6	NP26W	F26	NPJ826GY	F6
NP1262I	F6	NP326	F6	NPJ826I	F6
NP1262LA	F6	NP326AL	F6	NPJ826LA	F6
NP1262W	F6	NP326BK	F6	NPJ826W	F6
NP126AL	F6	NP326GY	F6	NS5E12U	F32
NP126BK	F6	NP326I	F6	NS5E24U	F32
NP126GY	F6	NP326LA	F6	NS5E48U	F32
NP126I	F6	NP326W	F6	NS612AL	F7
NP126LA	F6	NP703I	F16	NS612AL	F35
NP126W	F6	NP703W	F16	NS612BK	F7
NP1326	F6	NP724I	F16	NS612BK	F35
NP1326AL	F6	NP724W	F16	NS612GY	F7
NP1326BK	F6	NP826	F6	NS612GY	F35
NP1326GY	F6	NP826AL	F6	NS612I	F7
NP1326I	F6	NP826BK	F6	NS612I	F35
NP1326LA	F6	NP826GY	F6	NS612LA	F7
NP1326W	F6	NP826I	F6	NS612LA	F35
NP226	F6	NP826LA	F6	NS612U	F32
NP2262	F6	NP826W	F6	NS612W	F7
NP2262AL	F6	NPJ126	F6	NS612W	F35
NP2262BK	F6	NPJ126AL	F6	NS613AL	F7
NP2262GY	F6	NPJ126BK	F6	NS613AL	F35
NP2262I	F6	NPJ126GY	F6	NS613BK	F7
NP2262LA	F6	NPJ126I	F6	NS613BK	F35
NP2262W	F6	NPJ126LA	F6	NS613GY	F7
NP226AL	F6	NPJ126W	F6	NS613GY	F35
NP226BK	F6	NPJ1326	F6	NS613I	F7
NP226GY	F6	NPJ1326AL	F6	NS613I	F35
NP226I	F6	NPJ1326I	F6	NS613LA	F7
NP226LA	F6	NPJ1326LA	F6	NS613LA	F35
NP226W	F6	NPJ1326W	F6	NS613W	F7
NP26	F5	NPJ226	F6	NS613W	F35
NP262	F5	NPJ226AL	F6	NS614AL	F7
NP262AL	F5	NPJ226BK	F6	NS614AL	F35



## INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
NS614BK	F7	NS744W	F37	NS782I	F9
NS614BK	F35	NS745I	F37	NS782I	F36
NS614GY	F7	NS745W	F37	NS782LA	F9
NS614GY	F35	NS747AL	F37	NS782LA	F36
NS614I	F7	NS747I	F37	NS782W	F9
NS614I	F35	NS747LA	F37	NS782W	F36
NS614LA	F7	NS747W	F37	NS783AL	F9
NS614LA	F35	NS748AL	F37	NS783AL	F36
NS614W	F7	NS748I	F37	NS783I	F9
NS614W	F35	NS748LA	F37	NS783I	F36
NS616AL	F7	NS748W	F37	NS783LA	F9
NS616AL	F35	NS750AL	F37	NS783LA	F36
NS616BK	F7	NS750I	F37	NS783W	F9
NS616BK	F35	NS750LA	F37	NS783W	F36
NS616GY	F7	NS750W	F37	NS784	F9
NS616GY	F35	NS751AL	F37	NS784	F36
NS616I	F7	NS751I	F37	NS784AL	F9
NS616I	F35	NS751LA	F37	NS784AL	F36
NS616LA	F7	NS751W	F37	NS784BK	F9
NS616LA	F35	NS752AL	F37	NS784BK	F36
NS616W	F7	NS752I	F37	NS784GY	F9
NS616W	F35	NS752LA	F37	NS784GY	F36
NS620AL	F7	NS752W	F37	NS784I	F9
NS620AL	F35	NS755AL	F37	NS784I	F36
NS620I	F7	NS755I	F37	NS784LA	F9
NS620I	F35	NS755LA	F37	NS784LA	F36
NS620LA	F7	NS755W	F37	NS784W	F9
NS620LA	F35	NS760I	F38	NS784W	F36
NS620W	F7	NS760W	F38	NS785	F9
NS620W	F35	NS761I	F38	NS785	F36
NS621AL	F7	NS761W	F38	NS785AL	F9
NS621AL	F35	NS770	F9	NS785AL	F36
NS621I	F7	NS770	F36	NS785BK	F9
NS621I	F35	NS770AL	F9	NS785BK	F36
NS621LA	F7	NS770AL	F36	NS785GY	F9
NS621LA	F35	NS770BK	F9	NS785GY	F36
NS621W	F7	NS770BK	F36	NS785I	F9
NS621W	F35	NS770GY	F9	NS785I	F36
NS624U	F32	NS770GY	F36	NS785LA	F9
NS648U	F32	NS770I	F9	NS785LA	F36
NS721AL	F38	NS770I	F36	NS785W	F9
NS721I	F38	NS770LA	F9	NS785W	F36
NS721W	F38	NS770LA	F36	NS790	F37
NS722AL	F38	NS770W	F9	NS790AL	F37
NS722I	F38	NS770W	F36	NS790BK	F37
NS722W	F38	NS771	F9	NS790GY	F37
NS723SS	F38	NS771	F36	NS790I	F37
NS725AL	F38	NS771AL	F9	NS790LA	F37
NS725I	F38	NS771AL	F36	NS790W	F37
NS725LA	F38	NS771I	F9	NS801AL	F27
NS725W	F38	NS771I	F36	NS801BK	F27
NS726SS	F38	NS771LA	F9	NS801GY	F27
NS730	F37	NS771LA	F36	NS801I	F27
NS730AL	F37	NS771W	F9	NS801LA	F27
NS730I	F37	NS771W	F36	NS801W	F26
NS730LA	F37	NS772AL	F9	NS801W	F27
NS730W	F37	NS772AL	F36	NS802AL	F27
NS732	F37	NS772I	F9	NS802BK	F27
NS732AL	F37	NS772I	F36	NS802GY	F27
NS732I	F37	NS772LA	F9	NS802I	F27
NS732LA	F37	NS772LA	F36	NS802LA	F27
NS732W	F37	NS772W	F9	NS802W	F26
NS735	F37	NS772W	F36	NS802W	F27
NS735AL	F37	NS780AL	F9	NSAV62M	F26
NS735I	F37	NS780AL	F36	NSAV6C	F26
NS735LA	F37	NS780I	F9	NSF70AL	F8
NS735W	F37	NS780I	F36	NSF70AL	F34
NS742AL	F37	NS780LA	F9	NSF70BK	F8
NS742I	F37	NS780LA	F36	NSF70BK	F34
NS742LA	F37	NS780W	F9	NSF70GY	F8
NS742W	F37	NS780W	F36	NSF70GY	F34
NS744AL	F37	NS782AL	F9	NSF70I	F8
NS744I	F37	NS782AL	F36	NSF70I	F34

# INDEX

K9

NUMERICAL INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
NSF70LA	F8	NSOAM8	F31	NSP104LA	F35
NSF70LA	F34	NSOBM	F31	NSP104W	F35
NSF70W	F8	NSOBNK14	F29	NSP106AL	F35
NSF70W	F26	NSOBOX14	F29	NSP106BK	F35
NSF70W	F34	NSOBOX14B	F29	NSP106GY	F35
NSJ5EAL	F8	NSOBOX14BC	F29	NSP106I	F35
NSJ5EAL	F34	NSOBOX14C	F29	NSP106LA	F35
NSJ5EB	F8	NSOBOX14D	F29	NSP106W	F35
NSJ5EB	F34	NSOBOX14DL	F29	NSP11AL	F35
NSJ5EBK	F8	NSOBOX14X2	F29	NSP11BK	F35
NSJ5EBK	F34	NSOBOX28	F29	NSP11GY	F35
NSJ5EGN	F8	NSOBOX28B	F29	NSP11I	F35
NSJ5EGN	F34	NSOBOX28BC	F29	NSP11LA	F35
NSJ5EGY	F8	NSOBOX28C	F29	NSP11W	F35
NSJ5EGY	F34	NSOBOX28D	F29	NSP12AL	F35
NSJ5EI	F8	NSOBOX28DL	F29	NSP12BK	F35
NSJ5EI	F34	NSOBOX28X2	F29	NSP12GY	F35
NSJ5ELA	F8	NSOBOX48	F29	NSP12I	F35
NSJ5ELA	F34	NSOBX10	F29	NSP12LA	F35
NSJ5EOR	F8	NSOBX10B	F29	NSP12W	F35
NSJ5EOR	F34	NSOBX10BC	F29	NSP13AL	F35
NSJ5ER	F8	NSOBX10C	F29	NSP13BK	F35
NSJ5ER	F34	NSOBX10D	F29	NSP13GY	F35
NSJ5EW	F8	NSODK6	F30	NSP13I	F35
NSJ5EW	F34	NSODM8	F30	NSP13LA	F35
NSJ5EY	F8	NSODM8C6	F30	NSP13W	F35
NSJ5EY	F34	NSOETM8	F30	NSP14AL	F35
NSJ6AL	F8	NSOFBS	F33	NSP14BK	F35
NSJ6AL	F34	NSOKA	F33	NSP14GY	F35
NSJ6B	F8	NSOKP	F33	NSP14I	F35
NSJ6B	F34	NSOKP	F26	NSP14LA	F35
NSJ6BK	F8	NSOKPS	F26	NSP14W	F26
NSJ6BK	F34	NSOKPS	F33	NSP14W	F35
NSJ6GN	F8	NSOMTM24	F30	NSP16AL	F35
NSJ6GN	F34	NSOPTM8	F30	NSP16BK	F35
NSJ6GY	F8	NSORAVC	F33	NSP16GY	F35
NSJ6GY	F34	NSOSAVC	F33	NSP16I	F35
NSJ6I	F8	NSOTVDM6	F30	NSP16LA	F35
NSJ6I	F34	NSOTVM6	F30	NSP16W	F35
NSJ6LA	F8	NSOVAMP	F31	NSP24AL	F35
NSJ6LA	F34	NSOVAMP240	F31	NSP24BK	F35
NSJ6OR	F8	NSOVM4	F31	NSP24GY	F35
NSJ6OR	F34	NSOVM42G	F31	NSP24I	F35
NSJ6R	F8	NSOVM6	F31	NSP24LA	F35
NSJ6R	F34	NSOVM62G	F31	NSP24W	F35
NSJ6W	F8	NSOVM8	F31	NSP26AL	F35
NSJ6W	F26	NSOVM82G	F31	NSP26BK	F35
NSJ6W	F34	NSP050B(BUCKET)	D2	NSP26GY	F35
NSJ6Y	F8	NSP050P	D2	NSP26I	F35
NSJ6Y	F34	NSP075B(BUCKET)	D2	NSP26LA	F35
NSJUAL	F8	NSP075P	D2	NSP26W	F35
NSJUAL	F34	NSP101AL	F35	OBEXBAR	A6
NSJUB	F8	NSP101BK	F35	ON050	D11
NSJUB	F34	NSP101GY	F35	ON075	D11
NSJUBK	F8	NSP101I	F35	ON100	D11
NSJUBK	F34	NSP101LA	F35	ON125	D11
NSJUGN	F8	NSP101W	F35	ON150	D11
NSJUGN	F34	NSP102AL	F35	ON200	D11
NSJUGY	F8	NSP102BK	F35	P0389NBK	E12
NSJUGY	F34	NSP102GY	F35	P0389NGY	E12
NSJUI	F8	NSP102I	F35	P038NBKA	E12
NSJUI	F34	NSP102LA	F35	P038NGYA	E12
NSJULA	F8	NSP102W	F35	P0509NBK	E12
NSJULA	F34	NSP103AL	F35	P0509NGY	E12
NSJUOR	F8	NSP103BK	F35	P050NBKA	E12
NSJUOR	F34	NSP103GY	F35	P050NGYA	E12
NSJUR	F8	NSP103I	F35	P0759NBK	E12
NSJUR	F34	NSP103LA	F35	P0759NGY	E12
NSJUW	F8	NSP103W	F35	P075NBKA	E12
NSJUW	F34	NSP104AL	F35	P075NGYA	E12
NSJUY	F8	NSP104BK	F35	P1009NBK	E12
NSJUY	F34	NSP104GY	F35	P1009NGY	E12
NSO6P1DM	F30	NSP104I	F35	P100NBKA	E12



INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
P100NGYA	E12	PERR125	D15	RC101AL	F12
P1259NBK	E12	PS0389NBK	E12	RC101I	F12
P1259NGY	E12	PS0389NGY	E12	RC101LA	F12
P125NBK	E12	PS0509NBK	E12	RC101W	F12
P125NGY	E12	PS0509NGY	E12	RC103	F12
P150NBK	E12	PS05GYKIT	E12	RC103AL	F12
P150NGY	E12	PS0759NBK	E12	RC103I	F12
P200NBK	E12	PS0759NGY	E12	RC103LA	F12
P200NGY	E12	PS07GYKIT	E12	RC103W	F12
PB001	.C2	PS1009NBK	E12	RC108	F12
PB002	.C2	PS1009NGY	E12	RC108AL	F12
PB071	.C2	R1S050	D12	RC108ALTR	F12
PB072	.C2	R1S075	D12	RC108I	F12
PB073	.C2	R1S100	D12	RC108ITR	F12
PB074	.C2	R1S125	D12	RC108LA	F12
PB075	.C2	R1S150	D12	RC108LATR	F12
PB076	.C2	R1S200	D12	RC108TR	F12
PB077	.C2	R1S250	D12	RC108W	F12
PB078	.C2	R1S300	D12	RC108WTR	F12
PB079	.C2	R1S350	D12	RC109	F12
PB080	.C2	R1S400	D12	RC109AL	F12
PB091	.C4	R28032401	F19	RC109I	F12
PB092	.C4	R28032406	F19	RC109LA	F12
PB101	.C3	R2S050	D12	RC109W	F12
PB102	.C3	R2S075	D12	RC303	F12
PB103	.C3	R2S100	D12	RC303AL	F12
PB104	.C3	R2S125	D12	RC303I	F12
PB111	.C4	R2S150	D12	RC303LA	F12
PB121	.C3	R2S200	D12	RC303W	F12
PB122	.C3	R2S250	D12	RC308	F12
PB123	.C3	R2S300	D12	RC308AL	F12
PB124	.C3	R2S350	D12	RC308ALTR	F12
PB151	.C3	R2S400	D12	RC308I	F12
PB152	.C3	RAY103PAL	F19	RC308ITR	F12
PB153	.C3	RAY103PI	F19	RC308TR	F12
PB154	.C3	RAY103PLA	F19	RC308W	F12
PB181	.C4	RAY103PW	F19	RC308WTR	F12
PB182	.C4	RAY10PAL	F19	RC309	F12
PB191	.C4	RAY10PI	F19	RC309AL	F12
PB201	.C4	RAY10PLA	F19	RC309I	F12
PB202	.C4	RAY10PW	F19	RC309W	F12
PB211	.C4	RAY2LFSQAL	F19	RCD101AL	F3
PB401	.C2	RAY2LFSQI	F19	RCD101BK	F3
PB402	.C2	RAY2LFSQLA	F19	RCD101GY	F3
PB403	.C2	RAY2LFSQW	F19	RCD101I	F3
PB404	.C2	RAY600PAL	F19	RCD101LA	F3
PB404	.C2	RAY600PI	F19	RCD101W	F3
PB406	.C2	RAY600PLA	F19	RCD103AL	F3
PB411	.C4	RAY600PW	F19	RCD103BK	F3
PB411	.C4	RAY603PAL	F19	RCD103GY	F3
PB502	.C5	RAY603PI	F19	RCD103I	F3
PB512	.C5	RAY603PLA	F19	RCD103LA	F3
PB521	.C4	RAY603PW	F19	RCD103W	F3
PB532	.C5	RAYFSQFAL	F19	RCD108AL	F3
PB543	.C5	RAYFSQFI	F19	RCD108ALTR	F3
PB553	.C5	RAYFSQFLA	F19	RCD108BK	F3
PB563	.C5	RAYFSQFW	F19	RCD108BKTR	F3
PB630	.C4	RB0705	D11	RCD108GY	F3
PB631	.C4	RB1005	D11	RCD108GYTR	F3
PB730	.C4	RB1007	D11	RCD108I	F3
PB731	.C4	RB1205	D11	RCD108ITR	F3
PEEB050	.D9	RB1207	D11	RCD108LA	F3
PEEB075	.D9	RB1210	D11	RCD108LATR	F3
PEEB100	.D9	RB1505	D11	RCD108W	F3
PEEE050	.D9	RB1507	D11	RCD108WTR	F3
PEEE075	.D9	RB1510	D11	RCD109AL	F3
PEEE100	.D9	RB1512	D11	RCD109I	F3
PERB050	.D15	RB2005	D11	RCD109LA	F3
PERB075	.D15	RB2007	D11	RCD109W	F3
PERB100	.D15	RB2010	D11	RCD111AL	F3
PERR050	.D15	RB2012	D11	RCD111BK	F3
PERR075	.D15	RB2015	D11	RCD111I	F3
PERR100	.D15	RC101	F12	RCD111LA	F3

# INDEX

K11

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
RCD111W	F3	RDVELV303PAL	F18	RJ620GY	F24
RCD303AL	F3	RDVELV303PI	F18	RJ620GYTR	F17
RCD303BK	F3	RDVELV303PLA	F18	RJ620GYTR	F24
RCD303GY	F3	RDVELV303PW	F18	RJ620I	F17
RCD303I	F3	RDVFSQFAL	F18	RJ620I	F24
RCD303LA	F3	RDVFSQFI	F18	RJ620ITR	F17
RCD303W	F3	RDVFSQFLA	F18	RJ620ITR	F24
RCD308AL	F3	RDVFSQFW	F18	RJ620LA	F17
RCD308ALTR	F3	RDVLV600PAL	F18	RJ620LA	F24
RCD308BK	F3	RDVLV600PI	F18	RJ620LATR	F17
RCD308BKTR	F3	RDVLV600PLA	F18	RJ620LATR	F24
RCD308GY	F3	RDVLV600PW	F18	RJ620W	F17
RCD308GYTR	F3	RDVLV603PAL	F18	RJ620W	F24
RCD308I	F3	RDVLV603PI	F18	RJ620WTR	F17
RCD308ITR	F3	RDVLV603PLA	F18	RJ620WTR	F24
RCD308LA	F3	RDVLV603PW	F18	RJ62AL	F17
RCD308LATR	F3	REK050	D15	RJ62AL	F24
RCD308W	F3	REK075	D15	RJ62ALTR	F17
RCD308WTR	F3	REK100	D15	RJ62ALTR	F24
RCD309AL	F3	RF151	F22	RJ62BK	F17
RCD309I	F3	RF151D	F22	RJ62BK	F24
RCD309LA	F3	RF151TR	F22	RJ62BKTR	F17
RCD309W	F3	RF500	F21	RJ62BKTR	F24
RCW1AL	F5	RF506AL	F21	RJ62GY	F17
RCW1I	F5	RF506BK	F21	RJ62GY	F24
RCW1LA	F5	RF506BN	F21	RJ62GYTR	F17
RCW1W	F5	RF506BP	F21	RJ62GYTR	F24
RCW2AL	F5	RF506BR	F21	RJ62I	F17
RCW2I	F5	RF506CH	F21	RJ62I	F24
RCW2LA	F5	RF506CU	F21	RJ62ITR	F17
RCW2W	F5	RF506NI	F21	RJ62ITR	F24
RCW3AL	F5	RF506SS	F21	RJ62LA	F17
RCW3I	F5	RF507AL	F21	RJ62LA	F24
RCW3LA	F5	RF507BK	F21	RJ62LATR	F17
RCW3W	F5	RF507BN	F21	RJ62LATR	F24
RCW4AL	F5	RF507BP	F21	RJ62W	F17
RCW4I	F5	RF507BR	F21	RJ62W	F24
RCW4LA	F5	RF507CH	F21	RJ62WTR	F17
RCW4W	F5	RF507CU	F21	RJ62WTR	F24
RCW5AL	F5	RF507NI	F21	RJ650AL	F17
RCW5I	F5	RF507SS	F21	RJ650AL	F24
RCW5LA	F5	RF509BR	F21	RJ650ALTR	F17
RCW5W	F5	RF515AL	F21	RJ650ALTR	F24
RCW6AL	F5	RF515BK	F21	RJ650BK	F17
RCW6I	F5	RF515BN	F21	RJ650BK	F24
RCW6LA	F5	RF515BP	F21	RJ650BKTR	F17
RCW6W	F5	RF515BR	F21	RJ650BKTR	F24
RD600PDK	F19	RF515CH	F21	RJ650GY	F17
RD600RI	F19	RF515CU	F21	RJ650GY	F24
RD600RW	F19	RF515NI	F21	RJ650GYTR	F17
RD603PDK	F19	RF515SS	F21	RJ650GYTR	F24
RDS30	F17	RF6500BR	F22	RJ650I	F17
RDS50	F17	RFS5I	F19	RJ650I	F24
RDV103PAL	F18	RFS5LA	F19	RJ650ITR	F17
RDV103PI	F18	RFS5W	F19	RJ650ITR	F24
RDV103PLA	F18	RFSQ2FDK	F19	RJ650LA	F17
RDV103PW	F18	RJ600	F17	RJ650LA	F24
RDV10PAL	F18	RJ600	F17	RJ650LATR	F17
RDV10PI	F18	RJ600	F17	RJ650LATR	F24
RDV10PLA	F18	RJ600	F17	RJ650W	F17
RDV10PW	F18	RJ600	F24	RJ650W	F24
RDV600PAL	F18	RJ600	F24	RJ650WTR	F17
RDV600PI	F18	RJ600	F24	RJ650WTR	F24
RDV600PLA	F18	RJ600	F24	RJ65AL	F17
RDV600PW	F18	RJ620AL	F17	RJ65AL	F24
RDV603PAL	F18	RJ620AL	F24	RJ65ALTR	F17
RDV603PI	F18	RJ620ALTR	F17	RJ65ALTR	F24
RDV603PLA	F18	RJ620ALTR	F24	RJ65BK	F17
RDV603PW	F18	RJ620BK	F17	RJ65BK	F24
RDVELV300PAL	F18	RJ620BK	F24	RJ65BKTR	F17
RDVELV300PI	F18	RJ620BKTR	F17	RJ65BKTR	F24
RDVELV300PLA	F18	RJ620BKTR	F24	RJ65GY	F17
RDVELV300PW	F18	RJ620GY	F17	RJ65GY	F24

NUMERICAL INDEX



## INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
RJ65GYTR.....	F17	RR151IWRTR.....	F14	RR15QW.....	F13
RJ65GYTR.....	F24	RR151LA.....	F14	RR15QWTR.....	F13
RJ65I.....	F17	RR151LATR.....	F14	RR15S.....	F14
RJ65I.....	F24	RR151LAWRTR.....	F14	RR15SAL.....	F14
RJ65ITR.....	F17	RR151TR.....	F14	RR15SALTR.....	F14
RJ65ITR.....	F24	RR151W.....	F14	RR15SALWRTR.....	F14
RJ65LA.....	F17	RR151WRTR.....	F14	RR15SBK.....	F14
RJ65LA.....	F24	RR151WTR.....	F14	RR15SBKTR.....	F14
RJ65LATR.....	F17	RR151WWRTR.....	F14	RR15SBKWTR.....	F14
RJ65LATR.....	F24	RR155.....	F14	RR15SI.....	F14
RJ65W.....	F17	RR155AL.....	F14	RR15SITR.....	F14
RJ65W.....	F24	RR155ALWLR.....	F14	RR15SIWRTR.....	F14
RJ65WTR.....	F17	RR155BK.....	F14	RR15SLA.....	F14
RJ65WTR.....	F24	RR155BKWR.....	F14	RR15SLATR.....	F14
RMS100AL.....	F20	RR155GY.....	F14	RR15SLAWRTR.....	F14
RMS100I.....	F20	RR155GYWR.....	F14	RR15STR.....	F14
RMS100ILAL.....	F20	RR155I.....	F14	RR15SW.....	F14
RMS100ILI.....	F20	RR155IWR.....	F14	RR15SWRTR.....	F14
RMS100ILLA.....	F20	RR155LA.....	F14	RR15SWTR.....	F14
RMS100ILW.....	F20	RR155LAWR.....	F14	RR15SWWRTR.....	F14
RMS100LA.....	F20	RR155W.....	F14	RR15W.....	F14
RMS100W.....	F20	RR155WR.....	F14	RR201.....	F14
RMS101AL.....	F20	RR155WWR.....	F14	RR201AL.....	F14
RMS101I.....	F20	RR15AL.....	F14	RR201ALTR.....	F14
RMS101ILAL.....	F20	RR15BK.....	F14	RR201ALWRTR.....	F14
RMS101ILI.....	F20	RR15E.....	F14	RR201BK.....	F14
RMS101ILLA.....	F20	RR15EAL.....	F14	RR201BKTR.....	F14
RMS101ILW.....	F20	RR15EALTR.....	F14	RR201BKWRTR.....	F14
RMS101LA.....	F20	RR15EBK.....	F14	RR201CHBS.....	F17
RMS101W.....	F20	RR15EBKTR.....	F14	RR201CHBSTR.....	F17
RMS120AL.....	F20	RR15EGY.....	F14	RR201CHI.....	F17
RMS120I.....	F20	RR15EGYTR.....	F14	RR201CHITR.....	F17
RMS120ILAL.....	F20	RR15EI.....	F14	RR201CHSS.....	F17
RMS120ILI.....	F20	RR15EITR.....	F14	RR201CHSSTR.....	F17
RMS120ILLA.....	F20	RR15ELA.....	F14	RR201CHW.....	F17
RMS120ILW.....	F20	RR15ELATR.....	F14	RR201CHWTR.....	F17
RMS120LA.....	F20	RR15EQ.....	F13	RR201GY.....	F14
RMS120W.....	F20	RR15EQAL.....	F13	RR201GYTR.....	F14
RMS121AL.....	F20	RR15EQALTR.....	F13	RR201GYWRTR.....	F14
RMS121I.....	F20	RR15EQBK.....	F13	RR201I.....	F14
RMS121ILAL.....	F20	RR15EQBKTR.....	F13	RR201ITR.....	F14
RMS121ILI.....	F20	RR15EQI.....	F13	RR201IWRTR.....	F14
RMS121ILLA.....	F20	RR15EQITR.....	F13	RR201LA.....	F14
RMS121ILW.....	F20	RR15EQLA.....	F13	RR201LATR.....	F14
RMS121LA.....	F20	RR15EQLATR.....	F13	RR201LAWRTR.....	F14
RMS121W.....	F20	RR15EQTR.....	F13	RR201TR.....	F14
RMS140AL.....	F20	RR15EQW.....	F13	RR201W.....	F14
RMS140I.....	F20	RR15EQWTR.....	F13	RR201WRTR.....	F14
RMS140W.....	F20	RR15ETR.....	F14	RR201WTR.....	F14
RMS141AL.....	F20	RR15EW.....	F14	RR201WWRTR.....	F14
RMS141I.....	F20	RR15EWTR.....	F14	RR205.....	F14
RMS141W.....	F20	RR15I.....	F14	RR205AL.....	F14
RR15.....	F14	RR15K.....	F14	RR205ALWLR.....	F14
RR151.....	F14	RR15KAL.....	F14	RR205BK.....	F14
RR151AL.....	F14	RR15KALTR.....	F14	RR205BKWR.....	F14
RR151ALTR.....	F14	RR15KI.....	F14	RR205GY.....	F14
RR151ALWRTR.....	F14	RR15KITR.....	F14	RR205GYWR.....	F14
RR151BK.....	F14	RR15KLA.....	F14	RR205I.....	F14
RR151BKTR.....	F14	RR15KLATR.....	F14	RR205IWR.....	F14
RR151BKWRTR.....	F14	RR15KTR.....	F14	RR205LA.....	F14
RR151CHBS.....	F17	RR15KW.....	F14	RR205LAWR.....	F14
RR151CHBSTR.....	F17	RR15KWTR.....	F14	RR205W.....	F14
RR151CHI.....	F17	RR15LA.....	F14	RR205WR.....	F14
RR151CHITR.....	F17	RR15Q.....	F13	RR205WWR.....	F14
RR151CHSS.....	F17	RR15QAL.....	F13	RR330.....	F16
RR151CHSSTR.....	F17	RR15QALTR.....	F13	RR330F.....	F16
RR151CHW.....	F17	RR15QBK.....	F13	RR335P.....	F16
RR151CHWTR.....	F17	RR15QBKTR.....	F13	RR350.....	F16
RR151GY.....	F14	RR15QI.....	F13	RR350F.....	F16
RR151GYTR.....	F14	RR15QITR.....	F13	RR430.....	F16
RR151GYWRTR.....	F14	RR15QLA.....	F13	RR430F.....	F16
RR151I.....	F14	RR15QLATR.....	F13	RR430FW.....	F16
RR151ITR.....	F14	RR15QTR.....	F13	RR430PM.....	F16

# INDEX

K13

NUMERICAL INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
RR430WIPCN	F16	RRD15SITR	F4	RS315ILC	F11
RR435P	F16	RRD15SIWRTR	F4	RS315ILI	F11
RR450	F16	RRD15SLA	F4	RS315ILLA	F11
RR450F	F16	RRD15SLATR	F4	RS315ILW	F11
RR450FW	F16	RRD15SLAWRTR	F4	RS315KAL	F11
RR450PM	F16	RRD15STR	F4	RS315KI	F11
RR450WIPCN	F16	RRD15SW	F4	RS315KLA	F11
RRD15	F4	RRD15SWRTR	F4	RS315KW	F11
RRD151	F4	RRD15SWTR	F4	RS315LA	F11
RRD151AL	F4	RRD15SWWRTR	F4	RS315S	F11
RRD151ALTR	F4	RRD15W	F4	RS315SAL	F11
RRD151BK	F4	RRD201	F4	RS315SI	F11
RRD151BKTR	F4	RRD201AL	F4	RS315SLA	F11
RRD151GY	F4	RRD201ALTR	F4	RS315SW	F11
RRD151GYTR	F4	RRD201BK	F4	RS315W	F11
RRD151I	F4	RRD201BKTR	F4	RS415	F11
RRD151ITR	F4	RRD201GY	F4	RS415AL	F11
RRD151LA	F4	RRD201GYTR	F4	RS415BK	F11
RRD151LATR	F4	RRD201I	F4	RS415I	F11
RRD151TR	F4	RRD201ITR	F4	RS415LA	F11
RRD151W	F4	RRD201LA	F4	RS415W	F11
RRD151WTR	F4	RRD201LATR	F4	RS600I	F18
RRD155	F4	RRD201TR	F4	RS600LA	F18
RRD155AL	F4	RRD201W	F4	RS600PAL	F18
RRD155BK	F4	RRD201WTR	F4	RS600PI	F18
RRD155GY	F4	RRD205	F4	RS600PLA	F18
RRD155I	F4	RRD205AL	F4	RS600PW	F18
RRD155LA	F4	RRD205BK	F4	RS600W	F18
RRD155W	F4	RRD205GY	F4	RS603PAL	F18
RRD15AL	F4	RRD205I	F4	RS603PI	F18
RRD15BK	F4	RRD205LA	F4	RS603PLA	F18
RRD15E	F4	RRD205W	F4	RS603PW	F18
RRD15EAL	F4	RRDK	F19	RS613PI	F18
RRD15EALTR	F4	RS100W	F17	RS613PLA	F18
RRD15EBK	F4	RS101I	F17	RS613PW	F18
RRD15EBKTR	F4	RS101W	F17	RSD115	F2
RRD15EGY	F4	RS103PAL	F18	RSD115AL	F2
RRD15EGYTR	F4	RS103PI	F18	RSD115BK	F2
RRD15EI	F4	RS103PLA	F18	RSD115GY	F2
RRD15EITR	F4	RS103PW	F18	RSD115I	F2
RRD15ELA	F4	RS10PAL	F18	RSD115ILAL	F2
RRD15ELATR	F4	RS10PI	F18	RSD115ILI	F2
RRD15ETR	F4	RS10PLA	F18	RSD115ILLA	F2
RRD15EW	F4	RS10PW	F18	RSD115ILW	F2
RRD15EWTR	F4	RS115	F11	RSD115IM	F2
RRD15GY	F4	RS115AL	F11	RSD115LA	F2
RRD15I	F4	RS115BK	F11	RSD115LAM	F2
RRD15K	F4	RS115I	F11	RSD115PLAL	F2
RRD15KAL	F4	RS115LAL	F11	RSD115PLI	F2
RRD15KALTR	F4	RS115ILC	F11	RSD115PLLA	F2
RRD15KBK	F4	RS115ILI	F11	RSD115PLW	F2
RRD15KBKTR	F4	RS115ILLA	F11	RSD115W	F2
RRD15KGY	F4	RS115ILW	F11	RSD115WM	F2
RRD15KGYTR	F4	RS115KAL	F11	RSD215	F2
RRD15KI	F4	RS115KI	F11	RSD215AL	F2
RRD15KITR	F4	RS115KLA	F11	RSD215BK	F2
RRD15KLA	F4	RS115KW	F11	RSD215GY	F2
RRD15KLATR	F4	RS115LA	F11	RSD215I	F2
RRD15KTR	F4	RS115S	F11	RSD215LA	F2
RRD15KW	F4	RS115SAL	F11	RSD215W	F2
RRD15KWTR	F4	RS115SI	F11	RSD315	F2
RRD15LA	F4	RS115SLA	F11	RSD315AL	F2
RRD15S	F4	RS115SW	F11	RSD315BK	F2
RRD15SAL	F4	RS115W	F11	RSD315GY	F2
RRD15SALTR	F4	RS2LFSQAL	F18	RSD315I	F2
RRD15SALWRTR	F4	RS2LFSQI	F18	RSD315ILAL	F2
RRD15SBK	F4	RS2LFSQLA	F18	RSD315ILI	F2
RRD15SBKTR	F4	RS2LFSQW	F18	RSD315ILLA	F2
RRD15SBKWRTR	F4	RS315	F11	RSD315ILW	F2
RRD15SGY	F4	RS315AL	F11	RSD315LA	F2
RRD15SGYTR	F4	RS315BK	F11	RSD315W	F2
RRD15SGYWRTR	F4	RS315I	F11	RSD415	F2
RRD15SI	F4	RS315ILAL	F11	RSD415AL	F2



INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
RSD415BK	F2	SCH262	F5	SECP9GA	E7
RSD415GY	F2	SCH723	F16	SF038	D3
RSD415I	F2	SCS050	D7	SF038SF	D3
RSD415LA	F2	SCS075	D7	SF050	D3
RSD415W	F2	SCS100	D7	SF050SF	D3
RSELV300PAL	F18	SCS125	D7	SFFGAL	F8
RSELV300PI	F18	SCS150	D7	SFFGAL	F34
RSELV300PLA	F18	SCS200	D7	SFFGBK	F8
RSELV300PW	F18	SCS250	D7	SFFGBK	F34
RSELV303PAL	F18	SCS300	D7	SFFGEI	F8
RSELV303PI	F18	SCS400	D7	SFFGEI	F34
RSELV303PLA	F18	SCSI050	D7	SFFGGY	F8
RSELV303PW	F18	SCSI075	D7	SFFGGY	F34
RSFSQFAL	F18	SCSI100	D7	SFFGLA	F8
RSFSQFI	F18	SCSI125	D7	SFFGLA	F34
RSFSQFLA	F18	SCSI150	D7	SFFGW	F8
RSFSQFW	F18	SCSI200	D7	SFFGW	F34
RSKAL	F18	SCSI250	D7	SFGRFAL	F8
RSKI	F18	SCSI300	D7	SFGRFAL	F34
RSKLA	F18	SCSI400	D7	SFGRFBK	F8
RSKW	F18	SCZ050	D7	SFGRFBK	F34
RSLV600PAL	F18	SCZ075	D7	SFGRFEI	F8
RSLV600PI	F18	SCZ100	D7	SFGRFEI	F34
RSLV600PLA	F18	SCZ125	D7	SFGRFGY	F8
RSLV600PW	F18	SCZ150	D7	SFGRFGY	F34
RSLV603PAL	F18	SCZ200	D7	SFGRFLA	F8
RSLV603PI	F18	SCZ250	D7	SFGRFLA	F34
RSLV603PLA	F18	SCZ300	D7	SFGRFW	F8
RSLV603PW	F18	SCZ400	D7	SFGRFW	F34
RU100SS	F23	SCZI050	D7	SFHCBK	F26
RU100W	F23	SCZI075	D7	SFK050	D3
RU170W	F23	SCZI100	D7	SFRCBFFAL	F8
RU200SS	F23	SCZI125	D7	SFRCBFFAL	F34
RU200W	F23	SCZI150	D7	SFRCBFFBK	F8
RU270W	F23	SCZI200	D7	SFRCBFFBK	F34
RW0705	D16	SCZI250	D7	SFRCBFFEI	F8
RW1005	D16	SCZI300	D7	SFRCBFFEI	F34
RW1007	D16	SCZI400	D7	SFRCBFFGY	F8
RW1205	D16	SEC100BA	E7	SFRCBFFGY	F34
RW1207	D16	SEC100GA	E7	SFRCBFFLA	F8
RW1210	D16	SEC38BA	E7	SFRCBFFLA	F34
RW1505	D16	SEC38GA	E7	SFRCBFFW	F8
RW1507	D16	SEC50BA	E7	SFRCBFFW	F34
RW1510	D16	SEC50GA	E7	SFRCBRAL	F8
RW1512	D16	SEC75BA	E7	SFRCBRAL	F34
RW2005	D16	SEC75GA	E7	SFRCBRBK	F8
RW2007	D16	SECM12B	E7	SFRCBRBK	F34
RW2010	D16	SECM12G	E7	SFRCBREI	F8
RW2012	D16	SECM16B	E7	SFRCBREI	F34
RW2015	D16	SECM16G	E7	SFRCBRGY	F8
RW2505	D16	SECM20B	E7	SFRCBRGY	F34
RW2507	D16	SECM20G	E7	SFRCBRLA	F8
RW2510	D16	SECM25B	E7	SFRCBRLA	F34
RW2512	D16	SECM25G	E7	SFRCBRW	F8
RW2515	D16	SECM32B	E7	SFRCBRW	F34
RW2520	D16	SECM32G	E7	SFRCGNFFAL	F8
RW3010	D16	SECM40B	E7	SFRCGNFFAL	F34
RW3020	D16	SECM40G	E7	SFRCGNFFBK	F8
RW3025	D16	SECP11BA	E7	SFRCGNFFBK	F34
S105	D17	SECP11GA	E7	SFRCGNFFEI	F8
S1F038	D4	SECP13BA	E7	SFRCGNFFEI	F34
S-30	A26	SECP13GA	E7	SFRCGNFFGY	F8
S-55	A26	SECP16BA	E7	SFRCGNFFGY	F34
SB126	F6	SECP16GA	E7	SFRCGNFFLA	F8
SB26	F5	SECP21BA	E7	SFRCGNFFLA	F34
SB262	F5	SECP21GA	E7	SFRCGNFFW	F8
SB826	F6	SECP29BA	E7	SFRCGNFFW	F34
SBEXBAR	A27	SECP29GA	E7	SFRCGNRAL	F8
SBP126	F6	SECP36BA	E7	SFRCGNRAL	F34
SBP26	F5	SECP36GA	E7	SFRCGNRBK	F8
SBP262	F5	SECP7BA	E7	SFRCGNRBK	F34
SBP263	F5	SECP7GA	E7	SFRCGNREI	F8
SCH26	F5	SECP9BA	E7	SFRCGNREI	F34



# INDEX

K15

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
SFRCGNRGY	F8	SFRCYRGY	F34	SHC1029	E2
SFRCGNRGY	F34	SFRCYRLA	F8	SHC1030	E2
SFRCGNRLA	F8	SFRCYRLA	F34	SHC1030ZP	E2
SFRCGNRLA	F34	SFRCYRW	F8	SHC1031	E2
SFRCGNRW	F8	SFRCYRW	F34	SHC1031ZP	E2
SFRCGNRW	F34	SFSBAL10	F34	SHC1032	E2
SFRCRFFAL	F8	SFSBBK10	F34	SHC1032ZP	E2
SFRCRFFAL	F34	SFSBEI10	F34	SHC1033	E2
SFRCRFFBK	F8	SFSBLA10	F34	SHC1033ZP	E2
SFRCRFFBK	F34	SFSBW10	F34	SHC1034	E2
SFRCRFFEI	F8	SFSFSGY10	F34	SHC1034ZP	E2
SFRCRFFEI	F34	SFUSBABW	F26	SHC1035CR	E2
SFRCRFFGY	F8	SHC1001CR	E1	SHC1035SS	E2
SFRCRFFGY	F34	SHC1002	E1	SHC1035ZP	E2
SFRCRFFLA	F8	SHC1002CR	E1	SHC1036	E2
SFRCRFFLA	F34	SHC1003	E1	SHC1036CR	E2
SFRCRFFW	F8	SHC1003CR	E1	SHC1036SS	E2
SFRCRFFW	F34	SHC1003SS	E1	SHC1037	E2
SFRCRRAL	F8	SHC1004	E1	SHC1037CR	E2
SFRCRRAL	F34	SHC1004CR	E1	SHC1037SS	E2
SFRCRRBK	F8	SHC1004SS	E1	SHC1037ZP	E2
SFRCRRBK	F34	SHC1005	E1	SHC1038	E2
SFRCRREI	F8	SHC1005CR	E1	SHC1038CR	E2
SFRCRREI	F34	SHC1006CR	E1	SHC1038SS	E2
SFRCRRGY	F8	SHC1007	E1	SHC1038ZP	E2
SFRCRRGY	F34	SHC1008	E1	SHC1039	E2
SFRCRRLA	F8	SHC1008CR	E1	SHC1039CR	E2
SFRCRRLA	F34	SHC1008ZP	E1	SHC1040	E2
SFRCRRW	F8	SHC1009	E1	SHC1040CR	E2
SFRCRRW	F34	SHC1009CR	E1	SHC1041	E2
SFRCWFFAL	F8	SHC1009SS	E1	SHC1041CR	E2
SFRCWFFAL	F34	SHC1010	E1	SHC1041SS	E2
SFRCWFFBK	F8	SHC1010CR	E1	SHC1042	E2
SFRCWFFBK	F34	SHC1010ZP	E1	SHC1042CR	E2
SFRCWFFEI	F8	SHC1011	E1	SHC1042SS	E2
SFRCWFFEI	F34	SHC1011CR	E1	SHC1043	E2
SFRCWFFGY	F8	SHC1011SS	E1	SHC1043CR	E2
SFRCWFFGY	F34	SHC1012	E1	SHC1043ZP	E2
SFRCWFFLA	F8	SHC1012CR	E1	SHC1044	E2
SFRCWFFLA	F34	SHC1012SS	E1	SHC1044CR	E2
SFRCWFFW	F8	SHC1012ZP	E1	SHC1044SS	E2
SFRCWFFW	F34	SHC1015	E1	SHC1046	E3
SFRCWRAL	F8	SHC1016	E1	SHC1047	E3
SFRCWRAL	F34	SHC1017	E1	SHC1048	E3
SFRCWRBK	F8	SHC1018	E1	SHC1049	E3
SFRCWRBK	F34	SHC1019	E1	SHC1050	E3
SFRCWREI	F8	SHC1019CR	E1	SHC1051	E3
SFRCWREI	F34	SHC1020	E1	SHC1052	E3
SFRCWRGY	F8	SHC1020CR	E1	SHC1052ZP	E3
SFRCWRGY	F34	SHC1020SS	E1	SHC1053	E3
SFRCWRLA	F8	SHC1020ZP	E1	SHC1053ZP	E3
SFRCWRLA	F34	SHC1021	E1	SHC1054	E3
SFRCWRW	F8	SHC1021CR	E1	SHC1054ZP	E3
SFRCWRW	F34	SHC1021SS	E1	SHC1055	E3
SFRCYFFAL	F8	SHC1021ZP	E1	SHC1056	E3
SFRCYFFAL	F34	SHC1022	E1	SHC1057	E3
SFRCYFFBK	F8	SHC1022CR	E1	SHC1057ZP	E3
SFRCYFFBK	F34	SHC1022SS	E1	SHC1058	E3
SFRCYFFEI	F8	SHC1022ZP	E1	SHC1058ZP	E3
SFRCYFFEI	F34	SHC1023	E1	SHC1059	E3
SFRCYFFGY	F8	SHC1023CR	E1	SHC1059ZP	E3
SFRCYFFGY	F34	SHC1023SS	E1	SHC1061	E3
SFRCYFFLA	F8	SHC1023ZP	E1	SHC1062	E3
SFRCYFFLA	F34	SHC1024	E1	SHC1063	E3
SFRCYFFW	F8	SHC1024CR	E1	SHC1064	E3
SFRCYFFW	F34	SHC1024SS	E1	SHC1065	E3
SFRCYRAL	F8	SHC1024ZP	E1	SHC1066	E3
SFRCYRAL	F34	SHC1025	E1	SHC1067	E3
SFRCYRBK	F8	SHC1026	E1	SHC1068	E3
SFRCYRBK	F34	SHC1027	E1	SHC1069	E3
SFRCYREI	F8	SHC1027ZP	E1	SHC1070	E3
SFRCYREI	F34	SHC1028	E1	SHC1071	E3
SFRCYRGY	F8	SHC1028ZP	E1	SHC1072	E3

NUMERICAL INDEX



INDEX

CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE	CATALOGUE NO.	PAGE
SHC1073	E3	SQ350	D4	THI300	D15
SHC1074	E3	SQ400	D4	THI350	D15
SHC1076	E3	SQ90038	D3	THI400	D15
SHC1077	E3	SQ90038SF	D3	UFC0001	E6
SHC1078	E3	SQ90050	D3	UFC0001CR	E6
SHC1079	E3	SQ90050SF	D3	UFC0001ZP	E6
SHC1080	E3	SQ90075	D3	UFC0002	E6
SHC1081	E3	SQ90100	D3	UFC0003	E6
SHC1086	E3	SQ90125	D3	UFC0003CR	E6
SHC1088	E3	SQ90150	D3	UFC2001CR	E6
SHC1089	E3	SQ90200	D3	UFC2003CR	E6
SHC1090	E3	SQ90250	D3	VHC1021	E4
SHC1091	E3	SQ90300	D3	VHC1022	E4
SHC1092	E3	SQ90350	D3	VHC1022ZP	E4
SHC1093	E3	SQ90400	D3	VHC1023	E4
SHC1094	E3	SS126	F6	VHC1023ZP	E4
SHC1095	E3	SS126L	F6	VHC1024	E4
SHC1097ZP	E2	SS1426	F6	VHC1024ZP	E4
SHC1098ZP	E2	SS226	F6	VHC1035	E4
SHC1099ZP	E2	SS26	F5	VHC1036	E4
SHC2005CR	E1	SS262	F5	VHC1037	E4
SHC2008CR	E1	SS262L	F5	VHC1041	E4
SHC2010CR	E1	SS263	F5	VHC1042	E4
SHC2011CR	E1	SS264	F5	VHC1052	E4
SHC2012CR	E1	SS265	F5	VHC1053	E4
SHC2021CR	E1	SS266	F5	WPS2	C7
SHC2022CR	E1	SS26L	F5	WPS3	C7
SHC2023CR	E1	SS326	F6	X-CUBE	A2
SHC2024CR	E1	SS703	F16		
SHC2035CR	E2	SS723	F16		
SHC2036CR	E2	SS826	F6		
SHC2037CR	E2	SU573	C5		
SHC2038CR	E2	SW001	C2		
SHC2040CR	E2	SW002	C2		
SHC2041CR	E2	SW071	C2		
SHC2042CR	E2	SW072	C2		
SHC2043CR	E2	SW091	C4		
SHC2044CR	E2	SW092	C4		
SHCM161011	E6	SW101	C3		
SHCM201017	E6	SW102	C3		
SHCM201022	E6	SW111	C4		
SHCM201023	E6	SW121	C3		
SHCM201024	E6	SW122	C3		
SHCM251033	E6	SW151	C3		
SHCM251034	E6	SW152	C3		
SHCM301037	E6	SW181	C4		
SKS050	D8	SW182	C4		
SKS075	D8	SW191	C4		
SKS100	D8	SW201	C4		
SKS125	D8	SW202	C4		
SKS150	D8	SW211	C4		
SKS200	D8	SW401	C2		
SKS250	D8	SW402	C2		
SKS300	D8	SW411	C4		
SKS400	D8	SW421	C4		
SKZ050	D8	SW502	C5		
SKZ075	D8	SW512	C5		
SKZ100	D8	SW521	C4		
SKZ125	D8	SW532	C5		
SKZ150	D8	SW731	C4		
SKZ200	D8	TES1	D2		
SKZ250	D8	TES1B(BUCKET)	D2		
SKZ300	D8	TES2	D2		
SKZ400	D8	TES2B(BUCKET)	D2		
SQ038	D4	TES3	D2		
SQ050	D4	TES4	D2		
SQ075	D4	THI050	D15		
SQ100	D4	THI075	D15		
SQ125	D4	THI100	D15		
SQ150	D4	THI125	D15		
SQ200	D4	THI150	D15		
SQ250	D4	THI200	D15		
SQ300	D4	THI250	D15		





# trade**SELECT**<sup>TM</sup>

**Hubbell Canada LP** • 870 Brock Road South • Pickering, ON L1W 1Z8  
Tel: (905) 839-1138 • Fax: (905) 839-9108 • [www.HubbellOnline.com](http://www.HubbellOnline.com)