


T&B Conduit Fittings

EMT Fittings




EMT Fittings—Nylon Insulated

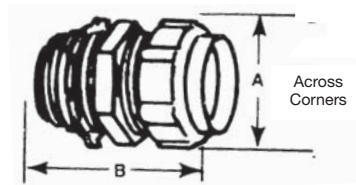

Cat. No.	Size	Dimensions (in.)	
		A	B
5123	1/2"	1-3/64	1-21/32
5223	3/4"	1-21/64	1-27/32
5323	1"	1-11/16	1-7/8
5423	1-1/4"	2-1/16	2-11/32
5523	1-1/2"	2-5/16	2-23/32
5623	2"	2-25/32	2-13/16

U.L. Listed and CSA Certified raintight.




EMT Couplings



Cat. No.	Size	Dimensions (in.)	
		A	B
5120	1/2"	1-1/16	1-27/32
5220	3/4"	1-5/16	2-1/8
5320	1"	1-11/16	2-1/8
5420	1-1/4"	2-1/16	2-29/32
5520	1-1/2"	2-5/16	3-1/16
5620	2"	2-3/4	3-7/32

U.L. Listed and CSA Certified raintight.

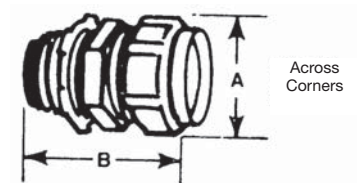

EMT Fittings




Cat. No.	Size	Dimensions (in.)	
		A	B
5121-TB	1/2"	1-1/16	1-9/16
5221	3/4"	1-5/16	1-21/32
5321	1"	1-11/16	1-3/4
5421	1-1/4"	2-1/16	1-11/32
5521-TB	1-1/2"	2-5/16	2-9/16
5621	2"	2-3/4	2-3/4

U.L. Listed and CSA Certified raintight.


T&B E.M.T. (thinwall) fittings comply with Federal Spec. WF408B.

T&B Conduit Fittings


EMT Fittings



Ideal for cramped locations or tight corners where large radius conduit elbows will not fit or would appear unworkmanlike. Shoulders on body of 1/2" size are hex-shaped to provide positive holding for standard installation tools. Use insulated type for simple, and safe, installations. Malleable iron. CSA rated 105°C.



Ideal for cramped locations or tight corners where large radius conduit elbows will not fit or would appear unworkmanlike. Shoulders on body of 1/2" size are hex-shaped to provide positive holding for standard installation tools.



For connecting EMT to threaded rigid and intermediate metal conduit.

Short Elbows—Insulated



Cat. No.	Size	Dimension (in.)		
		A	B	C
4240	1/2"	1-7/8	1-1/8	11/16
4241-TB	1/2"	1-11/16	1-3/8	1/2
4242	1"	1-7/8	1-5/8	5/8
4243-TB	1-1/4"	2-3/4	2-5/16	11/16
4244	1-1/2"	3-1/16	2-5/8	11/16
4245	2"	3-3/8	3-7/32	3/4

U.L. Listed and CSA Certified raintight.

Short Elbows Malleable Iron



Cat. No.	Size	Dimension (in.)		
		A	B	C
4230	1/2"	1-7/16	1-9/32	7/16
4231	3/4"	1-11/16	1-19/32	1/2
4232	1"	1-7/8	1-27/32	5/8
4233	1-1/4"	2-3/4	2-15/32	11/16
4234	1-1/2"	3-1/16	2-3/4	11/16
4235	2"	3-3/8	3-5/16	11/16

U.L. Listed and CSA Certified raintight.

Combination Coupling—Steel



Cat. No.	Size	Dimension (in.)	
		A	B
530-TB	1/2"	1-3/8	1-1/16
531	3/4"	1-1/2	1-11/32
532	1"	1-19/32	1-21/32

U.L. Listed and CSA Certified raintight.

T&B Conduit Fittings


EMT Fittings



Pipe Straps—Steel



Oval Hole for Screw Size (C)



Elongated bolt hole makes alignment easy, even when holes in mounting surface are out of alignment. Snap on features hold strap in place.

Cat. No.	Size	Dimensions (in.)		
		A	B	C (Bolt Hole)
4159C	1/2"	1-27/32	3/4	1/4
4160C	3/4"	2-1/32	3/4	1/4
4161C	1"	2-11/32	3/4	1/4
4162*	1-1/4"	2-7/8	3/4	1/4
4163*	1-1/2"	3-11/16	1-1/4	11/32
4164*	2"	4-1/16	1-1/8	13/32

Not U.L. Listed

*Not CSA


Conform to CEC 12-1404



Pipe Straps—Malleable Iron



Oval Hole for Screw Size (C)



Designed to fit each size of conduit snugly. High reinforcing ribs on each side increase strength, reduce weight. Hot dipped galvanized finish.

Cat. No.	Size	Dimensions (in.)		
		A	B	C (Bolt Hole)
4176	1/2"	2-5/32	2-1/32	1/4
4177	3/4"	2-9/16	1-1/16	1/4
4178	1"	3	3/4	1/4
4179	1-1/4"	3-3/4	1-3/16	5/16
4180	1-1/2"	4-3/16	1-5/16	3/8
4181	2"	5-3/16	1-1/8	7/16
1282*	2-1/2"	5-15/16	1-1/2	1/2
1283*	3	6-11/16	1-5/8	1/2
1284*	3-1/2	7-19/32	1-3/4	5/8
1285*	4"	8-5/16	1-7/8	5/8


Not U.L. Listed.

*Not CSA

Conforms to CEC 12-1404



Pipe Spacers



Used with T&B conduit straps to permit space between conduit and mounting surface. Eliminates need for costly offset-bending conduit and possible corrosive moisture traps when conduit is mounted directly to a surface. Malleable iron. Hot-dipped galvanized finish, pre-mountable and stackable to eliminate offsetting.

Cat. No.	Size	Dimensions (in.)	
		A	B
1350	1/2", 3/4", 1"	3"	7/8"
1351	1-1/4", 1-1/2", 2"	5"	1-3/16"
1352	2-1/2", 3"	9-9/16"	1-3/4"
1353	3-1/2", 4"	7-9/16"	2"
1354	4-1/2", 5", 6"	10-9/16"	2-9/16"

Conforms to CEC 12-012 (5).