



IC-Rated 1400 Lumen 5" and 6" LED Downlights, Gen 4

Ultra-efficient, high-performance illumination for high-ceiling applications

When high-performance illumination is required for high-ceiling applications, Juno Generation 4, IC-rated, 1400 lumen LED recessed downlights are the ideal solution. These downlights produce brilliant illumination and are equally at home in both residential and commercial environments.

Features include:

- Dedicated, IC-rated 5" or 6" new construction housings fit nicely within 2x8 construction
- Ultra-efficient 21-watt consumption, providing nearly 80% energy savings compared to equivalent incandescent lamps
- State-of-the-art light engines with LEDs binned within a 3-step MacAdam Ellipse, exceeding ENERGY STAR® requirements
- Superior fixture-to-fixture color uniformity
- 90+ CRI ensures outstanding color rendering
- 50,000-hour service life



Juno® IC-Rated 1400 Lumen 5" and 6" LED Downlights, Gen 4

Energy-efficient, high-performance illumination

Juno Generation 4 LED IC-rated downlights now produce up to 1400 brilliant lumens while consuming less than 21 watts ... that's far less energy than equivalent incandescent or CFL light sources. They are available with 2700K, 3000K, 3500K or 4000K color temperatures and are supplied with wide-flood optics (other optics optional). ENERGY STAR® and California T24 certified when used with select LED light engines and trims.

5" IC-Rated 1400 Lumen Generation 4 LED Downlights

5" New Construction



IC20LED G4, 1400 Lumen Series
Dedicated 5" LED new construction housing with integral light engine and choice of dimmable drivers. The eldoLED driver option delivers smooth and flicker-free deep dimming performance. Air-Loc fully sealed housing does not require separate gasket. IC housing designed for use in IC or non-IC construction. Wide flood optic provided as standard.

15¼" L x 9¼" W x 7⅝" H
Ceiling cutout: 5⅝"



Example: IC20LED G4 14LM 27K 90CRI 120 FRPC


Series	Gen	Lumens	CCT	CRI	Voltage/Driver
IC20LED 5" New Construction Housing	G4	14LM 1400 Lumens	27K 2700K	90CRI 90 CRI	120 FRPC 120V Only; Forward Phase/ ELV Dimming
			30K 3000K		
			35K 3500K		
			40K 4000K		
					MVOLT EZ1* Multi-Volt (120-277V) eldoLED 0-10V, 1% dim
					MVOLT EZ10* Multi-Volt (120-277V) eldoLED 0-10V, 10% dim

*A+ Capable

ENERGY STAR® and T24 certification is dependent on trim finish and LED color temperature. See housing spec sheet for specific information for each trim.

Extensive Trim Options

Juno IC-Rated 1400 lumen LED recessed housings are compatible with a broad selection of Juno 5" and 6" open and lensed trims. A dedicated wall wash scoop is also available for wall wash applications.

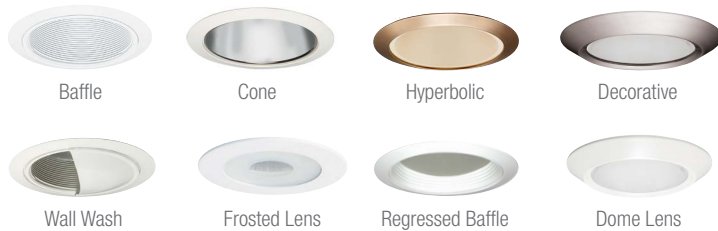

6" IC-Rated 1400 Lumen Generation 4 LED Downlights

6" New Construction



IC22LED G4, 1400 Lumen Series
Dedicated 6" LED new construction housing with integral light engine and choice of dimmable drivers. The eldoLED driver option delivers smooth and flicker-free deep dimming performance. Air-Loc® fully sealed housing does not require separate gasket. IC housing designed for use in IC or non-IC construction. Wide flood optic provided as standard.

15¼" L x 9⅝" W x 7⅝" H
Ceiling cutout: 6⅝"



Example: IC22LED G4 14LM 27K 90CRI 120 FRPC

Series	Gen	Lumens	CCT	CRI	Voltage/Driver
IC22LED 6" New Construction Housing	G4	14LM 1400 Lumens	27K 2700K	90CRI 90 CRI	120 FRPC 120V Only; Forward Phase/ ELV Dimming
			30K 3000K		
			35K 3500K		
			40K 4000K		
					MVOLT EZ1* Multi-Volt (120-277V) eldoLED 0-10V, 1% dim
					MVOLT EZ10* Multi-Volt (120-277V) eldoLED 0-10V, 10% dim

Accessories

Catalog No.	Description
LEDOPTIC3 MFL	Medium Flood Optic (50°)
LEDOPTICG3 NFL	Narrow Flood Optic (37°)
LEDOPTICG3 SP	Spot Optic (10°)



A+ Capable configurations support A+ Certified Solutions. A+ Certified solutions from Acuity Brands help you quickly and confidently select and implement lighting systems that are both compatible and consistent. Go to www.acuitybrands.com/APIus or contact your local Acuity Brands representative for more information.



All trademarks referenced are property of their respective owners. Specifications subject to change without notice. Printed in the U.S.A.