

SECTION Q



Table of Contents



Two Duplex Receptacles
or Blank Pole



Isolated Ground or
Surge Suppression



GFCI Self Test and
Duplex Receptacles



Product	Page
Products at a Glance	Q-2
Features and Benefits	Q-3
Aluminum Series Offering	Q-4
Custom Pole Configurations	Q-5
Division 16 Specifications	Q-6



Products at a Glance



Two Duplex Receptacles or Blank Pole

- (2) 20A 125V Style Line® duplex receptacles; one circuit
- Available in three standard lengths to accommodate a variety of applications
- Available in five attractive durable paint colors: a gray, ivory, black, white and office white painted and clear anodized aluminum finishes to suit every need



Isolated Ground or Surge Suppression

- (1) Orange isolated ground 20A 125V Style Line® duplex receptacle;
- (1) 20A 125V Style Line® duplex receptacle; two circuits
- (2) Orange isolated ground 20A 125V Style Line® duplex receptacles;
- (1) isolated ground surge suppression 20A 125V duplex receptacle; one circuit




GFCI Self Test and Duplex Receptacles

- (1) 20A 125V GFCI Self Test duplex receptacle with (2) ground fault protected 20A 125V Style Line® duplex receptacles; one circuit



Adjustable T-Bar and Trim Kit

- Adjustable T-bar for mounting poles in the middle of the ceiling tiles
- All service poles include ceiling trim plates, replacements also available

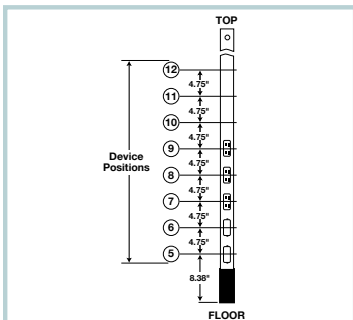

Custom Pole Configurations

- Create your own custom service poles using the chart on page Q-5
- For configurations that require additional customization, please consult Hubbell Technical Service



IEC Pin and Sleeve Accessories Back Box

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Non-Metallic Back Box	Gray	703863306871	882620A

Listings

UL Type 1 and External Listing Table

Specifications

Accessory Item	Non-Metallic Back Box
Back Box	15 Degree Angle
Box Trip Size	1" NPT

Performance

Environmental	
Moisture Resistance	IP37 Suitability

Accessories

Receptacle/Panel Accommodation: 16A, 20A, 30A & 32A IEC Pin & Sleeve
 Receptacle/Panel Accommodation: Watertight Safety-Shrouds

Resources

Customer Link (Training)
 #C48809

Dimensions in Inches (mm)
 Hubbell Wiring Device-Kellems • Hubbell Incorporated Entrance • 40 Waterline Drive • Shelton, CT 06484
 Phone (802) 288-8200 • Fax (802) 288-1001 • Application Support • 1-800-491-9913

eSpec Sheets Available Online

- Product Features
- Specifications
- Dimensions
- Performance
- Complementary Products

Aluminum Service Poles



Features and Benefits

Aluminum Series Offering

Hubbell offers a line of attractive and durable Aluminum Service Poles which distribute power and telecommunications wiring from above the ceiling to workstations below.

They are offered in standard lengths of 10' 2", 12' 2", and 15' 2" with a variety of electrical wiring devices. Poles with three service capability have a divider to separate power and low voltage wiring.

These customizable power poles effectively distribute power, fiber, and data cabling from the ceiling to the floor. Available in varying lengths and colors, custom options maximize space and allow workstations, retail checkout areas, collaboration areas, digital signage, vending machines, appliances, and kiosks to be pulled away from the wall.

- Factory ordered custom pole lengths and configurations available for special applications
- UL listed
- Suitable for retail checkout area applications



Housing Design

- Poles with three service capability ideal for delivering power, fiber, and data cabling from the ceiling to the floor
- Available in three standard lengths to accommodate a variety of applications
- Style Line® duplex receptacles and two Style Line® knockouts for communications



Accessories

- Each pole include a ceiling trim mounting plate and bottom scuff boot



Colors Available

- Available in five attractive durable paint colors: gray, ivory, black, white and office white painted and clear anodized aluminum finishes to suit every need



Aluminum Service Poles



Aluminum Series Offering



HBLPP10AI



HBLPP10IGA

HBLPP10SAI




HBLPP10GFW



ATB



PPTRIM1



Three Service Aluminum Service Poles

Height Feet (m)


Description	Color	10' 2" (3.10m)	12' 2" (3.71m)	15' 2" (4.62m)
(2) 20A 125V Style Line® duplex receptacles; one circuit	Black	HBLPP10BK	HBLPP12BK	HBLPP15BK
	Gray	HBLPP10A	HBLPP12A	HBLPP15A
	Ivory	HBLPP10AI	HBLPP12AI	HBLPP15AI
	Office White	HBLPP10OW	HBLPP12OW	HBLPP15OW
	White	HBLPP10W	HBLPP12W	HBLPP15W
	Clear Anodized Aluminum	HBLPP10AAL	HBLPP12AAL	HBLPP15AAL
(1) Orange isolated ground 20A 125V Style Line® duplex receptacle; (1) 20A 125V Style Line® duplex receptacle; two circuits	Black	HBLPP10IGBK	—	—
	Gray	HBLPP10IGA	—	—
	Ivory	HBLPP10IGAI	—	—
	Office White	HBLPP10IGOW	—	—
	White	HBLPP10IGW	—	—
	Clear Anodized Aluminum	HBLPP10IGAL	—	—
(2) Orange isolated ground 20A 125V Style Line® duplex receptacles; (1) isolated ground surge suppression 20A 125V duplex receptacle; one circuit	Black	HBLPP10SBK	—	—
	Gray	HBLPP10SA	—	—
	Ivory	HBLPP10SAI	—	—
	Office White	HBLPP10SOW	—	—
	White	HBLPP10SW	—	—
	Clear Anodized Aluminum	HBLPP10SAL	—	—
(1) 20A 125V GFCI Self Test duplex receptacle with (2) ground fault protected 20A 125V Style Line® duplex receptacles; one circuit	Black	HBLPP10GFBK	HBLPP12GFBK	HBLPP15GFBK
	Gray	HBLPP10GF	HBLPP12GF	HBLPP15GF
	Ivory	HBLPP10GFI	HBLPP12GFI	HBLPP15GFI
	Office White	HBLPP10GFW	HBLPP12GFW	HBLPP15GFW
	White	HBLPP10GFW	HBLPP12GFW	HBLPP15GFW
	Clear Anodized Aluminum	HBLPP10GFAL	HBLPP12GFAL	HBLPP15GFAL
Blank pole; divider; (4) Style Line® device knockouts	Black	HBLPPOBK	HBLPPO12BK	HBLPPO15BK
	Gray	HBLPPOA	HBLPPO12A	HBLPPO15A
	Ivory	HBLPPOAI	HBLPPO12AI	HBLPPO15AI
	Office White	HBLPPOOW	HBLPPO12OW	HBLPPO15OW
	White	HBLPPOW	HBLPPO12W	HBLPPO15W
	Clear Anodized Aluminum	HBLPPOAAL	HBLPPO12AAL	HBLPPO15AAL

Accessories

Description	Catalog Number
Adjustable T-bar assembly for mounting poles in the middle of ceiling tile.	ATB*
Replacement service pole trim kit (office white).	PPTRIM1*

Note: * Not UL listed.

Dimensions

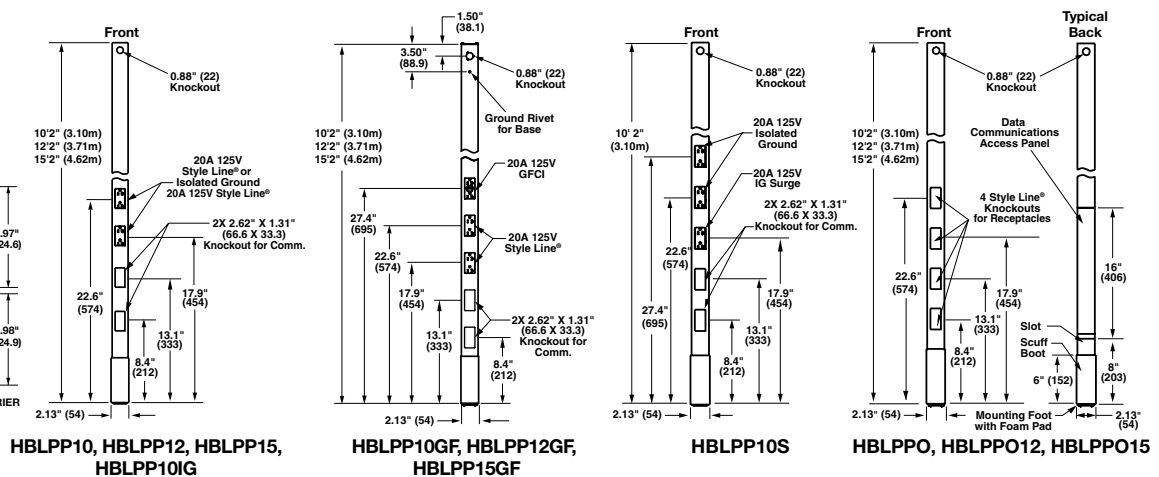

Dimensions in Inches (mm)

Aluminum Service Poles



Custom Pole Configurations

Using the chart below, you can create a custom service pole. For configurations that require additional customization, please consult Hubbell Technical Service at (475) 882-4800.

Position		1	2	3	4	5	6	7	8	9	10	11	12	13	14
Selections	S P	1	0	0	2	1	1	B	B	B	X	X	X	C	I


Example: SP100211BBBXXXCI

10 Feet 02 Inches, (2) Rectangular Style Line® Knockouts for Data, (3) HBL2162 Duplex Receptacles, (2) Circuits (First 2 Receptacles on Circuit #1, Remaining Receptacles on Circuit #2), Ivory.

Worksheet

Position		1	2	3	4	5	6	7	8	9	10	11	12	13	14
Selections	S P														

Position 1 & 2: Height to the nearest foot.	08-22 Feet.
Position 3 & 4: Height in inches up to 11".	00-11 Inches.
<p>Position 5, 6, 7, 8, 9, 10, 11, 12: Starting at Position 5 Select Datacom Knockouts/Device Frames followed by Power Receptacle/Power Knockout options. If the service pole is power only, select receptacle options starting at Position 5. Empty Positions should be filled with an "X" to designate an empty field.</p> <p><i>Note: If power receptacles are chosen, then power knockouts may not be chosen in the same service pole.</i></p>	<p>Data Selections</p> <ul style="list-style-type: none"> 1 - Rectangular Style Line® Knockout. 2 - ½" NPT Knockout (0.875" diameter). 3 - ¾" NPT Knockout (1.109" diameter). 4 - 2-Port Style Line® Data Frame, 1-Gang, 2 Port Voice/Data Frame. 5 - 3-Port Style Line® Data Frame, 1-Gang, 3 Port Voice/Data Frame. <p>Power Selections</p> <ul style="list-style-type: none"> 6 - Rectangular Style Line® Knockout (for blank poles only). 7 - ½" NPT Knockout (0.875" diameter, for blank poles only). 8 - ¾" NPT Knockout (1.109" diameter, for blank poles only). A - 5362, 20A, 125V AC, Duplex. B - HBL2162, 20A, 125V AC, Style Line® Decorator Duplex. C - IG5362, 20A, 125V AC, I.G. Duplex. D - IG2162, 20A, 125V AC, I.G. Style Line® Decorator Duplex. G - HBL4700, 15A, 125V AC, Twist-Lock® Duplex. H - IG4700A, 15A, 125V AC, I.G. Twist-Lock® Duplex. I - IG2310, 20A, 125V AC, I.G. Twist-Lock® Single. J - IG5361, 20A, 125V AC, I.G. Single. K - HBL5361, 20A, 125V AC, Single. L - HBL2310, 20A, 125V AC, Twist-Lock® Single. M - HBL2610, 30A, 125V AC, Twist-Lock® Single. N - HBL2320, 20A, 250V AC, Twist-Lock® Single. O - HBL2620, 30A, 250V AC, Twist-Lock® Single. Q - IG4710, 15A, 125V AC, I.G. Twist-Lock® Single. R - HBL4710, 15A, 125V AC, Twist-Lock® Single. S - HBL5662, 15A, 250V AC, Duplex. T - IG5662, 15A, 250V AC, I.G. Duplex. U - HBL5661, 15A, 250V AC, Single. V - IG5661, 15A, 250V AC, I.G. Single. W - HBL5462, 20A, 250V AC, Duplex.
Position 13: Power Circuits	<p>Z - No Circuits (Should only be selected when the service poles has ONLY Data and/or Power knockouts).</p> <p>A - All devices on a single circuit.</p> <p>B - 2 Circuits, First Receptacle on Circuit #1, Remaining Receptacles on Circuit #2.</p> <p>C - 2 Circuits, First 2 Receptacles on Circuit #1, Remaining Receptacles on Circuit #2.</p> <p>D - 2 Circuits, First 3 Receptacles on Circuit #1, Remaining Receptacles on Circuit #2.</p> <p>E - 2 Circuits, First 4 Receptacles on Circuit #1, Remaining Receptacles on Circuit #2.</p> <p>F - 2 Circuits, First 5 Receptacles on Circuit #1, Remaining Receptacles on Circuit #2.</p> <p>G - 2 Circuits, First 6 Receptacles on Circuit #1, Remaining Receptacles on Circuit #2.</p> <p>H - 2 Circuits, First 7 Receptacles on Circuit #1, Remaining Receptacles on Circuit #2.</p>
Position 14: Color	<p>I - Ivory.</p> <p>G - Gray.</p> <p>W - White.</p> <p>K - Black.</p> <p>A - Aluminum with clear anodized finish.</p>

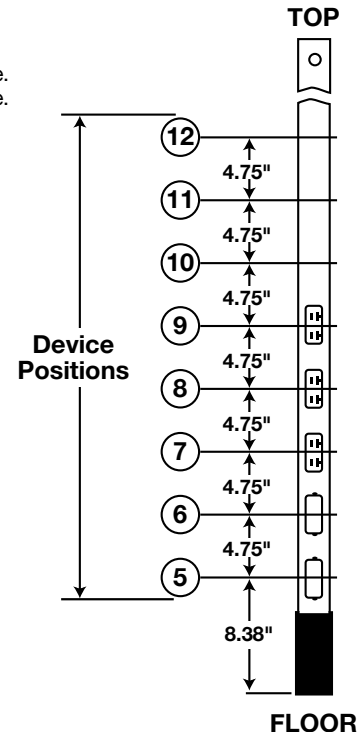



Division 16 Specifications

Part 2: Products

2.01 Manufacturer

A. The power poles specified herein for branch circuit wiring shall be Hubbell Service Poles as manufactured by Hubbell Inc., Wiring Device-Kellems® or approved equal. Other manufacturers may be considered equal if they meet the performance requirements of this specification and have received prior written approval.

2.02 Components/Accessories

A. The hardware for mounting Service Poles in the middle of a ceiling tile shall be Hubbell adjustable T-Bar type ATB with trim plate kit type PPTRIM1.

2.03 Materials

A. Standard and Custom Aluminum Service Poles

These Service Poles shall be extruded aluminum with a heavy gauge body (.050 ±.005 inches thick) to resist denting. These poles shall be two-channel to accommodate both power and low voltage services on the same side of the pole. Service poles shall be pre-wired with #12 AWG wire and equipped with specification grade Style Line® decorator receptacles (20A, 125V). These receptacles shall be Hubbell type HBL2162xx or an approved equal. The low voltage (back) channel of the service pole shall incorporate an access panel that provides a passageway to two Style Line® communication knockouts located on the front of the pole.

Finish

Service Poles will include a painted or clear anodized finish.

Custom poles are available in Black, Gray, Ivory, Office White, White, and Clear Anodized Aluminum.

Heights

Standard Service Poles shall be available in three sizes to accommodate various ceiling heights: 10 ft. 2 in. (3.10m), 12 ft. 2 in. (3.71m) and 15 ft. 2 in. (4.62m). Custom Poles shall be available in a range of sizes, a configurator pole is 8 through 22 ft. Other custom poles can be as short as 6 in. through 22 ft.

10 ft. 2 in. (3.10m): Hubbell type HBLPP10BK, HBLPP10A, HBLPP10AI, HBLPP10OW, HBLPP10W, and HBLPP10AAL.

12 ft. 2 in. (3.71m): Hubbell type HBLPP12BK, HBLPP12A, HBLPP12AI, HBLPP12OW, HBLPP12W, and HBLPP12AAL.

15 ft. 2 in. (4.62m): Hubbell type HBLPP15BK, HBLPP15A, HBLPP15AI, HBLPP15OW, HBLPP15W, and HBLPP15AAL.

8-22 feet: Hubbell Custom Poles.

2. Isolated Ground

The following Service Poles contain one Hubbell isolated ground receptacle Hubbell #IG2162 and one #HBL2162xx, both 20A, 125V Style Line® decorator receptacles (wired on separate circuits). Custom poles with a variety of receptacles may also include isolated ground type devices. 10 ft. 2 in. (3.10m): Isolated Ground; Hubbell Type HBLPP10IGBK, HBLPP10IGA, HBLPP10IGAI, HBLPP10IGOW, HBLPP10IGW, and HBLPP10IGAL.

3. Surge Suppression/Isolated Ground

The following Service Poles contain one Hubbell #IG5362xxSA (20A, 125V Surge/IG Style Line® decorator duplex) and two #IG2162 (20A, 125V IG Style Line® decorator duplex) receptacles. All receptacles are wired on the same circuit, therefore providing surge protection at each outlet. Custom poles with a variety of receptacle options may also include surge suppression. 10 ft. 2 in. (3.10m): With Surge; Hubbell Type HBLPP10SBK, HBLPP10SA, HBLPP10SAI, HBLPP10SOW, HBLPP10SW, and HBLPP10SAL.

4. GFCI

The following Service Poles contain one Hubbell #GFST20 (20A, 125V GFCI Self Test Style Line® decorator duplex) and two #HBL2162 (20A, 125V Style Line® decorator duplex) receptacles. All receptacles are wired on the same circuit, the two HBL2162 are GFCI protected by being wired to the load side of the GFST20.

10 ft. 2 in. (3.10m): Hubbell type HBLPP10GFBK, HBLPP10GF, HBLPP10GFI, HBLPP10GFOW, HBLPP10GFW, and HBLPP10GFAL.

12 ft. 2 in. (3.71m): Hubbell type HBLPP12GFBK, HBLPP12GF, HBLPP12GFI, HBLPP12GFOW, HBLPP12GFW, and HBLPP12GFAL.

15 ft. 2 in. (4.62m): Hubbell type HBLPP15GFBK, HBLPP15GF, HBLPP15GFI, HBLPP15GFOW, HBLPP15GFW, and HBLPP15GFAL.

5. Blank

The following Service Poles are two-channel and do not include receptacles or wiring. All poles include a barrier which starts between the second and third knockout positions from the bottom of the pole. Custom poles with or without a barrier are available as well.

10 ft. 2 in. (3.10m): Hubbell type HBLPPOBK, HBLPPOA, HBLPPOAI, HBLPPOOW, HBLPPOW, and HBLPPOAAL.

12 ft. 2 in. (3.71m): Hubbell type HBLPPO12BK, HBLPPO12A, HBLPPO12AI, HBLPPO12OW, HBLPPO12W, and HBLPPO12AAL.

15 ft. 2 in. (4.62m): Hubbell type HBLPPO15BK, HBLPPO15A, HBLPPO15AI, HBLPPO15OW, HBLPPO15W, and HBLPPO15AAL.

B. Voice/Data Interface

All Service Poles must allow for acceptance of Hubbell Style Line® communication outlets.