



STAND-ALONE INSTALL. SUPPORT FOR 3RU11 SZ
 S2 STAND-ALONE INSTALLATION MAIN CIRCUIT:
 SCREW TERMINAL AUX. CIRCUIT: --

Figure similar

General technical data:		
product brandname		SIRIUS
Product designation		individual mount
Size of overload relay		S2
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70
Installation/ mounting/ dimensions:		
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	55
Height	mm	105
Depth	mm	111
Connections/ Terminals:		
•		
— Type of connectable conductor cross-sections for main contacts finely stranded		

- with core end processing
- Type of connectable conductor cross-sections at AWG conductors
- for main contacts

	1x (1 ... 35 mm ²)
	1x (18 ... 1)

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
--------------------------	---------------------------	-------------------	-------------------



[Special Test Certificate](#)



Shipping Approval	other
-------------------	-------



[Environmental Confirmations](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU1936-3AA01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU1936-3AA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU1936-3AA01&lang=en

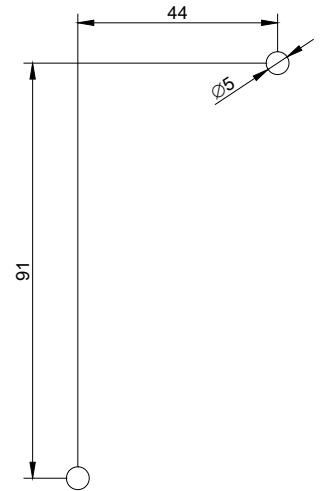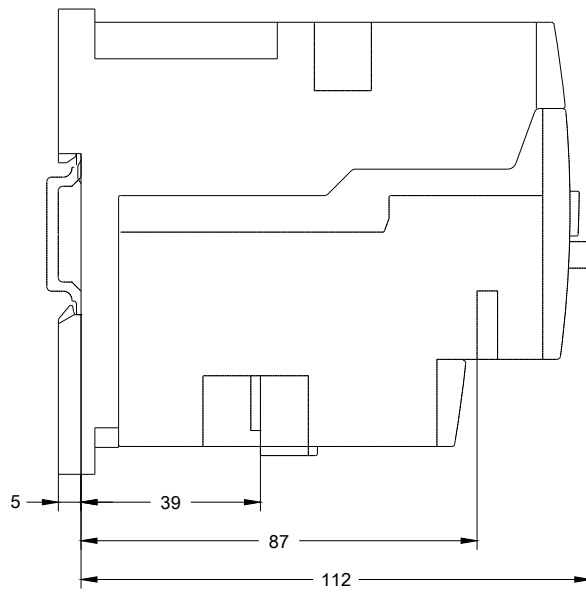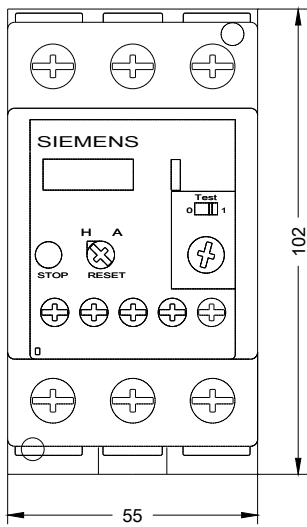

last modified:

07/07/2017