

Turning tools

GENERAL TURNING | PARTING & GROOVING | THREADING | TOOLING SYSTEMS

2012



How to choose the right tool for parting and grooving

1 Define the type of operation and system to use

Identify your operation:

- Parting
- External or internal grooving, face grooving, shallow grooving
- External or internal turning
- Undercutting, profiling

and choose the most suitable system for it. See overview.



2 Select the insert geometry and grade

Choose the insert geometry and grade.

Choose the insert size on the corresponding ordering page.

3 Select the tooling system and type of holder

Choose Coromant Capto® or shank tool, depending on clamping possibilities in turret/spindle.

Choose the right holder size on the corresponding ordering page.


The insert seat must correspond to the size of the insert.

4 Select feed and cutting speed

Find the recommended feed for the insert.






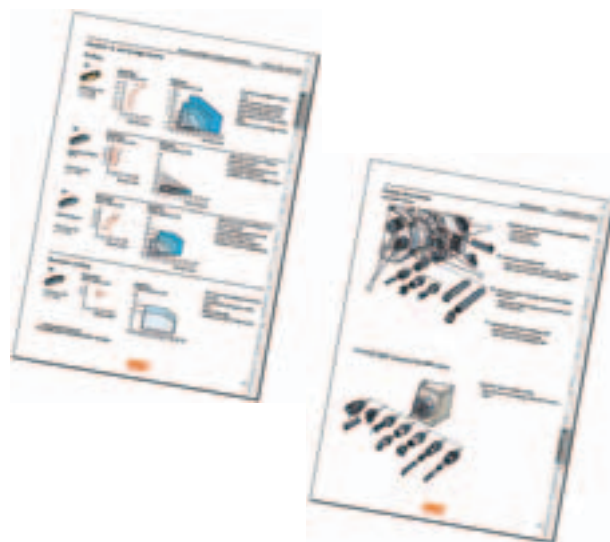











Choose the recommended cutting speed.

Find starting values for cutting speeds and feeds for different materials on the insert boxes.



For more technical information, see our Metalcutting Technical guide

Symbols for page references:

	External machining		Coromant Capto® unit		Inserts		How to choose tool, overview
	Internal machining		Conventional holder		Spare parts/accessories		Grade descriptions
	CoroTurn® SL internal adaptors		Conventional bar		Sleeves		Cutting data, speed recommendations
	Tailor Made options		Tooling systems		Holders for parting blades		Cutting data, feed and cutting depth recommendations
	Conversion table, formulas and definitions						

PARTING AND GROOVING

Applications

Parting off, grooving, profiling and turning	B4
Insert overview	B6
Tool holders, overview	B9

Products

CoroCut 1- and 2-edge

Parting off, grooving, profiling and turning	B14
Insert code key	B15
Inserts	B16
Tool holder code key	B27
External tools	B28
Internal tools	B46

CoroCut® 3 edge

Shallow parting and grooving	B49
Insert code key	B15
Inserts	B50
Tool holder code key	B27
External tools	B54

T-Max Q-Cut®

Parting off, grooving, profiling and turning	B56
Inserts 151.2	B57
External/internal tools 151.2	B66
Inserts 151.3	B75
External/internal tools 151.3	B77

Other systems for parting and grooving

CoroThread, circlip grooving	B82
T-Max® ceramic for grooving and profiling	B83
CoroCut® XS, external tools for small part machining	B85
CoroTurn® XS, internal tools for small part machining	A325
CoroCut® MB, internal tools for precision machining	B92

Sleeves for cylindrical bars

EasyFix	A320
---------	------

Spare parts

Torque wrenches	B109
-----------------	------

Cutting data

Cutting depth, feed recommendations and geometry descriptions	B124
Cutting speed recommendations	B138

Grade information

	B146
--	------




CoroCut® 1- and 2-edge

The first choice system for all parting and grooving



CoroThread® 254


For external and internal circlip grooving



T-Max Q-Cut®


151.2
For deep parting

151.3
For internal machining and small diameter face grooving



T-Max®

For grooving and profiling of heat resistant super alloys

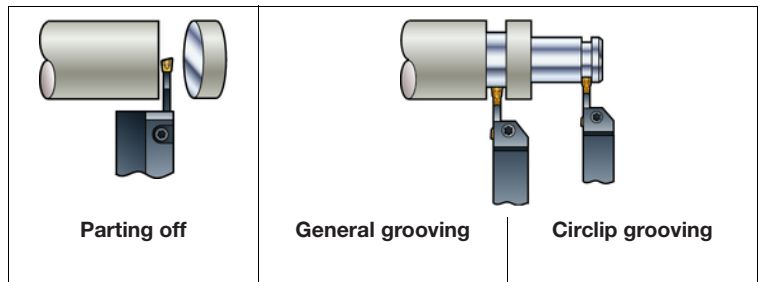


CoroCut® 2-edge
Cutting depths up to 20 mm (.787 inch)
Page B14

• •

• •

•



CoroCut® 1-edge
Cutting depths up to 20 mm (.787 inch)
Page B14

• •

• •




CoroCut® 3-edge
Cutting depths up to 6.4 mm (.251 inch)
Page B49

• •

•


•



T-Max Q-Cut® 151.2
Page B56

•

•



T-Max Q-Cut® 151.3
Page B75



CoroThread® 254
Page B82

• •



CoroCut® XS
Page B85

Small part precision


Small part precision



CoroCut® MB
Page B92



CoroTurn® XS
Page A325



T-Max® ceramic
Page B83

•

• • = First choice

• = Alternative



CoroCut® 3-edge

For shallow parting, grooving and profiling.




CoroTurn® XS

For internal precision grooving, turning and threading in small part machining







CoroCut® XS

For precision parting/grooving, turning and threading operations in small part machining



CoroCut® MB

For internal precision grooving, threading and turning

 Face grooving	 Profiling	 Turning	 Internal machining
<p>• •</p> <p>First cut diameter from 34 mm (1.339 inch)</p>	<p>• •</p>	<p>• •</p>	<p>• •</p> <p>Min bore 25 mm (.984 inch)</p>
<p>•</p>	<p>•</p>	<p>•</p>	
	<p>•</p>		<p>•</p> <p>Min bore 25 mm (.984 inch)</p>
<p>• •</p> <p>First cut diameter from 24 mm (.945 inch)</p>			<p>• •</p> <p>Min bore 20 mm (.787 inch)</p>
			<p>•</p> <p>Circlip grooving. Min bore 12 mm (.472 inch)</p>
		<p>• •</p> <p>Small part machining</p>	
			<p>• •</p> <p>Min bore 10 mm (.394 inch)</p>
<p>• •</p> <p>First cut diameter from 12 mm (.472 inch)</p>			<p>• •</p> <p>Min bore 4.2 mm (.165 inch)</p>
	<p>•</p>		<p>• •</p> <p>Min bore 63.5 mm (2.500 inch)</p>




Parting and grooving inserts

Parting

CoroCut® 1-2

CoroCut® 3 T-Max Q-Cut®

T-Max Q-Cut® 151.2



	123-CF	123-CM	123-CR	123-CS	123-CM/CS	151.2-3F	151.2-4E	151.2-5E	151.2-7E	151.2-9E
Insert width, mm	2.50-4.00	1.50-5.00	2.50-6.00	1.50-3.00	1.00-2.00	1.87-3.12	2.50-8.00	2.00-6.00	2.50-4.00	2.50-4.00
Insert width, inch	.098-.157	.059-.197	.098-.236	.059-.118	.039-.079	.062-.188	.098-.315	.079-.236	.098-.157	.098-.157
Page	B16	B16	B16	B17	B50	B58	B57	B57	B57	B58

Parting





CoroCut® XS

Grooving

CoroCut® 1-2

CoroCut® 3

T-Max Q-Cut®




	151.2-5F	MACR/L	123-GF	123-GM	123-GM	123-GR	123-CBN	123-GS	123-RS
Insert width, mm	2.00-5.00	0.70-2.50	1.50-8.00	2.00-11.00	12.00-15.00	15	3.00-8.00	0.50-3.18	0.50-3.00
Insert width, inch	.079-.197	.028-.098	.059-.315	.079-.433	.472-.591	.591	.118-.315	.020-.125	.020-.118
Page	B58	B87	B18	B19	B20	B20	B21	B51	B52

Grooving

T-Max Q-Cut® 151.2

T-Max Q-Cut® 151.3

CoroCut® XS




	151.2-4G	151.2-5G	151.2-6G	151.2-CBN	151.2-4U	151.3-4G	151.3-7G	MAGR/L	MAFR/L	MABR/L
Insert width, mm	1.85-9.52	1.85-8.00	6.35-9.52	3.00-7.92	2.00-8.00	1.85-8.00	3.00-6.00	0.50-2.50	-	-
Insert width, inch	.073-.394	.073-.315	.250-.375	.125-.312	.079-.315	.073-.315	.118-.236	.020-.098	-	-
Page	B59	B60	B60	B59	B64	B75	B76	B88	B88	B88

Grooving, internal










CoroTurn® XS









CoroCut® MB



















	CXS-..G	CXS-..GX	CXS-..F	MB-..G	MB-..GX	MB-..TE	MB-..B	MB-FA/FB
Insert width, mm	0.78-2.00	1.00	1.00-3.00	0.73-3.00	1.00	-	-	1.00-3.00
Insert width, inch	.031-.079	.039	.039-.118	.039-.118	.039	-	-	.039-.118
Page	A334	A338	A338	B94	B100	B96	B96	B96

Parting and grooving inserts

	Grooving		Profiling						
	CoroThread [®] circlip	T-Max [®] ceramic	CoroCut [®] 1-2						
									
	254	150.22/CSG	123-RM	123-RO	123-RS	123-CBN	123-AM	123-GS	123-RS
Insert width, mm	1.10-4.15	3.17-9.52	3.00-8.00	2.00-8.00	3.00-8.00	3.00-8.00	6.00-8.00	2.00-4.00	2.00-4.00
Insert width, inch	.043-.163	.125-.375	.118-.315	.079-.315	.118-.315	.118-.315	.236-.315	.079-.157	.079-.157
Page	B82	B83	B22	B22	B23	B23	B23	B25	B25

	Profiling				T-Max Q-Cut [®] 151.3		CoroTurn [®] XS	CoroCut [®] MB	T-Max [®] ceramic
									
	151.2-4P	151.2-5P	151.2-PCD	151.2-CBN	151.3-7P	CXS-..R	MB-..R	150.23	
Insert width, mm	3.00-10.00	3.00-8.00	3.18-8.00	3.00-7.92	3.00-6.00	1.00-2.00	0.80-3.00	3,17-6.35	
Insert width, inch	.118-.394	.118-.315	.125-.315	.118-.312	.118-.236	.039-.079	.012-.118	.125-.250	
Page	B62	B62	B62	B62	B76	A337	B100	B83	

	Turning		T-Max Q-Cut [®] 151.2		CoroTurn [®] XS		CoroCut [®] MB	
								
	123-TF	123-TM	151.2-4T	151.2-5T	CXS-..T98	CXS-..TE	MB-..T45	MB-..T93
Insert width, mm	3.00-8.00	3.00-8.00	3.00-6.00	3.00-6.00	-	-	-	-
Insert width, inch	.118-.315	.118-.315	.118-.236	.118-.236	-	-	-	-
Page	B24	B24	B64	B64	A329	A333	B96	B96

	Blanks				T-Max Q-Cut [®] 151.2		CoroCut [®] XS	
	CoroCut [®] 1-2				CoroCut [®] 3		CoroCut [®] XS	
								
	N123-BG	R/L123-BG	123-BG	123-BG	N123-BG	151.2-3B	151.2-4B	MAXR/L
Insert width, mm	2.30-11.60	6.00	6.03	4.04	3.40	2.40-8.50	2.60-11.45	3.18
Insert width, inch	.091-.457	.236	.237	.159	.134	.094-.335	.102-.451	.125
Page	B26	B26	B26	B26	B53	B65	B65	B90

CoroCut® and T-Max Q-Cut®

Insert geometries

The CoroCut® family offers many insert geometries in a variety of styles, all designed to increase productivity in parting and grooving operations. From the extremely strong -CR geometry and -4E geometry that can withstand interrupted cuts; to the very sharp -RS and the -F-P diamond tipped insert for non-ferrous materials.

The last two digits in the ordering code guide you to the correct insert, see table below

Application	Low feed			Medium feed			High feed		Optimizing				
	CoroCut® 1-2	Q-Cut® 151.2	Q-Cut® 151.3	CoroCut® 1-2	Q-Cut® 151.2	Q-Cut® 151.3	CoroCut® 1-2	Q-Cut® 151.2	CoroCut® 1-2	CoroCut® 3	Q-Cut® 151.2	Q-Cut® 151.3	
Parting off													
Turning													
Profiling													
For hardened materials													
Grooving													
For hardened materials													
Aluminium profiling													
Undercutting													
Face grooving													

¹⁾ Parting in Multi-Spindle Automatics

Grades

The CoroCut® family has different carbide grades to cover all types of workpiece materials from the very wear resistant grade GC3115 to the toughest grade on the market 1145. Cubic boron nitride and diamond tipped inserts are also available

ISO P = Steel


ISO M = Stainless steel

ISO K = Cast iron








ISO N = Aluminum and non-ferrous materials

ISO S = Heat resistant super alloys








ISO H = Hardened materials



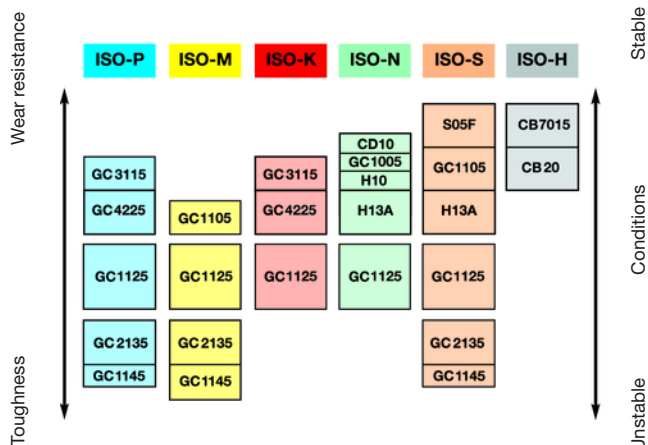




Coromant Capto® cutting units for parting and grooving

CoroCut® 1-2	Grooving, parting off, profiling and turning	Grooving and profiling	CoroCut® 3	Parting off tubes and small diameters, grooving	T-Max Q-Cut®	Grooving, parting off, profiling and turning
						
	Cx-R/LF123	Cx-NF123		Cx-RF123T/U		Cx-R/LF151.23
Insert width, mm	1.50-8.00	2.39-5.56	Insert width, mm	1.00-2.00	Insert width, mm	1.85-10.0
Insert width, inch	.059-.315	.094-.219	Insert width, inch	.039-.079	Insert width, inch	.073-.394
Coupling size	C3-C8	C3-C6	Coupling size	C3-C4	Coupling size	C3-C8
Page	B28	B28	Page	B54	Page	B66









Parting blades








CoroCut® 1-2	Parting off	T-Max Q-Cut®	Parting off	Parting off Blades for Manchester holders	Parting off Blades for HSS holders	Cartridges for Multi-spindles
						
	N123 R/LF123		151.2	151.2 R/L151.2	151.2	
Insert width, mm	1.50-6.00 1.50-5.00	Insert width, mm	1.85-10.00	2.00-6.00 3.00	2.00-6.00	1.57-3.96
Insert width, inch	.059-.236 .059-.197	Insert width, inch	.073-.394	.079-.236 .118	.079-.236	.062-.156
Max a_r , mm	5.00-55.00 5.00-32.00	Max a_r , mm	34.80-100.00	38.10-63.50 19.05	25.40-57.15	13-34
Max a_r , inch	.197-2.165 .197-1.260	Max a_r , inch	1.370-3.937	1.500-2.500 .750	1.000-2.250	.510-1.340
Page	B30 B31	Page	B67	B71	B72	B73

Tool block for parting blades	Coromant Capto® adaptor for parting blades	
	Radial mounting	Axial mounting
		
151.2	Cx-APBA	Cx-APBR/L
B32	H32	H32







T-Max Q-Cut®	Cartridges for Multi-spindles
	
Insert width, mm	1.57 - 3.96
Insert width, inch	.062-.156
Max a_r , mm	13-34
Max a_r , inch	.510 - 1.340
Page	B74

Shank tools for parting and grooving

CoroCut® 1-2 	Grooving, parting off, profiling and turning	Profiling				Shallow grooving and face grooving	Face grooving
							
Insert width, mm	R/LF123/-S 1.50-15.00	NF123 5.00-15.00	R/LX123-...007 8.00	R/LX123-...045 3.00-6.00	R/LX123-...070 5.00-6.00	R/LF123 R/LG123 3.00-7.13	R/LF123 R/LG123 3.00-8.00
Insert width, inch	.059-.591	.197-.591	.315	.118-.236	.197-.236	.118-.281	.118-.315
Shank size, mm	1010-3232	2525-3232	2525-3232	2020-2525	2525-3232	2525	2020-2525
Shank size, inch	.375-1.500		1.00-1.250	.750-1.250	1.00-1.250	1.00	.750-1.250
Page	B33	B39	B39	B39	B39	B41	B42














CoroCut® 3 	Parting off tubes and small diameters	T-Max Q-Cut® 	Parting off	Grooving, parting off, profiling and turning	Undercutting	Face grooving (For 151.3 inserts)
						
Insert width, mm	RF123T RF123U 1.00-2.00	Insert width, mm	R/L151.20 R/L151.21 1.85-8.00	R/L151.23 1.85-8.00	R/LS151.22 1.85-8.00	R/LF151.37 R/LG151.37 2.40-6.00
Insert width, inch	.039-.078	Insert width, inch	.073-.315	.073-.315	.073-.315	.094-.236
Shank size, mm	1010-3232	Shank size, mm	0808-3232	1616-3232	2525-3232	2525
Shank size, inch	.375-1.260	Shank size, inch	.375-1.250	.625-1.250	.500-1.250	1.000
Page	B55	Page	B68	B69	B70	B77

Boring bars for parting and grooving



CoroCut® 1-2 	Grooving, profiling and turning	Profiling	T-Max Q-Cut® 	Grooving, profiling and turning	Face grooving
					
Insert width, mm	R/LAG123 3.00-6.00	R/LAX123 5.00-8.00	Insert width, mm	R/LAG151.32 (For 151.3 inserts) 1.85-8.00	R/LAF151.37 (For 151.3 inserts) 2.40-6.00
Insert width, inch	.118-.236	.197-.315	Insert width, inch	.073-.315	.094-.236
Min. bore, mm	25.00-60.00	64.00	Min. bore, mm	15.01-50.00	26.00-42.00
Min. bore, inch	.984-2.362	2.520	Min. bore, inch	.591-1.969	1.024-1.654
Bar diameter, mm	16-50	40	Bar diameter, mm	16-40	25-40
Bar diameter, inch	.625-2.000	1.500	Bar diameter, inch	.625-1.500	.984-1.575
Page	B46	B48	Page	B79	B81

Shank holders for QS-holding system see page .




Cutting heads with CoroTurn® SL coupling for parting and grooving

CoroCut® SL	Grooving, parting off, profiling and turning	Internal grooving and profiling	Shallow grooving and face grooving	Face grooving	CoroCut® 3 SL	Shallow grooving
						
	R/L123-B		R/L123-C	R/L123-A		R/L 123 T/U
Insert width, mm	1.50-7.14		3.00-7.14	2.49-7.14	Insert width, mm	.050-3.18
Insert width, inch	.059-.281		.118-.281	.098-.281	Insert width, inch	.002-.0125
SL coupling size, mm	25-40		25-40	32-40	Coupling size, mm	25-40
Page	I42		I43	I44	Page	I47
T-Max Q-Cut® SL	Grooving and parting (For 151.2 inserts)	Internal grooving and profiling (For 151.3 inserts)	Face grooving (For 151.3 inserts)	Grooving and profiling (For 151.3 inserts)	CoroCut® XS SL Small part precision	
						
	R/L151.21	R/L151.3	R/L151.3 A/B	R/LAG 551.31	R/L SMAL	
Insert width, mm	3.00-6.00	2.00-7.92	3.00-5.56	1.85-8.00	-	
Insert width, inch	.118-.236	.079-.312	.118-.219	.073-.315		
SL coupling size, mm	25-40	25-40	32	16-40	25-32	
Page	I48	I49	I50	I51	I52	

Accessories




Sleeves for cylindrical boring bars	EasyFix	
		
For bar diameter, mm	131 5-25	132 5-25
For bar diameter, inch	.187-.750	.187-1.000
Page	A321	A322

Accessories for cutting fluid supply





Coolant nozzle	Coolant connector	Coolant tube
		
For Coromant Capto® cutting units	For boring bar	For SL cutting blades
Page	A324	I122

Cutting heads with CoroTurn® SL70 coupling

B

<p>CoroTurn® SL70</p> 	<p>Grooving, parting off, profiling and turning</p> 	<p>Internal grooving and profiling</p> 
	<p>SL70-CRD CR / SL70-CR SCR / SL70-SR D CR</p>	
	<p>Insert size, mm (iC, inch)</p> <p>09-12 (3/8-1/2)</p>	
	<p>SL70 coupling size</p> <p>70</p>	
<p>Page</p> <p>I102</p>		





C

<p>CoroCut® SL70</p> 	<p>Grooving and parting</p> 	<p>Internal grooving and profiling</p> 	<p>Face grooving</p> 
	<p>SL70-R/L123</p>		<p>SL70-R/L123</p>
	<p>Insert width, mm</p> <p>3-16</p> <p>Insert width, inch</p> <p>.118-.590</p> <p>SL70 coupling size</p> <p>70</p>		<p>4-6</p> <p>.157-.236</p> <p>70</p>
	<p>Page</p> <p>I104</p>		<p>I105</p>


G

H

Adaptors






Coromant Capto® adaptors	0°	5°	45°	90°
				
Coromant Capto® size	C5-C8	C6	C6	C5-C8
SL70 coupling size	70	70	70	70
Page	I106	I106	I106	I106







I

<p>CoroTurn SL® quick change adaptor for SL70 cutting heads</p> 		
	<p>Coupling size</p>	
	<p>Machine side</p> <p>80</p> <p>Tool side</p> <p>70</p>	<p>80</p> <p>70</p>
	<p>Page</p> <p>I95</p>	<p>I95</p>






J







CoroCut® MB boring bars/inserts

CoroCut® MB	Steel shank boring bar	Carbide shank boring bar	Inserts Grooving	Profiling	Pre-parting
					
	MB-A	MB-E	MB G	MB R	MB GX
Bar diameter, mm	16	12-16			
Bar diameter, inch	.625	.500-.625			
Insert size	07-09	07-09	07-09	07-09	07-09
Page	B106	B106	B94	B100	B100

Inserts Entering angle/Lead angle					
Face grooving	$\kappa_r 45^\circ/45^\circ$ Turning/profiling	$\kappa_r 93^\circ/-3^\circ$ Turning	$\kappa_r 93^\circ/-3^\circ$ Copying	$\kappa_r 117.5^\circ / -27.5^\circ$ Back boring	Threading
					
MB-FA/FB 09	MB T045 07	MB T093 07	MB TE 93 07	MB B030 07	MB TH 07
B101	B96	B96	B96	B96	B102

CoroCut® XS shank tools for small part machining/inserts

CoroCut® XS	Shank holders	SL cutting head	Inserts for Parting off	Parting off	Parting off
					
	SMALR/L/SMALR/L-X	R/L SMAL	MACR/L-N	MACR/L-R	MACR/L-L
Insert size	3	3	3	3	3
SL coupling size, mm		25-32			
Shank size, mm	1010-1616				
Shank size, inch	.500-.625				
Page	B91	I52	B87	B87	B87

CoroCut® XS	Inserts for					CoroTurn® XS boring bars
	Grooving Profiling	Grooving	Turning	Back turning	Threading	 For total assortment, grooving, threading and turning, see page A342
						
	MACR/L-T	MAGR/L	MAFR/L	MABR/L	MATR/L	
Insert size	3	3	3	3	3	
Page	B87	B88	B89	B89	B90	

CoroCut® 1-2 system


System with 1 or 2 cutting edges

The first choice system for all parting, profiling and grooving operations.



Tool holder assortment

There are a wide range of different tool holders for CoroCut® 1-2 edge inserts.

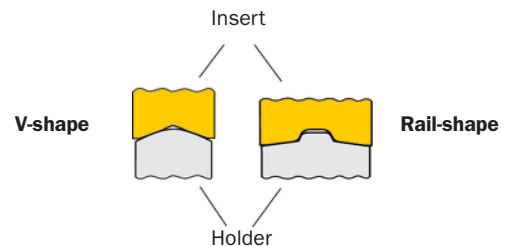

Insert clamping

The system is based on a patented Rail and V-shaped design that counteracts high axial forces from both sides. This, in combination with a long insert, gives exceptional stability.

CoroCut® SL - Flexible tool solution


By using CoroTurn® SL adaptors and CoroCut® SL cutting blades a large number of tooling solutions, both external and internal, can be achieved with a limited number of items. See page I2.

Tailor Made

Even more options are available thanks to tailored design. For more information on our Tailor Made program see page J3.

Insert geometries

A large variety of geometries are available, dedicated to different applications and feed areas.

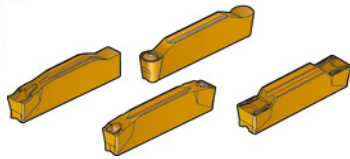

Insert versions

CoroCut® 1-2 insert are available in widths from 1.5 mm (.059 inch) up to 15 mm (.591 inch).

- CoroCut® 2-edge for the most economical machining.
- CoroCut® 1-edge version for cutting depths deeper than 50 mm (1.969 inch)



Insert grades

To cover all types of workpiece materials CoroCut® inserts are available in a variety of specially developed grades:


- Cemented carbide
- Polycrystalline diamond
- Cubic boron nitride
- Cermet

ISO application areas:






Code key for CoroCut® 1-2-3 edge inserts


N	123	H	2	-	0400	-	00	04	-	TF
1	2	3	4		5		6	7		8

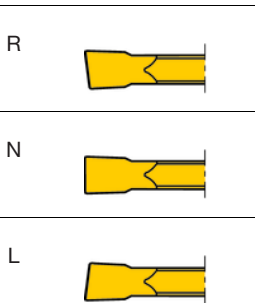1 Hand of insert 	2 Main code <p style="text-align: center; font-size: 1.2em;">123</p>	3 Insert seat size * CoroCut® 1-2 D G K E H L F J M R CoroCut® 3 T = Right hand cutting U = Left hand cutting To correspond with seat size on holder.
--	---	---

* Insert seat interchangeability:



Insert seat size	Size, mm	Holder	Insert seat size	Size, mm	Holder
D	1.5	D	H	4.0	H
E	2.0	E	J	5.0	J, H
F	2.5	F, E	K	6.0	K, J, H
G	3.0	G, F, E	L	8.0	L
			M	9.0	M
			R	15.0	R

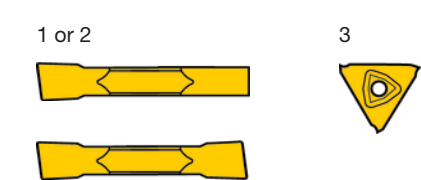4 Number of edges 	5 Insert width E.g.: 0400 = .157 inch (4 mm) 	6 Front angle E.g.: 00 = 0° 05 = 5° 
---	---	---

7 Corner radius E.g.: 04 = .016 inch (0.4 mm) 08 = .031 inch (0.8 mm) 	8 Geometry designation <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> First digit: Type of operation A = Aluminium/profiling C = Cut off T = Turning G = Grooving R = Profiling B = Blank </td> <td style="width: 50%; border: none; vertical-align: top;"> Second digit: E = ER treated cutting edge F = Low feed M = Medium feed R = High feed O = Optimized for special areas S = Sharp cutting edge G = Blank </td> </tr> </table>	First digit: Type of operation A = Aluminium/profiling C = Cut off T = Turning G = Grooving R = Profiling B = Blank	Second digit: E = ER treated cutting edge F = Low feed M = Medium feed R = High feed O = Optimized for special areas S = Sharp cutting edge G = Blank
First digit: Type of operation A = Aluminium/profiling C = Cut off T = Turning G = Grooving R = Profiling B = Blank	Second digit: E = ER treated cutting edge F = Low feed M = Medium feed R = High feed O = Optimized for special areas S = Sharp cutting edge G = Blank		

CoroCut® 1- and 2-edge

Parting

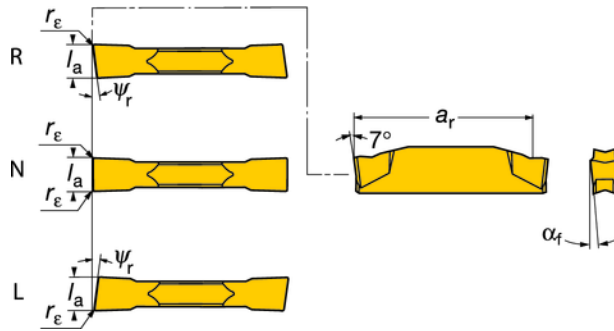

Tolerances, mm (inch):
 $l_a = +0.10/-0 (+.004/-0)$
 $r_e = \pm 0.10 (\pm .004)$

C	Selection criteria, millimeter, inch (mm, in.)	l_a		ψ_f	α_f	r_e		a_r		Seat size ¹⁾	Ordering code	P					M			K		N		S																			
		mm	in.			mm	in.	max mm	max in.			GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC															
		mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.														
B	Low feed 	CoroCut® 2-edge																																									
		2.5	.098	5°	5°	0.15	.006	18.4	.724	F	L123F2-0250-0501-CF	☆	☆	☆																													
		2.5	.098	0°	6°	0.10	.004	18.4	.724		N123F2-0250-0001-CF	☆	☆	☆																													
		2.5	.098	5°	5°	0.15	.006	18.4	.724		R123F2-0250-0501-CF	☆	☆	☆																													
		3.0	.118	0°	7°	0.10	.004	18.4	.724	G	N123G2-0300-0001-CF	☆	☆	☆	☆																												
		3.0	.118	5°	7°	0.15	.006	18.3	.720		R/L123G2-0300-0501-CF	☆	☆	☆																													
		4.0	.157	5°	7°	0.15	.006	25.3	.996	H	L123H2-0400-0501-CF	☆	☆	☆																													
		4.0	.157	0°	7°	0.15	.006	23.3	.917		N123H2-0400-0001-CF	☆	☆	☆	☆																												
		4.0	.157	5°	7°	0.15	.006	25.3	.996		R123H2-0400-0501-CF	☆	☆	☆																													
		G	Medium feed 	CoroCut® 1-edge																																							
2.0	.079			0°	5°	0.20	.008			E	N123E1-0200-0002-CM	☆	☆	☆	☆																												
2.5	.098			0°	5°	0.20	.008			F	N123F1-0250-0002-CM	☆	☆	☆	☆																												
3.0	.118			0°	7°	0.20	.008			G	N123G1-0300-0002-CM	☆	☆	☆	☆																												
4.0	.157			0°	6°	0.20	.008			H	N123H1-0400-0002-CM	☆	☆	☆	☆																												
5.0	.197			0°	6°	0.20	.008			J	N123J1-0500-0002-CM	☆	☆	☆	☆																												
CoroCut® 2-edge																																											
1.5	.059			0°	5°	0.20	.008	12.9	.508	D	N123D2-0150-0002-CM	☆	☆	☆	☆																												
2.0	.079			0°	5°	0.20	.008	19	.748	E	N123E2-0200-0002-CM	☆	☆	☆	☆																												
2.0	.079			5°	5°	0.20	.008	19	.748		R/L123E2-0200-0502-CM	☆	☆	☆																													
2.5	.098	0°	5°	0.20	.008	18.9	.744	F	N123F2-0250-0002-CM	☆	☆	☆	☆																														
2.5	.098	5°	5°	0.20	.008	18.9	.744		R/L123F2-0250-0502-CM	☆	☆	☆																															
3.0	.118	0°	7°	0.20	.008	18.9	.744	G	N123G2-0300-0002-CM	☆	☆	☆	☆																														
3.0	.118	5°	7°	0.20	.008	18.8	.740		R/L123G2-0300-0502-CM	☆	☆	☆																															
4.0	.157	0°	6°	0.20	.008	24.1	.949	H	N123H2-0400-0002-CM	☆	☆	☆	☆																														
4.0	.157	5°	6°	0.20	.008	24.1	.949		R/L123H2-0400-0502-CM	☆	☆	☆																															
5.0	.197	5°	6°	0.20	.008	24.1	.949	J	L123J2-0500-0502-CM	☆	☆	☆																															
5.0	.197	0°	6°	0.20	.008	24.1	.949		N123J2-0500-0002-CM	☆	☆	☆	☆																														
5.0	.197	5°	6°	0.20	.008	24.1	.949		R123J2-0500-0502-CM	☆	☆	☆																															
H	High feed 	CoroCut® 1-edge																																									
		2.5	.098	0°	5°	0.30	.012			F	N123F1-0250-0003-CR	☆	☆	☆																													
		3.0	.118	0°	6°	0.30	.012			G	N123G1-0300-0003-CR	☆	☆	☆																													
		4.0	.157	0°	7°	0.30	.012			H	N123H1-0400-0003-CR	☆	☆	☆																													
		5.0	.197	0°	7°	0.40	.016			J	N123J1-0500-0004-CR	☆	☆	☆																													
		CoroCut® 2-edge																																									
		2.5	.098	5°	5°	0.30	.012	18.9	.744	F	L123F2-0250-0503-CR	☆	☆	☆																													
		2.5	.098	0°	6°	0.30	.012	18.9	.744		N123F2-0250-0003-CR	☆	☆	☆	☆																												
		2.5	.098	5°	5°	0.30	.012	18.9	.744		R123F2-0250-0503-CR	☆	☆	☆																													
		3.0	.118	0°	6°	0.30	.012	18.9	.744	G	N123G2-0300-0003-CR	☆	☆	☆	☆																												
3.0	.118	5°	5°	0.30	.012	18.8	.740		R/L123G2-0300-0503-CR	☆	☆	☆																															
4.0	.157	0°	7°	0.30	.012	23.7	.933	H	N123H2-0400-0003-CR	☆	☆	☆	☆																														
4.0	.157	5°	6°	0.30	.012	23.7	.933		R/L123H2-0400-0503-CR	☆	☆	☆																															
5.0	.197	5°	6°	0.40	.016	23.6	.929	J	L123J2-0500-0504-CR	☆	☆	☆																															
5.0	.197	0°	6°	0.40	.016	23.7	.933		N123J2-0500-0004-CR	☆	☆	☆	☆																														
5.0	.197	5°	6°	0.40	.016	23.6	.929		R123J2-0500-0504-CR	☆	☆	☆																															
6.0	.236	0°	6°	0.40	.016	23.5	.925	K	N123K2-0600-0004-CR	☆	☆	☆	☆																														

1) When using CoroCut® 1-edge inserts the a_r of the toolholder gives the maximum depth of cut.

N = Neutral, R = Right hand, L = Left hand
 ☆ = First choice


2) To correspond with seat size on holder.

For geometry description, see page B124.




CoroCut® 1- and 2-edge

Parting

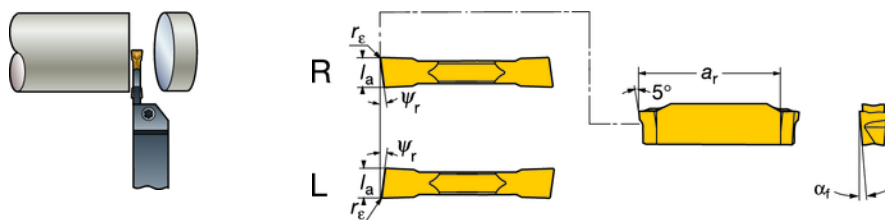

Tolerances, mm (inch):

 $l_a = \pm 0.02 (\pm 0.0008)$ $r_\epsilon = \pm 0.05 (\pm 0.002)$

	Selection criteria, millimeter, inch (mm, in.)										Seat size ¹⁾	Ordering code	P					M			K		N		S																			
	l_a	l_a	ψ_r	α_f	r_ϵ	r_ϵ	a_r	a_r	GC	GC			GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC														
	mm	in.			mm	in.	mm	in.																																				
Low feed  123-CS	1.5	.059	10°	2.5°	0.10	.004	13.4	.528	D	CoroCut® 2-edge															P15																			
	1.5	.059	15°	2.5°	0.10	.004	13.4	.528		R/L123D2-0150-1001-CS		☆																																
	2.0	.079	10°	2.5°	0.10	.004	19.4	.764	E	R/L123E2-0200-1001-CS		☆																																
	2.0	.079	15°	2.5°	0.10	.004	19.4	.764		R/L123E2-0200-1501-CS		☆																																
	2.5	.098	10°	2.5°	0.10	.004	19.4	.764	F	R/L123F2-0250-1001-CS		☆																																
	2.5	.098	15°	2.5°	0.10	.004	19.4	.764		R/L123F2-0250-1501-CS		☆																																
	3.0	.118	10°	2.5°	0.10	.004	19.4	.764	G	R/L123G2-0300-1001-CS		☆																																
	3.0	.118	15°	2.5°	0.10	.004	19.4	.764		R/L123G2-0300-1501-CS		☆																																
												P15	P30	P45	P35	P15	P20	P10	M15	M25	M40	M80	K30	K15	K25	N25	S15	S25	S40	S30														

1) To correspond with seat size on holder.

R = Right hand, L = Left hand



★ = First choice

For geometry description, see page B124.



CoroCut® 1- and 2-edge

For grooving of hardened materials

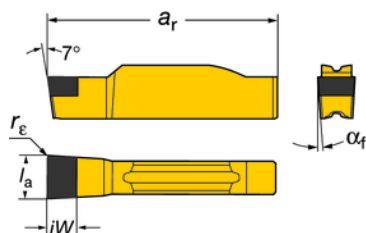

Tailor Made

Tolerances, mm (inch):

$l_a = \pm 0.02 (\pm 0.0008)$

$r_e = \pm 0.05 (\pm 0.002)$

	Selection criteria, millimeter, inch (mm, in.)								Seat size ²⁾	Ordering code	H	
	l_a mm	l_a in.	r_e mm	r_e in.	α_f	a_r max ¹⁾	iW	7015 CB			CB20 CB	
Low feed 123-GE	CoroCut® 1-edge											
	N123G1-0300-0002-GE										★	
	N123G1-0318-0002-GE										★	
	N123H1-0400-0002-GE										★	
	N123H1-0470-0002-GE										★	
	N123H1-0500-0002-GE										★	
	N123J1-0600-0002-GE										★	
	N123K1-0635-0002-GE										★	
N123L1-0800-0002-GE										★		
123-S	CoroCut® 1-edge											
	N123G1-030004S01025										★	
	N123H1-040004S01025										★	
	N123H1-050004S01025										★	
	N123J1-060004S01025										★	
N123L1-080008S01025										★		
											H15	H01


¹⁾ When using CoroCut® 1-edge inserts the a_r of the toolholder gives the maximum depth of cut.

N = Neutral

²⁾ To correspond with seat size on holder.



★ = First choice

For geometry description, see page B124.



CoroCut® 1- and 2-edge

Profiling

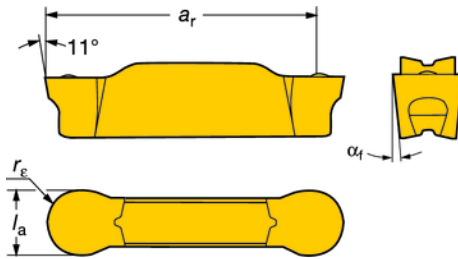

Tailor Made


Tolerances, mm (inch):
 -RM
 $l_a = +0.10/0 (+.004/0)$
 $r_e = \pm 0.10 (\pm .004)$
 -RO
 $l_a = \pm 0.02 (\pm .0008)$
 $r_e = \pm 0.10 (\pm .0004)$

	Selection criteria, millimeter, inch (mm, in.)								Seat size ²⁾	Ordering code	P				M				K				N				S				
	l_a mm	l_a in.	r_e mm	r_e in.	α_f	a_r max mm ¹⁾	a_r max in. ¹⁾	Seat size ²⁾			Ordering code	GC	GC	GC	CT	GC	GC	GC	-	GC	GC	GC	-	GC	GC	GC	-	GC	GC	GC	-
												1125	2135	3115	4225	525	1005	1105	1125	2135	H13A	1125	3115	4225	H13A	H13A	1125	1005	1105	1125	GC
Low feed 123-RO	CoroCut® 2-edge																														
	2.00	.079	1.00	.039	7°	19.20	.756	E	N123E2-0200-RO	★	☆			☆	☆	☆	☆	★			☆	★	☆	☆	☆	☆	☆	☆	★		
	2.39	.094	1.20	.047	7°	19.00	.748		N123E2-0239-RO	★				☆	☆	★		★			☆	★	☆	☆	☆	☆	☆	☆	★		
	3.00	.118	1.50	.059	7°	18.70	.736	F	N123F2-0300-RO	★	☆			☆	☆	☆	☆	★			☆	★	☆	☆	☆	☆	☆	☆	★		
	3.18	.125	1.59	.063	7°	18.60	.732		N123F2-0318-RO	★				☆	☆	★		★			☆	★	☆	☆	☆	☆	☆	☆	★		
	3.96	.156	1.98	.078	7°	23.30	.917	H	N123H2-0396-RO	★				☆	★			★			☆	★	☆	☆	☆	☆	☆	☆	★		
	4.00	.157	2.00	.079	7°	23.30	.917		N123H2-0400-RO	★	☆			☆	★			★			☆	★	☆	☆	☆	☆	☆	☆	★		
	4.50	.177	2.25	.089	7°	23.00	.906		N123H2-0450-RO	★				☆	★			★			☆	★	☆	☆	☆	☆	☆	☆	★		
	4.75	.187	2.38	.094	7°	22.90	.902		N123H2-0475-RO	★				☆	★			★			☆	★	☆	☆	☆	☆	☆	☆	★		
	5.00	.197	2.50	.098	7°	22.80	.898		N123H2-0500-RO	★	☆			☆	★			★			☆	★	☆	☆	☆	☆	☆	☆	★		
6.00	.236	3.00	.118	7°	22.20	.874	J	N123J2-0600-RO	★	☆			☆	★			★			☆	★	☆	☆	☆	☆	☆	☆	★			
6.35	.250	3.18	.125	7°	22.00	.866		N123J2-0635-RO	★				☆	★			★			☆	★	☆	☆	☆	☆	☆	☆	★			
7.14	.281	3.57	.141	7°	21.60	.850	K	N123K2-0714-RO	★				☆	★			★			☆	★	☆	☆	☆	☆	☆	☆	★			
8.00	.315	4.00	.157	7°	27.30	1.075	L	N123L2-0800-RO	★	☆			☆	★			★			☆	★	☆	☆	☆	☆	☆	☆	★			
Medium feed 123-RM	CoroCut® 1-edge																														
	4.00	.157	2.00	.079	7°			G	N123G1-0400-RM	☆	☆	☆	★			★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆			
	6.00	.236	3.00	.118	7°			J	N123J1-0600-RM	☆	☆	☆	★			★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆			
	8.00	.315	4.00	.157	7°			L	N123L1-0800-RM	☆	☆	☆	★			★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆			
Medium feed 123-RM	CoroCut® 2-edge																														
	3.00	.118	1.50	.059	7°	18.60	.732	F	N123F2-0300-RM	☆	☆	☆	★	☆		★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆			
	3.18	.125	1.59	.063	7°	18.60	.732		N123F2-0318-RM	☆	☆	☆	★			★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆			
	4.00	.157	2.00	.079	7°	18.10	.713	G	N123G2-0400-RM	☆	☆	☆	★	☆		★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆			
	4.00	.157	2.00	.079	7°	23.10	.909	H	N123H2-0400-RM	☆	☆	☆	★			★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆			
	4.75	.187	2.38	.094	7°	22.90	.902		N123H2-0475-RM	☆	☆	☆	★			★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆			
	5.00	.197	2.50	.098	7°	22.70	.894		N123H2-0500-RM	☆	☆	☆	★			★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆			
	6.00	.236	3.00	.118	7°	22.20	.874	J	N123J2-0600-RM	☆	☆	☆	★			★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆			
6.35	.250	3.18	.125	7°	22.00	.866		N123J2-0635-RM	☆	☆	☆	★			★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆				
8.00	.315	4.00	.157	7°	27.00	1.063	L	N123L2-0800-RM	☆	☆	☆	★			★	☆	☆	☆	☆	★	☆	★	☆	☆	☆	☆	☆				

1) When using CoroCut® 1-edge inserts the a_r of the toolholder gives the maximum depth of cut.
 2) To correspond with seat size on holder.



N = Neutral
 ★ = First choice

For geometry description, see page B124.




CoroCut® 1- and 2-edge

Aluminium profiling

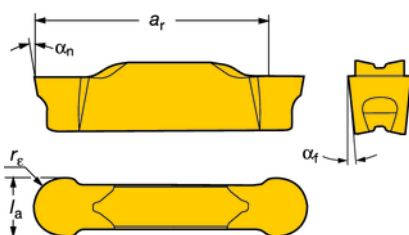



Tolerances, mm (inch):
 $l_a = \pm 0.02 (\pm 0.0008)$

		Selection criteria, millimeter, inch (mm, in.)										N	
		l_a mm	l_a in.	r_c mm	r_c in.	α_f	a_r max mm ¹⁾	a_r max in. ¹⁾	Seat size ²⁾	Ordering code		GC	-
Medium feed		6.00	.236	3.00	.118	7°	22.2	.874	J	CoroCut® 2-edge N123J2-0600-AM		1005	H10
		8.00	.315	4.00	.157	7°	27.3	1.075	L	N123L2-0800-AM		★	☆
												N10	N10




1) When using CoroCut® 1-edge inserts the a_r of the toolholder gives the maximum depth of cut.

2) To correspond with seat size on holder.

Profiling non-ferrous and hardened materials



Tolerances, mm (inch):
 $\pm 0.02 (\pm 0.0008)$

		Selection criteria, millimeter, inch (mm, in.)										N		S		H	
		l_a mm	l_a in.	r_c mm	r_c in.	α_f	a_r max ¹⁾	iW	Seat size ²⁾	Ordering code		CD10	CB	CB	CB		
Low feed		3	.118	1.5	.059	7°	∞	2.7	F	CoroCut® 1-edge N123F1-0300S01025					★		
		4	.157	2	.079	7°	∞	3.6	H	N123H1-0400S01025					★		
		5	.197	2.5	.098	7°	∞	4.7		N123H1-0500S01025					★		
		6	.236	3	.118	7°	∞	5.6	J	N123J1-0600S01025					★		
		3	.118	1.5	.059	7°	∞	2.7	F	CoroCut® 1-edge N123F1-0300-RS		★					
		4	.157	2	.079	7°	∞	3.6	H	N123H1-0400-RS		★					
		5	.197	2.5	.098	7°	∞	4.7		N123H1-0500-RS		★					
		6	.236	3	.118	7°	∞	5.6	J	N123J1-0600-RS		★					
		3	.118	1.5	.059	7°	∞	2.7	F	CoroCut® 1-edge N123F1-0300-RE		★	★	★	☆		
		3.18	.125	1.59	.063	7°	∞	2.7		N123F1-0318-RE		★	★	★			
		4	.157	2	.079	7°	∞	3.6	H	N123H1-0400-RE		★	★	★	☆		
		5	.197	2.5	.098	7°	∞	4.7		N123H1-0500-RE		★	★	★	☆		
	6	.236	3	.118	7°	∞	5.5	J	N123J1-0600-RE		★	★	★	☆			
	6.35	.250	3.17	.125	7°	∞	5.5		N123J1-0635-RE		★	★	★	☆			
	8	.315	4	.157	7°	∞	7.0	L	N123L1-0800-RE		★	★	★	☆			
											ND1	ST15	HT15	HO1			

1) When using CoroCut® 1-edge inserts the a_r of the toolholder gives the maximum depth of cut.

2) To correspond with seat size on holder.


N = Neutral
 ★ = First choice

For geometry description, see page B124.




CoroCut® 1-edge inserts

Grooving

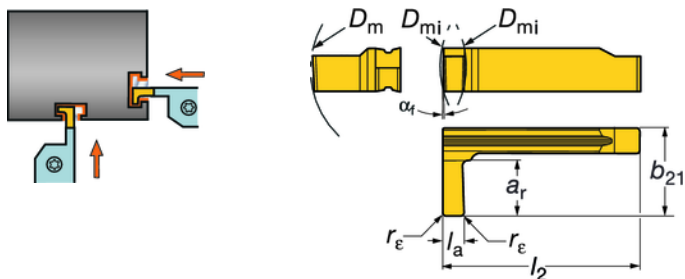

Tolerances, mm (inch):
 $l_a = \pm 0.02 (\pm .001)$
 $r_E = \pm 0.05 (\pm .002)$

	Selection criteria, mm, inch					Seat size ¹⁾	Ordering code	Dimensions, mm, inch				P	M	K	N	S
	l_a	r_E	α_f	a_r max	b_{21}			l_2	D_m	$D_{mi}^{2)}$	GC	GC	GC	GC	GC	
											1115	1115	1115	1115	1115	
 Low feed 123-GS	2.0	0.2	6°	4.0	H	CoroCut® 1-edge R/LG123H1-0200-0002-GS	8.0	25.6	44.0	104.0	☆	★	☆	☆	★	
	.079	.008		.157			.315	1.006	1.732	4.094						
	3.0	0.2	6°	5.0		R/LG123H1-0300-0002-GS	9.0	25.6	44.0	104.0	☆	★	☆	☆	★	
	.118	.008		.197			.354	1.006	1.732	4.094						
	4.0	0.4	6°	6.0		R/LG123H1-0400-0004-GS	10.0	25.6	44.0	104.0	☆	★	☆	☆	★	
	.157	.016		.236			.394	1.006	1.732	4.094						
	2.0	0.2	6°	6.0	L	R/LG123L1-0200-0002-GS	14.0	30.9	62.0	147.0	☆	★	☆	☆	★	
	.079	.008		.236			.551	1.216	2.441	5.787						
	3.0	0.2	6°	9.0		R/LG123L1-0300-0002-GS	17.0	30.9	62.0	147.0	☆	★	☆	☆	★	
	.118	.008		.354			.669	1.216	2.441	5.787						
4.0	0.4	6°	9.0		R/LG123L1-0400-0004-GS	17.0	30.9	62.0	147.0	☆	★	☆	☆	★		
	.157	.016		.354			.669	1.216	2.441	5.787						


1) To correspond with seat size on holder.

R = Right hand, L = Left hand


2) Facegrooving minimum first cut diameter.

★ = First choice

Profiling

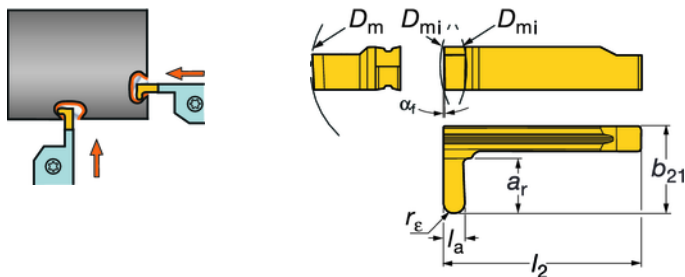

Tolerances, mm (inch):
 $l_a = \pm 0.02 (\pm .0008)$
 $r_E = \pm 0.05 (\pm .002)$

	Selection criteria, mm, inch					Seat size ¹⁾	Ordering code	Dimensions, mm, inch				P	M	K	N	S
	l_a	r_E	α_f	a_r max	b_{21}			l_2	D_m	$D_{mi}^{2)}$	GC	GC	GC	GC	GC	
											1115	1115	1115	1115	1115	
 Low feed 123-RS	2.0	1.0	6°	4.0	H	CoroCut® 1-edge R/LG123H1-0200-0010-RS	8.0	25.6	44.0	104.0	☆	★	☆	☆	★	
	.079	.039		.157			.315	1.006	1.732	4.094						
	3.0	1.5	6°	5.0		R/LG123H1-0300-0015-RS	9.0	25.6	44.0	104.0	☆	★	☆	☆	★	
	.118	.059		.197			.354	1.006	1.732	4.094						
	4.0	2.0	6°	6.0		R/LG123H1-0400-0020-RS	10.0	25.6	44.0	104.0	☆	★	☆	☆	★	
	.157	.079		.236			.394	1.006	1.732	4.094						
	2.0	1.0	6°	6.0	L	R/LG123L1-0200-0010-RS	14.0	30.9	62.0	147.0	☆	★	☆	☆	★	
	.079	.039		.236			.551	1.216	2.441	5.787						
	3.0	1.5	6°	9.0		R/LG123L1-0300-0015-RS	17.0	30.9	62.0	147.0	☆	★	☆	☆	★	
	.118	.059		.354			.669	1.216	2.441	5.787						
4.0	2.0	6°	9.0		R/LG123L1-0400-0020-RS	17.0	30.9	62.0	147.0	☆	★	☆	☆	★		
	.157	.079		.354			.669	1.216	2.441	5.787						

1) To correspond with seat size on holder.

R = Right hand, L = Left hand

2) Facegrooving minimum first cut diameter.

★ = First choice


For geometry description, see page B124.




CoroCut® 1- and 2-edge

Blanks


0° blanks

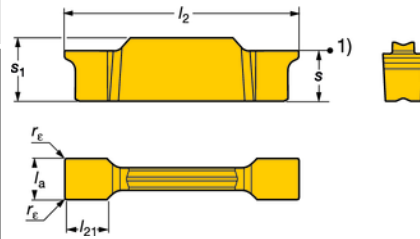


90° blanks

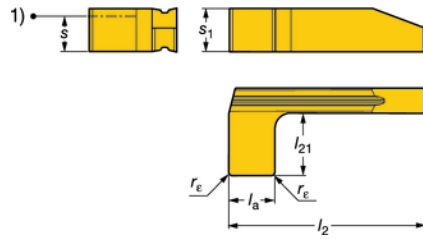

45° blanks

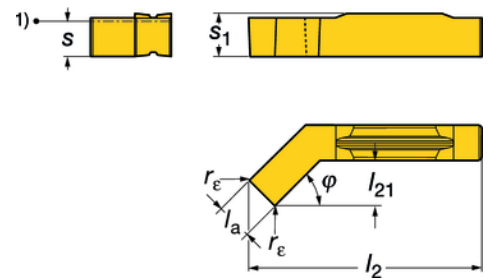

T-shape

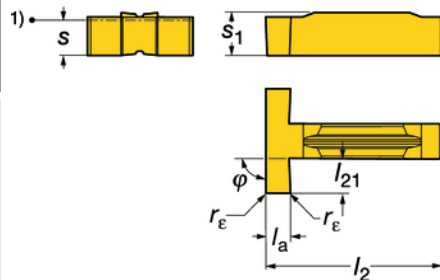

Right hand style shown

1) Cutting edge height

Dimension $l_a \times l_{21}$ is grinding area for specific profiles.

Tolerances, mm (inch):

$l_a \pm 0.10 (\pm .004)$

$l_2 \pm 0.30 (\pm .012)$

$l_{21} \pm 0.30 (\pm .012)$

For T-shape:







$l_a +0.15/-0.05 (+.006/- .002)$

$l_2 \pm 0.30 (\pm .012)$

$l_{21} \pm 0.30 (\pm .012)$

B

C

	Selection criteria, mm, inch					Seat size ²⁾	Ordering code	Dimensions, mm, inch				P		M		K		N		S		
	l_a	ψ_r	r_c	Width range min	Width range max			l_2	l_{21}	s	s_1	H10	H10F	H13A	H10	H10F	H13A	H10	H10F	H13A	H10	H10F
 123-BG	4.0	90°	0.2		3.9	L	CoroCut® 2-edge NX123L2-0400-BG	31.21	5.01	6.05	7.40	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	.159		.008		.154			1.229	.197	.238	.291											
 123-BG	6.0	45°	0.2		5.9	L	CoroCut® 1-edge R/LX123L1-0600-4500-BG	40.19	7.59	6.05	7.40	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	.237		.008		.232			1.582	.299	.238	.291											
 123-BG	11.6		0.2	8	11.2	L	CoroCut® 1-edge N123L1-1160-0002-BG	30.50	7.8	6.05	7.40	☆		☆	☆	☆	☆	☆	☆	☆	☆	☆
	.457		.008	.315	.441			1.201	.307	.238	.291											
 123-BG	6.0		0.2		5.9	H	CoroCut® 1-edge R/LG123H1-0600-BG	25.65	8	4.35	5.50	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	.236		.008		.232			1.010	.315	.171	.216											
 123-BG	6.0		0.2		5.9	L	CoroCut® 1-edge R/LG123L1-0600-BG	31.00	12	6.05	7.40	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	.236		.008		.232			1.220	.472	.238	.291											
 123-BG	2.3		0.2	1.5	1.9	D	CoroCut® 2-edge N123D2-0230-0002-BG	15.00	2.8	4.10	4.60	★		★	☆	★	☆	★	☆	★	☆	
	.091		.008	.059	.075			.591	.110	.161	.181											
	2.7		0.2	1.9	2.3	E	CoroCut® 2-edge N123E2-0270-0002-BG	21.60	3.8	4.30	5.20	★		★	☆	★	☆	★	☆	★	☆	
	.106		.008	.075	.091			.850	.150	.169	.205											
	3.8		0.2	2.3	3.4	F	CoroCut® 2-edge N123F2-0380-0002-BG	21.60	4	4.30	5.20	★		★	☆	★	☆	★	☆	★	☆	
	.150		.008	.091	.134			.850	.157	.169	.205											
	4.2		0.2	2.6	3.8	G	CoroCut® 2-edge N123G2-0420-0002-BG	21.60	4.7	4.30	5.20	★		★	☆	★	☆	★	☆	★	☆	
	.165		.008	.102	.150			.850	.185	.169	.205											
	5.2		0.2	3.2	4.8	H	CoroCut® 2-edge N123H2-0520-0002-BG	26.20	6	4.35	5.50	★		★	☆	★	☆	★	☆	★	☆	
	.205		.008	.126	.189			1.032	.236	.171	.216											
6.2		0.2	4.5	5.8	J	CoroCut® 2-edge N123J2-0620-0002-BG	26.20	6	4.35	5.50	★		★	☆	★	☆	★	☆	★	☆		
.244		.008	.177	.228			1.032	.236	.171	.216												
7.2		0.2	5.5	6.8	K	CoroCut® 2-edge N123K2-0720-0002-BG	26.20	6	4.35	5.50	★		★	☆	★	☆	★	☆	★	☆		
.284		.008	.216	.268			1.032	.236	.171	.216												
8.4		0.2	6.5	8	L	CoroCut® 2-edge N123L2-0840-0002-BG	31.50	7	6.05	7.40	★		★	☆	★	☆	★	☆	★	☆		
.331		.008	.256	.315			1.240	.276	.238	.291												

G

H


I

1) To correspond with seat size on holder.

N = Neutral, R = Right hand, L = Left hand

Note: Precaution should be taken when grinding cemented carbide products. See page J7 for safety information.

★ = First choice



Code key for CoroCut® holders

Coromant Capto®

C4	-	R	F	123	E	15	-	27055	B
1		2	3	4	5	6		7	8

Shank holder

Metric








R	F	123	E	08	-	1616	B	-	007	064	B
2	3	4	5	6		7	8		10	12	13





Inch





R	F	123	E	059	-	08	B	-	S
2	3	4	5	6		7	8		11



Blade

N	123	F	55	-	25	A	2
2	4	5	6		7	8	9

1 Coupling size C = Coromant Capto® D_{5m} = Coupling size  <table border="1"> <thead> <tr> <th></th> <th>D_{5m}</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td>C3</td> <td>32</td> <td></td> <td>(1.260)</td> </tr> <tr> <td>C4</td> <td>40</td> <td></td> <td>(1.575)</td> </tr> <tr> <td>C5</td> <td>50</td> <td></td> <td>(1.968)</td> </tr> <tr> <td>C6</td> <td>63</td> <td></td> <td>(2.480)</td> </tr> <tr> <td>C8</td> <td>80</td> <td></td> <td>(3.150)</td> </tr> </tbody> </table>		D_{5m}	mm	inch	C3	32		(1.260)	C4	40		(1.575)	C5	50		(1.968)	C6	63		(2.480)	C8	80		(3.150)	2 Hand of tool R  N  L 	3 Holder style F  0° G  90° X  1-70°
	D_{5m}	mm	inch																							
C3	32		(1.260)																							
C4	40		(1.575)																							
C5	50		(1.968)																							
C6	63		(2.480)																							
C8	80		(3.150)																							
4 Main code 123																										

5 Insert seat size CoroCut® 1-2 D G K E H L F J M R CoroCut® 3 T = Right hand cutting U = Left hand cutting To correspond with seat size on insert.	6 Machining limitations   Max cutting depth a_r in mm Metric 08 = 8 mm Inch 059 = .590 inch	7 Shank/cutting unit dimension Coromant Capto®  For example: f_1 27 mm 055 mm 1.063 inch 2.165 inch Shank tool  inches Shank size in 1/16 inch eg. 08 = 8/16 = 1/2 inch h x b 08 Metric Integers to be preceded by 0, e.g. b = 8 mm indicated by 08 h b 16 16 Blade Dimensions in mm.
---	---	--

8 Clamping system A Spring clamp  B Screw clamp  C Shallow grooving  D Screw clamp reinforced 	9 Number of insert seats 1 One insert seat 2 Two insert seats	10 Holder angle 007 = 7° 045 = 45° 070 = 70° Valid for holder style = X
---	--	--

11 Special application S = Holder for small part machines	12 Min. diameter for first cut, for face grooving Min. diameter for first cut in mm.	13 Type of curve, for face grooving  B = B curve  A = A curve
---	--	--

CoroCut® 1- and 2-edge


Coromant Capto® cutting units

Screw clamp




Note!
When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

Cx-R/LF123



Right hand

Cx-NF123



Neutral

Coolant inlet: Radial through the taper

Main application	a_r max mm ¹⁾	a_r max inch ¹⁾	Seat size ²⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)						Gauge inserts	Nm ³⁾
					D_{5m} mm	D_{5m} in.	f_1 mm	f_1 in.	l_1 mm	l_1 in.		
	8	.315	D	C3-R/LF123D08-22050B	32	1.260	22	.866	50	1.968	N123D2-0150- CM	2.0
	8	.315		C4-R/LF123D08-27050B	40	1.575	27	1.063	50	1.968	N123D2-0150- CM	3.0
	8	.315		C5-R/LF123D08-35055B	50	1.968	35	1.378	55	2.165	N123D2-0150- CM	2.0
	15	.591		C3-R/LF123D15-22050B	32	1.260	22	.866	50	1.968	N123D2-0150- CM	3.5
	15	.591		C4-R/LF123D15-27055B	40	1.575	27	1.063	55	2.165	N123D2-0150- CM	3.5
	15	.591	C5-R/LF123D15-35055B	50	1.968	35	1.378	55	2.165	N123D2-0150- CM	3.5	
	8	.591	E	C3-R/LF123E08-22050B	32	1.260	22	.866	50	1.968	N123E2-0200- CM	2.0
	8	.315		C4-R/LF123E08-27050B	40	1.575	27	1.063	50	1.968	N123E2-0200- CM	3.7
	8	.315		C5-R/LF123E08-35060B	50	1.968	35	1.378	60	2.362	N123E2-0200- CM	2.0
	15	.591		C3-R/LF123E15-22055B	32	1.260	22	.866	55	2.165	N123E2-0200- CM	4.0
	15	.591		C4-R/LF123E15-27055B	40	1.575	27	1.063	55	2.165	N123E2-0200- CM	4.0
	15	.591	C5-R/LF123E15-35060B	50	1.968	35	1.378	60	2.362	N123E2-0200- CM	4.0	
	10	.394	F	C3-R/LF123F10-22050B	32	1.260	22	.866	50	1.968	N123F2-0250- CM	3.0
	10	.394		C4-R/LF123F10-27050B	40	1.575	27	1.063	50	1.968	N123F2-0250- CM	5.0
	10	.394		C5-R/LF123F10-35060B	50	1.968	35	1.378	60	2.362	N123F2-0250- CM	2.5
20	.787	C3-R/LF123F20-22055B		32	1.260	22	.866	55	2.165	N123F2-0250- CM	4.0	
20	.787	C4-R/LF123F20-27060B		40	1.575	27	1.063	60	2.362	N123F2-0250- CM	4.0	
20	.787	C5-R/LF123F20-35060B	50	1.968	35	1.378	60	2.362	N123F2-0250- CM	4.0		
10	.394	G	C3-R/LF123G10-22050B	32	1.260	22	.866	50	1.968	N123G2-0300- CM	4.5	
10	.394		C4-R/LF123G10-27055B	40	1.575	27	1.063	55	2.165	N123G2-0300- CM	4.0	
10	.394		C5-R/LF123G10-35060B	50	1.968	35	1.378	60	2.362	N123G2-0300- CM	4.5	
10	.394		C6-R/LF123G10-45065B	63	2.480	45	1.772	65	2.559	N123G2-0300- CM	3.0	
20	.787		C3-R/LF123G20-22055B	32	1.260	22	.866	55	2.165	N123G2-0300- CM	5.0	
20	.787		C4-R/LF123G20-27060B	40	1.575	27	1.063	60	2.362	N123G2-0300- CM	5.0	
20	.787	C5-R/LF123G20-35060B	50	1.968	35	1.378	60	2.362	N123G2-0300- CM	5.0		
20	.787	C6-R/LF123G20-45065B	63	2.480	45	1.772	65	2.559	N123G2-0300- CM	5.0		
13	.512	H	C3-R/LF123H13-22055B	32	1.260	22	.866	55	2.165	N123H2-0400- CM	4.5	
13	.512		C4-R/LF123H13-27055B	40	1.575	27	1.063	55	2.165	N123H2-0400- CM	7.5	
13	.512		C5-R/LF123H13-35060B	50	1.968	35	1.378	60	2.362	N123H2-0400- CM	5.0	
13	.512		C6-R/LF123H13-45065B	63	2.480	45	1.772	65	2.559	N123H2-0400- CM	4.0	
20	.787		C3-R/LF123H20-22060B	32	1.260	22	.866	60	2.362	N123H2-0400- CM	7.0	
25	.984		C4-R/LF123H25-27067B	40	1.575	27	1.063	67	2.638	N123H2-0400- CM	7.0	
25	.984	C5-R/LF123H25-35067B	50	1.968	35	1.378	67	2.638	N123H2-0400- CM	7.0		
25	.984	C6-R/LF123H25-45070B	63	2.480	45	1.772	70	2.756	N123H2-0400- CM	7.0		
13	.512	J	C4-R/LF123J13-27055B	40	1.575	27	1.063	55	2.165	N123J2-0500- CM	7.5	
13	.512		C5-R/LF123J13-35060B	50	1.968	35	1.378	60	2.362	N123J2-0500- CM	5.0	
13	.512		C6-R/LF123J13-45065B	63	2.480	45	1.772	65	2.559	N123J2-0500- CM	4.0	
13	.512		C8-R/LF123J13-42080B	80	3.150	42	1.654	80	3.150	N123J2-0500- GM	3.5	
25	.984		C4-R/LF123J25-27067B	40	1.575	27	1.063	67	2.638	N123J2-0500- CM	6.0	
25	.984		C5-R/LF123J25-35067B	50	1.968	35	1.378	67	2.638	N123J2-0500- CM	6.0	
25	.984	C6-R/LF123J25-45070B	63	2.480	45	1.772	70	2.756	N123J2-0500- CM	6.0		

1) a_r max. for holder. For max stability choose a holder with shortest possible a_r .

N = Neutral, R = Right hand, L = Left hand

2) To correspond with seat size on insert.

3) Insert tightening torque Nm. Use torque wrench, see page B109.

Continued ...



CoroCut® 1- and 2-edge

Coromant Capto® cutting units


Screw clamp

Tailor Made

Note!


When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

Cx-R/LF123



Right hand

Cx-NF123



Neutral

... Continued

Coolant inlet: Radial through the taper

Main application	a_r max mm ¹⁾	a_r max inch ¹⁾	Seat size ²⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)						Gauge inserts	Nm ³⁾	
					D_{5m} mm	D_{5m} in.	f_1 mm	f_1 in.	l_1 mm	l_1 in.			
	16	.630	K	C4-R/LF123K16-27060B	40	1.575	27	1.063	60	2.362	N123K2-0600-CR	6.5	
	16	.630		C5-R/LF123K16-35060B	50	1.968	35	1.378	60	2.362	N123K2-0600-CR	7.0	
	16	.630		C6-R/LF123K16-45065B	63	2.480	45	1.772	65	2.559	N123K2-0600-CR	5.2	
	16	.630		C8-LF123K16-42080B	80	3.150	42	1.654	80	3.150	N123K2-0600-GM	4.0	
	16	.630		C8-RF123K16-42080B	80	3.150	42	1.654	80	3.150	N123K2-0600-GM	4.0	
	25	.984		C4-R/LF123K25-27070B	40	1.575	27	1.063	70	2.756	N123K2-0600-CR	6.0	
	25	.984	L	C5-R/LF123K25-35070B	50	1.968	35	1.378	70	2.756	N123K2-0600-CR	6.0	
	25	.984		C6-R/LF123K25-45075B	63	2.480	45	1.772	75	2.953	N123K2-0600-CR	6.0	
	13	.512		C5-R/LF123L13-35060B	50	1.968	35	1.378	60	2.362	N123L2-0800-GM	5.5	
	16	.630		C6-R/LF123L16-45065B	63	2.480	45	1.772	65	2.559	N123L2-0800-GM	5.5	
	25	.984		C5-R/LF123L25-35070B	50	1.968	35	1.378	70	2.756	N123L2-0800-GM	7.0	
	25	.984		C6-R/LF123L25-45075B	63	2.480	45	1.772	75	2.953	N123L2-0800-GM	7.0	
	25	.984	J	C8-LF123L25-42080B	80	3.150	42	1.654	80	3.150	N123L2-0800-GM	8.0	
	25	.984		C8-RF123L25-42080B	80	3.150	42	1.654	80	3.150	N123L2-0800-GM	8.0	
	20	.787		G	C3-NF123G20-00060B	32	1.260	2	.079	60	2.362	N123G2-0400-RM	5.0
	20	.787			C4-NF123G20-00070B	40	1.575	2	.079	70	2.756	N123G2-0400-RM	5.0
	20	.787			C5-NF123G20-00070B	50	1.968	2	.079	70	2.756	N123G2-0400-RM	5.0
	20	.787		J	C6-NF123G20-00075B	63	2.480	2	.079	75	2.953	N123G2-0400-RM	5.0
25	.984	C4-NF123J25-00077B	40		1.575	3	.118	77	3.032	N123J2-0600-RM	6.0		
25	.984	C5-NF123J25-00077B	50		1.968	3	.118	77	3.032	N123J2-0600-RM	6.0		
25	.984	J	C6-NF123J25-00082B	63	2.480	3	.118	82	3.228	N123J2-0600-RM	6.0		

1) a_r max. for holder. For max stability choose a holder with shortest possible a_r .

N = Neutral, R = Right hand, L = Left hand

2) To correspond with seat size on insert.

3) Insert tightening torque Nm. Use torque wrench, see page B109.

Main spare parts

Seat size	Cutting unit size	Screw	Key (Torx Plus)
D, E, F	C3-C5	3212 012-259	5680 043-14 (20IP)
G	C3-C6	3212 012-310	5680 043-15 (25IP)
H, J, K, L	C4-C6	3212 012-360	5680 043-17 (30IP)




CoroCut® 1- and 2-edge


Double ended parting blade

Spring clamp


Design 1 N123 Blades with curved re-inforcement

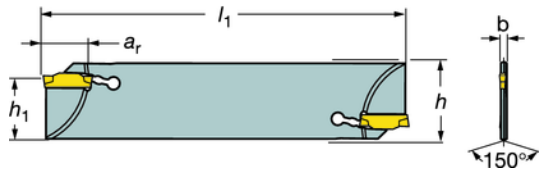

Design 2 N123 Blades with straight re-inforcement

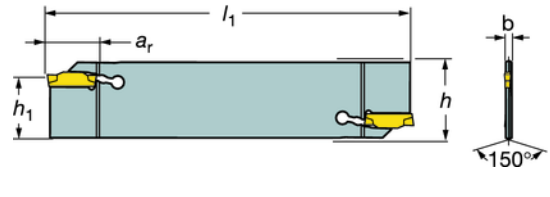

Design 3 N123 Blades without re-inforcement

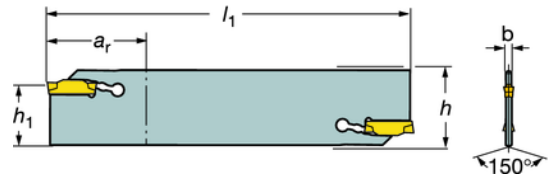

Note!
When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

Neutral style

Main application	Design	a_r min mm ¹⁾	a_r min inch ¹⁾	a_r max mm ¹⁾	a_r max inch ¹⁾	Seat size ²⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)								Gauge inserts
								b mm	b in.	h mm	h in.	h_1 mm	h_1 in.	l_1 mm	l_1 in.	
	1	5	.197	15	.591	D	N123D15-21A2 ³⁾	1	.039	25.9	1.020	21.4	.842	110	4.331	N123D2-0150-CM
	1	5	.197	15	.591	E	N123E15-21A2 ³⁾	1.5	.059	25.9	1.020	21.4	.842	110	4.331	N123E2-0200-CM
	2			15	.591	D	N123D15-25A2	1	.039	31.9	1.256	25	.984	150	5.906	N123D2-0150-CM
	2			20	.787	E	N123E20-25A2	1.5	.059	31.9	1.256	25	.984	150	5.906	N123E2-0200-CM
	3			30	1.181	F	N123F30-21A2	2	.080	25.9	1.020	21.4	.842	110	4.331	N123F2-0250-CM
	3			55	2.165		N123F55-25A2	2	.080	31.9	1.256	25	.984	150	5.906	N123F2-0250-CM
	3			30	1.181	G	N123G30-21A2	2.3	.090	25.9	1.020	21.4	.842	110	4.331	N123G2-0300-CM
	3			55	2.165		N123G55-25A2	2.3	.090	31.9	1.256	25	.984	150	5.906	N123G2-0300-CM
	3			55	2.165	H	N123H55-25A2	3.3	.130	31.9	1.256	25	.984	150	5.906	N123H2-0400-CM
	3			55	2.165	J	N123J55-25A2	4.5	.177	31.9	1.256	25	.984	150	5.906	N123J2-0500-CM
	3			55	2.165	K	N123K55-25A2	5.5	.216	31.9	1.256	25	.984	150	5.906	N123K2-0600-CR


¹⁾ For max stability adjust to shortest position

²⁾ To correspond with seat size on insert.

³⁾ For min. and max. a_r at respective workpiece diameters (D_m), see diagrams below for cutting depth limitation.

Cutting depth limitation for CoroCut® blades with curved re-inforcement

Due to re-inforcement of the blade the max. cutting depth is dependent on the workpiece diameter. (inch)

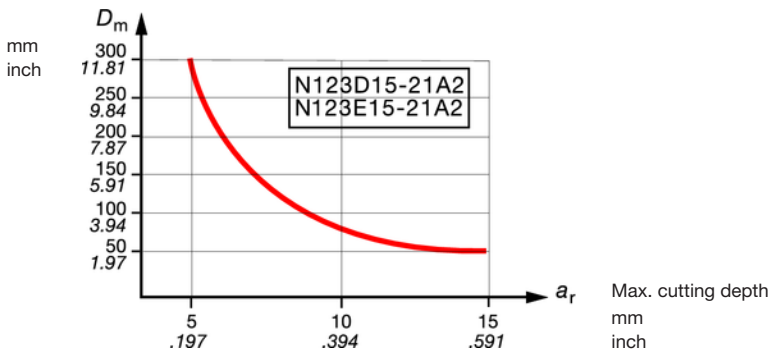

Main spare parts

Seat size	Insert key ¹⁾
D-K	5680 058-01

¹⁾ Must be ordered separately.




CoroCut® 1- and 2-edge


Single ended parting blade

Screw clamp

Blades with curved re-inforcement
R/LF123

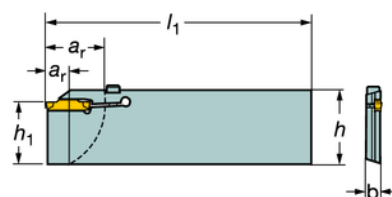

R/LF123M
R/LF123R

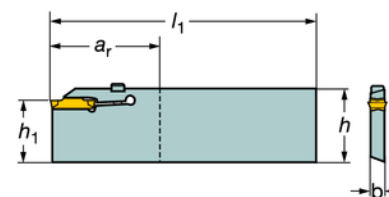

Note!

When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

Right hand style shown

Main application	Dimensions, millimeter, inch (mm, in.)				Seat size ²⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)				Gauge inserts		Nm ³⁾			
	a_r min mm ¹⁾	a_r min inch ¹⁾	a_r max mm ¹⁾	a_r max inch ¹⁾			b mm	b in.	h mm	h in.	h_1 mm	h_1 in.		l_1 mm	l_1 in.	
	5	.197	25	.984	E	R/LF123E25-25B1	8	.315	31.9	1.256	25	.984	150	5.906	N123E2-0200-CM	3.3
	5	.197	25	.984	F	R/LF123F25-25B1	8	.315	31.9	1.256	25	.984	150	5.906	N123F2-0250-CM	3.6
	5	.197	25	.984	G	R/LF123G25-25B1	8	.315	31.9	1.256	25	.984	150	5.906	N123G2-0300-CM	4.5
	25	.906	32	1.260	H	R/LF123H32-25B1	8	.315	31.9	1.256	25	.984	150	5.906	N123H2-0400-CM	4.9
			100	3.937	M	R/LF123M100-45B1	8.15	.321	50.8	2.000	45	1.772	250	9.842	N123M1-1100-GM	4.5
			120	4.724		R/LF123M120-93B1	8.15	.321	101.6	4.000	93	3.680	300	11.811	N123M1-1100-GM	4.5
			120	4.724	R	R/LF123R120-93B1	11.10	.457	101.6	4.000	93	3.680	300	11.811	N123R1-1500-GR	4.5

¹⁾ For min. and max. a_r at respective workpiece diameters (D_m), see diagrams below for cutting depth limitation.

²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque Nm. Use torque wrench, see page B109.


R = Right hand, L = Left hand

Cutting depth limitation for CoroCut® blades with curved re-inforcement

Due to re-inforcement of the blade the max. cutting depth is dependent on the workpiece diameter.

Screw clamp blades

Workpiece diameter, inch

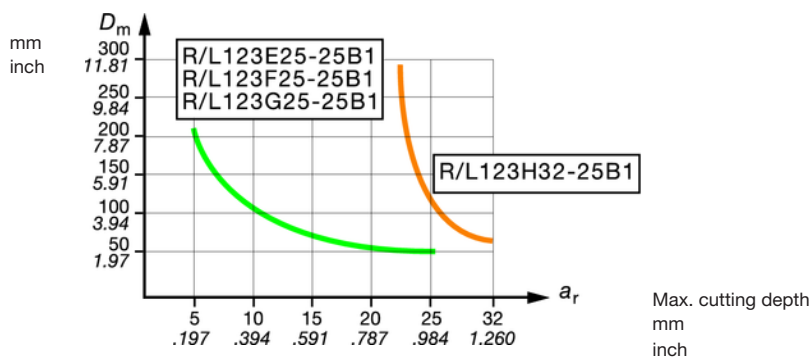


Main spare parts

Seat size	Screw	Key (Torx Plus)
E-H	3212 012 259	5680 043-14 (20IP)
M	5512 046-01	5680 043-15 (25IP)
R	3212 012-311	5680 043-15 (25IP)



Tool block for parting blades

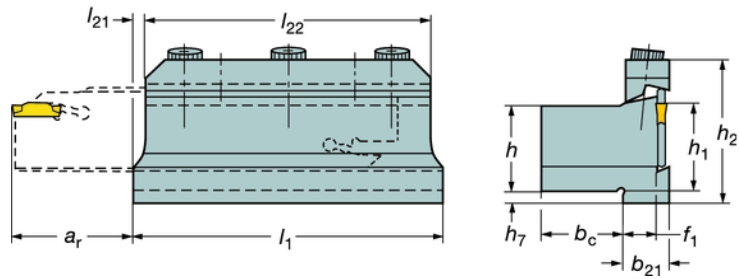

Metric version

Cutting edge height on blades	ar max	Ordering code	Dimensions, mm									
			b21	bc	f1	h	h1	h2	h7	l1	l21	l22
21	35	151.2-2020-21M	18.0	20.0	13.4	20	20	45.5	10.0	80	5	70
21	35	151.2-2520-21	18.0	20.0	13.4	25	25	45.5	10.0	80	5	70
25	60	151.2-2020-25	18.0	20.0	13.4	20	25	52.5	10.0	120	5	110
25	60	151.2-2520-25	18.0	20.0	13.4	25	25	52.5	10.0	120	5	110
25	60	151.2-3232-25	18.0	32.0	13.4	32	32	54.5	5.0	120	5	110
45	100	151.2-3232-45	20.4	31.6	13.4	32	32	82.5	29.7	160	5	150
45	100	151.2-4040-45	20.4	39.6	13.4	40	40	82.5	21.7	160	5	150
93	120	151.2-5050-93	29.1	49.0	19.7	50	50.5	152.3	68.4	178	-	-


Inch version

Cutting edge height on blades	ar max	Ordering code	Dimensions, inch									
			b21	bc	f1	h	h1	h2	h7	l1	l21	l22
21	1.38	151.2-12-21M	.730	.730	.5299	.750	.750	1.790	.430	3.150	.197	2.756
25	2.36	151.2-16-25M	.730	.980	.5299	1.000	1.000	1.790	.430	4.720	.197	4.331
25	2.36	151.2-20-25M	.730	1.230	.5299	1.250	1.250	2.150	.210	4.720	.197	4.331
25	2.36	151.2-24-25M	.730	1.480	.5299	1.500	1.500	2.400	.200	4.720	.197	4.331
45	3.93	151.2-20-45	.800	1.230	.5299	1.250	1.250	3.250	1.181	6.299	.197	5.906
45	3.93	151.2-24-45	.800	1.480	.5299	1.500	1.500	3.250	1.929	6.299	.197	5.906
93	4.20	151.2-32-93	1.146	1.929	.7717	2.000	2.020	5.968	2.693	7.008	-	-


Main spare parts

Tool block mm	Inch	Clamp	Clamp screw	Key (mm)
151.2-2020-21M	151.2-12-21M	5412 120-01	3212 010-410	3021 010-060 (6.0)
151.2-2520-21		5412 120-01	3212 010-410	3021 010-060 (6.0)
151.2-2020-25	151.2-16-25M	5412 120-02	3212 010-411	3021 010-060 (6.0)
151.2-2520-25	151.2-20-25M	5412 120-02	3212 010-411	3021 010-060 (6.0)
151.2-3232-25	151.2-24-25M	5412 120-02	3212 010-411	3021 010-060 (6.0)
151.2-3232-45	151.2-20-45	5412 120-03	3212 010-412	3021 010-060 (6.0)
151.2-4040-45	151.2-24-45	5412 120-03	3212 010-412	3021 010-060 (6.0)
151.2-5050-93	151.2-32-93	5412 120-04	3212 010-464	3021 010-080 (8.0)

Coolant adaptor for tool blocks and adaptors



Cutting edge height on blades	Ordering code	Dimensions, mm, inch						
		b22	h21	h22	l23	l24	l25	Dth
21, 25, 45	5691 050-011	17	10	28	26	16.2	17.2	G¼"
		.669	.394	1.10	1.02	.638	.677	G¼"



Ordering example: 2 pieces 5691 050-011

Main spare parts

1	2	3		
Nozzle	Mounting screw	Plug	Key (mm) for plug	Key (mm) for mounting screw
5691 029-02	3212 010-358	5519 055-01	3021 010-060 (6.0)	3021 010-050 (5.0)



CoroCut® 1- and 2-edge


Shank tools
Screw clamp

Tailor Made

Note!

When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

R/L123



Right hand style shown

Metric version

Main application	a_r max ¹⁾	Seat size ²⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ³⁾
				b	f_1	h	h_1	l_1	l_3		
	8	D	R/LF123D08-1212B	12	13	12	12	125	25.5	N123D2-0150- CM	2.5
	8		R/LF123D08-1616B	16	17	16	16	100	25.5	N123D2-0150- CM	2.5
	8		R/LF123D08-2020B	20	21	20	20	125	25.5	N123D2-0150- CM	2.5
	8		R/LF123D08-2525B	25	26	25	25	150	25.5	N123D2-0150- CM	2.5
	15		R/LF123D15-1616B	16	17	16	16	100	33.5	N123D2-0150- CM	3.5
	15		R/LF123D15-2020B	20	21	20	20	125	33.5	N123D2-0150- CM	3.5
	15		R/LF123D15-2525B	25	26	25	25	150	33.5	N123D2-0150- CM	3.5
	8	E	R/LF123E08-1212B	12	13	12	12	125	25.5	N123E2-0200- CM	2.5
	8		R/LF123E08-1616B	16	17	16	16	125	25.5	N123E2-0200- CM	2.5
	8		R/LF123E08-2020B	20	21	20	20	125	25.5	N123E2-0200- CM	2.5
	8		R/LF123E08-2525B	25	26	25	25	150	25.5	N123E2-0200- CM	2.5
	12		R/LF123E12-1212B	12	13	12	12	125	30.5	N123E2-0200- CM	3.5
	15		R/LF123E15-1616B	16	17	16	16	125	33.5	N123E2-0200- CM	4.0
	15		R/LF123E15-2020B	20	21	20	20	125	33.5	N123E2-0200- CM	4.0
	15		R/LF123E15-2525B	25	26	25	25	150	33.5	N123E2-0200- CM	4.0
10	F	R/LF123F10-1212B	12	13	12	12	125	29	N123F2-0250- CM	3.0	
10		R/LF123F10-1616B	16	17	16	16	125	29	N123F2-0250- CM	3.0	
10		R/LF123F10-2020B	20	21	20	20	125	29	N123F2-0250- CM	3.0	
10		R/LF123F10-2525B	25	26	25	25	150	29	N123F2-0250- CM	3.0	
20		R/LF123F20-1616B	16	17	16	16	125	40	N123F2-0250- CM	4.0	
20		R/LF123F20-2020B	20	21	20	20	125	40	N123F2-0250- CM	4.0	
20		R/LF123F20-2525B	25	26	25	25	150	40	N123F2-0250- CM	4.0	
20		R/LF123F20-3225B	25	26	32	32	170	40	N123F2-0250- CM	4.0	
10	G	R/LF123G10-1616B	16	17	16	16	125	30	N123G2-0300- CM	3.5	
10		R/LF123G10-2020B	20	21	20	20	125	30	N123G2-0300- CM	3.5	
10		R/LF123G10-2525B	25	26	25	25	150	30	N123G2-0300- CM	3.5	
10		R/LF123G10-3225B	25	26	32	32	170	30	N123G2-0300- CM	3.5	
12		R/LF123G12-1212B	12	13	12	12	125	32	N123G2-0300- CM	3.5	
20		R/LF123G20-1616B	16	17	16	16	125	41	N123G2-0300- CM	5.0	
20		R/LF123G20-2020B	20	21	20	20	125	41	N123G2-0300- CM	5.0	
20		R/LF123G20-2525B	25	26	25	25	150	41	N123G2-0300- CM	5.0	
20		R/LF123G20-3225B	25	26	32	32	170	41	N123G2-0300- CM	5.0	
20		R/LF123G20-3232B	32	33	32	32	170	41	N123G2-0300- CM	5.0	
13	H	R/LF123H13-1616B	16	17	16	16	125	34	N123H2-0400- CM	4.5	
13		R/LF123H13-2020BM	20	21	20	20	125	34	N123H2-0400- CM	4.5	
13		R/LF123H13-2525BM	25	26	25	25	150	34	N123H2-0400- CM	4.5	
13		R/LF123H13-3225BM	25	26	32	32	170	34	N123H2-0400- CM	4.5	
13		R/LF123H13-3232BM	32	33	32	32	170	34	N123H2-0400- CM	4.5	
25		R/LF123H25-1616B	16	17	16	16	125	47	N123H2-0400- CM	7.0	
25		R/LF123H25-2020BM	20	21	20	20	125	47	N123H2-0400- CM	7.0	
25		R/LF123H25-2525BM	25	26	25	25	150	47	N123H2-0400- CM	7.0	
25		R/LF123H25-3225BM	25	26	32	32	170	47	N123H2-0400- CM	7.0	
25		R/LF123H25-3232BM	32	33	32	32	170	47	N123H2-0400- CM	7.0	
13	J	R/LF123J13-2020BM	20	21	20	20	125	34	N123J2-0500- CM	5.0	
13		R/LF123J13-2525BM	25	26	25	25	150	34	N123J2-0500- CM	5.0	
13		R/LF123J13-3225BM	25	26	32	32	170	34	N123J2-0500- CM	5.0	
13		R/LF123J13-3232BM	32	33	32	32	170	34	N123J2-0500- CM	5.0	
32		R/LF123J32-2525BM	25	26	25	25	150	57	N123J2-0500- CM	7.5	
32		R/LF123J32-3225BM	25	26	32	32	170	57	N123J2-0500- CM	7.5	
32		R/LF123J32-3232BM	32	33	32	32	170	57	N123J2-0500- CM	7.5	

¹⁾ a_r max. for holder. For max stability choose a holder with shortest possible a_r .

R = Right hand, L = Left hand

²⁾ To correspond with seat size on insert.

N = Neutral

³⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

Continued ...



CoroCut® 1- and 2-edge

Shank tools

Screw clamp


B

Tailor Made

Note!


When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

R/L123



Right hand style shown

N123



Neutral

... Continued

Metric version

C

Main application	a_r max ¹⁾	Seat size ²⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ³⁾
				b	f_1	h	h_1	l_1	l_3		
	16	K	R/LF123K16-2525BM	25	26	25	25	150	39	N123K2-0600-CR	5.5
	16		R/LF123K16-3225BM	25	26	32	32	170	39	N123K2-0600-CR	5.5
	16		R/LF123K16-3232BM	32	33	32	32	170	39	N123K2-0600-CR	5.5
	32		R/LF123K32-2525BM	25	26	25	25	150	58	N123K2-0600-CR	7.5
	32		R/LF123K32-3225BM	25	26	32	32	170	58	N123K2-0600-CR	7.5
	32		R/LF123K32-3232BM	32	33	32	32	170	58	N123K2-0600-CR	7.5
	16	L	R/LF123L16-2525BM	25	26	25	25	150	41	N123L2-0800-GM	6.5
	25		R/LF123L25-2525BM	25	26	25	25	150	52	N123L2-0800-GM	7.0
	25		R/LF123L25-3225BM	25	26	32	32	170	52	N123L2-0800-GM	7.0
	32		R/LF123L32-3225BM	25	26	32	32	170	60	N123L2-0800-GM	7.5
32		R/LF123L32-3232BM	32	33	32	32	170	60	N123L2-0800-GM	7.5	
	25	J	NF123J25-2525BM	25	15	25	25	150	52.2	N123J2-0600-RM	6.0
	25		NF123J25-3225BM	25	15	32	32	170	52.2	N123J2-0600-RM	6.0
	32	M	R/LF123M32-3232B	32	34	32	32	250	63.9	N123M1-1100-GM	9.0
	32		R/LF123M32-4040B	40	42.2	40	40	250	63.9	N123M1-1100-GM	9.0
	50		R/LF123M50-4040B	40	42	40	40	250	63.9	N123M1-1100-GM	4.5
	32	R	R/LF123R32-3232B	32	34.5	32	32	250	71.3	N123R1-1500-GR	10.0
	32		R/LF123R32-4040B	40	42.5	40	40	250	71.3	N123R1-1500-GR	10.0
	50		R/LF123R50-4040B	40	42.5	40	40	250	71.3	N123R1-1500-GR	4.5
	32		NF123R32-4040B	40	27.5	40	40	250	71.3	N123R1-1500-GR	10.0

¹⁾ a_r max. for holder. For max stability choose a holder with shortest possible a_r .

²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

R = Right hand, L = Left hand

N = Neutral

Main spare parts

I

Seat size	Shank holder size		a_r mm	a_r inch	Screw	Key (Torx Plus)
	metric	inch				
D, E, F, G	1212	08			3212 012-257	5680 043-14 (20IP)
D, E, F	1616-3225	10-20			3212 012-259	5680 043-14 (20IP)
G	1616	-			3212 012-309	5680 043-15 (25IP)
G	2020-3232	12-20			3212 012-310	5680 043-15 (25IP)
H	1616	-			3212 012-309	5680 043-15 (25IP)
H, J, K, L	2020-3232	12-24			5512 044-01	5680 043-17 (30IP)
M	3232-4040	20-24	32	1.260	5512 044-01	5680 048-07 (30IP)
M	4040	24	50	2.000	5512 046-01	5680 043-15 (25IP)
R	3232-4040	20-24	32	1.260	5512 044-01	5680 048-07 (30IP)
R	4040	24	50	2.000	3212 012-311	5680 043-15 (25IP)

J




CoroCut® 1- and 2-edge

Shank tools

Screw clamp

Tailor Made

R/L123



Note!

When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

Right hand style shown

Inch version

Main application	a_r max ¹⁾	Seat size ²⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ³⁾
				b	f_1	h	h_1	l_1	l_3		
	.315	D	R/LF123D032-08B	.500	.512	.500	.500	4.500	1.000	N123D2-0150- CM	1.8
	.320		RF123D032-10B	.625	.670	.625	.625	4.500	1.000	N123D2-0150- CM	1.8
	.320		R/LF123D032-12B	.750	.825	.750	.750	4.500	1.000	N123D2-0150- CM	1.8
	.320		R/LF123D032-16B	1.000	1.028	1.000	1.000	5.000	1.000	N123D2-0150- CM	1.8
	.590		RF123D059-10B	.625	.670	.625	.625	4.500	1.320	N123D2-0150- CM	2.6
	.590		R/LF123D059-12B	.750	.827	.750	.750	4.500	1.320	N123D2-0150- CM	2.6
	.590		R/LF123D059-16B	1.000	1.028	1.000	1.000	6.000	1.320	N123D2-0150- CM	2.6
	.320	E	R/LF123E032-08B	.500	.512	.500	.500	4.500	1.004	N123E2-0200- CM	1.8
	.320		R/LF123E032-10B	.625	.669	.625	.625	4.500	1.004	N123E2-0200- CM	1.8
	.320		R/LF123E032-12B	.750	.827	.750	.750	4.500	1.004	N123E2-0200- CM	1.8
	.320		R/LF123E032-16B	1.000	1.024	1.000	1.000	5.000	1.004	N123E2-0200- CM	1.8
	.590		R/LF123E059-08B	.500	.512	.500	.500	4.500	1.319	N123E2-0200- CM	3.0
.590		R/LF123E059-10B	.625	.669	.625	.625	4.500	1.319	N123E2-0200- CM	3.0	
.590		R/LF123E059-12B	.750	.827	.750	.750	5.000	1.319	N123E2-0200- CM	3.0	
.590		R/LF123E059-16B	1.000	1.024	1.000	1.000	6.000	1.319	N123E2-0200- CM	3.0	
.400	F	R/LF123F040-10B	.625	.669	.625	.625	4.500	1.142	N123F2-0250- CM	2.2	
.400		R/LF123F040-12B	.750	.827	.750	.750	4.500	1.142	N123F2-0250- CM	2.2	
.400		R/LF123F040-16B	1.000	1.024	1.000	1.000	5.000	1.142	N123F2-0250- CM	2.2	
.400		R/LF123F040-20B	1.250	1.299	1.250	1.250	6.000	1.142	N123F2-0250- CM	2.2	
.790		R/LF123F079-10B	.625	.669	.625	.625	4.500	1.575	N123F2-0250- CM	3.0	
.790		R/LF123F079-12B	.750	.827	.750	.750	5.000	1.575	N123F2-0250- CM	3.0	
.790		R/LF123F079-16B	1.000	1.024	1.000	1.000	6.000	1.575	N123F2-0250- CM	3.0	
.790		R/LF123F079-20B	1.250	1.299	1.250	1.250	6.000	1.575	N123F2-0250- CM	3.0	
.394	G	R/LF123G040-10B	.625	.669	.625	.625	4.500	1.181	N123G2-0300- CM	2.6	
.400		R/LF123G040-12B	.750	.827	.750	.750	4.500	1.181	N123G2-0300- CM	2.6	
.400		R/LF123G040-16B	1.000	1.024	1.000	1.000	5.000	1.181	N123G2-0300- CM	2.6	
.400		R/LF123G040-20B	1.250	1.299	1.250	1.250	6.000	1.181	N123G2-0300- CM	2.6	
.790		R/LF123G079-12B	.750	.827	.750	.750	5.000	1.614	N123G2-0300- CM	3.7	
.790		R/LF123G079-16B	1.000	1.024	1.000	1.000	6.000	1.614	N123G2-0300- CM	3.7	
.790		R/LF123G079-20B	1.250	1.299	1.250	1.250	6.000	1.614	N123G2-0300- CM	3.7	
.510	H	R/LF123H051-12BM	.750	.827	.750	.750	4.500	1.338	N123H2-0400- CM	3.3	
.510		R/LF123H051-16BM	1.000	1.024	1.000	1.000	5.000	1.338	N123H2-0400- CM	3.7	
.510		R/LF123H051-20BM	1.250	1.299	1.250	1.250	6.000	1.338	N123H2-0400- CM	3.7	
.512		R/LF123H051-10B	.625	.669	.625	.625	4.500	1.339	N123H2-0400- CM	3.3	
.980		R/LF123H098-12BM	.750	.827	.750	.750	5.000	1.850	N123H2-0400- CM	4.1	
.980		R/LF123H098-16BM	1.000	1.024	1.000	1.000	6.000	1.850	N123H2-0400- CM	5.2	
.980		R/LF123H098-20BM	1.250	1.299	1.250	1.250	6.000	1.850	N123H2-0400- CM	5.2	
.510	J	R/LF123J051-16BM	1.000	1.024	1.000	1.000	5.000	1.338	N123J2-0500- CM	3.7	
.510		R/LF123J051-20BM	1.250	1.299	1.250	1.250	6.000	1.338	N123J2-0500- CM	3.7	
1.260		R/LF123J126-16BM	1.000	1.024	1.000	1.000	6.000	2.244	N123J2-0500- CM	5.5	
1.260		R/LF123J126-20BM	1.250	1.299	1.250	1.250	6.000	2.244	N123J2-0500- CM	5.5	
1.260		R/LF123J126-24BM	1.500	1.614	1.500	1.500	8.000	2.244	N123J2-0500- CM	5.5	

¹⁾ a_r max. for holder. For max stability choose a holder with reinforced design.

R = Right hand, L = Left hand

²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

Continued ...



CoroCut® 1- and 2-edge


Shank tools

Screw clamp




Note!
When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

R/L123



Right hand style shown

N123



Neutral

... Continued

Inch version

Main application	a_r max ¹⁾	Seat size ²⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ³⁾
				b	f_1	h	h_1	l_1	l_3		
	.630	K	R/LF123K063-16BM	1.000	1.024	1.000	1.000	5.000	1.535	N123K2-0600-CR	4.1
	.630		R/LF123K063-20BM	1.250	1.299	1.250	1.250	6.000	1.535	N123K2-0600-CR	4.1
	1.260	R/LF123K126-16BM	1.000	1.024	1.000	1.000	6.000	2.283	N123K2-0600-CR	5.5	
	1.260	R/LF123K126-20BM	1.250	1.299	1.250	1.250	6.000	2.283	N123K2-0600-CR	5.5	
	1.260	R/LF123K126-24BM	1.500	1.614	1.500	1.500	8.000	2.283	N123K2-0600-CR	5.5	
	.630	L	R/LF123L063-16BM	1.000	1.028	1.000	1.000	6.000	1.600	N123L2-0800-GM	4.8
	1.000		R/LF123L100-16BM	1.000	1.028	1.000	1.000	6.000	2.000	N123L2-0800-GM	5.2
	1.000	R/LF123L100-20BM	1.250	1.300	1.250	1.250	6.000	2.000	N123L2-0800-GM	5.2	
	1.380	R/LF123L138-20BM	1.250	1.300	1.250	1.250	7.000	2.400	N123L2-0800-GM	5.5	
	1.380	R/LF123L138-24BM	1.500	1.614	1.500	1.500	8.000	2.400	N123L2-0800-GM	5.5	
	1.260	M	R/LF123M125-20B	1.250	1.339	1.250	1.250	10.00	2.516	N123M1-1100-GM	6.6
	1.260		R/LF123M125-24B	1.500	1.583	1.500	1.500	10.00	2.516	N123M1-1100-GM	6.6
	2.000	R/LF123M200-24B	1.500	1.575	1.500	1.500	10.00	2.516	N123M1-1100-GM	3.3	
	1.260	NF123M125-24B	1.500	.972	1.500	1.500	10.00	2.516	N123M1-1100-GM	6.6	
	1.260	R	R/LF123R125-20B	1.250	1.346	1.250	1.250	10.00	2.807	N123R1-1500-GR	7.4
	1.260		R/LF123R125-24B	1.500	1.602	1.500	1.500	10.00	2.807	N123R1-1500-GR	7.4
	2.000	R/LF123R200-24B	1.500	1.598	1.500	1.500	10.00	2.807	N123R1-1500-GR	3.3	
	1.260	NF123R125-24B	1.500	1.043	1.500	1.500	10.00	2.807	N123R1-1500-GR	7.4	

¹⁾ a_r max. for holder. For max stability choose a holder with reinforced design.

R = Right hand, L = Left hand

²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

N = Neutral

Main spare parts

Seat size	Shank holder size		a_r mm	a_r inch	Screw	Key (Torx Plus)
	metric	inch				
D, E, F, G	1212	08			3212 012-257	5680 043-14 (20IP)
D, E, F	1616-3225	10-20			3212 012-259	5680 043-14 (20IP)
G	1616	-			3212 012-309	5680 043-15 (25IP)
G	2020-3232	12-20			3212 012-310	5680 043-15 (25IP)
H	1616	-			3212 012-309	5680 043-15 (25IP)
H, J, K, L	2020-3232	12-24			5512 044-01	5680 043-17 (30IP)
M	3232-4040	20-24	32	1.260	5512 044-01	5680 048-07 (30IP)
M	4040	24	50	2.000	5512 046-01	5680 043-15 (25IP)
R	3232-4040	20-24	32	1.260	5512 044-01	5680 048-07 (30IP)
R	4040	24	50	2.000	3212 012-311	5680 043-15 (25IP)




CoroCut® 1- and 2-edge

Swiss shank tools for small part machining

Screw clamp

R/LF123 -S



Note!

When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

Shank holders for QS-holding system see page A242.

Right hand style shown

Metric version

Main application	D_m max	a_r max ¹⁾	Seat size ²⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ³⁾
					b	f_1	h	h_1	l_1	l_3		
	20	10	D	R/LF123D10-1010B-S	10	10	10	10	125	21.6	N123D2-0150-CM	2.5
	22	11		R/LF123D11-1212B-S	12	12	12	12	125	22.6	N123D2-0150-CM	2.5
	16	8		R/LF123D08-1616B-S	16	16	16	16	125	19.6	N123D2-0150-CM	2.5
	34	17		R/LF123D17-1616B-S	16	16	16	16	125	28.6	N123D2-0150-CM	2.5
	20	10	E	R/LF123E10-1010B-S	10	10	10	10	125	21.6	N123E2-0200-CM	2.5
	22	11		R/LF123E11-1212B-S	12	12	12	12	125	22.6	N123E2-0200-CM	2.5
	22	11		R/LF123E11-1616B-S	16	16	16	16	125	22.6	N123E2-0200-CM	2.5
	34	17		R/LF123E17-1616B-S	16	16	16	16	125	28.6	N123E2-0200-CM	2.5
	20	10	F	R/LF123F10-1010B-S	10	10	10	10	125	21.6	N123F2-0250-CM	2.5
	30	15		R/LF123F15-1212B-S	12	12	12	12	125	20	N123F2-0250-CM	2.5
	34	17		R/LF123F17-1616B-S	16	16	16	16	125	28.6	N123F2-0250-CM	2.5
	34	17		R/LF123G17-1616B-S	16	16	16	16	125	28.6	N123G2-0300-CM	3.0

Inch version

Main application	D_m max	a_r max ¹⁾	Seat size ²⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ⁴⁾
					b	f_1	h	h_1	l_1	l_3		
	.780	.390	D	R/LF123D039-06B-S	.375	.375	.375	.375	5.000	.847	N123D2-0150-CM	1.8
	.860	.430		R/LF123D043-08B-S	.500	.500	.500	.500	5.000	.887	N123D2-0150-CM	1.8
	.640	.320		R/LF123D032-10B-S	.625	.625	.625	.625	5.000	.777	N123D2-0150-CM	1.8
	1.340	.670		R/LF123D067-10B-S	.625	.625	.625	.625	5.000	1.127	N123D2-0150-CM	1.8
	.780	.390	E	R/LF123E039-06B-S	.375	.375	.375	.375	5.000	.847	N123E2-0200-CM	1.8
	.860	.430		R/LF123E043-08B-S	.500	.500	.500	.500	5.000	.887	N123E2-0200-CM	1.8
	.860	.430		R/LF123E043-10B-S	.625	.625	.625	.625	5.000	.887	N123E2-0200-CM	1.8
	1.340	.670		R/LF123E067-10B-S	.625	.625	.625	.625	5.000	1.127	N123E2-0200-CM	1.8
	.780	.390	F	R/LF123F039-06B-S	.375	.375	.375	.375	5.000	.847	N123F2-0250-CM	1.8
	1.180	.590		R/LF123F059-08B-S	.500	.500	.500	.500	5.000	1.047	N123F2-0250-CM	1.8
	1.340	.670		R/LF123F067-10B-S	.625	.625	.625	.625	5.000	1.127	N123F2-0250-CM	1.8
	1.340	.670		R/LF123G067-10B-S	.625	.625	.625	.625	5.000	1.127	N123G2-0300-CM	2.2

1) a_r max. for holder

2) To correspond with seat size on insert.

3) Insert tightening torque Nm. Use torque wrench, see page B109.

4) Insert tightening torque ft-lbs. Use torque wrench, see page B109.

R = Right hand, L = Left hand

Main spare parts

Seat size	Shank holder size		Screw	Key (Torx Plus)
	Metric	Inch		
D, E, F	1010	06	5513 021-07	5680 043-13 (15IP)
D, E, F	1212	08	5513 021-07	5680 043-13 (15IP)
D, E, F, G	1616	10	5513 021-04	5680 043-13 (15IP)



CoroCut® 1- and 2-edge


Reinforced shank tools for parting off, with reduced f_1 offset.

Screw clamp



Note!
When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

R/LF123 Reinforced



Right hand style shown

Metric version

Main application	D_m max	a_r max ¹⁾	Seat size ²⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ³⁾
					b	f_1	h	h_1	l_1	l_3		
	34	17	E	R/LF123E17-2020D	20	20.5	20	20	125	35.5	N123E2-0200- CM	4.0
	34	17	F	R/LF123F17-2020D	20	20.5	20	20	125	37	N123F2-0250- CM	4.0
	34	17		R/LF123F17-2525D	25	25.5	25	25	150	37	N123F2-0250- CM	4.0
	44	22	G	R/LF123G22-2020D	20	20.6	20	20	125	43	N123G2-0300-CM	5.0
	44	22		R/LF123G22-2525D	25	25.6	25	25	150	43	N123G2-0300-CM	5.0
	44	22	H	R/LF123H22-2020D	20	20.6	20	20	125	44	N123H2-0400- CM	6.0
	44	22		R/LF123H22-2525D	25	25.6	25	25	150	44	N123H2-0400- CM	6.0

Inch version

Main application	D_m max	a_r max ¹⁾	Seat size ²⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ⁴⁾
					b	f_1	h	h_1	l_1	l_3		
	1.340	.670	E	R/LF123E067-12D	.750	.770	.750	.750	5.000	1.398	N123E2-0200- CM	3.0
	1.340	.670	F	R/LF123F067-12D	.750	.770	.750	.750	5.000	1.458	N123F2-0250- CM	3.0
	1.340	.670		R/LF123F067-16D	1.000	1.020	1.000	1.000	5.000	1.458	N123F2-0250- CM	3.0
	1.740	.870	G	R/LF123G087-12D	.750	.774	.750	.750	5.000	1.697	N123G2-0300-CM	3.7
	1.740	.870		R/LF123G087-16D	1.000	1.024	1.000	1.000	5.000	1.697	N123G2-0300-CM	3.7
	1.740	.870	H	R/LF123H087-12D	.750	.774	.750	.750	5.000	1.736	N123H2-0400- CM	4.4
	1.740	.870		R/LF123H087-16D	1.000	1.024	1.000	1.000	5.000	1.736	N123H2-0400- CM	4.4

- a_r max. for holder
- To correspond with seat size on insert.
- Insert tightening torque Nm. Use torque wrench, see page B109.
- Insert tightening torque ft-lbs. Use torque wrench, see page B109.

R = Right hand, L = Left hand

Main spare parts

Seat size	Shank holder size		Screw	Key (Torx Plus)
	Metric	Inch		
E, F	2020-2525	12-16	3212 012-257	5680 043-14 (20IP)
G	2020-2525	12-16	3212 012-310	5680 043-15 (25IP)
H	2020	12	5512 044-01	5680 043-15 (25IP)
H	2525	16	5512 044-01	5680 043-17 (30IP)



CoroCut® 1- and 2-edge

Shank tools for profiling

Screw clamp


Shank, 0° style
NF123

Shank, 0° style
R/LF123

Shank, 7° style
R/LX123...-007

Shank, 45° style
R/LX123...-045

Shank, 70° style
R/LX123...-070

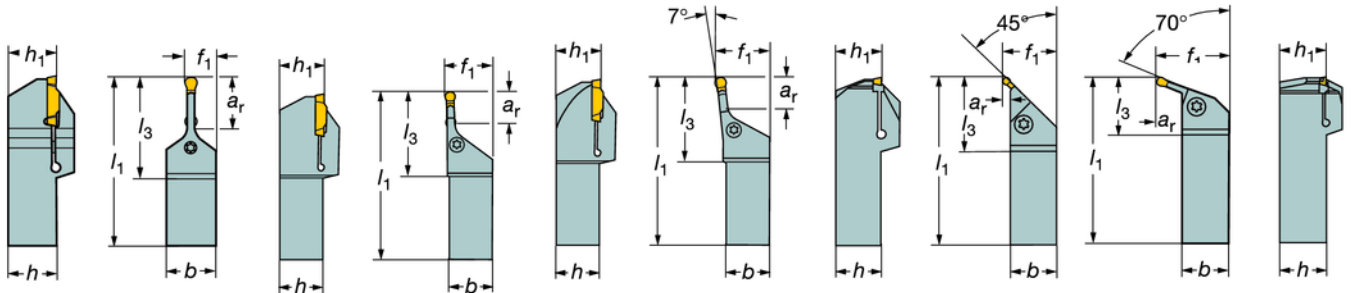

Neutral style

Right hand style shown

Tailor Made

Note! When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

Metric version

Main application	a_r max ¹⁾	Shank style	Seat size ²⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ³⁾
					b	f ₁	h	h ₁	l ₁	l ₃		
	25	0°	J	NF123J25-2525BM	25	15	25	25	150	52.2	N123J2-0600- RM	6.0
	25	0°	J	NF123J25-3225BM	25	15	32	32	170	52.2	N123J2-0600- RM	6.0
	22	0°	J	R/LF123J22-2525B	25	26	25	25	150	51.5	N123J2-0600- RM	6.0
	25	7°	L	R/LX123L25-2525B-007	25	32	25	25	190	63.7	N123L2-0800- RM	6.5
	25	7°	L	R/LX123L25-3232B-007	32	40	32	32	190	63.7	N123L2-0800- RM	6.5
	4	45°	G	R/LX123G04-2020B-045	20	24	20	20	150	41.1	N123G2-0400- RM	4.5
	4	45°	J	R/LX123G04-2525B-045	25	29	25	25	150	41.1	N123G2-0400- RM	4.5
	5	45°	J	R/LX123J05-2020B-045	20	25	20	20	150	44.9	N123J2-0600- RM	5.0
	5	45°	J	R/LX123J05-2525B-045	25	30	25	25	150	44.9	N123J2-0600- RM	5.0
	5	45°	J	R/LX123J05-3225B-045	25	30	32	32	150	44.9	N123J2-0600- RM	5.0
	16	70°	J	R/LX123J16-2525B-070	25	41.7	25	25	190	40	N123J2-0600- RM	5.0
	16	70°	J	R/LX123J16-3232B-070	32	48.7	32	32	190	40	N123J2-0600- RM	5.0

¹⁾ a_r max. for holder

N = Neutral, R = Right hand, L = Left hand

²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

Seat size	Shank holder size	Screw	Key (Torx Plus)
G	2020-2525	3212 012-309	5680 043-15 (25IP)
J (NF)	2525-3225	5512 044-01	5680 043-17 (30IP)
J, L	2020-3232	3212 012-360	5680 043-17 (30IP)



CoroCut® 1- and 2-edge

Shank tools for profiling


Screw clamp



Shank, 7° style
RX123...-007

Shank, 45° style
R/LX123...-045

Shank, 70° style
R/LX123...-070

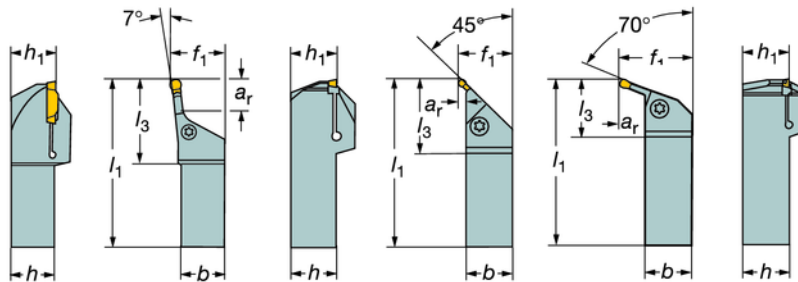

Note! When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

Right hand style shown

Inch version

Main application	a_r max ¹⁾	Shank style	Seat size ²⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ³⁾
					b	f_1	h	h_1	l_1	l_3		
	.945	7°	L	RX123L095-16B-007	1.000	1.252	1.000	1.000	7.480	2.500	N123L2-0800- RM	3.5
	.157	45°	G	R/LX123G016-12B-045	.750	.921	.750	.750	5.906	1.701	N123G2-0400- RM	3.3
	.157	45°		R/LX123G016-16B-045	1.000	1.173	1.000	1.000	5.906	1.701	N123G2-0400- RM	3.3
	.197	45°	J	R/LX123J020-12B-045	.750	.961	.750	.750	5.906	1.902	N123J2-0600- RM	3.7
	.197	45°		R/LX123J020-16B-045	1.000	1.213	1.000	1.000	6.693	1.902	N123J2-0600- RM	3.7
	.630	70°	J	R/LX123J062-16B-070	1.000	1.669	1.000	1.000	7.480	1.575	N123J2-0600- RM	3.7
	.630	70°		R/LX123J062-20B-070	1.250	1.917	1.250	1.250	7.480	1.575	N123J2-0600- RM	3.7

¹⁾ a_r max. for holder


²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

N = Neutral, R = Right hand, L = Left hand

Main spare parts

Seat size	Shank holder size	Screw	Key (Torx Plus)
G	12-16	3212 012-309	5680 043-15 (25IP)
J, L	12-20	3212 012-360	5680 043-17 (30IP)




CoroCut® 1- and 2-edge


Shank tools for shallow grooving and face grooving

Screw clamp

Shank, 0° style
R/LF123



Shank, 90° style
R/LG123



Right hand style shown

Metric version

Main application	a_r max	a_{r2}	Shank style	Seat size ¹⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ²⁾
						b	f_1	h	h_1	l_1	l_3		
	3.5	7	0°	G	R/LF123G07-1616C	16	21	16	16	125	27	N123G2-0300-CM	3.5
	3.5	7	0°		R/LF123G07-2020C	20	21	20	20	125	27	N123G2-0300-CM	3.5
	3.5	7	0°		R/LF123G07-2525C	25	26	25	25	150	27	N123G2-0300-CM	3.5
	4.5	8	0°	K	R/LF123K08-2020C	20	21	20	20	125	30	N123K2-0600-CR	4.5
	4.5	8	0°		R/LF123K08-2525CM	25	26	25	25	150	30	N123K2-0600-CR	4.5
	3.5	7	90°	G	R/LG123G07-1616C	16	25	16	16	125	23.5	N123G2-0300-CM	3.5
	3.5	7	90°		R/LG123G07-2020C	20	29	20	20	125	23.5	N123G2-0300-CM	3.5
	3.5	7	90°		R/LG123G07-2525C	25	34	25	25	150	23.5	N123G2-0300-CM	3.5
	4.5	8	90°	K	R/LG123K08-2020C	20	30	20	20	125	28.7	N123K2-0600-CR	4.5
	4.5	8	90°		R/LG123K08-2525CM	25	34	25	25	150	28.7	N123K2-0600-CR	4.5

Inch version

Main application	a_r max	a_{r2}	Shank style	Seat size ¹⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ³⁾
						b	f_1	h	h_1	l_1	l_3		
	.177	.276	0°	G	R/LF123G028-10C	.625	.669	.625	.625	5.000	1.063	N123G2-0300-CM	3.0
	.177	.276	0°		R/LF123G028-12C	.750	.787	.750	.750	5.000	1.063	N123G2-0300-CM	3.0
	.138	.276	0°		R/LF123G028-16C	1.000	1.024	1.000	1.000	6.000	1.063	N123G2-0300-CM	3.0
	.177	.315	0°	K	R/LF123K032-12C	.750	.787	.750	.750	5.000	1.181	N123K2-0600-CR	4.1
	.177	.315	0°		R/LF123K032-16CM	1.000	1.024	1.000	1.000	6.000	1.181	N123K2-0600-CR	4.1
	.138	.276	90°	G	R/LG123G028-10C	.625	.984	.625	.625	5.000	.925	N123G2-0300-CM	2.6
	.138	.276	90°		R/LG123G028-12C	.750	1.142	.750	.750	5.000	.925	N123G2-0300-CM	2.6
	.138	.276	90°		R/LG123G028-16C	1.000	1.339	1.000	1.000	6.000	.925	N123G2-0300-CM	2.6
	.177	.315	90°	K	R/LG123K032-12C	.750	1.142	.750	.750	5.000	1.130	N123K2-0600-CR	2.4
	.177	.315	90°		R/LG123K032-16CM	1.000	1.339	1.000	1.000	6.000	1.130	N123K2-0600-CR	2.4

¹⁾ Shallow grooving holders can take several insert sizes. Holder with seat size G can take insert size E, F and G. Holders with seat size K can take insert size H, J and K. Please note f_1 and l_3 dimensions above are valid when using G resp. K insert size.

²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

R = Right hand, L = Left hand

Shallow grooving holder for face grooving

Holder seat size ¹⁾	Insert seat size	First cut diameter		Max cutting depth		First cut diameters
		Min - Max mm	inch	mm	inch	
G	E	100 - ∞	3.937 - ∞	3.5	.138	
	F	83 - ∞	3.268 - ∞	3.5	.138	
	G	57 - ∞	2.244 - ∞	3.5	.138	
K	H	46 - ∞	1.811 - ∞	4.5	.177	
	J	46 - ∞	1.811 - ∞	4.5	.177	
	K	46 - ∞	1.811 - ∞	4.5	.177	

Main spare parts

Seat size	Screw	Key (Torx Plus)
G	3212 012-310	5680 043-15 (25IP)
K	5512 044-01	5680 043-17 (30IP)



CoroCut® 1- and 2-edge

Shank tools for face grooving


Screw clamp

B




Note!
When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.


Shank, 90° style
R/LG123



Shank, 0° style
R/LF123



First cut diameters



Right hand style shown

Metric version

C

Main application	First cut diameter, mm			Shank style	Seat size ¹⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ²⁾
	min	max	a_r max				b	f_1	h	h_1	l_1	l_3		
	40	60	13	90°	H	R/LG123H13-2525B-040BM	25	40	25	25	150	25.9	N123H2-0400-TF	2.8
	52	72	13	90°		R/LG123H13-2525B-052BM	25	40	25	25	150	25.9	N123H2-0400-TF	4.3
	64	100	13	90°		R/LG123H13-2525B-064BM	25	40	25	25	150	25.9	N123H2-0400-TF	3.2
	92	140	13	90°		R/LG123H13-2525B-092BM	25	40	25	25	150	25.9	N123H2-0400-TF	3.7
	132	230	13	90°		R/LG123H13-2525B-132BM	25	40	25	25	150	25.9	N123H2-0400-TF	4.0
	220	500	13	90°		R/LG123H13-2525B-220BM	25	40	25	25	150	25.9	N123H2-0400-TF	4.3
	300	1100	13	90°		R/LG123H13-2525B-300BM	25	40	25	25	150	25.9	N123H2-0400-TF	4.3
	64	100	20	90°		R/LG123H20-2525B-064BM	25	47	25	25	150	26.9	N123H2-0400-TF	4.3
	92	140	20	90°		R/LG123H20-2525B-092BM	25	47	25	25	150	26.9	N123H2-0400-TF	5.0
	132	230	20	90°		R/LG123H20-2525B-132BM	25	47	25	25	150	26.9	N123H2-0400-TF	5.3
	58	100	20	90°	K	R/LG123K20-2525B-058BM	25	47	25	25	150	30.65	N123K2-0600-TF	4.1
	88	180	20	90°		R/LG123K20-2525B-088BM	25	47	25	25	150	30.65	N123K2-0600-TF	4.9
	168	400	20	90°		R/LG123K20-2525B-168BM	25	47	25	25	150	30.65	N123K2-0600-TF	5.3
	50	80	20	90°	L	R/LG123L20-2525B-050BM	25	47	25	25	150	41.4	N123L2-0800-TF	4.7
	75	150	20	90°		R/LG123L20-2525B-075BM	25	47	25	25	150	41.4	N123L2-0800-TF	5.4
	140	400	20	90°		R/LG123L20-2525B-140BM	25	47	25	25	150	41.4	N123L2-0800-TF	6.2
	34	44	12	0°	G	R/LF123G12-2020B-034B	20	21	20	20	125	32	N123G2-0300-TF	2.1
	38	48	12	0°		R/LF123G12-2020B-038B	20	21	20	20	125	32	N123G2-0300-TF	2.1
	42	60	13	0°		R/LF123G13-2020B-042B	20	21	20	20	125	33	N123G2-0300-TF	2.2
	54	75	13	0°		R/LF123G13-2020B-054B	20	21	20	20	125	33	N123G2-0300-TF	2.3
67	100	13	0°		R/LF123G13-2020B-067B	20	21	20	20	125	33	N123G2-0300-TF	2.6	
90	160	13	0°		R/LF123G13-2020B-090B	20	21	20	20	125	33	N123G2-0300-TF	2.9	
130	300	13	0°		R/LF123G13-2020B-130B	20	21	20	20	125	33	N123G2-0300-TF	3.1	
34	44	12	0°		R/LF123G12-2525B-034B	25	26	25	25	150	32	N123G2-0300-TF	2.1	
38	48	12	0°		R/LF123G12-2525B-038B	25	26	25	25	150	32	N123G2-0300-TF	2.1	
42	60	19	0°		R/LF123G19-2525B-042B	25	26	25	25	150	40	N123G2-0300-TF	3.2	
54	75	19	0°		R/LF123G19-2525B-054B	25	26	25	25	150	40	N123G2-0300-TF	3.4	
67	100	22	0°		R/LF123G22-2525B-067B	25	26	25	25	150	43	N123G2-0300-TF	3.7	
90	160	22	0°		R/LF123G22-2525B-090B	25	26	25	25	150	43	N123G2-0300-TF	4.2	
130	300	22	0°		R/LF123G22-2525B-130B	25	26	25	25	150	43	N123G2-0300-TF	4.5	
40	60	13	0°	H	R/LF123H13-2020B-040BM	20	21	20	20	125	34	N123H2-0400-TF	2.8	
52	72	13	0°		R/LF123H13-2020B-052BM	20	21	20	20	125	34	N123H2-0400-TF	3.0	
64	100	13	0°		R/LF123H13-2020B-064BM	20	21	20	20	125	34	N123H2-0400-TF	3.2	
92	140	13	0°		R/LF123H13-2020B-092BM	20	21	20	20	125	34	N123H2-0400-TF	3.7	
132	230	13	0°		R/LF123H13-2020B-132BM	20	21	20	20	125	34	N123H2-0400-TF	4.0	
220	500	13	0°		R/LF123H13-2020B-220BM	20	21	20	20	125	34	N123H2-0400-TF	4.3	
40	60	13	0°		R/LF123H13-2525B-040BM	25	26	25	25	150	34	N123H2-0400-TF	2.8	
52	72	13	0°		R/LF123H13-2525B-052BM	25	26	25	25	150	34	N123H2-0400-TF	3.0	
64	100	13	0°		R/LF123H13-2525B-064BM	25	26	25	25	150	34	N123H2-0400-TF	3.2	
92	140	13	0°		R/LF123H13-2525B-092BM	25	26	25	25	150	34	N123H2-0400-TF	3.7	
132	230	13	0°		R/LF123H13-2525B-132BM	25	26	25	25	150	34	N123H2-0400-TF	4.0	
220	500	13	0°		R/LF123H13-2525B-220BM	25	26	25	25	150	34	N123H2-0400-TF	4.3	
300	1100	13	0°		R/LF123H13-2525B-300BM	25	26	25	25	150	34	N123H2-0400-TF	4.3	
40	60	20	0°		R/LF123H20-2525B-040BM	25	26	25	25	150	42	N123H2-0400-TF	3.8	
52	72	20	0°		R/LF123H20-2525B-052BM	25	26	25	25	150	42	N123H2-0400-TF	4.0	
64	100	25	0°		R/LF123H25-2525B-064BM	25	26	25	25	150	47	N123H2-0400-TF	4.3	
92	140	25	0°		R/LF123H25-2525B-092BM	25	26	25	25	150	47	N123H2-0400-TF	5.0	
132	230	25	0°		R/LF123H25-2525B-132BM	25	26	25	25	150	47	N123H2-0400-TF	5.3	
220	500	25	0°		R/LF123H25-2525B-220BM	25	26	25	25	150	47	N123H2-0400-TF	5.7	
300	800	25	0°		R/LF123H25-2525B-300BM	25	26	25	25	150	47	N123H2-0400-TF	5.7	

¹⁾ a_r max. for holder. For max stability choose a holder with reinforced design.

R = Right hand, L = Left hand

²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

Continued ...

J



CoroCut® 1- and 2-edge

Shank tools for face grooving

Screw clamp

... Continued

Metric version

Main application	First cut diameter, mm			Shank style	Seat size ¹⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ²⁾
	min	max	a _r max				b	f ₁	h	h ₁	l ₁	l ₃		
	40	70	13	0°	J	R/LF123J13-2525B-040BM	25	26	25	25	150	34	N123J2-0500- TF	2.8
	60	95	13	0°		R/LF123J13-2525B-060BM	25	26	25	25	150	34	N123J2-0500- TF	3.2
	85	130	13	0°		R/LF123J13-2525B-085BM	25	26	25	25	150	34	N123J2-0500- TF	3.6
	120	180	13	0°		R/LF123J13-2525B-120BM	25	26	25	25	150	34	N123J2-0500- TF	4.0
	175	500	13	0°		R/LF123J13-2525B-175BM	25	26	25	25	150	34	N123J2-0500- TF	4.0
	40	70	20	0°		R/LF123J20-2525B-040BM	25	26	25	25	150	43	N123J2-0500- TF	3.8
	180	980	20	0°		R/LF123J20-2525B-180BM	25	26	25	25	150	43	N123J2-0500- TF	4.3
	60	95	25	0°		R/LF123J25-2525B-060BM	25	26	25	25	150	48	N123J2-0500- TF	4.9
	85	130	25	0°		R/LF123J25-2525B-085BM	25	26	25	25	150	48	N123J2-0500- TF	5.3
	120	180	25	0°		R/LF123J25-2525B-120BM	25	26	25	25	150	48	N123J2-0500- TF	5.3
	175	500	25	0°		R/LF123J25-2525B-175BM	25	26	25	25	150	48	N123J2-0500- TF	5.3
	40	70	13	0°	K	R/LF123K13-2525B-040BM	25	26	25	25	150	35	N123K2-0600- TF	3.2
	58	100	13	0°		R/LF123K13-2525B-058BM	25	26	25	25	150	35	N123K2-0600- TF	3.5
	88	180	13	0°		R/LF123K13-2525B-088BM	25	26	25	25	150	35	N123K2-0600- TF	4.1
	168	400	13	0°		R/LF123K13-2525B-168BM	25	26	25	25	150	35	N123K2-0600- TF	4.5
	40	70	20	0°		R/LF123K20-2525B-040BM	25	26	25	25	150	44	N123K2-0600- TF	3.8
	58	100	25	0°		R/LF123K25-2525B-058BM	25	26	25	25	150	49	N123K2-0600- TF	4.1
	88	180	25	0°		R/LF123K25-2525B-088BM	25	26	25	25	150	49	N123K2-0600- TF	4.9
	168	400	25	0°		R/LF123K25-2525B-168BM	25	26	25	25	150	49	N123K2-0600- TF	5.3
	220	1000	25	0°		R/LF123K25-2525B-220BM	25	26	25	25	150	49	N123K2-0600- TF	5.7
88	180	25	0°		R/LF123K25-3225B-088BM	25	26	32	32	170	49	N123K2-0600- TF	4.9	
168	400	25	0°		R/LF123K25-3225B-168BM	25	26	32	32	170	49	N123K2-0600- TF	5.3	
220	1000	25	0°		R/LF123K25-3225B-220BM	25	26	32	32	170	49	N123K2-0600- TF	5.7	
75	150	15	0°	L	R/LF123L15-2525B-075BM	25	26	25	25	150	39	N123L2-0800- TF	4.6	
140	400	15	0°		R/LF123L15-2525B-140BM	25	26	25	25	150	39	N123L2-0800- TF	5.3	
50	80	25	0°		R/LF123L25-2525B-050BM	25	26	25	25	150	55	N123L2-0800- TF	4.7	
75	150	28	0°		R/LF123L28-2525B-075BM	25	26	25	25	150	56	N123L2-0800- TF	5.8	
140	400	28	0°		R/LF123L28-2525B-140BM	25	26	25	25	150	56	N123L2-0800- TF	6.7	
75	150	28	0°		R/LF123L28-3225B-075BM	25	26	32	32	170	56	N123L2-0800- TF	5.8	
140	400	28	0°		R/LF123L28-3225B-140BM	25	26	32	32	170	56	N123L2-0800- TF	6.7	

¹⁾ a_r max. for holder. For max stability choose a holder with reinforced design.

R = Right hand, L = Left hand

²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

Main spare parts

Seat size	Screw	Key (Torx Plus)
G	3212 012-310	5680 043-15 (25IP)
H, J, K, L	5512 044-01	5680 043-17 (30IP)





CoroCut® 1- and 2-edge

Shank tools for face grooving


Screw clamp

Tailor Made

Note!
When using CoroCut® 2-edged insert the a_r of the insert gives the maximum depth of cut.

Shank, 90° style
R/LG123Shank, 0° style
R/LF123

First cut diameters



Right hand style shown

Inch version

Main application	First cut diameter, inch			Shank style	Seat size ¹⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ²⁾
	min	max	a_r max				b	f_1	h	h_1	l_1	l_3		
	1.575	2.362	.500	90°	H	R/LG123H050-16B-040BM	1.000	1.575	1.000	1.000	6.000	1.020	N123H2-0400-TF	2.1
	2.047	2.835	.500	90°		R/LG123H050-16B-052BM	1.000	1.575	1.000	1.000	6.000	1.020	N123H2-0400-TF	2.2
	2.520	3.937	.500	90°		R/LG123H050-16B-064BM	1.000	1.575	1.000	1.000	6.000	1.020	N123H2-0400-TF	2.3
	3.622	5.512	.500	90°		R/LG123H050-16B-092BM	1.000	1.575	1.000	1.000	6.000	1.020	N123H2-0400-TF	2.7
	5.197	9.055	.500	90°		R/LG123H050-16B-132BM	1.000	1.575	1.000	1.000	6.000	1.020	N123H2-0400-TF	2.9
	8.661	19.685	.500	90°		R/LG123H050-16B-220BM	1.000	1.575	1.000	1.000	6.000	1.020	N123H2-0400-TF	3.1
	11.81	43.307	.500	90°		R/LG123H050-16B-300BM	1.000	1.575	1.000	1.000	6.000	1.020	N123H2-0400-TF	3.1
	2.520	3.937	.790	90°		R/LG123H079-16B-064BM	1.000	1.850	1.000	1.000	6.000	1.060	N123H2-0400-TF	2.6
	3.622	5.512	.790	90°		R/LG123H079-16B-092BM	1.000	1.850	1.000	1.000	6.000	1.060	N123H2-0400-TF	2.6
	5.197	9.055	.790	90°		R/LG123H079-16B-132BM	1.000	1.850	1.000	1.000	6.000	1.060	N123H2-0400-TF	2.6
	2.284	3.937	.790	90°	K	R/LG123K079-16B-058BM	1.000	1.850	1.000	1.000	6.000	1.200	N123K2-0600-TF	3.3
	3.465	7.087	.790	90°		R/LG123K079-16B-088BM	1.000	1.850	1.000	1.000	6.000	1.200	N123K2-0600-TF	3.3
	6.614	15.748	.790	90°		R/LG123K079-16B-168BM	1.000	1.850	1.000	1.000	6.000	1.200	N123K2-0600-TF	3.3
	1.968	3.150	.790	90°	L	R/LG123L079-16B-050BM	1.000	1.850	1.000	1.000	6.000	1.630	N123L2-0800-TF	3.7
	2.953	5.906	.790	90°		R/LG123L079-16B-075BM	1.000	1.850	1.000	1.000	6.000	1.630	N123L2-0800-TF	3.7
	5.512	15.748	.790	90°		R/LG123L079-16B-140BM	1.000	1.850	1.000	1.000	6.000	1.630	N123L2-0800-TF	3.7
	1.339	1.732	.470	0°	G	R/LF123G047-12B-034B	.750	.827	.750	.750	5.000	1.260	N123G2-0300-TF	1.5
	1.496	1.890	.470	0°		R/LF123G047-12B-038B	.750	.827	.750	.750	5.000	1.260	N123G2-0300-TF	1.5
	1.654	2.362	.500	0°		R/LF123G050-12B-042B	.750	.827	.750	.750	5.000	1.287	N123G2-0300-TF	1.6
	2.126	2.953	.500	0°		R/LF123G050-12B-054B	.750	.827	.750	.750	5.000	1.287	N123G2-0300-TF	1.7
2.638	3.937	.500	0°		R/LF123G050-12B-067B	.750	.827	.750	.750	5.000	1.287	N123G2-0300-TF	1.9	
3.543	6.299	.500	0°		R/LF123G050-12B-090B	.750	.827	.750	.750	5.000	1.287	N123G2-0300-TF	2.1	
5.118	11.811	.500	0°		R/LF123G050-12B-130B	.750	.827	.750	.750	5.000	1.287	N123G2-0300-TF	2.3	
1.339	1.575	.470	0°		R/LF123G047-16B-034B	1.000	1.039	1.000	1.000	6.000	1.257	N123G2-0300-TF	3.0	
1.654	2.362	.750	0°		R/LF123G075-16B-042B	1.000	1.039	1.000	1.000	6.000	1.577	N123G2-0300-TF	3.0	
2.126	2.953	.750	0°		R/LF123G075-16B-054B	1.000	1.039	1.000	1.000	6.000	1.577	N123G2-0300-TF	3.0	
2.638	3.937	.750	0°		R/LF123G075-16B-067B	1.000	1.039	1.000	1.000	6.000	1.577	N123G2-0300-TF	3.0	
3.543	6.299	.870	0°		R/LF123G087-16B-090B	1.000	1.039	1.000	1.000	6.000	1.697	N123G2-0300-TF	3.0	
5.118	11.811	.870	0°		R/LF123G087-16B-130B	1.000	1.039	1.000	1.000	6.000	1.697	N123G2-0300-TF	3.0	
1.496	1.890	.470	0°		RF123G047-16B-038B	1.000	1.039	1.000	1.000	6.000	1.257	N123G2-0300-TF	3.0	
1.575	2.362	.500	0°	H	R/LF123H050-16B-040BM	1.000	1.024	1.000	1.000	6.000	1.327	N123H2-0400-TF	2.1	
2.047	2.835	.500	0°		R/LF123H050-16B-052BM	1.000	1.024	1.000	1.000	6.000	1.327	N123H2-0400-TF	2.2	
2.520	3.937	.500	0°		R/LF123H050-16B-064BM	1.000	1.024	1.000	1.000	6.000	1.327	N123H2-0400-TF	2.3	
3.622	5.512	.500	0°		R/LF123H050-16B-092BM	1.000	1.024	1.000	1.000	6.000	1.327	N123H2-0400-TF	2.7	
5.197	9.055	.500	0°		R/LF123H050-16B-132BM	1.000	1.024	1.000	1.000	6.000	1.327	N123H2-0400-TF	2.9	
8.661	19.685	.500	0°		R/LF123H050-16B-220BM	1.000	1.024	1.000	1.000	6.000	1.327	N123H2-0400-TF	3.1	
11.81	43.307	.500	0°		R/LF123H050-16B-300BM	1.000	1.024	1.000	1.000	6.000	1.327	N123H2-0400-TF	3.1	
1.575	2.362	.790	0°		R/LF123H079-16B-040BM	1.000	1.039	1.000	1.000	6.000	1.656	N123H2-0400-TF	3.0	
2.047	2.835	.790	0°		R/LF123H079-16B-052BM	1.000	1.039	1.000	1.000	6.000	1.656	N123H2-0400-TF	3.0	
2.520	3.937	1.000	0°		R/LF123H100-16B-064BM	1.000	1.039	1.000	1.000	6.000	1.888	N123H2-0400-TF	3.0	
3.622	5.512	1.000	0°		R/LF123H100-16B-092BM	1.000	1.039	1.000	1.000	6.000	1.888	N123H2-0400-TF	3.0	
5.197	9.055	1.000	0°		R/LF123H100-16B-132BM	1.000	1.039	1.000	1.000	6.000	1.888	N123H2-0400-TF	3.0	
8.661	19.685	1.000	0°		R/LF123H100-16B-220BM	1.000	1.039	1.000	1.000	6.000	1.888	N123H2-0400-TF	3.0	
11.81	31.496	1.000	0°		R/LF123H100-16B-300BM	1.000	1.039	1.000	1.000	6.000	1.888	N123H2-0400-TF	3.0	

¹⁾ To correspond with seat size on insert.

R = Right hand, L = Left hand

²⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

Continued ...




CoroCut® 1- and 2-edge

Shank tools for face grooving

Screw clamp

... Continued

Inch version

Main application	First cut diameter, inch			Shank style	Seat size ¹⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ²⁾
	min	max	a _r max				b	f ₁	h	h ₁	l ₁	l ₃		
	1.575	2.756	.500	0°	J	R/LF123J050-16B-040BM	1.000	1.024	1.000	1.000	6.000	1.327	N123J2-0500- TF	2.1
	2.362	3.740	.500	0°		R/LF123J050-16B-060BM	1.000	1.024	1.000	1.000	6.000	1.327	N123J2-0500- TF	2.4
	3.346	5.118	.500	0°		R/LF123J050-16B-085BM	1.000	1.024	1.000	1.000	6.000	1.327	N123J2-0500- TF	2.7
	4.724	7.087	.500	0°		R/LF123J050-16B-120BM	1.000	1.024	1.000	1.000	6.000	1.327	N123J2-0500- TF	3.0
	6.890	19.685	.500	0°		R/LF123J050-16B-175BM	1.000	1.024	1.000	1.000	6.000	1.327	N123J2-0500- TF	3.0
	1.575	2.756	.790	0°		R/LF123J079-16B-040BM	1.000	1.039	1.000	1.000	6.000	1.696	N123J2-0500- TF	3.3
	7.087	38.583	.790	0°		R/LF123J079-16B-180BM	1.000	1.039	1.000	1.000	6.000	1.696	N123J2-0500- TF	3.3
	2.362	3.740	1.000	0°		R/LF123J100-16B-060BM	1.000	1.039	1.000	1.000	6.000	1.906	N123J2-0500- TF	3.3
	3.346	5.118	1.000	0°		R/LF123J100-16B-085BM	1.000	1.039	1.000	1.000	6.000	1.906	N123J2-0500- TF	3.3
	4.724	7.087	1.000	0°		R/LF123J100-16B-120BM	1.000	1.039	1.000	1.000	6.000	1.906	N123J2-0500- TF	3.3
6.890	19.685	1.000	0°		R/LF123J100-16B-175BM	1.000	1.039	1.000	1.000	6.000	1.906	N123J2-0500- TF	3.3	
1.575	2.756	.500	0°	K	R/LF123K050-16B-040BM	1.000	1.024	1.000	1.000	6.000	1.366	N123K2-0600- TF	2.4	
2.284	3.937	.500	0°		R/LF123K050-16B-058BM	1.000	1.024	1.000	1.000	6.000	1.366	N123K2-0600- TF	2.6	
3.465	7.087	.500	0°		R/LF123K050-16B-088BM	1.000	1.024	1.000	1.000	6.000	1.366	N123K2-0600- TF	3.0	
6.614	15.748	.500	0°		R/LF123K050-16B-168BM	1.000	1.024	1.000	1.000	6.000	1.366	N123K2-0600- TF	3.3	
8.661	38.583	.500	0°		R/LF123K050-16B-220BM	1.000	1.024	1.000	1.000	6.000	1.366	N123K2-0600- TF	3.5	
1.575	2.756	.790	0°		R/LF123K079-16B-040BM	1.000	1.039	1.000	1.000	6.000	1.735	N123K2-0600- TF	3.7	
2.284	3.400	1.000	0°		R/LF123K100-16B-058BM	1.000	1.039	1.000	1.000	6.000	1.945	N123K2-0600- TF	3.7	
3.465	7.087	1.000	0°		R/LF123K100-16B-088BM	1.000	1.039	1.000	1.000	6.000	1.945	N123K2-0600- TF	3.7	
6.614	15.748	1.000	0°		R/LF123K100-16B-168BM	1.000	1.039	1.000	1.000	6.000	1.945	N123K2-0600- TF	3.7	
8.661	39.370	1.000	0°		R/LF123K100-16B-220BM	1.000	1.039	1.000	1.000	6.000	1.945	N123K2-0600- TF	3.7	
2.953	5.906	1.102	0°	L	R/LF123L110-16B-075BM	1.000	1.024	1.000	1.000	6.000	2.205	N123L2-0800- TF	4.2	
5.512	15.748	1.102	0°		R/LF123L110-16B-140BM	1.000	1.024	1.000	1.000	6.000	2.205	N123L2-0800- TF	4.2	
2.953	5.906	1.100	0°		R/LF123L110-20B-075BM	1.250	1.299	1.250	1.250	6.000	2.205	N123L2-0800- TF	4.2	
5.512	15.748	1.100	0°		R/LF123L110-20B-140BM	1.250	1.299	1.250	1.250	6.000	2.205	N123L2-0800- TF	4.9	

¹⁾ a_r max. for holder. For max stability choose a holder with reinforced design.

R = Right hand, L = Left hand

²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

Main spare parts

Seat size	Shank holder size	Screw	Key (Torx Plus)
G	2525	3212 012-310	5680 043-15 (25IP)
H, J, K, L	2525	5512 044-01	5680 043-17 (30IP)




CoroCut® 1- and 2-edge

Boring bars

Screw clamp

R/LAG 123

Cylindrical with flats

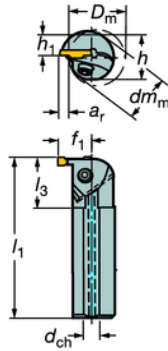Max overhang 3 x dm_m

All with internal coolant supply

Right hand style shown

Metric version

Main application	D_m min	a_r max	Seat size ¹⁾	Ordering code	Dimensions, mm							Gauge inserts	Nm ²⁾
					dm_m	f_1	h	h_1	l_1	l_3	d_{ch}		
	40	9.5	E	R/LAG123E09-32B	32	25.5	30	15	250	45	9	N123E2-0200- GM	4.0
	40	9	G	R/LAG123G09-32B	32	25.25	30	15	250	45	9	N123G2-0300- GM	4.5
	50	11		R/LAG123G11-40B	40	31	37	18.5	300	55	12	N123G2-0300- GM	4.5
	40	10	H	R/LAG123H10-32B	32	26.5	30	15	250	45	9	N123H2-0400- GM	4.5
	50	11		R/LAG123H11-40B	40	31	37	18.5	300	55	12	N123H2-0400- GM	5.0
	60	13		R/LAG123H13-50B	50	38.25	47	23.5	350	65	12	N123H2-0400- GM	5.0
	40	11	J	R/LAG123J11-32B	32	27	30	15	250	45	9	N123J2-0500- GM	5.0
	50	11		R/LAG123J11-40B	40	31	37	18.5	300	55	12	N123J2-0500- GM	5.5
	60	13		R/LAG123J13-50B	50	38.25	47	23.5	350	65	12	N123J2-0500- GM	5.5
	50	11	K	R/LAG123K11-40B	40	31	37	18.5	300	55	12	N123K2-0600- GM	5.5
60	13		R/LAG123K13-50B	50	38.25	47	23.5	350	65	12	N123K2-0600- GM	5.5	

Inch version

Main application	D_m min	a_r max	Seat size ¹⁾	Ordering code	Dimensions, inch							Gauge inserts	ft-lbs ³⁾
					dm_m	f_1	h	h_1	l_1	l_3	d_{ch}		
	1.575	.374	E	R/LAG123E035-20B	1.250	1.014	1.181	.591	9.842	1.772	.354	N123E2-0200- GM	3.0
	1.575	.354	G	R/LAG123G037-20B	1.250	.994	1.181	.591	9.842	1.772	.354	N123G2-0300- GM	3.3
	1.968	.433		R/LAG123G043-24B	1.500	1.220	1.457	.728	11.811	2.165	.472	N123G2-0300- GM	3.3
	1.575	.394	H	R/LAG123H039-20B	1.250	1.043	1.181	.591	9.842	1.772	.354	N123H2-0400- GM	3.3
	1.968	.433		R/LAG123H043-24B	1.500	1.220	1.457	.728	11.811	2.165	.472	N123H2-0400- GM	3.7
	2.362	.512		R/LAG123H051-32B	2.000	1.506	1.850	.925	13.780	2.559	.472	N123H2-0400- GM	3.7
	1.575	.433	J	R/LAG123J045-20B	1.250	1.063	1.181	.591	9.842	1.772	.354	N123J2-0500- GM	3.7
	1.968	.433		R/LAG123J045-24B	1.500	1.220	1.457	.728	11.811	2.165	.472	N123J2-0500- GM	4.1
	2.362	.512		R/LAG123J051-32B	2.000	1.506	1.850	.925	13.780	2.559	.472	N123J2-0500- GM	4.1
	1.968	.433	K	R/LAG123K043-24B	1.500	1.220	1.457	.728	11.811	2.165	.472	N123K2-0600- GM	4.1
2.362	.512		R/LAG123K053-32B	2.000	1.506	1.850	.925	13.780	2.559	.472	N123K2-0600- GM	4.1	

R = Right hand, L = Left hand

1) To correspond with seat size on insert.

2) Insert tightening torque Nm. Use torque wrench, see page B109.

3) Insert tightening torque ft-lbs. Use torque wrench, see page B109.

For coolant connector, see page A324.

Main spare parts

Seat size	Bar diameter, dm_m		Screw	Key (Torx Plus)
	mm	inch		
D, E, G	16-20	.625-.750	5512 031-03	5680 043-13 (15IP)
E	25-32	1.000-1.250	3212 012-259	5680 043-14 (20IP)
G	25-32	1.000-1.500	3212 012-309	5680 043-15 (25IP)
G	40		3212 012-310	5680 043-15 (25IP)
H, J	25	1.000	3212 012-309	5680 043-15 (25IP)
H, J	32	1.250	3212 012-359	5680 043-17 (30IP)
H, J, K	40-50	1.500-2.000	3212 012-360	5680 043-17 (30IP)




CoroCut® 1- and 2-edge

Boring bars
Screw clamp

R/LAG 123

Cylindrical with groove for EasyFix sleeve



Max overhang $3 \times d_m$

All with internal coolant supply

Right hand style shown

Metric version

Main application	Dimensions, mm		Seat size ¹⁾	Ordering code	Dimensions, mm					Gauge inserts	Nm ³⁾
	D_m min	a_r max			d_m	f_1	l_1	l_3	d_{ch}		
	25	4.5	D	R/LAG123D04-16B	16	12.5	150	25	6	N123D2-0150- CM	3.0
	32	5		R/LAG123D05-20B	20	15.25	180	30	6	N123D2-0150- CM	3.0
	32	5	E	R/LAG123E05-20B ²⁾	20	15.25	180	30	6	N123E2-0200- GM	3.5
	32	7		R/LAG123E07-25B	25	19.75	200	35	9	N123E2-0200- GM	3.5
	32	6	G	R/LAG123G06-20B ²⁾	20	15.25	180	30	6	N123G2-0300- GM	4.0
	32	7		R/LAG123G07-25B	25	19.75	200	35	9	N123G2-0300- GM	4.0
	32	7 ⁵⁾	H	R/LAG123H07-25B	25	19.25	200	35	9	N123H2-0400- GM	4.5
32	8 ⁵⁾	J	R/LAG123J08-25B	25	19.75	200	35	9	N123J2-0500- GM	5.0	

Inch version

Main application	Dimensions, inch		Seat size ¹⁾	Ordering code	Dimensions, inch					Gauge inserts	ft-lbs ⁴⁾
	D_m min	a_r max			d_m	f_1	l_1	l_3	d_{ch}		
	.984	.177	D	R/LAG123D016-10B	.625	.489	5.906	.984	.236	N123D2-0150- CM	2.2
	1.260	.197		R/LAG123D020-12B	.750	.592	7.087	1.181	.236	N123D2-0150- CM	2.2
	1.260	.197	E	R/LAG123E020-12B ²⁾	.750	.592	7.087	1.181	.236	N123E2-0200- GM	2.6
	1.260	.276		R/LAG123E028-16B	1.000	.785	7.874	1.378	.354	N123E2-0200- GM	2.6
	1.260	.236	G	R/LAG123G024-12B ²⁾	.750	.600	7.087	1.181	.236	N123G2-0300- GM	3.0
	1.260	.276		R/LAG123G030-16B	1.000	.778	7.874	1.378	.354	N123G2-0300- GM	3.0
	1.260	.276	H	R/LAG123H030-16B ⁵⁾	1.000	.758	7.874	1.378	.354	N123H2-0400- GM	3.3
1.260	.315	J	R/LAG123J031-16B ⁵⁾	1.000	.778	7.874	1.378	.354	N123J2-0500- GM	3.7	

¹⁾ To correspond with seat size on insert.

²⁾ When using an insert with -GF geometry, min. hole diameter (D_m) is .984 inch (25 mm).

³⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

⁴⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

⁵⁾ Max a_r is valid up to l_3 - dimension

R = Right hand, L = Left hand

For coolant connector, see page A324.

Main spare parts

Seat size	Bar diameter, d_m		Screw	Key (Torx Plus)
	mm	inch		
D, E, G	16-20	.625- .750	5512 031-03	5680 043-13 (15IP)
E	25-32	1.000-1.250	3212 012-259	5680 043-14 (20IP)
G	25-32	1.000-1.500	3212 012-309	5680 043-15 (25IP)
G	40		3212 012-310	5680 043-15 (25IP)
H, J	25	1.000	3212 012-309	5680 043-15 (25IP)
H, J	32	1.250	3212 012-359	5680 043-17 (30IP)
H, J, K	40-50	1.500-2.000	3212 012-360	5680 043-17 (30IP)




CoroCut® 1- and 2-edge

Boring bars for profiling

Screw clamp

With flats
R/LAX123

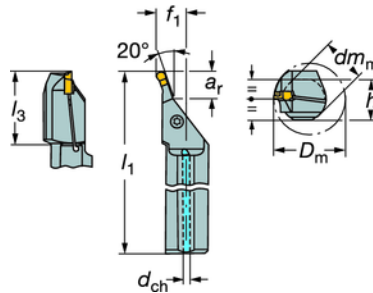

Max overhang 3 x dm_m

All with internal coolant supply

Right hand style shown

Metric version

				Dimensions, mm									
Main application	D_m min	a_r max	Seat size ¹⁾	Ordering code	dm_m	f_1	h	h_1	l_1	l_3	d_{ch}	Gauge inserts	Nm ²⁾
	63.5	25	J	R/LAX123J25-40B-020	40	26	37	18.5	254	65.6	12	N123J2-0600- AM	3.0
	63.5	25	L	R/LAX123L25-40B-020	40	26	37	18.5	254	65.6	12	N123L2-0800- AM	3.0

Inch version

				Dimensions, inch									
Main application	D_m min	a_r max	Seat size ¹⁾	Ordering code	dm_m	f_1	h	h_1	l_1	l_3	d_{ch}	Gauge inserts	ft-lbs ³⁾
	2.500	.941	J	R/LAX123J094-24B-020	1.500	.961	1.374	.687	10.000	2.539	.472	N123J2-0600- AM	2.2
	2.500	.941	L	R/LAX123L094-24B-020	1.500	1.000	1.374	.687	10.000	2.571	.472	N123L2-0800- AM	2.2

- 1) To correspond with seat size on insert.
- 2) Insert tightening torque Nm. Use torque wrench, see page B109.
- 3) Insert tightening torque ft-lbs. Use torque wrench, see page B109.

R = Right hand, L = Left hand

For coolant connector, see page A324.

Main spare parts


Seat size	Bar diameter, dm_m		Screw	Key (Torx Plus)
	inch	mm		
J, L	1.500	40	5512 044-01	5680 043-17 (30IP)



CoroCut® 3

System with 3 cutting edges

The productive choice for shallow parting
Grooving and profiling

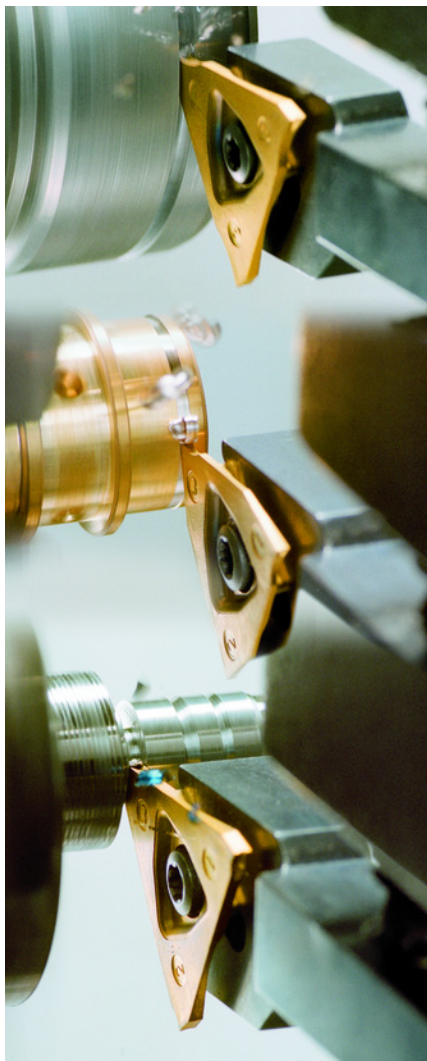

CoroCut® 3 system

Designed for economic shallow parting, grooving and profiling mass production, featuring:

Grooving widths 0.5 – 3.18 mm (0.020 – 0.125 inch)


Extremely small parting widths down to 1 mm (0.035 inch)

Cutting depths to 6.4 mm (0.252 inch)

Very close insert indexing tolerance

Maximum versatility – one holder for all insert widths

Tool holder assortment includes Coromant Capto® and shank holder in small to medium sizes

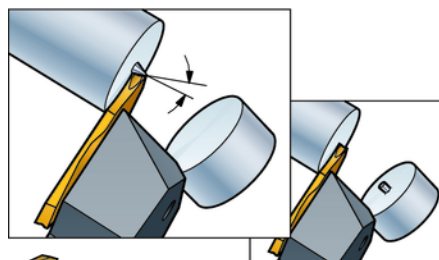

CoroCut® 3 inserts also available with front angle for pip and burr free parting.

Insert geometries

- CM, chip breaking geometry for normal cutting conditions
- CS, with extra sharp cutting edges to be used at very low cutting data and in low carbon materials.
- RS, full radii, sharp edge
- GS, straight cutting, sharp edge



123-CM



123-CS



123-RS



123-GS

Unique clamping system

The insert can be indexed directly on the machine by unscrewing two turns. If insert breakage should occur the clamping mechanism will not be affected - just index the insert and re-start the machine.


Tailor Made

Even more options are available thanks to tailored design. For more information on our Tailor Made program see page J3.




CoroCut® 3


Shallow parting



N123T3/R123T3/L123T3

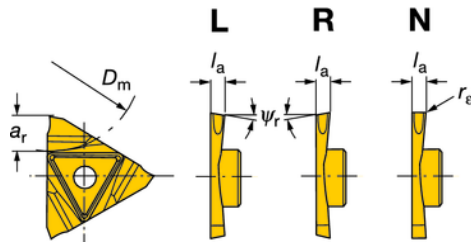

N123U3/R123U3/L123U3

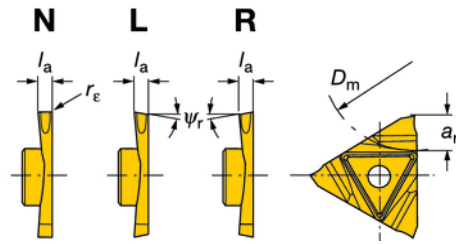

Tolerances, mm (inch):
 N123 -CM $l_a = \pm 0.03 (\pm .001)$
 $r_\epsilon = +0, -0.10 (+0, -.004)$
 N123 -CS $l_a = \pm 0.03 (\pm .001)$
 $r_\epsilon = +0.10, -0 (+.004, -0)$
 R/L123 -CS $l_a = \pm 0.07 (\pm .003)$
 $r_\epsilon = +0.10, -0 (+.004, -0)$

Selection criteria, millimeter, inch (mm, in.)		l_a		ψ_r	r_ϵ		a_r max		D_m max		Seat size ²⁾	Ordering code	P	M	K	N	S	
		mm	in.		mm	in.	mm	in. ¹⁾	mm	in. ¹⁾			mm	in. ¹⁾	GC	GC	GC	GC
Low feed	123-CS	1.00	.039	0°	0	.000	4.30	.169	50	1.968	T	N123T3-0100-0000-CS	★	★	★	★	★	
		1.50	.059	0°	0	.000	6.40	.252	100	3.937		N123T3-0150-0000-CS	★	★	★	★	★	
		2.00	.079	0°	0	.000	6.40	.252	100	3.937		N123T3-0200-0000-CS	★	★	★	★	★	
		1.00	.039	5°	0	.000	4.20	.165	50	1.968		R/L123T3-0100-0500-CS	★	★	★	★	★	
		1.00	.039	10°	0	.000	4.20	.165	50	1.968		R/L123T3-0100-1000-CS	★	★	★	★	★	
		1.00	.039	15°	0	.000	4.20	.165	50	1.968		R/L123T3-0100-1500-CS	★	★	★	★	★	
		1.50	.059	5°	0	.000	6.30	.248	100	3.937		R/L123T3-0150-0500-CS	★	★	★	★	★	
		1.50	.059	10°	0	.000	6.30	.248	100	3.937		R/L123T3-0150-1000-CS	★	★	★	★	★	
		1.50	.059	15°	0	.000	6.30	.248	100	3.937		R/L123T3-0150-1500-CS	★	★	★	★	★	
		2.00	.079	5°	0	.000	6.30	.248	100	3.937		R/L123T3-0200-0500-CS	★	★	★	★	★	
	2.00	.079	10°	0	.000	6.30	.248	100	3.937		R/L123T3-0200-1000-CS	★	★	★	★	★		
	2.00	.079	15°	0	.000	6.30	.248	100	3.937		R/L123T3-0200-1500-CS	★	★	★	★	★		
	Medium feed	123-CM	1.00	.039	0°	0	.000	4.30	.169	50	1.968	T	N123U3-0100-0000-CS	★	★	★	★	★
			1.50	.059	0°	0	.000	6.40	.252	100	3.937		N123U3-0150-0000-CS	★	★	★	★	★
			2.00	.079	0°	0	.000	6.40	.252	100	3.937		N123U3-0200-0000-CS	★	★	★	★	★
			1.00	.039	5°	0	.000	4.20	.165	50	1.968		R/L123U3-0100-0500-CS	★	★	★	★	★
			1.00	.039	10°	0	.000	4.20	.165	50	1.968		R/L123U3-0100-1000-CS	★	★	★	★	★
			1.00	.039	15°	0	.000	4.20	.165	50	1.968		R/L123U3-0100-1500-CS	★	★	★	★	★
			1.50	.059	5°	0	.000	6.30	.248	100	3.937		R/L123U3-0150-0500-CS	★	★	★	★	★
			1.50	.059	10°	0	.000	6.30	.248	100	3.937		R/L123U3-0150-1000-CS	★	★	★	★	★
1.50			.059	15°	0	.000	6.30	.248	100	3.937		R/L123U3-0150-1500-CS	★	★	★	★	★	
2.00			.079	5°	0	.000	6.30	.248	100	3.937		R/L123U3-0200-0500-CS	★	★	★	★	★	
2.00	.079	10°	0	.000	6.30	.248	100	3.937		R/L123U3-0200-1000-CS	★	★	★	★	★			
2.00	.079	15°	0	.000	6.30	.248	100	3.937		R/L123U3-0200-1500-CS	★	★	★	★	★			
												P30	M25	K30	N25	S25		

1) D_m max = max bar or tube diameter
 2) To correspond with seat size on holder.

N = Neutral, R = Right hand, L = Left hand
 ★ = First choice


T = Right hand cutting insert, U = Left hand cutting insert.

Insert code key, see page B15




CoroCut® 3

Grooving

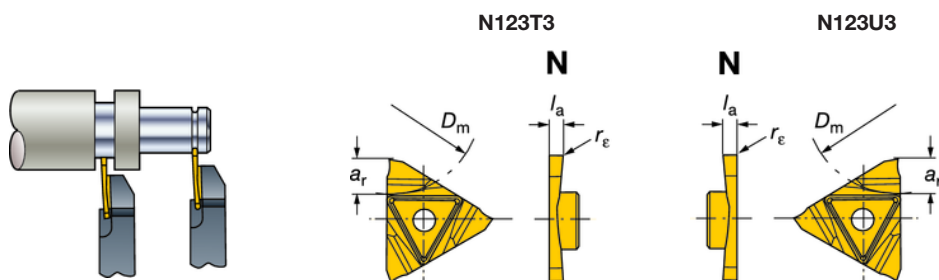

Tailor Made

Tolerances, mm (inch):
GS $l_a = \pm 0.02 (\pm 0.008)$

	Selection criteria, millimeter, inch (mm, in.)								For circlip width		Seat size ²⁾	Ordering code	P	M	K	N	S					
	l_a mm	l_a in.	r_e mm	r_e in.	a_r max mm	a_r max in.	D_m max mm ¹⁾	D_m max in. ¹⁾	mm	inch								GC	GC	GC	GC	GC
																		1125	1125	1125	1125	1125
 123-GS Low feed	0.50	.020	0	.000	1.50	.059	100	3.937	0.50	.020	T	N123T3-0050-0000-GS	★	★	★	★	★					
	0.60	.024	0	.000	1.60	.063	100	3.937				N123T3-0060-0000-GS	★	★	★	★	★					
	0.70	.028	0	.000	1.70	.067	100	3.937				N123T3-0070-0000-GS	★	★	★	★	★					
	0.80	.032	0	.000	1.80	.071	100	3.937				N123T3-0080-0000-GS	★	★	★	★	★					
	0.90	.035	0	.000	2.00	.079	100	3.937				N123T3-0090-0000-GS	★	★	★	★	★					
	1.00	.039	0	.000	2.20	.087	100	3.937				N123T3-0100-0000-GS	★	★	★	★	★					
	1.20	.047	0	.000	2.30	.091	100	3.937				N123T3-0120-0000-GS	★	★	★	★	★					
	1.40	.055	0	.000	2.70	.106	100	3.937				N123T3-0140-0000-GS	★	★	★	★	★					
	1.50	.059	0	.000	3.00	.118	100	3.937				N123T3-0150-0000-GS	★	★	★	★	★					
	1.60	.063	0	.000	3.20	.126	100	3.937				N123T3-0160-0000-GS	★	★	★	★	★					
	1.70	.067	0	.000	3.30	.130	100	3.937				N123T3-0170-0000-GS	★	★	★	★	★					
	1.95	.077	0	.000	3.90	.154	100	3.937				N123T3-0195-0000-GS	★	★	★	★	★					
	2.00	.079	0	.000	4.00	.157	100	3.937				N123T3-0200-0000-GS	★	★	★	★	★					
	2.25	.089	0	.000	4.50	.177	100	3.937				N123T3-0225-0000-GS	★	★	★	★	★					
	2.50	.098	0	.000	5.00	.197	100	3.937				N123T3-0250-0000-GS	★	★	★	★	★					
	2.75	.108	0	.000	5.50	.216	100	3.937				N123T3-0275-0000-GS	★	★	★	★	★					
	3.00	.118	0	.000	6.00	.236	100	3.937				N123T3-0300-0000-GS	★	★	★	★	★					
	3.18	.125	0	.000	6.00	.236	100	3.937				N123T3-0318-0000-GS	★	★	★	★	★					
	0.50	.020	0	.000	1.50	.059	100	3.937	0.50	.020	U	N123U3-0050-0000-GS	★	★	★	★	★					
	0.60	.024	0	.000	1.60	.063	100	3.937				N123U3-0060-0000-GS	★	★	★	★	★					
	0.70	.028	0	.000	1.70	.067	100	3.937				N123U3-0070-0000-GS	★	★	★	★	★					
	0.80	.032	0	.000	1.80	.071	100	3.937				N123U3-0080-0000-GS	★	★	★	★	★					
	0.90	.035	0	.000	2.00	.079	100	3.937				N123U3-0090-0000-GS	★	★	★	★	★					
	1.00	.039	0	.000	2.20	.087	100	3.937				N123U3-0100-0000-GS	★	★	★	★	★					
	1.20	.047	0	.000	2.30	.091	100	3.937				N123U3-0120-0000-GS	★	★	★	★	★					
	1.40	.055	0	.000	2.70	.106	100	3.937				N123U3-0140-0000-GS	★	★	★	★	★					
	1.50	.059	0	.000	3.00	.118	100	3.937				N123U3-0150-0000-GS	★	★	★	★	★					
	1.60	.063	0	.000	3.20	.126	100	3.937				N123U3-0160-0000-GS	★	★	★	★	★					
	1.70	.067	0	.000	3.30	.130	100	3.937				N123U3-0170-0000-GS	★	★	★	★	★					
	1.95	.077	0	.000	3.90	.154	100	3.937				N123U3-0195-0000-GS	★	★	★	★	★					
	2.00	.079	0	.000	4.00	.157	100	3.937				N123U3-0200-0000-GS	★	★	★	★	★					
	2.25	.089	0	.000	4.50	.177	100	3.937				N123U3-0225-0000-GS	★	★	★	★	★					
	2.50	.098	0	.000	5.00	.197	100	3.937				N123U3-0250-0000-GS	★	★	★	★	★					
	2.75	.108	0	.000	5.50	.216	100	3.937				N123U3-0275-0000-GS	★	★	★	★	★					
	3.00	.118	0	.000	6.00	.236	100	3.937				N123U3-0300-0000-GS	★	★	★	★	★					
	3.18	.125	0	.000	6.00	.236	100	3.937				N123U3-0318-0000-GS	★	★	★	★	★					

1) D_m max = max bar or tube diameter

2) To correspond with seat size on holder.

N = Neutral

★ = First choice


T = Right hand cutting insert, U = Left hand cutting insert.

Insert code key, see page B15



CoroCut® 3


Grooving/Profiling




Tailor Made

N123T3

N123U3

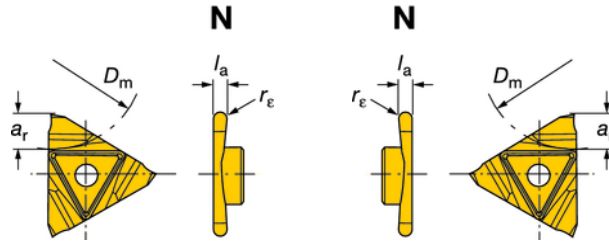

Tolerances, mm (inch):
RS $l_a = \pm 0.02 (\pm 0.0008)$

	Selection criteria, millimeter, inch (mm, in.)										Seat size ²⁾	Ordering code	P	M	K	N	S
	l_a		r_e		a_r max		D_m max		mm ¹⁾	in. ¹⁾			GC	GC	GC	GC	GC
	mm	in.	mm	in.	mm	in.	mm	in.					1125	1125	1125	1125	1125
Low feed  123-RS	0.50	.020	0.25	.010	1.50	.059	100	3.937			T	N123T3-0050-RS	★	★	★	★	★
	0.80	.032	0.4	.016	1.80	.071	100	3.937				N123T3-0080-RS	★	★	★	★	★
	1.00	.039	0.5	.020	2.20	.087	100	3.937				N123T3-0100-RS	★	★	★	★	★
	1.50	.059	0.75	.030	3.30	.130	100	3.937				N123T3-0150-RS	★	★	★	★	★
	2.00	.079	1	.039	4.00	.157	100	3.937				N123T3-0200-RS	★	★	★	★	★
	2.50	.098	1.25	.049	5.00	.197	100	3.937				N123T3-0250-RS	★	★	★	★	★
	3.00	.118	1.5	.059	6.00	.236	100	3.937				N123T3-0300-RS	★	★	★	★	★
	0.50	.020	0.25	.010	1.50	.059	100	3.937			U	N123U3-0050-RS	★	★	★	★	★
	0.80	.032	0.4	.016	1.80	.071	100	3.937				N123U3-0080-RS	★	★	★	★	★
	1.00	.039	0.5	.020	2.20	.087	100	3.937				N123U3-0100-RS	★	★	★	★	★
	1.50	.059	0.75	.030	3.30	.130	100	3.937				N123U3-0150-RS	★	★	★	★	★
	2.00	.079	1	.039	4.00	.157	100	3.937				N123U3-0200-RS	★	★	★	★	★
	2.50	.098	1.25	.049	5.00	.197	100	3.937				N123U3-0250-RS	★	★	★	★	★
	3.00	.118	1.5	.059	6.00	.236	100	3.937				N123U3-0300-RS	★	★	★	★	★
													P30	M25	K30	N25	S25

1) D_m max = max bar or tube diameter



2) To correspond with seat size on holder.

N = Neutral

★ = First choice

T = Right hand cutting insert, U = Left hand cutting insert.

Insert code key, see page B15



B124



B146



B2




J3



I8

CoroCut® 3

Blanks

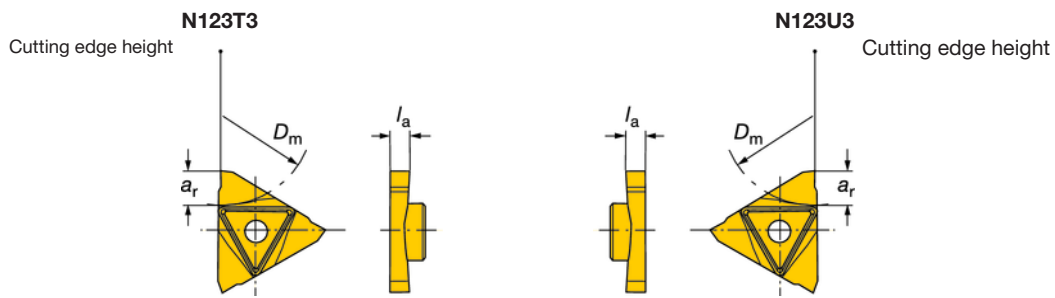

For grinding instructions, see Metalcutting Technical guide.

Tolerances, mm (inch):
-BG $l_a = \pm 0.05$ mm (.0020 inch)

123-BG	Selection criteria, millimeter, inch (mm, in.)								Seat size	Ordering code	P	M	K	N
	l_a mm	l_a in.	Width range min	Width range max	a_r max mm	a_r max in.	D_m max mm	D_m max in.			H10F	H10F	H10F	H10F
	3.40	.134	0.5	3	6.4	.252	100	3.937			T	N123T3-0340-BG	★	★
3.40	.134	0.5	3	6.4	.252	100	3.937	U	N123U3-0340-BG	★	★	★	★	

T = Right hand cutting insert, U = Left hand cutting insert.

Note: Precaution should be taken when grinding cemented carbide products. See page J7 for safety information.

N = Neutral
★ = First choice

Insert code key, see page B15




CoroCut® 3

Coromant Capto® cutting units for shallow parting, grooving and profiling

Screw clamp design

Cx-R/LF123



Right hand tool with right hand insert seat (T) shown.

Coolant inlet: Radial through the taper

Main application	ar max mm	ar max inch	Seat size ¹⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)						Gauge inserts	Nm ²⁾
					f ₁ mm	f ₁ in.	D _{5m} mm	D _{5m} in.	l ₁ mm	l ₁ in.		
	6.4	.252	T	C3-RF123T06-22045BM	22	.866	32	1.260	45	1.772	N123T3-0150- CM	3.0
	6.4	.252		C4-RF123T06-27060BM	27	1.063	40	1.575	60	2.362	N123T3-0150- CM	3.0
	6.4	.252	U	C3-LF123U06-22045BM	22	.866	32	1.260	45	1.772	N123U3-0150- CM	3.0
	6.4	.252		C4-LF123U06-27060BM	27	1.063	40	1.575	60	2.362	N123U3-0150- CM	3.0

¹⁾ To correspond with seat size on insert.

²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

³⁾ f₁, valid with gauge insert

T = Right hand cutting insert, U = Left hand cutting insert.


R = Right hand, L = Left hand

Note!
When using CoroCut3 inserts, the a_r of the insert gives the maximum depth of cut.
Cutting head for CoroTurn® SL, see page I47.

Main spare parts

Cutting unit size	Screw	Key (Torx Plus)	Screwdriver (Torx Plus) ¹⁾
C3-C4	5513 020-62	5680 049-02 (15IP)	5680 046-01 (8IP)

¹⁾ Accessories, must be ordered separately




CoroCut® 3

Shank tools for shallow parting, grooving and profiling

Screw clamp design

R/LF123



Right hand tool with right hand insert seat (T) shown.

Metric version

Main application	a_r max	Seat size ¹⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ²⁾
				b	f_1 ⁴⁾	h	h_1	l_1	l_3		
	6.4	T	RF123T06-1010BM	10	10	10	10	125	23	N123T3-0150- CM	3.0
	6.4		RF123T06-1212BM	12	12	12	12	125	23	N123T3-0150- CM	3.0
	6.4		RF123T06-1616BM	16	16	16	16	125	23	N123T3-0150- CM	3.0
	6.4		RF123T06-2020BM	20	20	20	20	125	23	N123T3-0150- CM	3.0
	6.4		RF123T06-2525BM	25	25	25	25	150	23	N123T3-0150- CM	3.0
	6.4		RF123T06-3232BM	32	32	32	32	170	23	N123T3-0150- CM	3.0
	6.4	U	LF123U06-1010BM	10	10	10	10	125	23	N123U3-0150- CM	3.0
	6.4		LF123U06-1212BM	12	12	12	12	125	23	N123U3-0150- CM	3.0
	6.4		LF123U06-1616BM	16	16	16	16	125	23	N123U3-0150- CM	3.0
	6.4		LF123U06-2020BM	20	20	20	20	125	23	N123U3-0150- CM	3.0
	6.4		LF123U06-2525BM	25	25	25	25	150	23	N123U3-0150- CM	3.0
	6.4		LF123U06-3232BM	32	32	32	32	170	23	N123U3-0150- CM	3.0

Inch version

Main application	a_r max	Seat size ¹⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ³⁾
				b	f_1 ⁴⁾	h	h_1	l_1	l_3		
	.252	T	RF123T023-06BM	.375	.375	.375	.375	4.500	.906	N123T3-0150- CM	2.2
	.252		RF123T023-08BM	.500	.500	.500	.500	4.500	.906	N123T3-0150- CM	2.2
	.252		RF123T023-10BM	.625	.625	.625	.625	4.500	.906	N123T3-0150- CM	2.2
	.252		RF123T023-12BM	.750	.750	.750	.750	4.500	.906	N123T3-0150- CM	2.2
	.252		RF123T023-16BM	1.000	1.000	1.000	1.000	5.000	.906	N123T3-0150- CM	2.2
	.252		RF123T023-20BM	1.250	1.250	1.250	1.250	6.000	.906	N123T3-0150- CM	2.2
	.252	U	LF123U023-06BM	.375	.375	.375	.375	4.500	.906	N123U3-0150- CM	2.2
	.252		LF123U023-08BM	.500	.500	.500	.500	4.500	.906	N123U3-0150- CM	2.2
	.252		LF123U023-10BM	.625	.625	.625	.625	4.500	.906	N123U3-0150- CM	2.2
	.252		LF123U023-12BM	.750	.750	.750	.750	4.500	.906	N123U3-0150- CM	2.2
	.252		LF123U023-16BM	1.000	1.000	1.000	1.000	5.000	.906	N123U3-0150- CM	2.2
	.252		LF123U023-20BM	1.250	1.250	1.250	1.250	6.000	.906	N123U3-0150- CM	2.2

¹⁾ To correspond with seat size on insert.

²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

⁴⁾ f_1 , valid with gauge insert

R = Right hand, L = Left hand

T = Right hand cutting insert, U = Left hand cutting insert.


Note!

When using CoroCut3 inserts, the a_r of the insert gives the maximum depth of cut. Cutting head for CoroTurn® SL, see page I47.

Main spare parts

Shank size		Screw	For screw head Key (Torx Plus)	For screw bottom Screwdriver (Torx Plus) ¹⁾
mm	inch			
1010	06	5513 020-63	5680 049-02 (15IP)	5680 046-01(8IP)
1212 - 3232	08 - 20	5513 020-62	5680 049-02 (15IP)	5680 046-01(8IP)

¹⁾ Accessories, must be ordered separately



T-Max Q-Cut®

System with 1 cutting edge

For deep parting, internal grooving and small diameter face grooving



Tool holder assortment

There are a wide range of different tool holders for T-Max Q-Cut® inserts


T-Max Q-Cut® options

- T-Max Q-Cut® 151.2 for deep parting
- T-Max Q-Cut® 151.3 for internal machining and small diameter face grooving



T-Max Q-Cut® SL - Flexible tool solution

By using CoroTurn® SL adaptors and T-Max Q-Cut® cutting blades for insert types 151.2 and 151.3 a large number of tooling solutions, both external and internal, can be made from a limited number of items. See page I2



Insert geometries

A large variety of geometries are available, dedicated to different applications and feed areas.

Insert grades

To cover all types of workpiece materials the T-Max Q-Cut® inserts are available in a variety of specially developed grades:

- Cemented carbide
- Polycrystalline diamond
- Cubic boron nitride
- Cermet

Tailor Made



Even more options are available thanks to tailored design. For more information on our Tailor Made program see page J3.

ISO application areas:



T-Max Q-Cut®

Parting

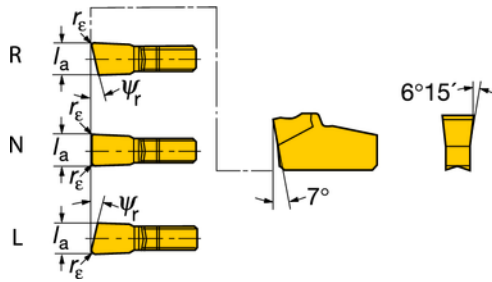

Tolerances, mm (inch):

- 5F
l_a = +0.25-0 (+.010-0)
- r_e = ±0.05 (±.002)
- 7E
l_a = +0.10/0 (+.004/0)
- r_e = ±0.10 (±.004)
- 9E
Neutral
l_a = +0.10/0 (+.004/0)
- r_e = ±0.10 (±.004)

- Right handed
l_a = +.004/0 (+.010/0)
- r_e = ±0.10 (±.004)


	Selection criteria, millimeter, inch (mm, in.)						Seat size ¹⁾	Ordering code	P				M				K				N				S							
	l _a		ψ _f	r _e		Seat size ¹⁾			Ordering code	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC
	mm	in.		mm	in.					1125	1145	2135	235	4225	1125	1145	2135	235	H13A	1125	3020	4225	H13A	H13A	1125	1005	1125	1145	2135	235	H13A	
151.2-9E	2.50	.098	1.5°	0.10	.004	25	R151.2-250 02-9E	★																								
	3.00	.118	0°	0.35	.014	30	N151.2-300-9E	★																								
	4.00	.157	0°	0.35	.014	40	N151.2-400-9E	★																								
	4.00	.157	1.5°	0.10	.004		R151.2-400 02-9E	★																								
151.2-7E Wiper	2.50	.098	0°	0.10	.004	25	N151.2-250-7E	☆	★		☆		☆		★						★		★									
	2.50	.098	5°	0.15	.006		R151.2-250 05-7E	☆	★		☆		☆		★							★		★								
	3.00	.118	0°	0.10	.004	30	N151.2-300-7E	☆	★	☆	☆		☆		★							★		★								
	3.00	.118	5°	0.15	.006		R151.2-300 05-7E	☆	★	☆	☆		☆		★								★		★							
	3.00	.118	5°	0.15	.006		L151.2-300 05-7E	★							★								★		★							
	4.00	.157	0°	0.15	.006	40	N151.2-400-7E	☆	★	☆	☆		☆		★								★		★							
151.2-5F Low feed	2.00	.079	0°	0.20	.008	20	N151.2-200-5F	★		☆	☆		☆		★						★		★		☆							
	2.00	.079	5°	0.10	.004		R151.2-200 05-5F	★		☆	☆		☆		★							★		★		☆						
	2.00	.079	5°	0.10	.004		L151.2-200 05-5F	★		☆	☆		☆		★							★		★		☆						
	2.00	.079	8°	0.10	.004		R151.2-200 08-5F	★		☆	☆		☆		★							★		★		☆						
	2.00	.079	8°	0.10	.004		L151.2-200 08-5F	★		☆	☆		☆		★							★		★		☆						
	2.00	.079	12°	0.10	.004		R151.2-200 12-5F	★		☆	☆		☆		★							★		★		☆						
	2.00	.079	12°	0.10	.004		L151.2-200 12-5F	★		☆	☆		☆		★							★		★		☆						
	2.00	.079	15°	0.10	.004		R/L151.2-200 15-5F	★		☆	☆		☆		★							★		★		☆						
	2.00	.079	20°	0.10	.004		R/L151.2-200 20-5F	★		☆	☆		☆		★							★		★		☆						
	2.50	.098	0°	0.20	.008	25	N151.2-250-5F	★		☆	☆		☆		★							★		★		☆						
	2.50	.098	5°	0.10	.004		R151.2-250 05-5F	★		☆	☆		☆		★							★		★		☆						
	2.50	.098	5°	0.10	.004		L151.2-250 05-5F	★		☆	☆		☆		★							★		★		☆						
	2.50	.098	8°	0.10	.004		R151.2-250 08-5F	★		☆	☆		☆		★							★		★		☆						
	2.50	.098	8°	0.10	.004		L151.2-250 08-5F	★		☆	☆		☆		★							★		★		☆						
	2.50	.098	12°	0.10	.004		R151.2-250 12-5F	★		☆	☆		☆		★							★		★		☆						
	2.50	.098	12°	0.10	.004		L151.2-250 12-5F	★		☆	☆		☆		★							★		★		☆						
	2.50	.098	15°	0.10	.004		R/L151.2-250 15-5F	★		☆	☆		☆		★							★		★		☆						
	3.00	.118	0°	0.20	.008	30	N151.2-300-5F	★		☆	☆		☆		★							★		★		☆						
	3.00	.118	5°	0.10	.004		R151.2-300 05-5F	★		☆	☆		☆		★							★		★		☆						
	3.00	.118	5°	0.10	.004		L151.2-300 05-5F	★		☆	☆		☆		★							★		★		☆						
3.00	.118	8°	0.10	.004		R151.2-300 08-5F	★		☆	☆		☆		★							★		★		☆							
3.00	.118	8°	0.10	.004		L151.2-300 08-5F	★		☆	☆		☆		★							★		★		☆							
3.00	.118	12°	0.10	.004		R/L151.2-300 12-5F	★		☆	☆		☆		★							★		★		☆							
4.00	.157	0°	0.20	.008	40	N151.2-400-5F	★		☆	☆		☆		★							★		★		☆							
4.00	.157	5°	0.10	.004		R/L151.2-400 05-5F	★		☆	☆		☆		★							★		★		☆							
4.00	.157	8°	0.10	.004		R151.2-400 08-5F	★		☆	☆		☆		★							★		★		☆							
4.00	.157	8°	0.10	.004		L151.2-400 08-5F	★		☆	☆		☆		★							★		★		☆							
5.00	.197	0°	0.20	.008	50	N151.2-500-5F	★		☆	☆		☆		★							★		★		☆							
5.00	.197	5°	0.10	.004		R151.2-500 05-5F	★		☆	☆		☆		★							★		★		☆							
5.00	.197	5°	0.10	.004		L151.2-500 05-5F	★		☆	☆		☆		★							★		★		☆							

1) To correspond with seat size on holder.

N = Neutral, R = Right hand, L = Left hand


For geometry description, see page B124.

★ = First choice



T-Max Q-Cut®

Grooving of hardened materials

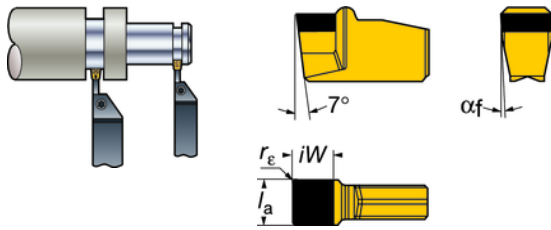

Tolerances, mm (inch):

E-G

$l_a = \pm 0.02 (\pm .0008)$

$r_\epsilon = \pm 0.05 (\pm .002)$


	Selection criteria, mm, inch	Seat size ¹⁾	Ordering code	H					
				CB20					
Low feed 151.2-EG	l_a mm	l_a in.	r_ϵ mm	r_ϵ in.	α_f	iW			
	3.00	.118	0.20	.008	3°	3	25	N151.2-300-25E-G	★
	3.17	.125	0.18	.007	3°	3		N151.2-A125-25E-G	★
	4.00	.157	0.20	.008	3°	3	30	N151.2-400-30E-G	★
	4.70	.185	0.56	.022	3°	3	40	N151.2-A185-40E-G	★
	5.00	.197	0.20	.008	3°	3		N151.2-500-40E-G	★
	6.00	.236	0.20	.008	3°	3	50	N151.2-600-50E-G	★
6.35	.250	0.56	.022	3°	3	60	N151.2-A250-60E-G	★	
									H01

¹⁾ To correspond with seat size on holder.

N = Neutral



For geometry description, see page B124.

★ = First choice



T-Max Q-Cut®

Profiling



Tolerances, mm (inch):

4P



$l_a = \pm 0.02 (\pm 0.0008)$

5P

$l_a = \pm 0.05 (\pm 0.002)$

B

C


	Selection criteria, inch, mm					Seat size ¹⁾	Ordering code	P				M				K		N		S					
	l_a	l_a	r_e	r_e				GC	GC	GC	CT	GC	GC	GC	CT	-	GC	GC	-	GC	GC	GC	-		
	mm	in.	mm	in.				1125	235	4225	525	1005	1125	235	525	H13A	1125	4225	H13A	-	H13A	1005	1125	235	H13A
 151.2-4P	3.00	.118	1.50	.059	30	N151.2-300-30-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	3.17	.125	1.59	.062		N151.2-A125-30-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	3.96	.156	1.98	.078	40	N151.2-A156-40-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	4.00	.157	2.00	.079		N151.2-400-40-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	4.50	.177	2.25	.089		N151.2-450-40-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	4.75	.187	2.38	.094		N151.2-A187-40-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	5.00	.197	2.50	.098		N151.2-500-40-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	5.56	.219	2.78	.110	50	N151.2-A219-50-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	6.00	.236	3.00	.118		N151.2-600-50-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	6.35	.250	3.17	.125		N151.2-A250-50-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
7.14	.281	3.57	.140	60	N151.2-A281-60-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆				
7.93	.312	3.96	.156		N151.2-A312-60-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆				
8.00	.315	4.00	.158		N151.2-800-60-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆				
9.52	.375	4.76	.188	80	N151.2-A375-80-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆				
10.00	.394	5.00	.197		N151.2-1000-80-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆				
 151.2-5P	3.00	.118	1.50	.059	30	N151.2-300-30-5P	☆	★	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	3.17	.125	1.59	.062		N151.2-A125-30-5P	☆	★	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	4.00	.158	2.00	.079	40	N151.2-400-40-5P	☆	★	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	4.75	.187	2.37	.094		N151.2-A187-40-5P	☆	★	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	5.00	.197	2.50	.098		N151.2-500-40-5P	☆	★	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	6.00	.236	3.00	.118	50	N151.2-600-50-5P	☆	★	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
	6.35	.250	3.17	.125		N151.2-A250-50-5P	☆	★	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆			
8.00	.315	4.00	.158	60	N151.2-800-60-5P	☆	★	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆				
							P30	P45	P20	P10	M10	M25	M35	M10	M15	M10	K30	K25	K20	N20	N25	S15	S25	S30	S15

1) To correspond with seat size on holder.




N = Neutral

For geometry description, see page B124.

★ = First choice


	Selection criteria, inch, mm					Seat size ¹⁾	Ordering code	P				M				K		N		S					
	l_a	l_a	r_e	r_e				GC	GC	GC	CT	GC	GC	GC	CT	-	GC	GC	-	GC	GC	GC	-		
	mm	in.	mm	in.				1125	235	4225	525	1005	1125	235	525	H13A	1125	4225	H13A	-	H13A	1005	1125	235	H13A
 151.2-4P	3.00	.118	1.50	.059	30	N151.2-300-30-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆		
	3.17	.125	1.59	.062		N151.2-A125-30-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆		
	3.96	.156	1.98	.078	40	N151.2-A156-40-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆		
	4.00	.157	2.00	.079		N151.2-400-40-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆		
	4.50	.177	2.25	.089		N151.2-450-40-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆		
	4.75	.187	2.38	.094		N151.2-A187-40-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆		
	5.00	.197	2.50	.098		N151.2-500-40-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆		
	5.56	.219	2.78	.110	50	N151.2-A219-50-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆		
	6.00	.236	3.00	.118		N151.2-600-50-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆		
	6.35	.250	3.17	.125		N151.2-A250-50-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆		
7.14	.281	3.57	.140	60	N151.2-A281-60-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆			
7.93	.312	3.96	.156		N151.2-A312-60-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆			
8.00	.315	4.00	.158		N151.2-800-60-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆			
9.52	.375	4.76	.188	80	N151.2-A375-80-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆			
10.00	.394	5.00	.197		N151.2-1000-80-4P	★	☆	☆	☆	★	☆	☆	☆	★	☆	☆	★	☆	☆	☆	☆	☆			
							P30	P45	P20	P10	M10	M25	M35	M10	M15	M10	K30	K25	K20	N20	N25	S15	S25	S30	S15

J





T-Max Q-Cut®

Turning and recessing

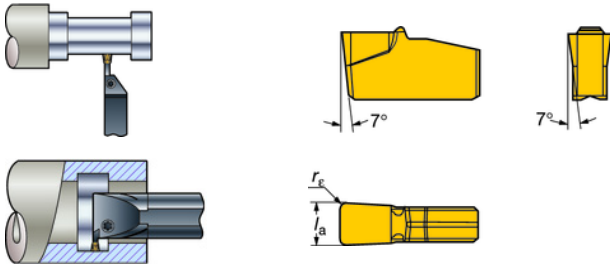

Tolerances, mm (inch):

 $l_a = +0.10/0 (+.004/0)$ $r_e = \pm 0.10 (\pm .004)$




	Selection criteria, inch, mm	P								M		K				
		l_a		r_e		Seat size ¹⁾	Ordering code	GC	GC	GC	CT	GC	CT	GC	GC	
		mm	in.	mm	in.			1125	3020	4225	525	1125	525	1125	3020	4225
Low feed  151.2-5T	3.00 .118 0.40 .016 30 N151.2-3004-30-5T	☆	☆	☆	☆											
	4.00 .157 0.40 .016 40 N151.2-4004-40-5T	☆	☆	☆	☆											
	4.00 .157 0.80 .032 N151.2-4008-40-5T	☆	☆	☆	☆											
	5.00 .197 0.40 .016 50 N151.2-5004-50-5T	☆	☆	☆	☆											
	6.00 .236 0.80 .032 60 N151.2-6008-60-5T	☆	☆	☆	☆											
Medium feed  151.2-4T	3.00 .118 0.40 .016 30 N151.2-3004-30-4T								★						★	
	4.00 .157 0.40 .016 40 N151.2-4004-40-4T								★						★	
	4.00 .157 0.80 .032 N151.2-4008-40-4T								★	☆		☆			★	
	5.00 .197 0.40 .016 50 N151.2-5004-50-4T								★						★	
	6.00 .236 0.80 .032 60 N151.2-6008-60-4T								★						★	
								P30	P15	P20	P10	M25	M10	K30	K15	K25

1) To correspond with seat size on holder.

N = Neutral

For geometry description, see page B124.

★ = First choice



B130



B146



B2




J3



I8

T-Max Q-Cut®

Undercutting

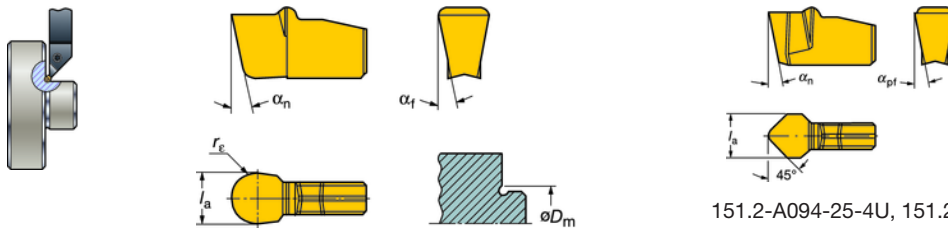

Tolerances, mm (inch):

$$l_a = \pm 0.02 (\pm .0008)$$

151.2-A094-25-4U, 151.2-A125-30-4U

	Selection criteria	l_a mm	l_a in.	r_e mm	r_e in.	D_m min mm	D_m max in.	α_t	α_n	Seat size ¹⁾	Ordering code	P		M		K	N	S	
												GC	CT	GC	CT	-	-	GC	-
												235	525	235	525	H13A	H13A	H13A	235
Medium feed 151.2-4U		2.00	.079	1.00	.039	30.00	1.181	5°	7°	20	N151.2-200-20-4U	★	☆	★	☆	★	☆	★	☆
		3.00	.118	1.50	.059	28.00	1.102	7°	7°	25	N151.2-300-25-4U	★	☆	★	☆	★	☆	★	☆
		4.00	.157	2.00	.079	23.00	.906	11°	7°	30	N151.2-400-30-4U	★	☆	★	☆	★	☆	★	☆
		5.00	.197	2.50	.098	27.00	1.063	11°	7°	40	N151.2-500-40-4U	★	☆	★	☆	★	☆	★	☆
		6.00	.236	3.00	.118	27.00	1.063	11°	7°	50	N151.2-600-50-4U	★	☆	★	☆	★	☆	★	☆
		8.00	.315	4.00	.157	30.00	1.181	11°	7°	60	N151.2-800-60-4U	★	☆	★	☆	★	☆	★	☆
		2.39	.094	0.51	.020	25.40	1.000	4.5°	7°	25	N151.2-A094-25-4U	★	☆					★	
		3.17	.125	1.19	.047	28.58	1.125	7°	7°	30	N151.2-A125-30-4U	★	☆					★	


1) To correspond with seat size on holder.

N = Neutral

For geometry description, see page B124.

★ = First choice

Blanks



Tolerances, mm (inch):

$$-3B \ l_a = \pm 0.05 (.002)$$

$$-4B \ l_a = \pm 0.04 (.002)$$

For grinding instructions see Metalcutting Technical guide


	Selection criteria, millimeter, inch (mm, in.)								Seat size ¹⁾	Ordering code	M	K	N	S
	l_a mm	l_a in.	r_e mm	r_e in.	Width range min	Width range max	α_t	H13A			H13A	H13A	H13A	
								-			-	-	-	
	2.40	.094	0.10	.004	1.90	2.3	11°	20	N151.2-240-20-3B	☆	☆	☆	☆	
	3.40	.134	0.10	.004	2.30	3.3	11°	25	N151.2-340-25-3B	☆	☆	☆	☆	
	4.40	.173	0.20	.008	3.00	4.3	12°	30	N151.2-440-30-3B	☆	☆	☆	☆	
	5.40	.213	0.20	.008	4.00	5.3	5°	40	N151.2-540-40-3B	☆	☆	☆	☆	
	6.50	.256	0.20	.008	5.00	6.4	5°	50	N151.2-650-50-3B	☆	☆	☆	☆	
	8.50	.335	0.30	.012	6.00	8.4	6°	60	N151.2-850-60-3B	☆	☆	☆	☆	
	2.60	.102	0.10	.004	1.90	2.3	11°	20	N151.2-260-20-4B	☆	☆	☆	☆	
	3.65	.144	0.10	.004	2.30	3.3	11°	25	N151.2-365-25-4B	☆	☆	☆	☆	
	4.65	.183	0.20	.008	3.00	4.3	12°	30	N151.2-465-30-4B	☆	☆	☆	☆	
	5.60	.220	0.20	.008	4.00	5.3	5°	40	N151.2-560-40-4B	☆	☆	☆	☆	
	6.75	.266	0.20	.008	5.00	6.4	5°	50	N151.2-675-50-4B	☆	☆	☆	☆	
	8.80	.346	0.30	.012	6.00	8.4	6°	60	N151.2-880-60-4B	☆	☆	☆	☆	
	11.45	.451	0.30	.012	8.00	11.2	10°	80	N151.2-1145-80-4B	☆	☆	☆	☆	

1) To correspond with seat size on holder.

N = Neutral

For geometry description, see page B124.

Note: Precaution should be taken when grinding cemented carbide products. See page J7 for safety information.




T-Max Q-Cut®

Coromant Capto® cutting units

Screw clamp



151.2

Cx-R/LF151.23

Coolant inlet: Radial through the taper

Right hand style shown

Main application	a_r max		Seat size	Ordering code	Dimensions, millimeter, inch (mm, in.)						Gauge inserts	Nm ³⁾
	mm ¹⁾	inch ¹⁾			D_{5m} mm	D_{5m} in.	f_1 mm	f_1 in.	l_1 mm	l_1 in.		
	15.00	.591	20	C3-RF151.23-22050-20	32	1.260	22	.866	50	1.968	N151.2-200-5E	2.5
	15.00	.591		C4-R/LF151.23-27055-20	40	1.575	27	1.063	55	2.165	N151.2-200-5E	2.5
	15.00	.591		C5-RF151.23-35060-20	50	1.968	35	1.378	60	2.362	N151.2-200-5E	2.5
	20.00	.787	25	C4-R/LF151.23-27060-25	40	1.575	27	1.063	60	2.362	N151.2-250-5E	3.0
	20.00	.787	30	C3-R/LF151.23-22055-30	32	1.260	22	.866	55	2.165	N151.2-300-5E	3.5
	20.00	.787		C4-R/LF151.23-27060-30	40	1.575	27	1.063	60	2.362	N151.2-300-5E	3.5
	20.00	.787		C5-R/LF151.23-35060-30	50	1.968	35	1.378	60	2.362	N151.2-300-5E	3.5
	20.00	.787		C6-R/LF151.23-45065-30	63	2.480	45	1.772	65	2.559	N151.2-300-5E	3.5
	25.00	.984	40	C4-R/LF151.23-27067-40	40	1.575	27	1.063	67	2.638	N151.2-400-5E	5.0
	25.00	.984		C5-R/LF151.23-35067-40	50	1.968	35	1.378	67	2.638	N151.2-400-5E	5.0
	25.00	.984		C6-R/LF151.23-45067-40	63	2.480	45	1.772	67	2.638	N151.2-400-5E	5.0
	32.00	1.260	50	C5-R/LF151.23-35075-50	50	1.968	35	1.378	75	2.953	N151.2-500-5E	5.0
	32.00	1.260		C6-R/LF151.23-45075-50	63	2.480	45	1.772	75	2.953	N151.2-500-5E	5.0
	32.00	1.260	60	C5-R/LF151.23-35076-60	50	1.968	35	1.378	76	2.992	N151.2-600-5E	5.0
	32.00	1.260		C6-R/LF151.23-45080-60	63	2.480	45	1.772	80	3.150	N151.2-600-5E	5.0

1) a_r max. for holder. For max stability choose a holder with shortest possible a_r .


2) To correspond with seat size on insert.

3) Insert tightening torque Nm. Use torque wrench, see page B109.

R = Right hand, L = Left hand

Main spare parts

Seat size	Screw	Key (Torx Plus)
20-30	3212 012-259	5680 043-14 (20IP)
40-60	3212 012-360	5680 043-17 (30IP)



B6



B67



B118



G6



B2



J3



J2


T-Max Q-Cut®

Double ended parting blade




151.2

Spring clamp
Seat size 20–60



Screw clamp
Seat size 80

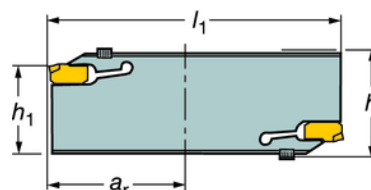

Neutral style

Main application	a _r max mm ¹⁾	a _r max inch ¹⁾	Seat size ²⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)						Gauge inserts	Nm ³⁾
					h mm	h in.	h ₁ mm	h ₁ in.	l ₁ mm	l ₁ in.		
	35	1.378	20	151.2-21-20	25.9	1.020	21.4	.842	110	4.331	N151.2-200-5E	
	35	1.378	25	151.2-21-25	25.9	1.020	21.4	.842	110	4.331	N151.2-250-5E	
	60	2.362		151.2-25-25	31.9	1.256	25	.984	150	5.906	N151.2-250-5E	
	35	1.378	30	151.2-21-30	25.9	1.020	21.4	.842	110	4.331	N151.2-300-5E	
	60	2.362		151.2-25-30	31.9	1.256	25	.984	150	5.906	N151.2-300-5E	
	35	1.378	40	151.2-21-40	25.9	1.020	21.4	.842	110	4.331	N151.2-400-5E	
	60	2.362		151.2-25-40	31.9	1.256	25	.984	150	5.906	N151.2-400-5E	
	60	2.362	50	151.2-25-50	31.9	1.256	25	.984	150	5.906	N151.2-500-5E	
	60	2.362	60	151.2-25-60	31.9	1.256	25	.984	150	5.906	N151.2-600-5E	
	100	3.937	80	151.2-45-80	52.5	2.067	45	1.772	250	9.842	N151.2-800-4E	3.5

¹⁾ a_r max. for holder. For max stability choose a holder with shortest possible a_r.


²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

Main spare parts

Seat size	Screw	Key (Torx Plus)
20-30	–	5680 057-021 ⁴⁾
40-60	–	5680 057-011 ⁴⁾
80	3212 012-259	5680 043-14 (20IP)

⁴⁾ Optional part to be ordered separately.



B6



B32



B117



B2



J2

T-Max Q-Cut®

Shank tools for parting


Spring clamp

B



151.2

R/L151.20 Re-inforced



Right hand style shown

C

Metric version

Main application				Ordering code	Dimensions, mm						Gauge inserts
	D_m max	a_r max ¹⁾	Seat size ²⁾		b	f_1	h	h_1	l_1	l_3	
	13	6	20	R/L151.20-0808-20	8	8.25	8	12	120	11	N151.2-200-5E
	20.6	10		R/L151.20-1010-20	10	10.25	10	12	120	13	N151.2-200-5E
	30	15		R/L151.20-1212-20	12	12.25	12	12	150	20.5	N151.2-200-5E
	30	15		R/L151.20-1612-20	12	12.25	16	16	150	20.5	N151.2-200-5E
	30	15	25	R/L151.20-1616-20	16	16.25	16	16	150	20.5	N151.2-200-5E
	30	15		R/L151.20-1212-25	12	12.25	12	12	150	20.5	N151.2-250-5E
	30	15		R/L151.20-1612-25	12	12.25	16	12	150	20.5	N151.2-250-5E
	30	15		R/L151.20-1616-25	16	16.25	16	16	150	20.5	N151.2-250-5E
	35	17	30	R/L151.20-2012-25	12	12.25	20	20	125	26	N151.2-250-5E
	35	17		R/L151.20-2020-25	20	20.25	20	20	125	26	N151.2-250-5E
	35	17		R/L151.20-2525-25	25	25.3	25	25	150	31.8	N151.2-250-5E
	35	17		R/L151.20-1612-30	12	12.3	16	16	100	26	N151.2-300-5E
	35	17	40	R/L151.20-2012-30	12	12.3	20	20	125	26	N151.2-300-5E
	35	17		R/L151.20-1616-30	16	16.3	16	16	100	26	N151.2-300-5E
	35	17		R/L151.20-2020-30	20	20.3	20	20	125	26	N151.2-300-5E
	45	22		R/L151.20-2020-30A	20	20.3	20	20	125	31.8	N151.2-300-5E
	45	22	40	R/L151.20-2525-30A	25	25.3	25	25	150	31.8	N151.2-300-5E
	45	22		R/L151.20-2020-40	20	20.3	20	20	125	31.8	N151.2-400-5E
45	22	40	R/L151.20-2525-40	25	25.3	25	25	150	31.8	N151.2-400-5E	

G

H

Inch version

Main application				Ordering code	Dimensions, inch						Gauge inserts
	D_m max	a_r max ¹⁾	Seat size ²⁾		b	f_1	h	h_1	l_1	l_3	
	.760	.380	20	R151.20-06-20	.375	.385	.375	.375	4.720	.630	N151.2-200-5E
	1.180	.591		R/L151.20-08-20	.500	.510	.500	.500	5.910		N151.2-200-5E
	1.180	.591		R/L151.20-10-20	.625	.634	.625	.625	5.910	.810	N151.2-200-5E
	1.180	.591	25	R/L151.20-08-25	.500	.510	.500	.500	5.910	.810	N151.2-250-5E
	1.180	.591		R/L151.20-10-25	.625	.634	.625	.625	5.910	.810	N151.2-250-5E
	1.380	.689		R/L151.20-12-25	.750	.760	.750	.750	4.500	1.050	N151.2-250-5E
	1.380	.689	30	R/L151.20-10-30	.625	.638	.625	.625	4.000	1.020	N151.2-300-5E
	1.380	.689		R/L151.20-12-30	.750	.764	.750	.750	4.500	1.020	N151.2-300-5E
	1.770	.886		R/L151.20-12-30A	.750	.764	.750	.750	4.500	1.240	N151.2-300-5E
	1.770	.886	40	R/L151.20-12-40	.750	.764	.750	.750	4.500	1.250	N151.2-400-5E

¹⁾ For max stability choose a holder with re-inforced design

²⁾ To correspond with seat size on insert.

R = Right hand, L = Left hand

Main spare parts

Seat size	Insert key ¹⁾
20-30	5680 057-021
40-60	5680 057-011

J

¹⁾ To be ordered separately.



B6



B117




G6



B2



J3



J2


T-Max Q-Cut®

Shank tools
Screw clamp



151.2

Deep a_r
R/L151.23



Right hand style shown

Metric version

Main application	a_r max ¹⁾	Seat size ²⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ³⁾
				b	f_1	h	h_1	l_1	l_3		
	15	20	R/LF151.23-1616-20M1	16	17	16	16	100	33.5	N151.2-200-5E	4.0
	15		R/LF151.23-2020-20M1	20	21	20	20	125	39	N151.2-200-5E	4.0
	15		R/LF151.23-2525-20M1	25	26	25	25	150	39	N151.2-200-5E	4.0
	20	25	R/LF151.23-1616-25M1	16	17	16	16	100	40	N151.2-250-5E	4.0
	20		R/LF151.23-2020-25M1	20	21	20	20	125	40	N151.2-250-5E	4.0
	20		R/LF151.23-2525-25M1	25	26	25	25	150	40	N151.2-250-5E	4.0
	20	30	R/LF151.23-1616-30M1	16	17	16	16	100	41	N151.2-300-5E	5.0
	20		R/LF151.23-2020-30M1	20	21	20	20	125	41	N151.2-300-5E	5.0
	20		R/LF151.23-2525-30M1	25	26	25	25	150	41	N151.2-300-5E	5.0
	20		R/LF151.23-3225-30M1	25	26	32	32	170	41	N151.2-300-5E	5.0
	25	40	R/LF151.23-2020-40M1	20	21	20	20	125	47	N151.2-400-5E	7.5
	25		R/LF151.23-2525-40M1	25	26	25	25	150	47	N151.2-400-5E	7.5
	25		R/LF151.23-3225-40M1	25	26	32	32	170	47	N151.2-400-5E	7.5
	32	50	R/LF151.23-2525-50M1	25	26	25	25	150	57	N151.2-500-5E	7.5
	32		R/LF151.23-3225-50M1	25	26	32	32	170	57	N151.2-500-5E	7.5
32	60	R/LF151.23-2525-60M1	25	26	25	25	150	58	N151.2-600-5E	7.5	
32		R/LF151.23-3225-60M1	25	26	32	32	170	57	N151.2-600-5E	7.5	

Inch version

Main application	a_r max ¹⁾	Seat size ²⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ⁴⁾
				b	f_1	h	h_1	l_1	l_3		
	.590	20	RF151.23-08-20	.500	.750	.500	.500	4.500	1.319	N151.2-200-5E	2.4
	.590		R/LF151.23-10-20	.625	.875	.625	.625	4.500	1.319	N151.2-200-5E	2.4
	.790	25	R/LF151.23-08-25	.500	.750	.500	.500	4.500	1.575	N151.2-250-5E	2.4
	.790		R/LF151.23-10-25	.625	.875	.625	.625	4.500	1.575	N151.2-250-5E	2.4
	.790		R/LF151.23-12-25	.750	1.000	.750	.750	5.000	1.575	N151.2-250-5E	2.4
	.790	30	R/LF151.23-12-30	.750	1.000	.750	.750	5.000	1.614	N151.2-300-5E	3.2
	.790		R/LF151.23-16-30	1.000	1.250	1.000	1.000	6.000	1.614	N151.2-300-5E	3.2
	.790		R/LF151.23-20-30	1.250	1.500	1.250	1.250	6.000	1.614	N151.2-300-5E	3.2
	.980	40	R/LF151.23-12-40	.750	1.000	.750	.750	5.000	1.850	N151.2-400-5E	5.0
	.980		R/LF151.23-16-40	1.000	1.250	1.000	1.000	6.000	1.850	N151.2-400-5E	4.6
	.980		R/LF151.23-20-40	1.250	1.500	1.250	1.250	6.000	1.850	N151.2-400-5E	4.6
	1.260	50	R/LF151.23-16-50	1.000	1.250	1.000	1.000	6.000	2.244	N151.2-500-5E	4.6
	1.260		R/LF151.23-20-50	1.250	1.500	1.250	1.250	6.000	2.244	N151.2-500-5E	4.6
	1.260	60	R/LF151.23-16-60	1.000	1.250	1.000	1.000	6.000	2.283	N151.2-600-5E	4.6
	1.260		R/LF151.23-20-60	1.250	1.500	1.250	1.250	6.000	2.283	N151.2-600-5E	4.6

¹⁾ a_r max. for holder. For max stability choose a holder with shortest possible a_r .

R = Right hand, L = Left hand


²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

⁴⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

Main spare parts

Seat size	Shank size, mm	Screw	Key (Torx Plus)
20-25	1616	3212 012-259	5680 043-14 (20IP)
30		3212 012-310	5680 043-15 (25IP)
30		3212 012-309	5680 043-15 (25IP)
40-60		3212 012-360	5680 043-17 (30IP)



B6



B118



G6



B2



B50

T-Max Q-Cut®

Shank tools for undercutting


Screw clamp

B




151.2

R/LS151.22
Metric



R/LS151.22
Inch



Right hand style shown

C

Metric version

Main application	Seat size ¹⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ²⁾
			b	f ₁	h	h ₁	l ₁	l ₃		
	20	R/LS151.22-2525-20	25	25.3	25	25	150	24	N151.2-200-20- 4U	2.5
	25	R/LS151.22-2525-25	25	25.6	25	25	150	27	N151.2-300-25- 4U	3.0
	30	R/LS151.22-2020-30	20	20.8	20	20	125	28	N151.2-400-30- 4U	3.5
		R/LS151.22-2525-30	25	25.8	25	25	150	28	N151.2-400-30- 4U	3.5
	40	R/LS151.22-2020-40	20	21.1	20	20	125	31	N151.2-500-40- 4U	4.5
		R/LS151.22-2525-40	25	26.1	25	25	150	31	N151.2-500-40- 4U	4.5
	50	R/LS151.22-2525-50	25	26.1	25	25	150	32	N151.2-600-50- 4U	5.0
		R/LS151.22-3225-50	25	26.1	32	32	170	32	N151.2-600-50- 4U	5.0
	60	R/LS151.22-2525-60	25	26.4	25	25	150	37	N151.2-800-60- 4U	5.0
		R/LS151.22-3225-60	25	26.4	32	32	170	37	N151.2-800-60- 4U	5.0

G

Inch version

Main application	Seat size ¹⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ³⁾
			b	f ₁	h	h ₁	l ₁	l ₃		
	20	R/LS151.22-12-20	.750	1.000	.750	.750	4.500	1.190	N151.2-200-20- 4U	1.4
	25	R/LS151.22-16-25	1.000	1.250	1.000	1.000	5.000	1.320	N151.2-300-25- 4U	1.6
	30	R/LS151.22-16-30	1.000	1.250	1.000	1.000	5.000	1.360	N151.2-400-30- 4U	1.9
		LS151.22-20-30	1.250	1.500	1.250	1.250	6.000	1.360	N151.2-400-30- 4U	1.9
	40	R/LS151.22-16-40	1.000	1.250	1.000	1.000	5.000	1.430	N151.2-500-40- 4U	2.4
	50	R/LS151.22-20-50	1.250	1.500	1.250	1.250	6.000	1.490	N151.2-600-50- 4U	2.7

H

¹⁾ To correspond with seat size on insert.

R = Right hand, L = Left hand


²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

Main spare parts

Seat size	Screw	Key (Torx Plus)
20-30	3212 012-259	5680 043-14 (20IP)
40-60	3212 012-360	5680 043-17 (30IP)

J



B6



G6



G6



B2




B50


T-Max Q-Cut®

Blades for Manchester holders, for parting

Spring clamp



151.2-4E

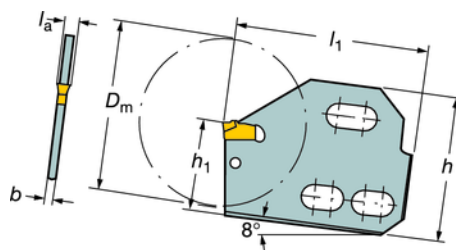

Main application	D_m	Seat size ¹⁾	Ordering code	Dimensions, mm, inch					Gauge inserts	Manchester holder designation		
				l_a	b	h	h_1	l_1				
	3.00	30	151.2-40-30-8	3.00	2.87	57.2	40.1	77.7	N151.2-300-4E	T-942, T-1305, T-1400, T-1401, 205-164, 205-171, 205-172, 205-174, 205-176, 205-182, 205-183, 205-185, 205-186, 205-194		
		40	151.2-40-40-8	.118	.090	2.250	1.580	3.060	N151.2-400-4E			
		50	151.2-40-50-8	5.00	4.32	57.2	40.1	77.7	N151.2-500-4E			
					.197	.170	2.250	1.580	3.060			
	2.00	20	151.2-27-20-8	2.00	1.52	44.5	26.9	59.4	N151.2-200-5E		T-940, T-1303, T-1410, T-1411, 205-179, 205-280, 205-288, 206-108, 206-113, 206-114, 206-118, 206-123	
					.079	.060	1.750	1.060	2.340			
		25	151.2-27-25-8	2.49	2.03	44.5	26.9	59.4	N151.2-250-4E			
					.098	.080	1.750	1.060	2.340			
		30	151.2-27-30-8	3.00	2.29	44.5	26.9	59.4	N151.2-300-4E			
					.118	.090	1.750	1.060	2.340			
	40	40	151.2-27-40-8	4.00	3.30	44.5	26.9	59.4	N151.2-400-4E			
					.157	.130	1.750	1.060	2.340			
50		151.2-27-50-8	5.00	4.32	44.5	26.9	59.4	N151.2-500-4E				
				.197	.170	1.750	1.060	2.340				
5.00	50	151.2-56-50-8	5.00	4.32	79.5	56.1	112.5	N151.2-500-4E	T-946, T-1430, T-1431, 205-167, 205-169, 205-170, 205-173, 205-177, 205-178, 205-192			
	60	151.2-56-60-8	6.00	5.33	79.5	56.1	112.5	N151.2-600-4E				
1.50	30	R151.2-16-30-8	3.00	2.29	28.2	1.52	29.7	N151.2-300-4E	206-141, 206-143, 206-142, 206-144			
				.118	.090	1.110	.660	1.770				
3.00	30	151.2-36-30-8	3.00	2.29	48.3	36.6	77.7	N151.2-300-4E	206-122, 206-110, 206-119, 206-120, 206-124, 206-115, 206-116, 206-121, 206-127			
				.118	.090	1.900	1.440	3.060				

¹⁾ To correspond with seat size on insert.

Main spare parts

Seat size	Insert key ¹⁾
20-30	5680 057-021
40-60	5680 057-011


¹⁾ Optional part to be ordered separately.



B117



B2




J2

T-Max Q-Cut®


Blades for HSS holders, for parting

Spring clamp

B



151.2-4E

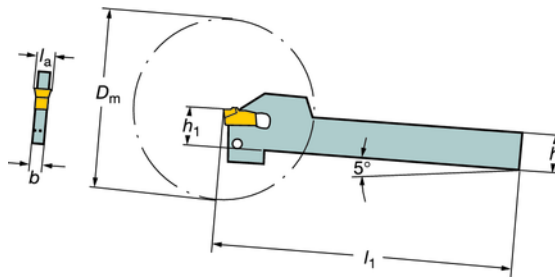

C

Main application	D_m	Seat size ¹⁾	Ordering code	Dimensions, mm, inch					Gauge inserts	HSS blade designation
				l_a	b	h	h_1	l_1		
	2.00	20	151.2-12-20-5	2.00	1.52	12.7	12.7	114	N151.2-200-5E	P2N, P2, P35, T35
				.079	.060	.500	.500	4.500		
	2.00	25	151.2-12-25-5	2.49	2.03	12.7	12.7	114	N151.2-250-4E	
				.098	.080	.500	.500	4.500		
	2.37	25	151.2-17-25-5	2.49	2.03	17.5	17.5	127	N151.2-250-4E	P3N, P3, P4, P5S, T3, T4, T5S
				.098	.080	.690	.690	5.000		
	2.37	30	151.2-17-30-5	3.00	2.29	17.5	17.5	127	N151.2-300-4E	
				.118	.090	.690	.690	5.000		
	3.00	30	151.2-22-30-5	3.00	2.29	22.4	22.4	150	N151.2-300-4E	P5X, P5N, P5, P6, T5, T6
				.118	.090	.880	.880	5.900		
4.00	30	151.2-28-30-5	3.00	2.29	28.7	28.7	150	N151.2-300-4E	P8X, P8N, P8, P9, P10, T8, T9, T10	
			.118	.090	1.130	1.130	5.900			
4.00	40	151.2-28-40-5	4.00	3.30	28.7	28.7	150	N151.2-400-4E		
			.157	.130	1.130	1.130	5.900			
4.50	60	151.2-28-60-5	6.00	5.33	28.7	28.7	179	N151.2-600-4E	P8X, P8N, P8, P9, P10, T8, T9, T10	
			.236	.210	1.130	1.130	7.000			

¹⁾ To correspond with seat size on insert.

G


Optional spare parts

Seat size	Insert key ¹⁾
20-30	5680 057-021
40-60	5680 057-011

¹⁾ Optional part to be ordered separately.

I


J




T-Max Q-Cut®

Replaceable cartridges for parting in Multi-Spindles

Spring clamp



151.2-3F 151.2-5F
151.2-5E 151.2-5G



Seat size ¹⁾	Ordering code	Dimensions, mm, inch								Gauge inserts	
		a_r	b	b_{21}	f_1	h	h_1	h_{5b}	l_1		l_{1c}
15	MS-RF151.23-13-15	13.0	10.9		11.2	18.0	22.1		55.1	18.0	N151.2-A062-15- 3F
		.510	.430		.441	.709	.870		2.170	.710	
25	MS-RF151.23-13-25	13.0	10.9		11.2	18.0	22.1		55.1	18.0	N151.2-A094-25- 3F
		.510	.430		.441	.709	.870		2.170	.710	
	MS-RF151.23-20-25	20.1	10.9		11.2	18.0	22.1		62.0	18.0	N151.2-A094-25- 3F
30	MS-RF151.23-13-30	13.0	10.7		11.2	18.0	22.1		55.1	18.0	N151.2-A125-30- 3F
		.510	.420		.441	.709	.870		2.170	.710	
	MS-RF151.23-20-30	20.0	10.8		11.2	18.0	22		62.0	18.0	N151.2-A125-30- 3F
		.787	.424		.441	.709	.866		2.441	.710	
	MS-RF151.23-26-30	25.9	10.7		11.2	18.0	22.1		68.1	18.0	N151.2-A125-30- 3F
1.020		.420		.441	.709	.870		2.680	.710		
40	MS-RF151.23-34-30	34.0	10.7	6.6	11.2	18.0	22.1	30.0	75.9	18.0	N151.2-A125-30- 3F
		1.340	.420	.260	.441	.709	.870	1.180	2.990	.710	
	MS-RF151.23-26-40	25.9	10.9		11.2	18.0	22.1		68.1	17.0	N151.2-A156-40- 3F
		1.020	.430		.441	.709	.870		2.680	.670	
	MS-RF151.23-34-40	34.0	10.9	6.6	11.2	18.0	22.1	30.0	75.9	17.0	N151.2-A156-40- 3F
		1.340	.430	.260	.441	.709	.870	1.180	2.990	.670	


¹⁾ To correspond with seat size on insert.

R = Right hand

Main spare parts

Seat size	Insert screw	Hex key (Size)
15 - 30	8 - 32 x 5/8" SHCS	SMS 875-9/64 (9/64)
40	1/4" - 20 x 5/8" SHCS	174.1-872 (3/16)

Machine adapted blocks for Acme-Gridley Multi-Spindles

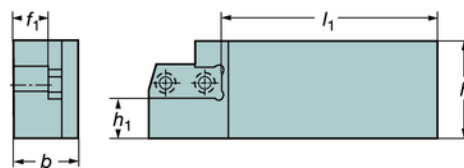

Ordering code	Dimensions, mm, inch					Comparable Acme Block Designation	
	l_1	h	h_1	b	f_1	I = In-board position Model	Machines
MS-R151.2-4225	131	42.9	8.4	25.4	7.8	AZ-71479 (I)	1-1/4" RA6
	5.150	1.690	.330	1.000	.309		
MS-R151.2-4331	165	42.9	12.1	31.8	14.2	AZ-41483, AZ-41479 (I)	1-1/4" R8, 1-5/8" RBN8 1-5/8" RB6, 2" RB6
	6.500	1.690	.480	1.250	.559		
MS-R151.2-4438	118	44.5	15.2	38.1	20.5	N/A	2" RA6, 2-1/4" RA6, 2-5/8" 2-5/8" RA6, 3" RB6, 4" RA6, 3-1/2" RA6, 3-1/2" RB6, 2-5/ 8" RA8, 2-1/4" RA8/RB8, 3-1/2" RB8
	4.650	1.750	.600	1.50	.809		

R = Right hand

Main spare parts


Block type	Blade clamping screw	Key (Torx Plus)	Nozzle
MS-R151.2	3212 106-503	5680 043-16 (27IP)	5691 028-01



B117



B2



B6


T-Max Q-Cut®

Replaceable cartridges


For parting in Multi-Spindle cartridges for Davenport blocks

Spring clamp

B



151.2-3F 151.2-5F
151.2-5E 151.2-5G



C


Seat size ¹⁾	Ordering code	Dimensions, mm, inch								Gauge inserts
		a_r	b	f_1	h	h_1	h_{sb}	l_1	l_2	
15	MS-R151.20-13-15	15.0	6.1	1.5	16.5	6.6	15.0	24.4	46.48	N151.2-A062-15- 3F
		.590	.240	.058	.650	.260	.590	.960	1.830	
25	MS-R151.20-13-25	15.0	6.1	2.3	16.5	6.6	15.0	24.4	46.48	N151.2-A094-25- 3F
		.590	.240	.090	.650	.260	.590	.960	1.830	
30	MS-R151.20-13-30	15.0	6.1	3.1	16.5	6.6	15.0	24.4	46.48	N151.2-A125-30- 3F
		.590	.240	.121	.650	.260	.590	.960	1.830	

¹⁾ To correspond with seat size on insert.

R = Right hand

G

Adapter plate for Davenport blocks

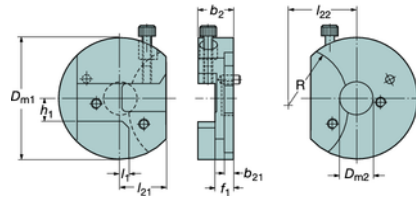

Ordering code	Dimensions, inch									
	b_2	b_{21}	D_{m1}	D_{m2}	f_1	l_1	l_{21}	l_{22}	r	h_1
MSLDAV-5014	14.2	3.3	50.8	14.2	7.0	4.0	19.05	28.5	25.4	9.7
	.560	.130	2.000	.560	.276	.157	.750	1.122	1.000	.383

H

Main spare parts

Screw	Key (Torx Plus)
3212 036-403	5680 043-15 (25IP)

Operational dimensions after assembling

Plate with blade

f_1 total = f_1 blade + f_1 plate
 h_1 total = h_1 blade - h_1 plate
 (neg h_1 total = below vertical center line)
 l_1 total = l_1 blade + l_1 plate

J



B117




B2



B6

T-Max Q-Cut® (Type 151.3)

Internal grooving

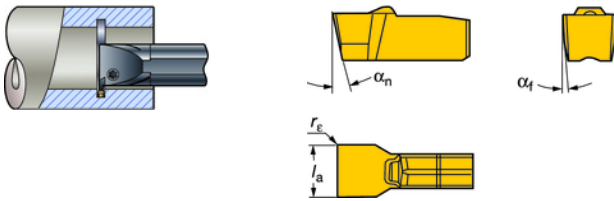

Tolerances, mm (inch):

$l_a = \pm 0.10 (\pm .004)$

$r_e = \pm 0.05 (\pm .002)$

For circlip grooves (151.3-A-46)

$l_a = +0.13 (+.005)$ $l_a = \pm 0.02 (\pm .0008)$

$+0.09 (+.0035)$

$r_e = \pm 0.05 (\pm .002)$ $r_e = \pm 0.05 (\pm .0020)$

These inserts can only be used in 151.3x holders.


	Selection criteria, millimeter, inch (mm, in.)					Ordering code	Dimensions		P				M			K	N	S		
	l_a mm	l_a in.	r_e mm	r_e in.	Seat size ¹⁾		α_n	α_f	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC
									1125	1145	2135	235	1125	1145	2135	235	HT3A	1125	HT3A	1125
151.3-4G	1.98	.078	0.18	.007	20	N151.3-A078-20-4G	11°	3°												
	2.00	.079	0.20	.008		N151.3-200-20-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	2.23	.088	0.18	.007		N151.3-A088-20-4G	11°	3°												
	2.39	.094	0.18	.007	25	N151.3-A094-25-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	2.46	.097	0.33	.013		N151.3-A097-25-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	2.67	.105	0.18	.007		N151.3-A105-25-4G	11°	3°												
	2.79	.110	0.33	.013		N151.3-A110-25-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	3.00	.118	0.20	.008	30	N151.3-300-30-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	3.10	.122	0.18	.007		N151.3-A122-30-4G	11°	3°												
	3.17	.125	0.18	.007		N151.3-A125-30-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	3.61	.142	0.33	.013		N151.3-A142-30-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	3.96	.156	0.18	.007	40	N151.3-A156-40-4G	11°	3°												
	4.00	.157	0.20	.008		N151.3-400-40-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	4.52	.178	0.18	.007		N151.3-A178-40-4G	11°	3°												
	4.70	.185	0.56	.022		N151.3-A185-40-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	4.80	.189	0.56	.022		N151.3-A189-40-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	5.00	.197	0.20	.008	50	N151.3-500-50-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	5.41	.213	0.18	.007		N151.3-A213-50-4G	11°	3°												
	5.56	.219	0.56	.022		N151.3-A219-50-4G	11°	3°												
	6.00	.236	0.20	.008	60	N151.3-600-60-4G	9°	3°	★											
6.35	.250	0.56	.022		N151.3-A250-60-4G	9°	3°													
7.93	.312	0.84	.033		N151.3-A312-60-4G	9°	3°													
8.00	.315	0.20	.008		N151.3-800-60-4G	9°	3°													
For circlip grooves																				
1.85	.073	0.10	.004	20	N151.3-185-20-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
2.15	.085	0.15	.006		N151.3-215-20-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
2.65	.104	0.15	.006	25	N151.3-265-25-4G	11°	3°													
3.15	.124	0.15	.006	30	N151.3-315-30-4G	11°	3°													
4.15	.163	0.15	.006	40	N151.3-415-40-4G	11°	3°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
5.15	.203	0.15	.006	50	N151.3-515-50-4G	11°	3°													

¹⁾ To correspond with seat size on holder.

N = Neutral

★ = First choice


For geometry description, see page B124.



T-Max Q-Cut® (Type 151.3)

Face grooving, internal grooving and turning

B

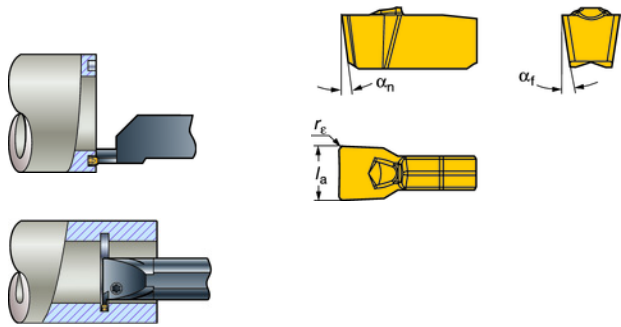

Tolerances, mm (inch):
 $l_a = +0.10/0 (+.004/0)$
 $r_e = \pm 0.10 (\pm .004)$

These inserts can only be used in 151.3x holders.

C

	Selection criteria, millimeter, inch (mm, in.)	Seat size ¹⁾	Ordering code	Dimensions		P				M			K		N		S		
				α_n	α_f	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	
						1125	1145	2135	235	3020	1125	1145	2135	235	1125	3020	1125	1125	1125
Low feed 	l_a mm l_a in. r_e mm r_e in.	25	N151.3-300-25-7G	11°	9°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
	l_a mm l_a in. r_e mm r_e in.	30	N151.3-400-30-7G	11°	8.5°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
	l_a mm l_a in. r_e mm r_e in.	40	N151.3-500-40-7G	11°	8.5°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
	l_a mm l_a in. r_e mm r_e in.	50	N151.3-600-50-7G	11°	8.5°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
						P30	P45	P35	P45	P15	M25	M40	M30	M35	K30	K15	N25	S25	S30


¹⁾ To correspond with seat size on holder.

N = Neutral

★ = First choice

Internal profiling and face grooving

H

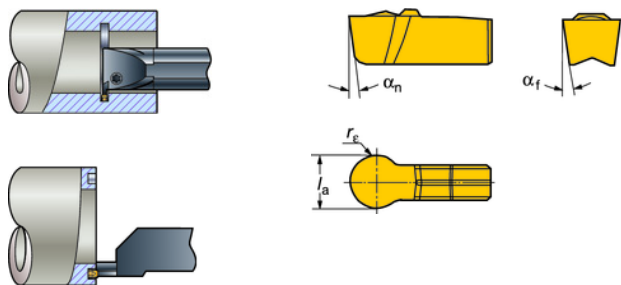

Tolerances, mm (inch):
 $l_a = \pm 0.05 (\pm .002)$

These inserts can only be used in 151.3x holders.

I

	Selection criteria, millimeter, inch (mm, in.)	Seat size ¹⁾	Ordering code	Dimensions		P				M			K		N		S	
				α_n	α_f	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC	GC
						1125	2135	3115	4225	1125	2135	1125	3115	4225	1125	1125	1125	2135
Low feed 	l_a mm l_a in. r_e mm r_e in.	25	N151.3-300-25-7P	11°	9°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	l_a mm l_a in. r_e mm r_e in.	30	N151.3-400-30-7P	11°	8.5°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	l_a mm l_a in. r_e mm r_e in.	40	N151.3-500-40-7P	11°	8.5°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	l_a mm l_a in. r_e mm r_e in.	50	N151.3-600-50-7P	11°	8.5°	★	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
						P30	P35	P15	P20	M25	M30	K30	K15	K25	N25	S25	S30	


¹⁾ To correspond with seat size on holder.

N = Neutral

★ = First choice

For geometry description, see page B124.

J



T-Max Q-Cut® (Type 151.3)

Shank tools for face grooving


Screw clamp




151.3

The 151.37 holder can only accept the 151.3 inserts


Reinforced
Shank, 0° style
R/LF 151.37



Shank, 0° style
R/LF 151.37



Shank, 90° style
R/LG 151.37



Right hand style shown

Metric version

Main application	First cut diameter, mm		a _r max mm ¹⁾	a _{r2}	Shank style	Seat size ²⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ³⁾	
	min	max						b	f ₁	f ₂₁	h	h ₁	l ₁			l ₃
	24	35	8.7	15	0° ⁴⁾	25	R/LF151.37-2525-024B25	25	26	4.8	25	25	150	37.7	N151.3-300-25- 7G	3.2
	29	40	8.7	15	0° ⁴⁾		R/LF151.37-2525-029B25	25	26	4.8	25	25	150	37.7	N151.3-300-25- 7G	3.2
	34	50	8.7	15	0° ⁴⁾		R/LF151.37-2525-034B25	25	26	4.8	25	25	150	37.7	N151.3-300-25- 7G	3.2
	44	70	15		0°		R/LF151.37-2525-044B25	25	26		25	25	150	37.7	N151.3-300-25- 7G	3.2
	64	100	15		0°		R/LF151.37-2525-064B25	25	26		25	25	150	37.7	N151.3-300-25- 7G	3.2
	27	45	8.7	20	0° ⁴⁾	30	R/LF151.37-2525-027B30	25	26	5.8	25	25	150	44.7	N151.3-400-30- 7G	3.3
	32	50	8.7	20	0° ⁴⁾		R/LF151.37-2525-032B30	25	26	5.8	25	25	150	44.7	N151.3-400-30- 7G	3.3
	42	70	20		0°		R/LF151.37-2525-042B30	25	26		25	25	150	44.7	N151.3-400-30- 7G	3.3
	62	120	20		0°		R/LF151.37-2525-062B30	25	26		25	25	150	44.7	N151.3-400-30- 7G	3.3
	112	200	20		0°		R/LF151.37-2525-112B30	25	26		25	25	150	44.7	N151.3-400-30- 7G	3.3
	25	45	10.7	20	0° ⁴⁾	40	R/LF151.37-2525-025B40	25	26	6.8	25	25	150	45.7	N151.3-500-40- 7G	3.4
	30	55	10.7	20	0° ⁴⁾		R/LF151.37-2525-030B40	25	26	6.8	25	25	150	45.7	N151.3-500-40- 7G	3.4
	45	80	20		0°		R/LF151.37-2525-045B40	25	26		25	25	150	45.7	N151.3-500-40- 7G	3.4
	70	120	20		0°		R/LF151.37-2525-070B40	25	26		25	25	150	45.7	N151.3-500-40- 7G	3.4
	90	200	20		0°		R/LF151.37-2525-090B40	25	26		25	25	150	45.7	N151.3-500-40- 7G	3.4
	23	45	10.7	20	0° ⁴⁾	50	R/LF151.37-2525-023B50	25	26	7.8	25	25	150	46.7	N151.3-600-50- 7G	3.8
	38	70	20		0°		R/LF151.37-2525-038B50	25	26		25	25	150	46.7	N151.3-600-50- 7G	3.8
	58	110	20		0°		R/LF151.37-2525-058B50	25	26		25	25	150	46.7	N151.3-600-50- 7G	3.8
	88	200	20		0°		R/LF151.37-2525-088B50	25	26		25	25	150	46.7	N151.3-600-50- 7G	3.8
		27	45	8.7	20	90° ⁴⁾	30	R/LG151.37-2525-027B30	25	47	5.8	25	25	150	26	N151.3-400-30- 7G
32		50	20		90°		R/LG151.37-2525-032B30	25	47		25	25	150	26	N151.3-400-30- 7G	3.0
42		70	20		90°		R/LG151.37-2525-042B30	25	47		25	25	150	26	N151.3-400-30- 7G	3.0
23		45	10.7	20	90° ⁴⁾	50	R/LG151.37-2525-023B50	25	47	5.8	25	25	150	30.2	N151.3-600-50- 7G	3.0
38		76	20		90°		R/LG151.37-2525-038B50	25	47		25	25	150	30.2	N151.3-600-50- 7G	3.5

¹⁾ For max stability choose a holder with shortest possible a_r.

²⁾ To correspond with seat size on insert.

³⁾ Insert tightening torque Nm. Use torque wrench, see page B109.



⁴⁾ Reinforced blade.

R = Right hand, L = Left hand

Main spare parts

Seat size	Screw	Key (Torx Plus)
25-50	3212 012-360	5680 043-17 (30IP)

First cut diameters

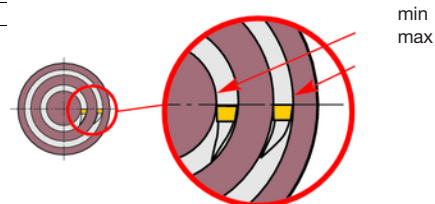

B6



B118



G6



B2



J3



J2

T-Max Q-Cut® (Type 151.3)

Shank tools for face grooving


Screw clamp




151.3

The 151.37 holder can only accept the 151.3 inserts


Reinforced
Shank style 0°
R/LF 151.37



Shank style 0°
R/LF 151.37



Shank style 90°
R/LG 151.37



Right hand style shown

Inch version

Main application	First cut diameter, inch		a_r max mm ¹⁾		Shank style	Seat size ²⁾	Ordering code	Dimensions, inch							Gauge inserts	ft-lbs ³⁾
	min	max	a_r	a_{r2}				b	f_1	f_{21}	h	h_1	l_1	l_3		
	.945	1.378	.343	.590	0° ⁴⁾	25	R/LF151.37-16-024B25	1.000	1.039	.189	1.000	1.000	6.000	1.484	N151.3-300-25-7G	2.4
	1.142	1.575	.343	.590	0° ⁴⁾		R/LF151.37-16-029B25	1.000	1.039	.189	1.000	1.000	6.000	1.484	N151.3-300-25-7G	2.4
	1.339	1.969	.343	.590	0° ⁴⁾		R/LF151.37-16-034B25	1.000	1.039	.189	1.000	1.000	6.000	1.484	N151.3-300-25-7G	2.4
	1.732	2.756	.591		0°		R/LF151.37-16-044B25	1.000	1.039		1.000	1.000	6.000	1.484	N151.3-300-25-7G	2.4
	2.520	3.937	.591		0°		R/LF151.37-16-064B25	1.000	1.039		1.000	1.000	6.000	1.484	N151.3-300-25-7G	2.4
	3.701	5.197	.591		0°		R/LF151.37-16-094B25	1.000	1.039		1.000	1.000	6.000	1.484	N151.3-300-25-7G	2.4
	5.197	7.874	.591		0°		R/LF151.37-16-132B25	1.000	1.039		1.000	1.000	6.000	1.484	N151.3-300-25-7G	2.4
	1.083	1.772	.343	.790	0° ⁴⁾	30	R/LF151.37-16-027B30	1.000	1.039	.228	1.000	1.000	6.000	1.760	N151.3-400-30-7G	2.5
	1.260	1.969	.343	.790	0° ⁴⁾		RF151.37-16-032B30	1.000	1.039	.228	1.000	1.000	6.000	1.760	N151.3-400-30-7G	2.5
	1.654	2.758	.787		0°		R/LF151.37-16-042B30	1.000	1.039		1.000	1.000	6.000	1.760	N151.3-400-30-7G	2.4
2.441	4.724	.787		0°		R/LF151.37-16-062B30	1.000	1.039		1.000	1.000	6.000	1.760	N151.3-400-30-7G	2.4	
4.409	7.874	.787		0°		R/LF151.37-16-112B30	1.000	1.039		1.000	1.000	6.000	1.760	N151.3-400-30-7G	2.4	
.984	1.772	.422	.790	0° ⁴⁾	40	R/LF151.37-16-025B40	1.000	1.039	.268	1.000	1.000	6.000	1.800	N151.3-500-40-7G	2.5	
1.181	2.165	.422	.790	0° ⁴⁾		RF151.37-16-030B40	1.000	1.039	.268	1.000	1.000	6.000	1.800	N151.3-500-40-7G	2.5	
1.772	3.15	.787		0°		R/LF151.37-16-045B40	1.000	1.039		1.000	1.000	6.000	1.800	N151.3-500-40-7G	2.5	
2.758	4.724	.787		0°		R/LF151.37-16-070B40	1.000	1.039		1.000	1.000	6.000	1.800	N151.3-500-40-7G	2.5	
3.543	7.874	.787		0°		R/LF151.37-16-090B40	1.000	1.039		1.000	1.000	6.000	1.800	N151.3-500-40-7G	2.5	
.906	1.772	.422	.790	0° ⁴⁾	50	R/LF151.37-16-023B50	1.000	1.039	.307	1.000	1.000	6.000	1.840	N151.3-600-50-7G	2.8	
1.496	2.756	.787		0°		RF151.37-16-038B50	1.000	1.039		1.000	1.000	6.000	1.840	N151.3-600-50-7G	2.8	
2.283	4.331	.787		0°		R/LF151.37-16-058B50	1.000	1.039		1.000	1.000	6.000	1.840	N151.3-600-50-7G	2.8	
3.150	7.874	.787		0°		R/LF151.37-16-088B50	1.000	1.039		1.000	1.000	6.000	1.840	N151.3-600-50-7G	2.8	
1.063	1.772	.340	.790	90° ⁴⁾	30	R/LG151.37-16-027B30	1.000	1.850	.228	1.000	1.000	6.000	1.024	N151.3-400-30-7G	2.2	
1.260	1.968	.790		90°		R/LG151.37-16-032B30	1.000	1.850		1.000	1.000	6.000	1.024	N151.3-400-30-7G	2.2	
1.654	2.755	.790		90°		R/LG151.37-16-042B30	1.000	1.850		1.000	1.000	6.000	1.024	N151.3-400-30-7G	2.2	
.906	1.771	.422	.790	90° ⁴⁾	50	R/LG151.37-16-023B50	1.000	1.850	.228	1.000	1.000	6.000	1.189	N151.3-600-50-7G	2.2	
1.496	2.755	.790		90°		R/LG151.37-16-038B50	1.000	1.850		1.000	1.000	6.000	1.189	N151.3-600-50-7G	2.6	


- 1) For max stability choose a holder with shortest possible a_r .
- 2) To correspond with seat size on insert.
- 3) Insert tightening torque ft-lbs. Use torque wrench, see page B109.
- 4) Reinforced blade.

R = Right hand, L = Left hand

Main spare parts

Seat size	Screw	Key (Torx Plus)
25-50	3212 012-360	5680 043-17 (30IP)

First cut diameters

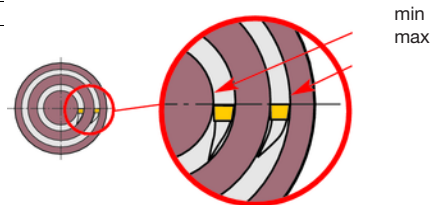

T-Max Q-Cut® (Type 151.3)


Boring bars for grooving, turning and profiling

Screw clamp



R/LAG151.32

Cylindrical, eccentric
With groove for EasyFix sleeve



The AG 151.32 tools can only accept the 151.3 inserts.

Max overhang $3 \times d_{m_m}$

All with internal coolant supply

Right hand style shown

Metric version

Main application				Ordering code	Dimensions, mm					Gauge inserts	Nm ²⁾
	D_m min	a_r max	Seat size ¹⁾		d_{m_m}	f_1	l_1	l_3	d_{ch}		
	12	2	20	R/LAG151.32-16M12-20	16	10	150	20	6	N151.3-200-20- 4G	2.5
	15	4	25	R/LAG151.32-16M15-25	16	12	150	20	6	N151.3-265-25- 4G	2.5
	16	4.5	30	R/LAG151.32-20Q16-30	20	14.25	180	21.5	6	N151.3-300-30- 4G	2.5
	18	5	40	R/LAG151.32-20Q18-40	20	14.75	180	23	6	N151.3-400-40- 4G	3.5

Inch version

Main application				Ordering code	Dimensions, inch					Gauge inserts	ft-lbs ³⁾
	D_m min	a_r max	Seat size ¹⁾		d_{m_m}	f_1	l_1	l_3	d_{ch}		
	.472	.079	20	R/LAG151.32-D10M47-20	.625	.394	5.906	.787	.236	N151.3-200-20- 4G	1.8
	.591	.157	25	R/LAG151.32-D10M59-25	.625	.472	5.906	.787	.236	N151.3-265-25- 4G	1.8
	.591	.157	30	R/LAG151.32-D12-M59-25	.750	.453	6.000	1.400	.236	N151.3-265-25- 4G	1.6
	.630	.187	30	R/LAG151.32-D12Q63-30	.750	.551	7.087	.846	.236	N151.3-300-30- 4G	1.8
	.709	.207	40	R/LAG151.32-D12Q71-40	.750	.571	7.087	.906	.236	N151.3-400-40- 4G	2.2

¹⁾ To correspond with seat size on insert.

²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

R = Right hand, L = Left hand

For coolant connector, see page A324.

Main spare parts

	Seat size	Screw	Key (Torx Plus)
R/LAG151.32	20	5512 031-07	5680 043-10 (8IP)
R/LAG151.32	25-30	5512 031-04	5680 043-10 (8IP)
R/LAG151.32	40	5512 031-03	5680 043-10 (8IP)



B6




B120



G6



B2



A320



J2

T-Max Q-Cut® (Type 151.3)

Boring bars for grooving, turning and profiling

Screw clamp


B



R/LAG151.32

Cylindrical with groove for EasyFix sleeve


$dm_m = 16-25$ mm



R/LAG151.32

Cylindrical with flats

$dm_m = 32-50$ mm (.625-1.500 inch)



The AG 151.32 tools can only accept the 151.3 inserts.

Max overhang $3 \times dm_m$

All with internal coolant supply

Right hand style shown

C

Metric version

			Dimensions, mm											
D_m min	a_r max	Seat size ¹⁾	Ordering code	dm_m	f_1	h	h_1	l_1	l_3	d_{ch}	Gauge inserts	Nm ²⁾		
20	3.5	20	R/LAG151.32-16M-20	16	11.5			150	24	6	N151.3-200-20- 4G	2.5		
25	4.5		R/LAG151.32-20Q-20	20	14.5			180	30	6	N151.3-200-20- 4G	2.5		
20	3.5	25	R/LAG151.32-16M-25	16	11.6			150	24.2	6	N151.3-265-25- 4G	3.0		
25	4.6		R/LAG151.32-20Q-25	20	14.6			180	30	6	N151.3-265-25- 4G	3.0		
32	6.1		R/LAG151.32-25R-25	25	18.6			200	32.2	8.5	N151.3-265-25- 4G	3.0		
40	7.1		R/LAG151.32-32S-25	32	23.1	30	15	250	36.3	8.5	N151.3-265-25- 4G	3.0		
25	4.5	30	R/LAG151.32-20Q-30	20	14.5			180	30	6	N151.3-300-30- 4G	3.5		
32	6		R/LAG151.32-25R-30	25	18.5			200	32.2	8.5	N151.3-300-30- 4G	3.5		
40	7		R/LAG151.32-32S-30	32	23	30	15	250	36.2	8.5	N151.3-300-30- 4G	3.5		
32	6.1	40	R/LAG151.32-25R-40	25	18.5			200	32.2	8.5	N151.3-400-40- 4G	4.5		
40	7.1		R/LAG151.32-32S-40	32	23.1	30	15	250	36.3	8.5	N151.3-400-40- 4G	4.5		
50	8.1		R/LAG151.32-40T-40	40	28.1	37	18.5	300	42.3	11.5	N151.3-400-40- 4G	4.5		
40	7	50	R/LAG151.32-32S-50	32	23	30	15	250	36.2	8.5	N151.3-500-50- 4G	5.0		
50	8		R/LAG151.32-40T-50	40	28	37	18.5	300	42.3	11.5	N151.3-500-50- 4G	5.0		
50	8	60	R/LAG151.32-40T-60	40	28	37	18.5	300	43.3	11.5	N151.3-800-60- 4G	5.0		

G

Inch version

			Dimensions, inch											
D_m min	a_r max	Seat size ¹⁾	Ordering code	dm_m	f_1	h	h_1	l_1	l_3	d_{ch}	Gauge inserts	ft-lbs ³⁾		
.790	.138	20	R/LAG151.32-D10-20	.625	.453	.560	.280	6.000	.950	.240	N151.3-200-20- 4G	1.4		
.980	.177		R/LAG151.32-D12-20	.750	.571	.710	.350	7.000	1.180	.240	N151.3-200-20- 4G	1.4		
.790	.138	25	R/LAG151.32-D10-25	.625	.457	.560	.280	6.000	.950	.240	N151.3-265-25- 4G	1.6		
.980	.181		R/LAG151.32-D12-25	.750	.575	.710	.350	7.000	1.180	.240	N151.3-265-25- 4G	1.6		
1.260	.240		R/LAG151.32-D16-25	1.000	.732	.910	.450	8.000	1.270	.350	N151.3-265-25- 4G	1.6		
1.580	.280		R/LAG151.32-D20-25	1.250	.909	1.180	.590	10.000	1.430	.350	N151.3-265-25- 4G	1.6		
.980	.177	30	R/LAG151.32-D12-30	.750	.571	.710	.350	7.000	1.180	.240	N151.3-300-30- 4G	1.9		
1.260	.236		R/LAG151.32-D16-30	1.000	.728	.910	.450	8.000	1.270	.350	N151.3-300-30- 4G	1.9		
1.580	.276		RAG151.32-D20-30	1.250	.906	1.180	.590	10.000	1.430	.350	N151.3-300-30- 4G	1.9		
1.260	.240	40	RAG151.32-D16-40	1.000	.734	.910	.450	8.000	1.270	.350	N151.3-400-40- 4G	2.4		
1.580	.281		R/LAG151.32-D20-40	1.250	.911	1.180	.590	10.000	1.430	.350	N151.3-400-40- 4G	2.4		
1.970	.319		R/LAG151.32-D24-40	1.500	1.106	1.460	.730	12.000	1.530	.470	N151.3-400-40- 4G	2.4		
1.580	.276	50	RAG151.32-D20-50	1.250	.906	1.180	.590	10.000	1.430	.350	N151.3-500-50- 4G	2.7		
1.970	.315		LAG151.32-D24-50	1.500	1.102	1.460	.730	12.000	1.530	.470	N151.3-500-50- 4G	2.7		
1.970	.315	60	RAG151.32-D24-60	1.500	1.102	1.460	.730	12.000	1.550	.470	N151.3-800-60- 4G	2.7		

¹⁾ To correspond with seat size on insert.

R = Right hand, L = Left hand

²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

For coolant connector, see page A324.

Main spare parts

Metric	Inch	Seat size	Screw	Key (Torx Plus)
R/LAG 151.32	R/LAG 151.32	20-30	5512 031-03	5680 043-13 (8IP)
R/LAG 151.32-25R	R/LAG 151.32-D16-40	40	5512 031-03	5680 043-13 (8IP)
R/LAG 151.32	R/LAG 151.32	40-60	3212 012-360	5680 043-17 (30IP)

J



T-Max Q-Cut® (Type 151.3)

Boring bars for face grooving

Screw clamp




The 151.37 bar can only accept the 151.3 inserts

Max overhang $3 \times dm_m$


All with internal coolant supply

Metric version

Cylindrical with flats
Shank, 0° style



First cut diameters



min.

max.

Right hand style shown

Main application	First cut diameter, mm		D_m		Seat size ¹⁾	Ordering code	Dimensions, mm					Gauge inserts	Nm ²⁾
	min	max	min	max			dm_m	f_1	h	l_1	l_3		
	18	101	26	5.3	25	R/LAF151.37-25-024A25	25	12.75	23	200	31.4	N151.3-300-25-7G	3.0
	16	101	26	5.3	30	R/LAF151.37-25-024A30	25	12.75	23	200	31.4	N151.3-400-30-7G	3.0
	16	55	26	12		R/LAF151.37-25-025A30	25	12.75	23	200	31.4	N151.3-400-30-7G	3.5
	23	400	42	6.3	50	R/LAF151.37-40-035A50 ³⁾	40	20.8	37	300	50	N151.3-600-50-7G	5.0
	23	80	42	15		R/LAF151.37-40-036A50 ³⁾	40	20.8	37	300	50	N151.3-600-50-7G	5.0

¹⁾ To correspond with seat size on insert.

²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.


³⁾ When using insert N151.3-500-40-7G first cut diameter, D_m min and f_1 dimensions will be changed.

R = Right hand, L = Left hand

For coolant connector, see page A324.

Main spare parts

Seat size	Screw	Key (Torx Plus)
25-30	3212 012-257	5680 043-14 (20IP)
50	3212 012-359	5680 043-17 (30IP)



B6




B120



G6



B2



A320




J2

CoroThread® 254 for circlip grooving

For circlip grooving and machining in shallow grooves

CoroThread® for circlip grooving



	\triangle	<i>iC</i>	<i>d</i> ₁ mm	<i>d</i> ₁ in.	<i>s</i> mm	<i>s</i> in.
16	3/8	4.39	.173	3.96	.156	
22	1/2	5.51	.217	5.56	.219	

Tolerances, mm (inch):
*l*_a = + 0.13 / + 0.05
 (+ .005 / + .002)
s = ± 0.13
 (±.005)

Note!


The right hand insert can be used in right hand external and left hand internal holders, and the left hand insert in left hand external and right hand internal holders.

To be used with CoroThread toolholders with shim giving 0° inclination angle.

Right hand style shown.


Selection criteria, millimeter, inch (mm, in.)									Dimensions, millimeter, inch (mm, in.)				P	M	K	N	S	
	<i>l</i> _a mm	<i>l</i> _a in.	<i>r</i> _c mm	<i>r</i> _c in.	<i>a</i> _r max mm	<i>a</i> _r max in.	\triangle	<i>iC</i>	Ordering code	x mm	x in.	z mm	z in.	gc	gc	gc	gc	gc
	1.10	.043	.080	.003	1.30	.051	16	3/8	254R/LG-16CC01-110	1.35	.053	0.05	.002	1135	1135	1135	1135	1135
	1.30	.051	.080	.003	1.60	.063			254R/LG-16CC01-130	1.35	.053	0.05	.002	★	★	★	★	★
	1.60	.063	.080	.003	1.85	.073			254R/LG-16CC01-160	1.35	.053	0.05	.002	★	★	★	★	★
	1.85	.073	.080	.003	1.85	.073			254R/LG-16CC01-185	1.35	.053	0.05	.002	★	★	★	★	★
	2.15	.085	.080	.003	1.85	.073			254R/LG-16CC01-215	1.35	.053	0.05	.002	★	★	★	★	★
	2.65	.104	.150	.006	2.20	.087	22	1/2	254R/LG-22CC01-265	1.70	.067	0.05	.002	★	★	★	★	★
	3.15	.124	.150	.006	2.20	.087			254R/LG-22CC01-315	1.70	.067	0.05	.002	★	★	★	★	★
	4.15	.163	.150	.006	2.60	.102			254R/LG-22CC01-415	1.30	.051	0.05	.002	★	★	★	★	★
														P25	M25	K20	N25	S25

R = Right hand, L = Left hand



T-Max® ceramic

For grooving and profiling of Heat Resistant Super Alloys and hardened materials

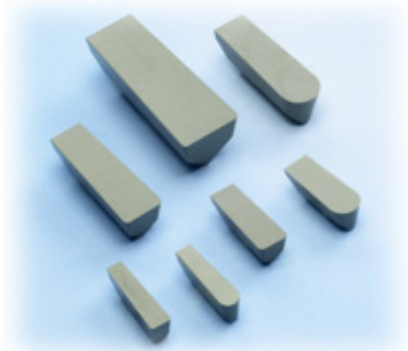

- Sharp cutting edges giving high quality grooves
- For both external and internal machining
- Grooving widths from 3.17 mm to 9.52 mm (.125 to .372 inch)
- Bores down to 63.5 mm (2.500 inch)

Ceramic grade CC670

- A silicon carbide "whisker" reinforced grade

Ceramic grooving and profiling inserts

Tolerances, mm (inch):


$s = +0/0.13 (+0/.005)$

$r_e = \pm 0.10 (\pm 0.004)$


$l_1 = \pm 0.03 (\pm 0.001)$

$l_a = \pm 0.03 (\pm 0.001)$

Grooving



Profiling




Profiling

	Selection criteria, millimeter, inch (mm, in.)					ISO	Dimensions, millimeter, inch (mm, in.)						S	H			
	l_a mm	l_a in.	r_e mm	r_e in.	Seat size ¹⁾		l_1 mm	l_1 in.	s mm	s in.	b_n mm	b_n in.	γ_n	α_f	CC	CC	
															670	670	
	3.17	.125	1.59	.063	1	150.23 0317 16E	12.70	.500	4.74	.187			6°	☆	☆	ANSI	
	3.17	.125	1.59	.063		150.23 0317 16T01020	12.70	.500	4.74	.187	0.10	.004	20°	☆	☆	CSG-4125T0320	
	4.75	.187	2.38	.094	2	150.23 0476 24E	12.70	.500	4.74	.187			11°	☆	☆	CSG-4187-A	
	4.75	.187	2.38	.094		150.23 0476 24T01020	12.70	.500	4.74	.187	0.10	.004	20°	☆	☆	CSG-4187-T0320	
	6.35	.250	3.17	.125	3	150.23 0635 32E	19.05	.750	6.35	.250				20°	☆	☆	CSG-6250-A
	6.35	.250	3.17	.125		150.23 0635 32T01020	19.05	.750	6.35	.250	0.10	.004	20°	☆	☆	CSG-6250-T0320	
														S10	H10		

Grooving

	Selection criteria, millimeter, inch (mm, in.)					ISO	Dimensions, millimeter, inch (mm, in.)						S	H			
	l_a mm	l_a in.	r_e mm	r_e in.	Seat size ¹⁾		l_1 mm	l_1 in.	s mm	s in.	b_n mm	b_n in.	γ_n	α_f	CC	CC	
															670	670	
	3.17	.125	0.38	.015	1	150.23 0317 04E	12.70	.500	4.74	.187			6°	☆	☆	ANSI	
	3.17	.125	0.38	.015		150.23 0317 04T01020	12.70	.500	4.74	.187	0.10	.004	20°	☆	☆	CSG-4125-1T0320	
	4.75	.187	0.79	.031	2	150.23 0476 08E	12.70	.500	4.74	.187			11°	☆	☆	CSG-4187-2A	
	4.75	.187	0.79	.031		150.23 0476 08T01020	12.70	.500	4.74	.187	0.10	.004	20°	☆	☆	CSG-4187-2T0320	
	6.35	.250	0.79	.031	3	150.23 0635 08E	19.05	.750	6.35	.250				20°	☆	☆	CSG-6250-2A
	6.35	.250	0.79	.031		150.23 0635 08T01020	19.05	.750	6.35	.250	0.10	.004	20°	☆	☆	CSG-6250-2T0320	
	7.93	.312	0.79	.031	4	150.23 0794 08E	25.40	1.000	8.56	.337				20°	☆	☆	CSG-8312-2A
	7.93	.312	0.79	.031		150.23 0794 08T01020	25.40	1.000	8.56	.337	0.10	.004	20°	☆	☆	CSG-8312-2T0320	
	9.52	.375	0.79	.031	4	150.23 0952 08E	25.40	1.000	8.56	.337				20°	☆	☆	CSG-8375-2A
	9.52	.375	0.79	.031		150.23 0952 08T01020	25.40	1.000	8.56	.337	0.10	.004	20°	☆	☆	CSG-8375-2T0320	
															S10	H10	


¹⁾ To correspond with seat size on holder.



Shank tools for ceramic grooving and profiling inserts

Screw clamp

B

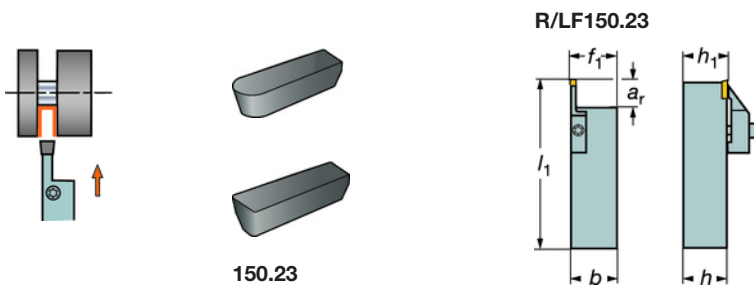

150.23

R/LF150.23

Right hand style

C

a _r max	Seat size ¹⁾	Ordering code	Dimensions, mm, inch					Gauge inserts	Nm ²⁾
			b	f ₁	h	h ₁	l ₁		
19	1	R/LF150.23-3244M-0317C	44	44.2	32	32	150	150.23-0317	3.5
			1.732	1.740	1.260	1.260	5.906		
19	2	R/LF150.23-3244M-0476C	44	44.4	32	32	150	150.23-0476	4.5
			1.732	1.748	1.260	1.260	5.906		
29	3	R/LF150.23-3244M-0635C	44	44.6	32	32	150	150.23-0635	5.0
			1.732	1.756	1.260	1.260	5.906		
38	4	R/LF150.23-3244M-0952C	44	45	32	32	150	150.23-0952	5.0
			1.732	1.772	1.260	1.260	5.906		

¹⁾ To correspond with seat size on insert.


²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

R = Right hand, L = Left hand

G

Boring bars for ceramic grooving and profiling inserts

Screw clamp

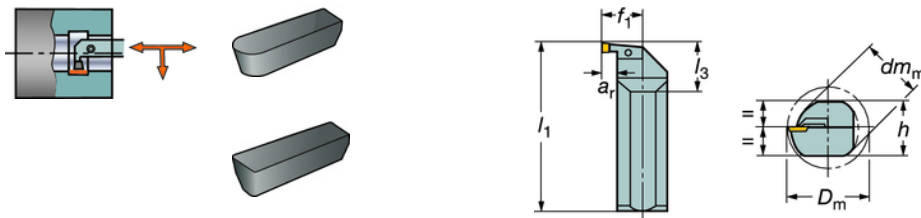

150.23

R/LAG150.23

Cylindrical with flats

Right hand style

H

Metric version

D _m min	a _r max	Seat size ¹⁾	Ordering code	Dimensions, mm, inch					Gauge inserts	Nm ²⁾	
				dm _m	f ₁	h	h ₁	l ₁			l ₃
63.5	10	2	R/LAG150.23-50V-0476C	50	35	47	23.5	400	55	150.23-0476	4.5
				1.968	1.378	1.850	.925	15.748	2.165		

¹⁾ To correspond with seat size on insert.

²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

R = Right hand, L = Left hand

I

Main spare parts

Shank tool	Screw	Key (Torx Plus)
R/LF 150.23	3212 036-506	5680 043-17 (30IP)
R/LAG 150.23	3212 106-504	5680 043-16 (27IP)


J



CoroCut® XS

For external Small Part Machining


For external parting off, grooving, threading and turning of small diameters

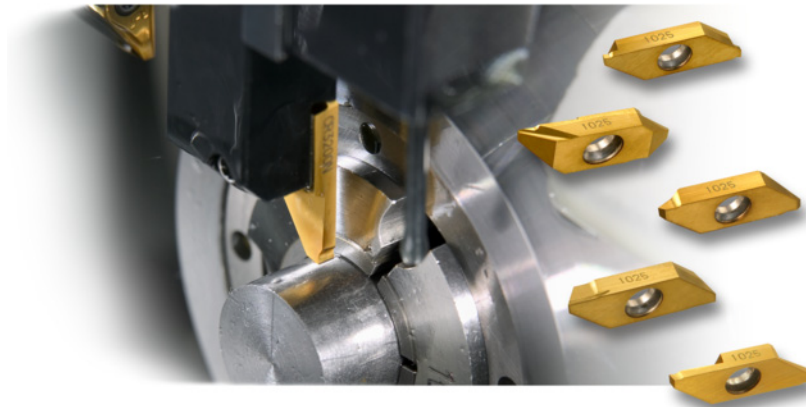


Tool holders

All inserts fit into the same tool holder

Also available as SL-cutting head, see page I52

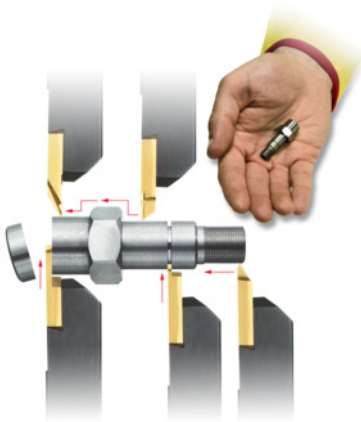

High precision square shank holders including dedicated holders for parting off close to sub spindle are available.




ISO application areas:



CoroCut® XS

- Designed for sliding head machines, workpiece 1 mm (.039 inch) in diameter
- High quality ground insert and holders
- Easy indexing
- Good accessibility when changing the insert. Insert screw can be reached from both sides, reducing down time and increasing the productivity.



Save material

With parting off inserts widths down to 0.7 mm (.028 inch) considerable amount of workpiece materials can be saved when parting off.

Holders for QS-holding system, see page A243

Code key for CoroCut® XS

Insert for parting

M	A	C	R	3	070	-	N
1	2	3	4	5	6		7

Insert for turning/grooving

M	A	G	R	3	125
1	2	3	4	5	6


Insert for threading

M	A	T	R	3	60	-	A
1	2	3	4	5	8		9


Shank holder

S	M	A	L	R	1010	K	3	-	X
10	1	11	4	12	13	5			14

1 Family description



2 Insert clearance angle



3 Type of operation

- C = Cut off/parting
- G = Grooving
- T = Threading
- F = Turning
- B = Back turning
- X = Semi-finishing blanks

4 Hand of insert/holder

- R = Right hand
- L = Left hand

5 Insert seat size

3

6 Insert thickness/corner radius, mm

For parting insert width (l_a) 070 = 0.70 mm (.028 inch)

For back turning insert corner radius (r_c) 005 = 0.05 mm (.002 inch)


7 For cut off inserts (C in third position)

- N = Neutral with geometry
- T = Neutral without geometry
- L = Left handed with geometry
- R = Right handed with geometry

8 For threading inserts (T in third position)


60 = V-profile 60°

9 For threading inserts Hand of thread point




10 Clamping system

S = Screw clamping



11 Holder style


AL = 90°



12 Shank dimensions

ex. 1010 = 10 x 10 (Metric version)

ex. 08 = 1/2" x 1/2" (Inch version)



13 Shank tool length, mm

C : $l_1 = 5"$

K : $l_1 = 125 \text{ mm}$




14 Additional information

X = Special designed for working with sub-spindle



CoroCut® XS inserts

Parting off

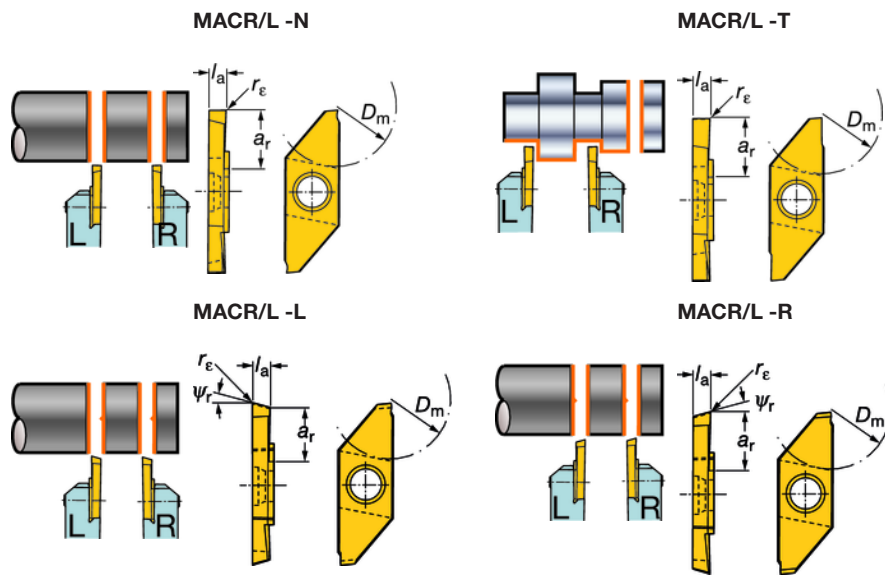





Tolerances, mm (inch):

 l_a : ±0.02 (±.0008) $r_ε$: ±0.03 (±.001)

Repeatability: ±0.03 (±.001)

Centre height: ±0.03 (±.001)


Right hand style shown

Selection criteria, millimeter, inch (mm, in.)												P		M		N		S			
	l_a mm	l_a in.	$r_ε$ mm	$r_ε$ in.	D_m max mm	D_m max in.	a_r max mm	a_r max in.	ψ_r	Insert seat size ¹⁾	Ordering code	GC	GC	GC	GC	GC	GC	GC	GC		
												1025	1105	1025	1105	1025	1105	H13A	1025	1105	H13A
 MAC-N	0.70	.028	0.05	.002	8	.315	4.3	.169	0°	3	MACR/L 3 070-N	★	☆	★	☆	★	☆	★	☆	★	☆
	1.00	.039	0.05	.002	12	.472	6.3	.248	0°		MACR/L 3 100-N	★	☆	★	☆	★	☆	★	☆	★	☆
	1.50	.059	0.05	.002	12	.472	6.3	.248	0°		MACR/L 3 150-N	★	☆	★	☆	★	☆	★	☆	★	☆
	2.00	.079	0.05	.002	16	.630	8.5	.335	0°		MACR/L 3 200-N	★	☆	★	☆	★	☆	★	☆	★	☆
 MAC-R	0.70	.028	0.05	.002	8	.315	4.3	.169	15°	3	MACR/L 3 070-R	★	☆	★	☆	★	☆	★	☆	★	☆
	1.00	.039	0.05	.002	12	.472	6.3	.248	15°		MACR/L 3 100-R	★	☆	★	☆	★	☆	★	☆	★	☆
	1.50	.059	0.05	.002	12	.472	6.3	.248	15°		MACR/L 3 150-R	★	☆	★	☆	★	☆	★	☆	★	☆
	1.50	.059	0.05	.002	12	.472	6.3	.248	20°		MACR/L 3 150-R20	★	☆	★	☆	★	☆	★	☆	★	☆
	2.00	.079	0.05	.002	16	.630	8.5	.335	15°		MACR/L 3 200-R	★	☆	★	☆	★	☆	★	☆	★	☆
2.00	.079	0.05	.002	16	.630	8.5	.335	20°		MACR/L 3 200-R20	★	☆	★	☆	★	☆	★	☆	★	☆	
 MAC-L	0.70	.028	0.05	.002	8	.315	4.3	.169	15°	3	MACR/L 3 070-L	★	☆	★	☆	★	☆	★	☆	★	☆
	1.00	.039	0.05	.002	12	.472	6.3	.248	15°		MACR/L 3 100-L	★	☆	★	☆	★	☆	★	☆	★	☆
	1.50	.059	0.05	.002	12	.472	6.3	.248	15°		MACR/L 3 150-L	★	☆	★	☆	★	☆	★	☆	★	☆
	2.00	.079	0.05	.002	16	.630	8.5	.335	15°		MACR/L 3 200-L	★	☆	★	☆	★	☆	★	☆	★	☆
 MAC-T	1.00	.039	0.05	.002	12	.472	6.3	.248	0°	3	MACR/L 3 100-T	★	☆	★	☆	★	☆	★	☆	★	☆
	1.50	.059	0.05	.002	12	.472	6.3	.248	0°		MACR/L 3 150-T	★	☆	★	☆	★	☆	★	☆	★	☆
	2.00	.079	0.05	.002	16	.630	8.2	.323	0°		MACR/L 3 200-T	★	☆	★	☆	★	☆	★	☆	★	☆
	2.50	.098	0.05	.002	16	.630	8.2	.323	0°		MACR/L 3 250-T	★	☆	★	☆	★	☆	★	☆	★	☆
												P25	P15	M25	M15	N25	N15	N20	S25	S15	S15

¹⁾ To correspond with seat size on holder.

R = Right hand, L = Left hand

★ = First choice




A


CoroCut® XS inserts

Grooving

B



MAGR/L




Tolerances, mm (inch):

 $l_a = \pm 0.025 (\pm 0.0008)$ $r_\epsilon = \pm 0.02 (\pm 0.001)$ Repeatability: $\pm 0.025 (\pm 0.001)$ Centre height: $\pm 0.025 (\pm 0.001)$

Right hand style shown

C

	Selection criteria, millimeter, inch (mm, in.)						Insert seat size ¹⁾	Ordering code				
	l_a mm	l_a in.	r_ϵ mm	r_ϵ in.	a_r max mm	a_r max in.			P	M	N	S
 MAG	0.50	0.02	0.05	0.002	1.30	.051	3	MAGR/L 3 050	GC	GC	GC	.
	0.75	0.03	0.05	0.002	2.50	.098		MAGR/L 3 075	★	★	★	★
	1.00	0.039	0.05	0.002	2.70	.106		MAGR/L 3 100	★	★	★	★
	1.25	0.049	0.05	0.002	2.70	.106		MAGR/L 3 125	★	★	★	★
	1.50	0.059	0.05	0.002	3.70	.146		MAGR/L 3 150	★	★	★	★
	1.75	0.069	0.05	0.002	3.70	.146		MAGR/L 3 175	★	★	★	★
	2.00	0.079	0.05	0.002	3.70	.146		MAGR/L 3 200	★	★	★	★
	2.50	0.098	0.05	0.002	3.70	.146		MAGR/L 3 250	★	★	★	★
									P25	M25	N25	S25

¹⁾ To correspond with seat size on holder.

R = Right hand, L = Left hand


H

I

J



B91



B136




B146



B2

CoroCut® XS inserts

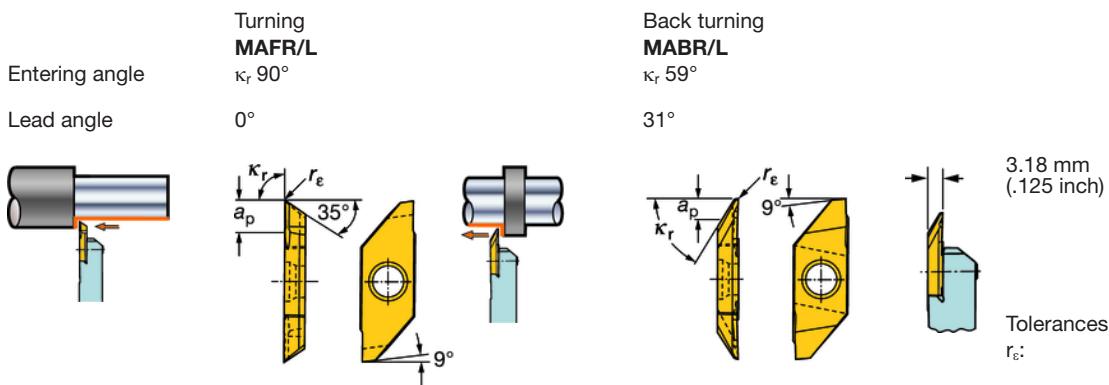

Turning, back turning



Tolerances, mm (inch):

 r_e : 0/-0.05
(0/-0.002)
Repeatability: ± 0.025 (± 0.001)Centre height: ± 0.025 (± 0.001)


Right hand style shown

	Selection criteria, millimeter, inch (mm, in.)				Insert seat size ¹⁾	Ordering code	P		M		N		S			
	r_e mm	r_e in.	Max a_p mm	Max a_p in.			GC	GC	GC	GC	GC	GC	GC	GC	GC	-
 MAF	0.03	.001	4	.157	3	MAFR/L 3 003	☆	☆	☆	☆	☆	☆	☆	☆		
	0.05	.002	4	.157		MAFR/L 3 005	☆	☆	☆	☆	☆	☆	☆	☆		
	0.10	.004	4	.157		MAFR/L 3 010	☆	☆	☆	☆	☆	☆	☆	☆		
	0.20	.008	4	.157		MAFR/L 3 020	☆	☆	☆	☆	☆	☆	☆	☆		
 MAB	0.03	.001	4	.157	3	MABR/L 3 003	☆	☆	☆	☆	☆	☆	☆	☆		
	0.05	.002	4	.157		MABR/L 3 005	☆	☆	☆	☆	☆	☆	☆	☆		
	0.10	.004	4	.157		MABR/L 3 010	☆	☆	☆	☆	☆	☆	☆	☆		
	0.20	.008	4	.157		MABR/L 3 020	☆	☆	☆	☆	☆	☆	☆	☆		
							P25	P15	M25	M15	N25	N15	N20	S25	S15	S15


¹⁾ To correspond with seat size on holder.

R = Right hand, L = Left hand

★ = First choice



B91



B136



B146




B2


CoroCut® XS inserts

Threading
V-profile 60°

MATR Right hand cutting insert **MATL** Left hand cutting insert

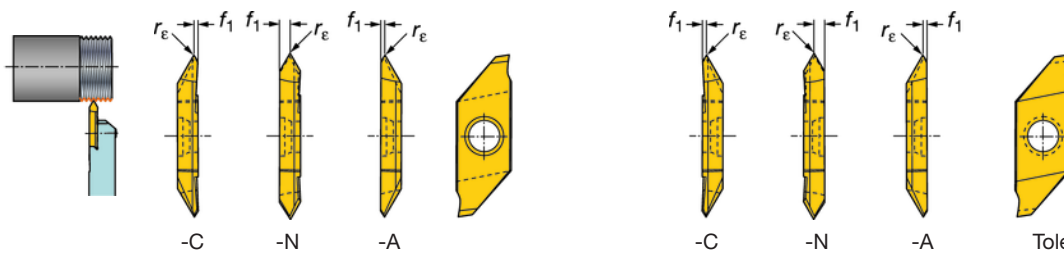

Tolerances, mm (inch):
 r_e ±0.02 (±.0008)
 Repeatability: ±0.025 (±.001)
 Centre height: ±0.025 (±.001)

Selection criteria, millimeter, inch (mm, in.)	Pitch, mm		Pitch, TPI		Insert seat size ¹⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)		P		M		N		S					
	r_e mm	r_e in.	min	max			min	max	f_1 mm	f_1 inch	GC	GC	GC	GC	GC	GC	GC	GC		
 MATR	0.05	.002	0.2	1.0	80	24	3	MATR/L 3 60-A	0.6	.024	☆	☆	☆	☆	☆	☆	☆			
	0.05	.002	0.2	1.0	80	24		MATR/L 3 60-C	0.6	.024	☆	☆	☆	☆	☆	☆	☆			
	0.05	.002	0.2	2.0	80	12		MATR/L 3 60-N	1.59	.063	☆	☆	☆	☆	☆	☆	☆			
											P25	P15	M25	M15	N25	N15	N20	S25	S15	S15


¹⁾ To correspond with seat size on holder.

R = Right hand, L = Left hand

CoroCut® XS

Blanks

MAXR/L

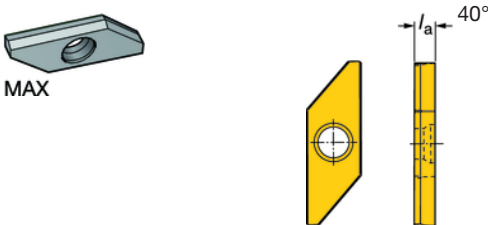

Tolerances, mm (inch):
 l_a ±0.02 (±.0008)
 r_e ±0.03 (±.001)
 Repeatability: ±0.03 (±.001)
 Centre height: ±0.03 (±.001)


For grinding instructions, see Metalcutting Technical guide.
Right hand style shown

Insert seat size ¹⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)		H10F
		l_a mm	l_a in.	
3	MAXR/L 3 300	3.18	.125	★


¹⁾ To correspond with seat size on holder.

R = Right hand, L = Left hand

Note: Precaution should be taken when grinding cemented carbide products. See page J7 for safety information.



CoroCut® XS shank holders



Right hand insert to be used with right hand holder and left hand holder.

Right hand style shown

Metric version

Seat size ¹⁾	Ordering code	Dimensions, mm						Gauge inserts	Nm ²⁾
		<i>b</i>	<i>f</i> ₁	<i>h</i>	<i>h</i> ₁	<i>l</i> ₁	<i>l</i> ₃		
3	SMALR/L 1010K 3	10	10	10	10	125	27	MAXL 3..	1.2
	SMALR/L 1212K 3	12	12	12	12	125	27	MAXL 3..	1.2
	SMALR/L 1616K 3	16	16	16	16	125	27	MAXL 3..	1.2

Inch version

Seat size ¹⁾	Ordering code	Dimensions, inch						Gauge inserts	ft-lbs ³⁾
		<i>b</i>	<i>f</i> ₁	<i>h</i>	<i>h</i> ₁	<i>l</i> ₁	<i>l</i> ₃		
3	SMALR/L 08C3	.500	.500	.500	.500	5.000	1.063	MAXL 3..	0.9
	SMALR/L 10C3	.625	.625	.625	.625	5.000	1.063	MAXL 3..	0.9

¹⁾ To correspond with seat size on insert.


²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

R = Right hand, L = Left hand

CoroCut® XS shank holders

Cut off holder when using sub-spindle



Shank holders for QS-holding system see page A243.

Right hand style shown

Metric version

Seat size ¹⁾	Ordering code	Dimensions, mm								Gauge inserts	Nm ²⁾
		<i>a</i> ₂ max	<i>b</i>	<i>f</i> ₁	<i>f</i> ₂	<i>h</i>	<i>h</i> ₁	<i>l</i> ₁	<i>l</i> ₃		
3	SMALR 1010K 3-X	20	10	10	7.5	10	10	125	27	MAXR 3..	1.2
	SMALR 1212K 3-X	20	12	12	7.5	12	12	125	27	MAXR 3..	1.2

Inch version

Seat size ¹⁾	Ordering code	Dimensions, inch							Gauge inserts	ft-lbs ³⁾
		<i>a</i> ₂ max	<i>b</i>	<i>f</i> ₁	<i>h</i>	<i>h</i> ₁	<i>l</i> ₁	<i>l</i> ₃		
3	SMALR 08C 3-X	.031	.500	.500	.500	.500	5.000	1.063	MAXR 3..	0.9

¹⁾ To correspond with seat size on insert.

²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

R = Right hand, L = Left hand

Main spare parts



Holder type		Screw		Key (Torx Plus)	
Metric	Inch				
SMALR/L...K3	SMALR/L...C3	5513 027-01	5680 046-01 (8IP)		
SMALR/L...K3-X	SMALR/L...C3-X	5513 027-02	5680 046-01 (8IP)		



CoroCut® MB

A system for machining of high precision components

Grooving, threading and turning from 10 mm (.394 inch)
Face grooving from 12 mm (.472 inch)

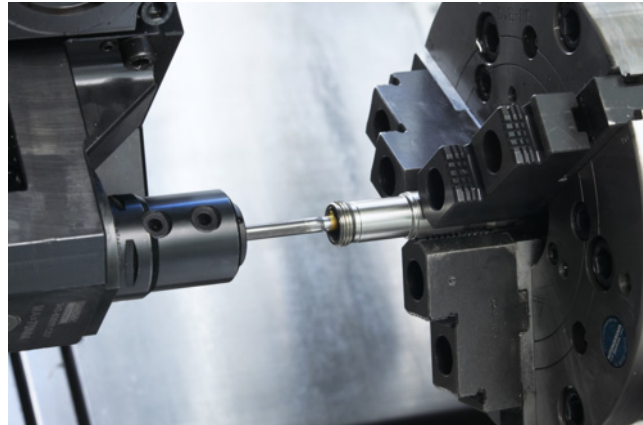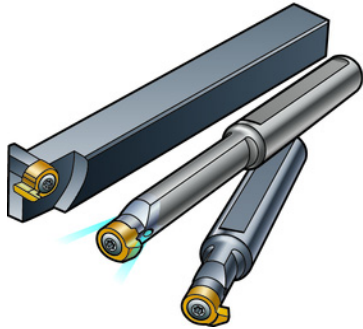

CoroCut® MB boring bars

To increase the stability and accessibility the bars are designed with an eccentric head with oval cross section

Bars are available in two designs

- Steel shank bars for overhang up to 1 x bar diameter
- Carbide shank bars for overhang up to 5.5 x bar diameter

CoroCut MB external tool holders

- Face grooving down to 12 mm (.472 inch) curve diameter
- Radial grooving
- Circlip grooving

CoroCut® MB

A system for internal machining of high precision components

Clamping of bars

- EasyFix clamping for best stability and accuracy
- Conventional bars with flats




For accurate machining with less vibration and precise centre height of the insert use cylindrical bars with EasyFix sleeves

CoroTurn® XS boring bars

CoroCut® MB boring bars

T-Max Q-Cut® and CoroCut® boring bars

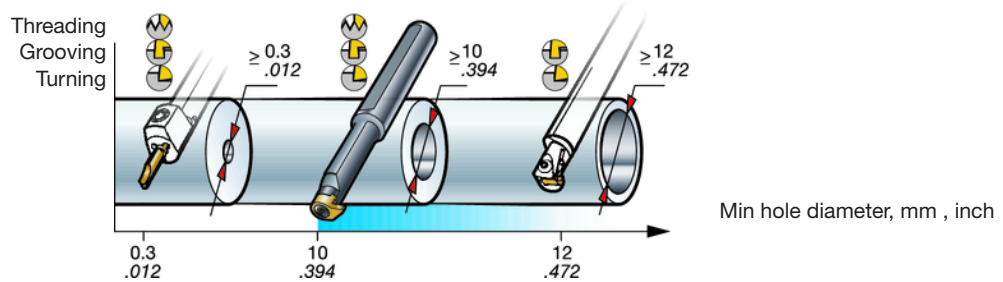

CoroCut® MB inserts

Application	Size 07	Size 09
	Min hole 10 mm (.394 inch)	
Grooving		
Turning		—
Threading		—
Face grooving	—	

Insert for turning/back boring

MB	-	07	T	093	A	-	02	-	10	R
1		2	3	4	16		5		9	12

Insert for grooving/pre-parting




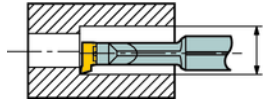


MB	-	07	G	070	-	00	-	10	R
1		2	3	6		5		9	12

Insert for threading

MB	-	07	TH	050	VM	-	10	R
1		2	3	7	8		9	12



Boring bars

MB	-	A	16	-	16	-	07	R
1		13	14		10		2	15

1 Main code MB = CoroCut® MB	2 Insert size, mm  07 = 7 mm (.276 inch) 09 = 9 mm (.354 inch)	3 Type of operation B = Back boring G = Grooving GX = Pre-parting R = Profiling full radius T = Turning TE = Turning copying, extended f ₁ -dimension TH = Threading FA = Face grooving A-curve FB = Face grooving B-curve	
4 Entering angle (Turning) E.g.: 093 = 93°	6 Insert width, l _a mm (Grooving)  E.g.: 100 = 1.00 mm (.039 inch)	7 Pitch (Threading) mm: pitch x 100 inch: No. of threads per inch x 10 (TPI)	
5 Nose radius, r _ε mm (Turning)  E.g.: 00 = Sharp 02 = 0.2 mm (.008 inch)	9 Min bore diameter, D _m min. (Insert)  E.g.: 10 = 10 mm (.394 inch)	10 Penetration depth, l ₃ (boring bar)  Inch E.g.: 06 = 0.630 inch 08 = 0.787 inch 12 = 1.260 inch Metric E.g.: 16 = 16 mm	
8 Thread profile (Threading) VM = V profile 60° MM = Metric 60° WH = Whitworth 55° UN = UN 60° NT = NPT 60° AC = ACME 29° SA = STUB-ACME	14 Bar dia, d _m inch  Inch 0625 = .625 inch Metric 16 = 16 mm	15 Shank type R = Cylindrical No symbol = With flats 16 Geometry - = Without chip forming geometry A = Chip forming geometry	
12 Hand of insert R = Right hand style L = Left hand style	13 Type of bar A = Steel bar with internal coolant supply E = Carbide shank bar		

CoroCut® MB inserts

Grooving

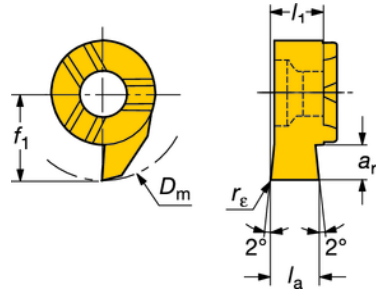

Tolerances, mm (inch):
 l_a : +0.05/-0 (+.002/-0)

Tolerances, mm (inch):

r_e ±0.02 (±.0008)
 l_1 : ±0.02 (±.0008)

For circlip grooves
 l_a : +0.03/-0 (+.0012 /-0)
 l_1 : ±0.02 (.0008)

Centre height:
 +0.05/-0 (+.002/-0)

Centre height:
 +0.05/-0 (.002/-0)
 -0


Right hand style shown

Selection criteria, millimeter, inch (mm, in.)	Insert size ¹⁾				Dimensions, millimeter, inch (mm, in.)	P	M	N	S										
	l_a	l_a	a_r max	a_r max						Ordering code	D_m min	D_m min	f_1	f_1	l_1	l_1	r_e	r_e	
	mm	in.	mm	in.															dm_m
	1.00	.039	1.8	.071	07	MB-07G100-00-10R/L	10	.394	5.8	.228	3.9	.154	0	0	★	★	★	★	
	1.50	.059	1.8	.071		MB-07G150-00-10R/L	10	.394	5.8	.228	3.9	.154	0	0	★	★	★	★	
	2.00	.079	1.8	.071		MB-07G200-00-10R/L	10	.394	5.8	.228	3.9	.154	0	0	★	★	★	★	
	2.50	.098	1.8	.071		MB-07G250-00-10R/L	10	.394	5.8	.228	3.9	.154	0	0	★	★	★	★	
	3.00	.118	1.8	.071		MB-07G300-00-10R/L	10	.394	5.8	.228	3.9	.154	0	0	★	★	★	★	
	3.18	.125	1.8	.071		MB-07G318-00-10R/L	10	.394	5.8	.228	3.9	.154	0	0	★	★	★	★	
	1.00	.039	2.8	.110	07	MB-07G100-00-11L	11	.433	6.8	.268	3.9	.154	0	0	★	★	★	★	
	1.00	.039	2.8	.110		MB-07G100-00-11R	11	.433	6.8	.268	3.9	.154	0	0	★	★	★	★	
	1.50	.059	2.8	.110		MB-07G150-00-11R/L	11	.433	6.8	.268	3.9	.154	0	0	★	★	★	★	
	2.00	.079	2.8	.110		MB-07G200-00-11R/L	11	.433	6.8	.268	3.9	.154	0	0	★	★	★	★	
2.50	.098	2.8	.110		MB-07G250-00-11R/L	11	.433	6.8	.268	3.9	.154	0	0	★	★	★	★		
3.00	.118	2.8	.110		MB-07G300-00-11R/L	11	.433	6.8	.268	3.9	.154	0	0	★	★	★	★		
3.18	.125	2.8	.110		MB-07G318-00-11R/L	11	.433	6.8	.268	3.9	.154	0	0	★	★	★	★		
1.00	.039	3.4	.134	07	MB-07G100-00-12R/L	12	.472	7.4	.291	3.9	.154	0	0	★	★	★	★		
1.50	.059	3.4	.134		MB-07G150-00-12R/L	12	.472	7.4	.291	3.9	.154	0	0	★	★	★	★		
2.00	.079	3.4	.134		MB-07G200-00-12R/L	12	.472	7.4	.291	3.9	.154	0	0	★	★	★	★		
1.50	.059	4	.157	09	MB-09G150-00-14R/L	14	.551	9	.354	5.3	.209	0	0	★	★	★	★		
2.00	.079	4	.157		MB-09G200-00-14R/L	14	.551	9	.354	5.3	.209	0	0	★	★	★	★		
2.00	.079	4	.157		MB-09G200-02-14R/L	14	.551	9	.354	5.3	.209	0	0	★	★	★	★		
2.50	.098	4	.157		MB-09G250-00-14R/L	14	.551	9	.354	5.3	.209	0	0	★	★	★	★		
3.00	.118	4	.157		MB-09G300-00-14R/L	14	.551	9	.354	5.3	.209	0	0	★	★	★	★		
1.50	.059	5.5	.216	09	MB-09G150-00-16R/L	16	.630	10.5	.413	5.2	.205	0	0	★	★	★	★		
2.00	.079	5.5	.216		MB-09G200-00-16R/L	16	.630	10.5	.413	5.2	.205	0	0	★	★	★	★		
2.00	.079	5.5	.216		MB-09G200-02-16R/L	16	.630	10.5	.413	5.2	.205	0	0	★	★	★	★		
2.50	.098	5.5	.216		MB-09G250-00-16R/L	16	.630	10.5	.413	5.2	.205	0	0	★	★	★	★		
2.50	.098	5.5	.216		MB-09G250-02-16R/L	16	.630	10.5	.413	5.2	.205	0	0	★	★	★	★		
3.00	.118	5.5	.216		MB-09G300-00-16R/L	16	.630	10.5	.413	5.2	.205	0	0	★	★	★	★		
3.00	.118	5.5	.216		MB-09G300-02-16R/L	16	.630	10.5	.413	5.2	.205	0	0	★	★	★	★		
1.50	.059	6.5	.256	09	MB-09G150-00-17R/L	17	.669	11.5	.453	5.2	.205	0	0	★	★	★	★		
2.00	.079	6.5	.256		MB-09G200-00-17R/L	17	.669	11.5	.453	5.2	.205	0	0	★	★	★	★		
2.50	.098	6.5	.256		MB-09G250-00-17R/L	17	.669	11.5	.453	5.2	.205	0	0	★	★	★	★		
3.00	.118	6.5	.256		MB-09G300-00-17R/L	17	.669	11.5	.453	5.2	.205	0	0	★	★	★	★		
For circlip grooves																			
0.73	.029	1.2	.047	07	MB-07G070-00-10R/L	10	.394	5.8	.228	3.8	.150	0	0	★	★	★	★		
0.83	.033	1.3	.051		MB-07G080-00-10R/L	10	.394	5.8	.228	3.8	.150	0	0	★	★	★	★		
0.93	.037	1.5	.059		MB-07G090-00-10R/L	10	.394	5.8	.228	3.8	.150	0	0	★	★	★	★		
1.20	.047	1.8	.071		MB-07G120-00-10R/L	10	.394	5.8	.228	3.9	.154	0	0	★	★	★	★		
1.40	.055	1.8	.071		MB-07G140-00-10R/L	10	.394	5.8	.228	3.9	.154	0	0	★	★	★	★		
1.70	.067	1.8	.071		MB-07G170-00-10R/L	10	.394	5.8	.228	3.9	.154	0	0	★	★	★	★		
0.73	.029	1.2	.047	09	MB-09G070-00-14R/L	14	.551	9	.354	5.2	.205	0	0	★	★	★	★		
0.83	.033	1.3	.051		MB-09G080-00-14R/L	14	.551	9	.354	5.2	.205	0	0	★	★	★	★		
0.93	.037	1.5	.059		MB-09G090-00-14R/L	14	.551	9	.354	5.2	.205	0	0	★	★	★	★		
1.20	.047	4	.157		MB-09G120-00-14R/L	14	.551	9	.354	5.3	.209	0	0	★	★	★	★		
1.40	.055	4	.157		MB-09G140-00-14R/L	14	.551	9	.354	5.3	.209	0	0	★	★	★	★		
1.70	.067	4	.157		MB-09G170-00-14R/L	14	.551	9	.354	5.3	.209	0	0	★	★	★	★		

¹⁾ To correspond to insert size on holder

R = Right hand, L = Left hand



★ = First choice



CoroCut® MB inserts

Grooving

For hardened materials

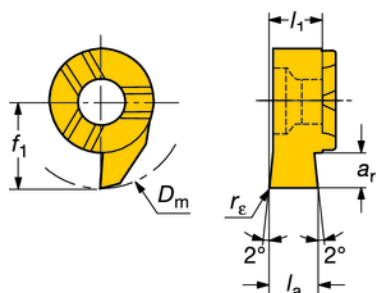

Right hand style shown

Tolerances, mm (inch):


l_a : +0.05/-0 (+.002/-0)

l_1 : ±0.02 (±.0008)

Centre height:

+0.05/-0 (+.002/-0)


-0

	Selection criteria, millimeter, inch (mm, in.)				Insert size ¹⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)								H CB 7015 ★ ★ H15
	l_a mm	l_a in.	a_r max mm	a_r max in.			d_{m_m}	D_m min mm	D_m min in.	f_1 mm	f_1 in.	l_1 mm	l_1 in.	r_e mm	
 MB..G	1.00	.039	2.8	.110	07	MB-07G100-00-11R	11	.433	6.8	.268	3.9	.154	0	0	★
	1.50	.059	2.8	.110		MB-07G150-00-11R	11	.433	6.8	.268	3.9	.154	0	0	★


¹⁾ To correspond to insert size on holder

R = Right hand, L = Left hand

★ = First choice



B106



B137



B146



B2

CoroCut® MB inserts

Turning/profiling

Entering angle 45°





MB-07T 045 Turning/profiling

Entering angle 93°

MB-07T093 Turning

Lead angle 45°

Lead angle -3°

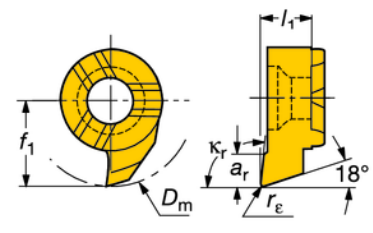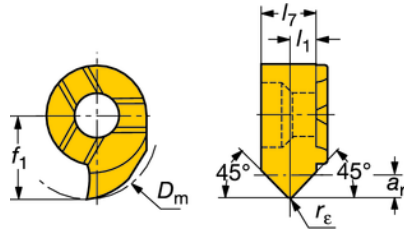

Tolerances, mm (inch):



$r_e: \pm 0.02 (\pm .0008)$

$l_1: \pm 0.02 (\pm .0008)$

Centre height:

$+0.05/-0 (+.002/-0)$


Right hand style shown

	Selection criteria, millimeter, inch (mm, in.)				Insert size ¹⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)								Right hand style shown				
	r_e	r_e	a_r max	a_r max			d_{mm}	D_m min	D_m min	f_1	f_1	l_1	l_1	l_7	l_7	P	M	N	S
	mm	in.	mm	in.												GC	GC	GC	GC
 MB-..T045	0.20	.008	1.50	.059	07	MB-07T045-02-10R/L	10.00	.394	5.80	.228	2.00	.079	4.00	.157	★	★	★	★	
 MB-..T093	0.20	.008	1.80	.071	07	MB-07T093-02-10L MB-07T093-02-10R	10.00	.394	5.60	.220	3.90	.154	3.90	.154	★	★	★	★	
															P25	M25	N25	S25	

¹⁾ To correspond to insert size on holder

R = Right hand, L = Left hand

★ = First choice



CoroCut® MB inserts

Copying/back boring

Entering angle 93°





MB-07TE 93 Copying

Entering angle 90°

MB-07B Back boring

Lead angle -3°

Lead angle 0°

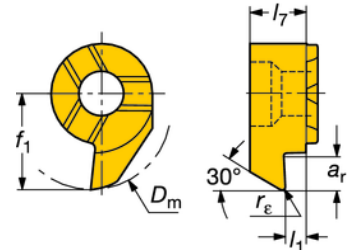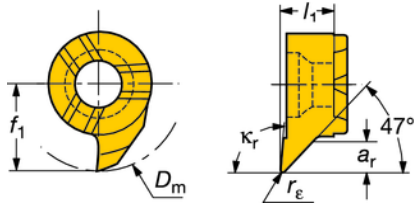



Tolerances, mm (inch):

 $r_e: \pm 0.02 (\pm .0008)$ $l_1: \pm 0.02 (\pm .0008)$

Centre height:

 $+0.05/-0 (+.002/-0)$

Right hand style shown


	Selection criteria, millimeter, inch (mm, in.)				Insert size ¹⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)								Right hand style shown					
	r_e mm	r_e in.	a_r max mm	a_r max in.			d_{m_m}	D_m min mm	D_m min in.	f_1 mm	f_1 in.	l_1 mm	l_1 in.	l_7 mm	l_7 in.	P	M	N	S	
 MB-...TE93	0.20	.008	1.80	.071	07	MB-07TE93-02-10R/L	10.00	.394	5.80	.220	3.90	.154					GC	GC	GC	GC
 MB-...B	0.20	.008	2.60	.102	07	MB-07B030-02-11R/L ²⁾	11.00	.433	6.80	.268	1.30	.051	4.00	.157						
																	P25	M25	N25	S25

¹⁾ To correspond to insert size on holder


R = Right hand, L = Left hand

²⁾ Insert with extended f_1 dimension

★ = First choice



B106



B137



B146




B2

CoroCut® MB inserts


Turning

For machining of hardened materials

Entering angle $\kappa_r 93^\circ$
Lead angle -3°



MB-07T 93 Turning

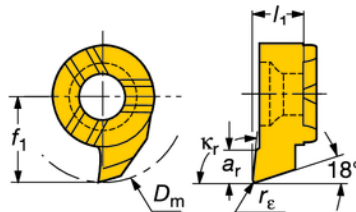

Tolerances, mm (inch):


$r_e = \pm 0.02 (\pm 0.0008)$

$l_1 = \pm 0.02 (\pm 0.0008)$

Centre height:


$+0.05/-0 (+.002 /-0)$

Right hand style shown


	Selection criteria, millimeter, inch (mm, in.)				Insert size ¹⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)						H CB 7015 ★
	r_e mm in.	r_e mm in.	a_r max mm in.	a_r max mm in.			$d_{m,m}$	D_m min mm in.	D_m min mm in.	f_1 mm in.	f_1 mm in.	l_1 mm in.	
 MB-...T093	0.20	.008	1.80	.071	07	MB-07T093-02-10R	10.00	.394	5.60	.220	3.90	.154	
													H15

¹⁾ To correspond with insert size on holder.

R = Right hand, L = Left hand
★ = First choice



B106



B137



B146






B2

CoroCut® MB inserts

Face grooving

MB-09FA A-curve

MB-09FB B-curve

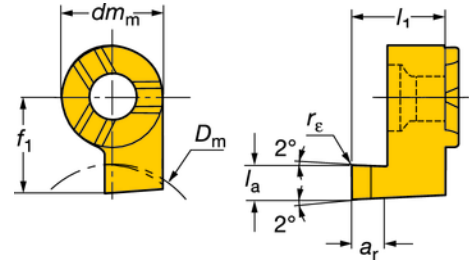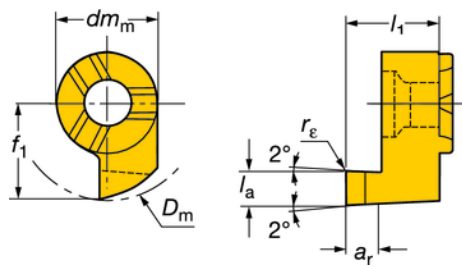

Tolerances, mm (inch):
 $l_a = +0.05/-0$ (+.002/-0)
 $r_\epsilon = \pm 0.02$ ($\pm .0008$)
 $l_1 = \pm 0.02$ ($\pm .0008$)
 Centre height:
 $+0.05/-0$ (+.002/-0)


Right hand style shown

	Selection criteria, millimeter, inch (mm, in.)								Insert size ¹⁾	Ordering code	Dimensions, millimeter, inch (mm, in.)				P	M	N	S					
	l_a mm	l_a in.	r_ϵ mm	r_ϵ in.	D_m min mm	D_m min in.	a_r max mm	a_r max in.			dm_m	f_1 mm	f_1 in.	l_1 mm					l_1 in.	GC	GC	GC	GC
																				1025	1025	1025	1025
 MB-FA	1.000	.039	0	.000	14	.551	1.5	.059	09	MB-09FA100-00-14R/L	9	.354	8.3	.327	★	★	★	★					
	1.500	.059	0.2	.008	14	.551	2.5	.098		MB-09FA150-02-14R/L	9	.354	8.3	.327	★	★	★	★					
	2.000	.079	0.2	.008	14	.551	5	.197		MB-09FA200-02-14R/L	9	.354	10.3	.406	★	★	★	★					
	2.500	.098	0.2	.008	14	.551	5	.197		MB-09FA250-02-14R/L	9	.354	10.3	.406	★	★	★	★					
	3.000	.118	0.2	.008	14	.551	5	.197		MB-09FA300-02-14R/L	9	.354	10.3	.406	★	★	★	★					
 MB-FB	1.000	.039	0	.000	12	.472	1.5	.059	09	MB-09FB100-00-14R/L	7	.276	8.3	.327	★	★	★	★					
	1.500	.059	0.2	.008	12	.472	2.5	.098		MB-09FB150-02-14R/L	7.5	.295	8.3	.327	★	★	★	★					
	2.000	.079	0.2	.008	12	.472	5	.197		MB-09FB200-02-14R/L	8	.315	10.3	.406	★	★	★	★					
	2.500	.098	0.2	.008	12	.472	5	.197		MB-09FB250-02-14R/L	8.5	.335	10.3	.406	★	★	★	★					
	3.000	.118	0.2	.008	12	.472	5	.197		MB-09FB300-02-14R/L	9	.354	10.3	.406	★	★	★	★					
														P25	M25	N25	S25						

¹⁾ To correspond to insert size on holder


N = Neutral, R = Right hand, L = Left hand

★ = First choice




CoroCut® MB inserts


Threading



Metric 60°
UN 60°?
V-profile 60°
NPT 60°

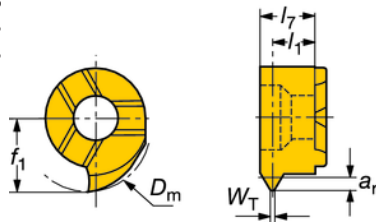

Whitworth 55°

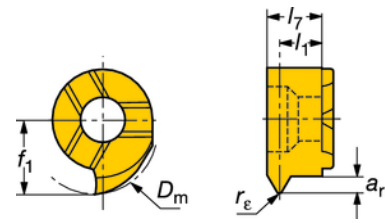

Tolerances, mm (inch):
l₁: ±0.02 (±.0008)
Centre height:
+0.05/-0 (+.002/-0)


Right hand style shown

C	Insert size ¹⁾	Pitch		Pitch, TPI		Dimensions, millimeter, inch (mm, in.)														P	M	N	S																																																																																										
		dm _m	Pitch, mm	min	max	TPI	min	max	Ordering code	a _r max mm	a _r max in.	D _m min mm	D _m min in.	f ₁ mm	f ₁ in.	l ₁ mm	l ₁ in.	l ₇ mm	l ₇ in.					W _T mm	W _T in.	GC1025	GC1025	GC1025	GC1025																																																																																				
G	07	2.5	1.5	1.75	16	20	MB-07TH150VM-10R/L	0.81	.032	10	.394	5.8	.228	3	.118	3.8	.150	0.18	.007	★	★	★	★																																																																																										
																								V profile 60°	10	.394	5.8	.228	3.2	.126	3.8	.150	0.12	.005	★	★	★	★																																																																											
																																							MB-07TH100VM-10R/L	10	.394	5.8	.228	3.2	.126	3.8	.150	0.12	.005	★	★	★	★																																																												
																																																						MB-07TH200VM-10R/L	10	.394	5.8	.228	2.8	.108	3.8	.150	0.25	.010	★	★	★	★																																													
																																																																					MB-07TH250VM-10R/L	10	.394	5.8	.228	2.6	.100	3.8	.150	0.31	.012	★	★	★	★																														
G	07	2.5	1.5	1.75	12	14	MB-07TH150MM-10L	0.81	.032	10	.394	5.8	.228	3	.118	3.8	.150	0.18	.007	★	★	★	★																																																																																										
																								Metric 60°	10	.394	5.8	.228	3.2	.126	3.8	.150	0.12	.005	★	★	★	★																																																																											
																																							MB-07TH100MM-10L	10	.394	5.8	.228	3.2	.126	3.8	.150	0.12	.005	★	★	★	★																																																												
																																																						MB-07TH100MM-10R	10	.394	5.8	.228	3.2	.126	3.8	.150	0.12	.005	★	★	★	★																																													
																																																																					MB-07TH150MM-10R	10	.394	5.8	.228	3	.118	3.8	.150	0.18	.007	★	★	★	★																														
																																																																																				MB-07TH175MM-10R/L	10	.394	5.8	.228	2.9	.114	3.8	.150	0.21	.008	★	★	★	★															
																																																																																																			MB-07TH200MM-10R/L	10	.394	5.8	.228	2.8	.108	3.8	.150	0.25	.010	★	★	★	★
H	07	2.5	1.5	1.75	12	14	MB-07TH150MM-10R	0.81	.032	10	.394	5.8	.228	3	.118	3.8	.150	0.18	.007	★	★	★	★																																																																																										
																								UN 60°	10	.394	5.8	.228	3.2	.126	3.9	.154	0.12	.005	★	★	★	★																																																																											
																																							MB-07TH320UN-10R/L	10	.394	5.8	.228	3.4	.134	3.9	.154	0.11	.004	★	★	★	★																																																												
																																																						MB-07TH280UN-10R/L	10	.394	5.8	.228	3.3	.130	3.9	.154	0.13	.005	★	★	★	★																																													
																																																																					MB-07TH240UN-10R/L	10	.394	5.8	.228	3.2	.126	3.9	.154	0.15	.006	★	★	★	★																														
																																																																																				MB-07TH200UN-10R/L	10	.394	5.8	.228	3.2	.126	3.9	.154	0.17	.007	★	★	★	★															
																																																																																																			MB-07TH180UN-10R/L	10	.394	5.8	.228	3.1	.122	3.9	.154	0.19	.008	★	★	★	★
H	07	2.5	1.5	1.75	12	14	MB-07TH140UN-10R/L	0.98	.039	10	.394	5.8	.228	3.2	.126	3.9	.154	0.22	.009	★	★	★	★																																																																																										
																								Whitworth 55°	10	.394	5.8	.228	2.8	.102	3.8	.150	0.13	.005	★	★	★	★																																																																											
																																							MB-07TH190WH-10R/L	10	.394	5.8	.228	2.8	.110	3.8	.150	0.13	.005	★	★	★	★																																																												
I	07	2.5	1.5	1.75	12	14	MB-07TH110WH-10R/L	1.48	.058	10	.394	5.8	.228	2.3	.091	3.8	.150	0.13	.005	★	★	★	★																																																																																										
																								NPT 60°	10	.394	5.8	.228	2.9	.114	3.8	.150	0.05	.002	★	★	★	★																																																																											
																																							MB-07TH180NT-10R/L	10	.394	5.8	.228	2.9	.114	3.8	.150	0.05	.002	★	★	★	★																																																												
I	07	2.5	1.5	1.75	12	14	MB-07TH140NT-10R/L	1.48	.058	10	.394	5.8	.228	2.7	.106	3.8	.150	0.07	.003	★	★	★	★																																																																																										
																								MB-07TH180NT-10R/L	10	.394	5.8	.228	2.7	.106	3.8	.150	0.07	.003	★	★	★	★																																																																											

1) To correspond to insert size on holder

R = Right hand, L = Left hand

★ = First choice





CoroCut® MB inserts

Threading

For hardened materials

Metric 60°

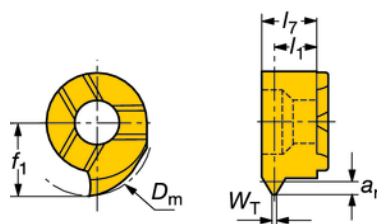

Tolerances, mm (inch):

l_1 : ± 0.02 ($\pm .0008$)

Centre height:

$+0.05/-0$ ($+ .002/-0$)


Right hand style shown

	Insert size ¹⁾	Pitch	Ordering code	Dimensions, millimeter, inch (mm, in.)												H
				a_r max mm	a_r max in.	D_m min mm	D_m min in.	f_1 mm	f_1 in.	l_1 mm	l_1 in.	l_7 mm	l_7 in.	W_T mm	W_T in.	
	07	1.0	MB-07TH100MM-10R	0.54	.021	10	.394	5.8	.228	3.2	.126	3.8	.150	0.12	.005	★
		1.5	MB-07TH150MM-10R	0.81	.032	10	.394	5.8	.228	3	.118	3.8	.150	0.18	.007	★
																H15


¹⁾ To correspond with insert size on holder.

R = Right hand, L = Left hand

★ = First choice



B106



B137




B146



B2



CoroCut® MB inserts

Threading



ACME 29°
Non-topping

STUB-ACME 29°
Non-topping

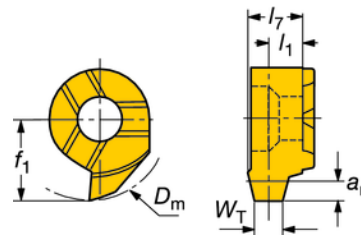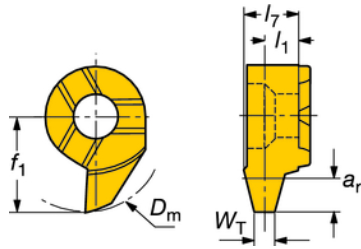

Tolerances, mm (inch):

$l_1 = \pm 0.02 (\pm .008)$

Centre height:

$+0.05/-0 (+.002/-0)$


Right hand style shown

Insert size ¹⁾	Pitch, TPI	Ordering code	Dimensions, millimeter, inch (mm, in.)																P	M	N	S		
			$d_{m_{mm}}$	TPI	a_r max mm	a_r max in.	D_m min mm	D_m min in.	f_1 mm	f_1 in.	l_1 mm	l_1 in.	l_7 mm	l_7 in.	W_T mm	W_T in.	GC	GC					GC	GC
																	1025	1025					1025	1025
Acme 29°																								
	07	16	MB-07TH160AC-11R	0.93	.037	11	.433	6.8	.268	3.3	.130	3.9	.154	0.52	.020	★	★	★	★					
		14	MB-07TH140AC-11R	1.05	.041	11	.433	6.8	.268	3.2	.126	3.9	.154	0.6	.024	★	★	★	★					
		12	MB-07TH120AC-11R	1.2	.047	11	.433	6.8	.268	3.1	.122	3.9	.154	0.71	.028	★	★	★	★					
		10	MB-07TH100AC-11R	1.54	.061	11	.433	6.8	.268	3	.118	3.9	.154	0.8	.032	★	★	★	★					
		8	MB-07TH080AC-11R	1.87	.074	11	.433	6.8	.268	2.8	.110	3.9	.154	1.03	.041	★	★	★	★					
STUB-Acme 29°																								
	07	16	MB-07TH160SA-10R	0.63	.025	10	.394	5.8	.228	3.35	.132	3.9	.154	0.59	.023	★	★	★	★					
		14	MB-07TH140SA-10R	0.69	.027	10	.394	5.8	.228	3.25	.128	3.9	.154	0.69	.027	★	★	★	★					
		12	MB-07TH120SA-10R	0.78	.031	10	.394	5.8	.228	3.2	.126	3.9	.154	0.82	.032	★	★	★	★					
		10	MB-07TH100SA-10R	1.04	.041	10	.394	5.8	.228	3.05	.120	3.9	.154	0.93	.037	★	★	★	★					
		8	MB-07TH080SA-10R	1.24	.049	10	.394	5.8	.228	2.45	.096	3.72	.146	1.19	.047	★	★	★	★					
																P25	M25	N25	S25					

¹⁾ To correspond to insert size on holder


R = Right hand, L = Left hand

★ = First choice



CoroCut® MB

Shank holders for external machining

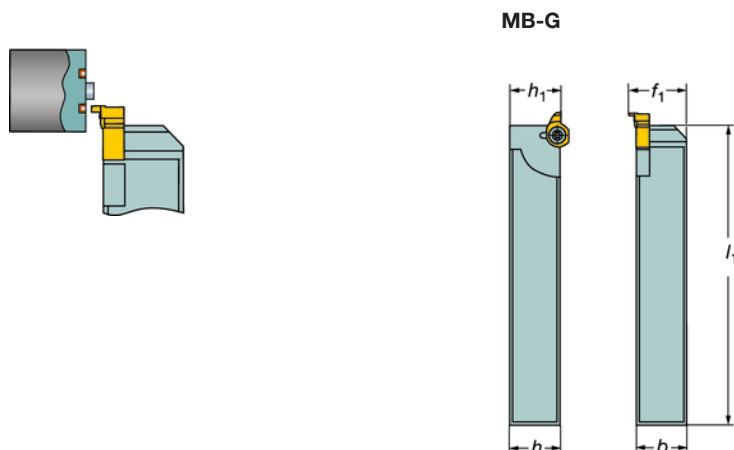

Right hand style shown

Note: Right hand tools use left hand inserts and vice versa.

Metric version

Insert size ¹⁾	Ordering code	Dimensions, mm					Gauge inserts	Nm ²⁾
		b	f ₁	h	h ₁	l ₁		
09	MBG-1212-09R/L	12	15.1	12	12	100	MB-09Fx150-xx-xxx	3.0
	MBG-1616-09R/L	16	19.1	16	16	120	MB-09Fx150-xx-xxx	3.0
	MBG-2020-09R/L	20	23.1	20	20	120	MB-09Fx150-xx-xxx	3.0
	MBG-2525-09R/L	25	28.1	25	25	150	MB-09Fx150-xx-xxx	3.0

Inch version

Insert size ¹⁾	Ordering code	Dimensions, inch					Gauge inserts	ft-lbs ³⁾
		b	f ₁	h	h ₁	l ₁		
09	MBG-08A-09R/L	.500	.622	.500	.500	3.937	MB-09Fx150-xx-xxx	2.2
	MBG-10C-09R/L	.625	.747	.625	.625	4.724	MB-09Fx150-xx-xxx	2.2
	MBG-12C-09R/L	.750	.872	.750	.750	4.724	MB-09Fx150-xx-xxx	2.2
	MBG-16D-09R/L	1.000	1.122	1.000	1.000	5.906	MB-09Fx150-xx-xxx	2.2

1) To correspond with seat size on insert.

2) Insert tightening torque Nm. Use torque wrench, see page B109.

3) Insert tightening torque ft-lbs. Use torque wrench, see page B109.

General min hole depend on insert, see resp insert ordering page

Main spare parts

Insert size	Insert screw	Key (Torx Plus)
09	5513 039-02	5680 049-01 (15IP)





CoroCut® MB

Boring bars

Cylindrical

With groove for EasyFix sleeve

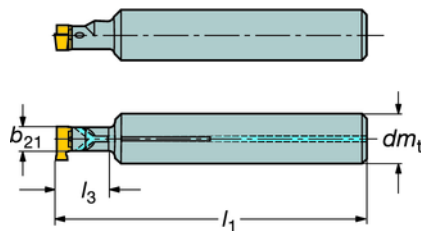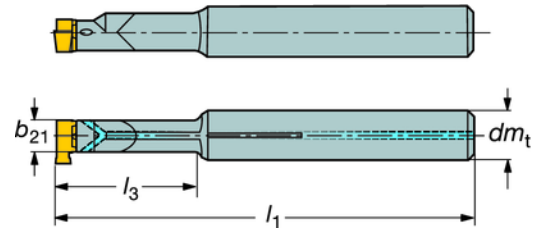MB-A
Steel shankMB-E
Carbide shank

Tool with right hand insert shown.

Max overhang:

3 x dm_t 5 x dm_t

All with internal coolant supply

Metric version

Bar dia.		Ordering code	Dimensions, mm			Gauge inserts	Nm ²⁾
dm_t	Insert size ¹⁾		b_{21}	l_1	l_3		
16	07	MB-A16-16-07R	7.4	97	16	MB-07..	1.4
16	09	MB-A16-20-09R	9.5	100	20	MB-09..	3.0
12	07	MB-E12-24-07R	7.4	92	24	MB-07..	1.4
12		MB-E12-32-07R	7.4	100	32	MB-07..	1.4
12		MB-E12-48-07R	7.4	115	48	MB-07..	1.4
12	09	MB-E12-34-09R	9.5	100	34	MB-09..	3.0
12		MB-E12-45-09R	9.5	110	45	MB-09..	3.0
12		MB-E12-64-09R	9.5	130	64	MB-09..	3.0
16		MB-E16-34-09R	9.5	100	34	MB-09..	3.0
16		MB-E16-45-09R	9.5	110	45	MB-09..	3.0
16		MB-E16-64-09R	9.5	130	64	MB-09..	3.0

Inch version

Bar dia.		Ordering code	Dimensions, inch			Gauge inserts	ft-lbs ³⁾
dm_t	Insert size ¹⁾		b_{21}	l_1	l_3		
.625	07	MB-A0625-06-07R	.291	3.937	.630	MB-07..	1.0
.625	09	MB-A0625-08-09R	.374	3.937	.787	MB-09..	2.2
.500	07	MB-E0500-12-07R	.291	3.937	1.260	MB-07..	1.0
.500		MB-E0500-19-07R	.291	4.528	1.890	MB-07..	1.0
.500	09	MB-E0500-13-09R	.374	3.937	1.339	MB-09..	2.2
.500		MB-E0500-17-09R	.374	4.331	1.772	MB-09..	2.2
.500		MB-E0500-25-09R	.374	5.118	2.520	MB-09..	2.2
.625		MB-E0625-13-09R	.374	3.937	1.339	MB-09..	2.2
.625		MB-E0625-17-09R	.374	4.331	1.772	MB-09..	2.2
.625		MB-E0625-25-09R	.374	5.118	2.520	MB-09..	2.2

¹⁾ To correspond with seat size on insert.²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

General min hole depend on insert, see resp insert ordering page

Main spare parts

Insert size	Insert screw	Key (Torx Plus)
07	5513 039-01	5680 051-03 (9IP)
09	5513 039-02	5680 049-01 (15IP)




CoroCut® MB


Carbide shank boring bars

Cylindrical with flat

MB-A
Steel shank

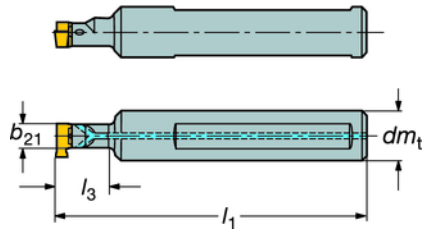

MB-E
Carbide shank

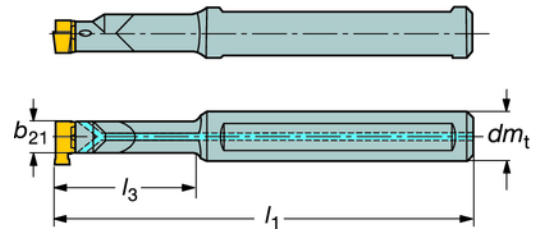

Tool with right hand insert shown.

Max overhang:

$3 \times dm_t$

$5 \times dm_t$

All with internal coolant supply

Metric version

Bar dia.			Dimensions, mm				
dm_t	Insert size ¹⁾	Ordering code	b_{21}	l_1	l_3	Gauge inserts	Nm ²⁾
16	07	MB-A16-16-07	7.4	97	16	MB-07..	1.4
16	09	MB-A16-20-09	9.5	100	20	MB-09..	3.0
12	07	MB-E12-24-07	7.4	92	24	MB-07..	1.4
12		MB-E12-32-07	7.4	100	32	MB-07..	1.4
12		MB-E12-48-07	7.4	115	48	MB-07..	1.4
12	09	MB-E12-34-09	9.5	100	34	MB-09..	3.0
12		MB-E12-45-09	9.5	110	45	MB-09..	3.0
12		MB-E12-64-09	9.5	130	64	MB-09..	3.0
16		MB-E16-34-09	9.5	100	34	MB-09..	3.0
16		MB-E16-45-09	9.5	110	45	MB-09..	3.0
16		MB-E16-64-09	9.5	130	64	MB-09..	3.0

Inch version

Bar dia.			Dimensions, inch				
dm_t	Insert size ¹⁾	Ordering code	b_{21}	l_1	l_3	Gauge inserts	ft-lbs ³⁾
.625	07	MB-A0625-06-07	.291	3.937	.630	MB-07..	1.0
.625	09	MB-A0625-08-09	.374	3.937	.787	MB-09..	2.2
.500	07	MB-E0500-12-07	.291	3.937	1.260	MB-07..	1.0
.500		MB-E0500-19-07	.291	4.528	1.890	MB-07..	1.0
.500	09	MB-E0500-17-09	.374	4.331	1.772	MB-09..	2.2
.500		MB-E0500-25-09	.374	5.118	2.520	MB-09..	2.2
.625		MB-E0625-25-09	.374	5.118	2.520	MB-09..	2.2

¹⁾ To correspond with seat size on insert.

²⁾ Insert tightening torque Nm. Use torque wrench, see page B109.

³⁾ Insert tightening torque ft-lbs. Use torque wrench, see page B109.

General min hole depend on insert, see resp insert ordering page

Main spare parts

Insert size	Insert screw	Key (Torx Plus)
07	5513 039-01	5680 051-03 (9IP)
09	5513 039-02	5680 049-01 (15IP)





Torque wrenches for correct insert clamping

Information


To get the best performance out of our tools, especially in parting and grooving, it is of great importance to have the correct insert tightening torque.

In the Sandvik Coromant assortment four metric and four inch torque wrenches using bits for different Torx Plus sizes are available.

5680 105-01
5680 105-02
5680 105-03
5680 105-04





5680 105-05
5680 105-06
5680 105-07
5680 105-08



Torque wrench	Torque range		Handle
	Nm	In-lbs	
5680 105-01	0.3 - 1.2		Straight
5680 105-02	1.2 - 3.0		Straight
5680 105-05	3.0 - 6.0		Angled
5680 105-06	4.0 - 8.8		Angled
5680 105-03		2.5 - 11.5	Straight
5680 105-04		11.0 - 26.0	Straight
5680 105-07		26.0 - 55.0	Angled
5680 105-08		35.4 - 78.0	Angled

Bit	$l/2$		N_T Torx Plus
	mm	Inch	
5680 084-01	50	1.969	8IP
5680 084-02	50	1.969	15IP
5680 084-03	89	3.504	15IP
5680 084-04	50	1.969	7IP
5680 084-05	50	1.969	9IP
5680 084-06	50	1.969	10IP
5680 084-07	50	1.969	20IP
5680 084-08	89	3.504	20IP
5680 084-09	89	3.504	25IP
5680 084-10	89	3.504	30IP
5680 084-11	50	1.969	6IP
5680 084-12	80	3.150	27IP
5680 084-13	35	1.378	50IP

CoroCut® external screw clamp tools

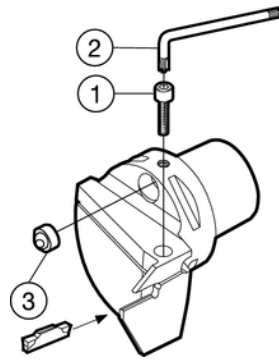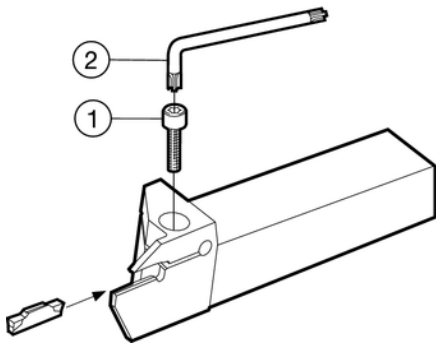



Nozzle for Coromant Capto® cutting units

NF 123	3
Cutting unit size	Nozzle
C3-C4	5691 029-01
C5-C6	5691 029-02
R/L 123	
C3-C4	5691 029-06
C5-C6	5691 029-02

Shank holders		Coromant Capto®	1	2
Metric	Inch		Clamping screw	Key (Torx Plus)
		C3-NF123 G20-00060B C4-NF123 G20-00070B C5-NF123 G20-00070B C6-NF123 G20-00075B	3212 012-310	5680 043-15 (25IP)
NF123J25-2525BM NF123J25-3225BM			5512 044-01 ¹⁾	5680 043-17 (30IP)
		C4-NF123 J25-00077B C5-NF123 J25-00077B C6-NF123 J25-00082B	3212 012-360	5680 043-17 (30IP)
R/LF123D08-1212B	R/LF123D032-08B		3212 012-257	5680 043-14 (20IP)
R/LF123D08-1616B	R/LF123D032-10B	C3-R/LF123D08-22050B	3212 012-259	5680 043-14 (20IP)
R/LF123D08-2020B	R/LF123D032-12B	C4-R/LF123D08-27050B		
R/LF123D08-2525B	R/LF123D032-16B	C5-R/LF123D08-35055B		
R/LF123D10-1010B-S	R/LF123D039-06B-S		5513 021-07	5680 043-13 (15IP)
R/LF123D11-1212B-S	R/LF123D043-08B-S		5513 021-07	5680 043-13 (15IP)
R/LF123D15-1616B	R/LF123D059-10B	C3-R/LF123 D15-22050B	3212 012-259	5680 043-14 (20IP)
R/LF123D15-2020B	R/LF123D059-12B	C4-R/LF123 D15-27055B		
R/LF123D15-2525B	R/LF123D059-16B	C5-R/LF123 D15-35055B		
R/LF123E08-1212B	R/LF123E032-08B		3212 012-257	5680 043-14 (20IP)
R/LF123E08-1616B	R/LF123E032-10B	C3-R/LF123E08-22050B	3212 012-259	5680 043-14 (20IP)
R/LF123E08-2020B	R/LF123E032-12B	C4-R/LF123E08-27050B		
R/LF123E08-2525B	R/LF123E032-16B	C5-R/LF123E08-35060B		
R/LF123E10-1010B-S	R/LF123E039-06B-S		5513 021-07	5680 043-13 (15IP)
R/LF123E11-1212B-S	R/LF123E043-08B-S		5513 021-07	5680 043-13 (15IP)
R/LF123E12-1212B			3212 012-257	5680 043-14 (20IP)
	R/LF123E059-08B		3212 012-257	5680 043-14 (20IP)
R/LF123E15-1616B	R/LF123E059-10B	C3-R/LF123 E15-22055B	3212 012-259	5680 043-14 (20IP)
R/LF123E15-2020B	R/LF123E059-12B	C4-R/LF123 E15-27055B		
R/LF123E15-2525B	R/LF123E059-16B	C5-R/LF123 E15-35060B		
R/LF123E17-1616B-S	R/LF123E067-10B-S		5513 021-04	5680 043-13 (15IP)
R/LF123E17-2020D	R/LF123E067-12D		3212 012-257	5680 043-14 (20IP)
R/LF123F10-1212B			3212 012-257	5680 043-14 (20IP)
R/LF123F10-1616B		C3-R/LF123F10-22050B	3212 012-259	5680 043-14 (20IP)
R/LF123F10-2020B		C4-R/LF123F10-27050B		
R/LF123F10-2525B		C5-R/LF123F10-35060B		
R/LF123F17-1616B-S	R/LF123F067-10B		5513 021-04	5680 043-13 (15IP)
R/LF123F17-2020D	R/LF123F067-12D		3212 012-257	5680 043-14 (20IP)
R/LF123F17-2525D	R/LF123F067-16D			
R/LF123F20-1616B	R/LF123F040-10B	C3-R/LF123 F20-22055B	3212 012-259	5680 043-14 (20IP)
R/LF123F20-2020B	R/LF123F040-12B	C4-R/LF123 F20-27060B		
R/LF123F20-2525B	R/LF123F040-16B	C5-R/LF123 F20-35060B		
R/LF123F20-3225B	R/LF123F040-20B			
	R/LF123F079-10B		3212 012-259	5680 043-14 (20IP)
	R/LF123F079-12B			
	R/LF123F079-16B			
	R/LF123F079-20B			
R/LF123G07-1616C	R/LF123G028-10C		3212 012-310	5680 043-15 (25IP)
R/LF123G07-2020C	R/LF123G028-12C			
R/LF123G07-2525C	R/LF123G028-16C			
R/LF123G10-1616B	R/LF123G040-10B		3212 012-309	5680 043-15 (25IP)
R/LF123G10-2020B	R/LF123G040-12B	C3-R/LF123G10-22050B	3212 012-310	5680 043-15 (25IP)
R/LF123G10-2525B	R/LF123G040-16B	C4-R/LF123G10-27055B		
R/LF123G10-3225B	R/LF123G040-20B	C5-R/LF123G10-35060B		
	R/LF123G040-24B			
R/LF123G12-1212B			3212 012-257	5680 043-14 (20IP)
R/LF123G12-2525B-034B	R/LF123G047-016B-034B		3212 012-310	5680 043-15 (25IP)
R/LF123G12-2525B-038B	R/LF123G047-016B-038B			

¹⁾ For holder without M in the ordering code, use screw 3212 012-360

CoroCut® external screw clamp tools

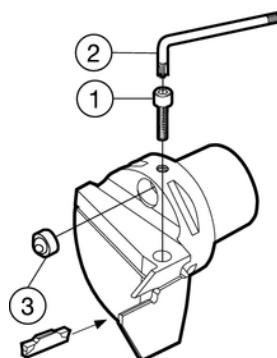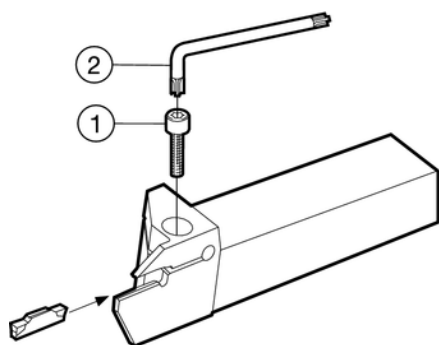


Nozzle for Coromant Capto® cutting units

Cutting unit size	Nozzle
C3-C4	5691 029-06
C5-C6	5691 029-02

Shank holders		Coromant Capto®	1	2
Metric	Inch		Clamping screw	Key (Torx Plus)
R/LF123G12-2020B-034B	R/LF123G047-12B-034B		3212 012-310	5680 043-15 (25IP)
R/LF123G12-2020B-038B	R/LF123G047-12B-038B			
R/LF123G13-2020B-042B	R/LF123G050-12B-042B			
R/LF123G13-2020B-054B	R/LF123G050-12B-054B			
R/LF123G13-2020B-067B	R/LF123G050-12B-067B			
R/LF123G13-2020B-090B	R/LF123G050-12B-090B			
R/LF123G13-2020B-130B	R/LF123G050-12B-130B			
R/LF123G17-1616B-S	R/LF123G067-10B-S		5513 021-04	5680 043-13 (15IP)
R/LF123G19-2525B-042B	R/LF123G075-16B-042B		3212 012-310	5680 043-15 (25IP)
R/LF123G19-2525B-054B	R/LF123G075-16B-054B			
	R/LF123G075-16B-067B			
R/LF123G20-1616B			3212 012-309	5680 043-15 (25IP)
R/LF123G20-2020B	R/LF123G079-12B	C3-R/LF123 G20-22055B	3212 012-310	5680 043-15 (25IP)
R/LF123G20-2525B	R/LF123G079-16B	C4-R/LF123 G20-27060B		
R/LF123G20-3225B	R/LF123G079-20B	C5-R/LF123 G20-35060B		
R/LF123G20-3232B	R/LF123G079-24B	C6-R/LF123 G20-45065B		
R/LF123G22-2020D	R/LF123G087--12D		32312 012-310	5680 043-15 (25IP)
R/LF123G22-2525D	R/LF123G087--16D			
R/LF123G22-2525B-067B				
R/LF123G22-2525B-090B	R/LF123G087-16B-090B			
R/LF123G22-2525B-130B	R/LF123G087-16B-130B			
R/LF123H13-1616B	R/LF123H051-10B		3212 012-309	5680 043-15 (25IP)
R/LF123H13-2020BM	R/LF123H051-12BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123H13-2525BM	R/LF123H051-16BM			
R/LF123H13-3225BM	R/LF123H051-20BM			
R/LF123H13-3232BM	R/LF123H051-24BM			
R/LF123H13-2020B-040BM	R/LF123H050-16B-040BM		5512 044-01	5680 043-17 (30IP)
R/LF123H13-2020B-052BM	R/LF123H050-16B-052BM			
R/LF123H13-2020B-064BM	R/LF123H050-16B-064BM			
R/LF123H13-2020B-092BM	R/LF123H050-16B-092BM			
R/LF123H13-2020B-132BM	R/LF123H050-16B-132BM			

1) For holder without M in the ordering code, use screw 3212 012-360

CoroCut® external screw clamp tools

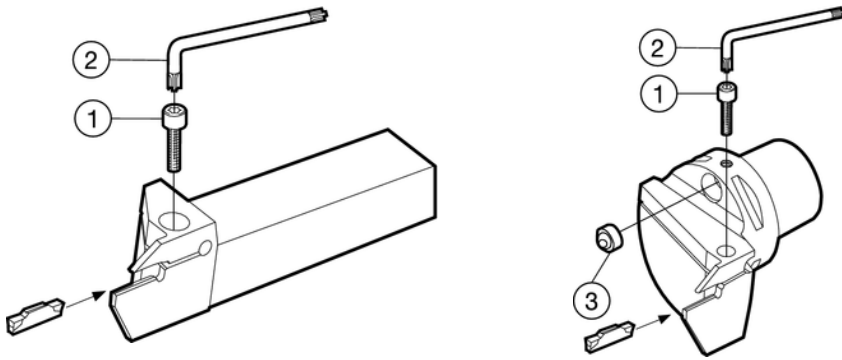



Nozzle for Coromant Capto® cutting units

Cutting unit size	Nozzle
C3-C4	5691 029-06
C5-C6	5691 029-02

Shank holders		Coromant Capto®	1	2
Metric	Inch		Clamping screw	Key (Torx Plus)
		C3-R/LF123 H13-22055B C4-R/LF123 H13-27055B C5-R/LF123 H13-35060B C6-R/LF123 H13-45065B	3212 012-360	5680 043-17 (30IP)
		C3-R/LF123 H20-22060B C4-R/LF123 H25-27067B C5-R/LF123 H25-35060B C6-R/LF123 H25-45065B	3212 012-360	5680 043-17 (30IP)
R/LF123H25-2020BM	R/LF123H098-12BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123H25-2525BM	R/LF123H098-16BM			
R/LF123H25-3225BM	R/LF123H098-20BM			
R/LF123H25-3232BM	R/LF123H098-24BM			
R/LF123H25-2525B-064BM	R/LF123H100-16B-064BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123H25-2525B-092BM	R/LF123H100-16B-092BM			
R/LF123H25-2525B-132BM	R/LF123H100-16B-132BM			
R/LF123H25-2525B-220BM	R/LF123H100-16B-220BM			
R/LF123H25-2525B-300BM	R/LF123H100-16B-300BM			
R/LF123J13-2020BM			5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123J13-2525BM	R/LF123J051-16BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123J13-3225BM	R/LF123J051-20BM			
R/LF123J13-3232BM	R/LF123J051-24BM			
R/LF123J13-2525-040BM	R/LF123J050-16B-040BM		5512 044-01	5680 043-17 (30IP)
R/LF123J13-2525-060BM	R/LF123J050-16B-060BM			
R/LF123J13-2525-085BM	R/LF123J050-16B-085BM			
R/LF123J13-2525-120BM	R/LF123J050-16B-120BM			
R/LF123J13-2525-175BM	R/LF123J050-16B-175BM			
		C4-R/LF123 J13-27055B C5-R/LF123 J13-35060B C6-R/LF123 J13-45065B C8-R/LF123 J13-42080B	3212 012-360	5680 043-17 (30IP)
R/LF123J20-2525B-040BM	R/LF123J079-16B-040BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123J20-2525B-180BM	R/LF123J079-16B-180BM			
R/LF123J22-2525B				
R/LF123J25-2525B-060BM	R/LF123J100-16B-060BM			
R/LF123J25-2525B-085BM	R/LF123J100-16B-085BM			
R/LF123J25-2525B-120BM	R/LF123J100-16B-120BM			
R/LF123J25-2525B-175BM	R/LF123J100-16B-175BM			

¹⁾ For holder without M in the ordering code, use screw 3212 012-360

CoroCut® external screw clamp tools

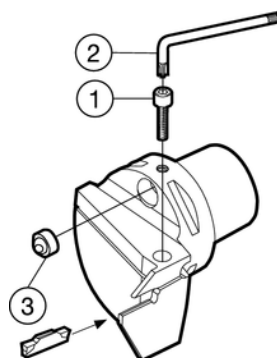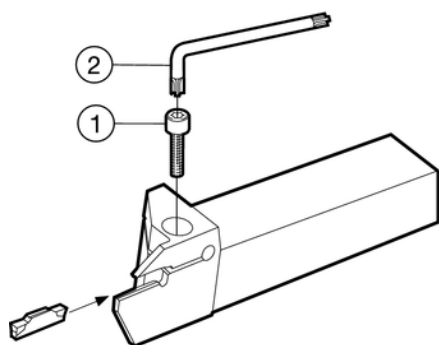



Nozzle for Coromant Capto® cutting units

Cutting unit size	Nozzle
C3-C4	5691 029-06
C5-C6	5691 029-02

Shank holders		Coromant Capto®	1	2
Metric	Inch		Clamping screw	Key (Torx Plus)
		C4-R/LF123 J25-27067B C5-R/LF123 J25-35067B C6-R/LF123 J25-45067B	3212 012-360	5680 043-17 (30IP)
R/LF123J32-2525BBM	R/LF123J126-16BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123J32-3225BBM	R/LF123J126-20BM			
R/LF123J32-3232BBM	R/LF123J126-24BM			
R/LF123K08-2020C	R/LF123K032-12C		5512 044-01	5680 043-17 (30IP)
R/LF123K08-2525CM	R/LF123K032-16CM			
R/LF123K13-2525B-040BM	R/LF123K050-16B-040BM		5512 044-01	5680 043-17 (30IP)
R/LF123K13-2525B-058BM	R/LF123K050-16B-058BM			
R/LF123K13-2525B-088BM	R/LF123K050-16B-088BM			
R/LF123K13-2525B-168BM	R/LF123K050-16B-168BM			
	R/LF123K050-16B-220BM			
		C4-R/LF123 K16-27050B C5-R/LF123 K16-35060B C6-R/LF123 K16-45065B C8-R/LF123 K16-42080B	3212 012-360	5680 043-17 (30IP)
R/LF123K16-2525BM	R/LF123K063-16BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123K16-3225BM	R/LF123K063-20BM			
R/LF123K16-3232BM	R/LF123K063-24BM			
	R/LF123K063-32BM			
R/LF123K20-2525B-040BM	R/LF123K079-16B-040BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123K25-2525B-058BM	R/LF123K100-16B-058BM			
R/LF123K25-2525B-088BM	R/LF123K100-16B-088BM			
R/LF123K25-2525B-168BM	R/LF123K100-16B-168BM			
R/LF123K25-2525B-220BM	R/LF123K100-16B-220BM			
R/LF123K25-3225B-088BM	R/LF123K079-16B-040BM		5512 044-01	5680 043-17 (30IP)
R/LF123K25-3225B-168BM	R/LF123K100-16B-058BM			
R/LF123K25-3225B-220BM	R/LF123K100-16B-088BM			
	R/LF123K100-16B-168BM			
	R/LF123K100-16B-220BM			
		C4-R/LF123 K25-27070B C5-R/LF123 K25-35070B C5-R/LF123 K25-45075B	3212 012-360	5680 043-17 (30IP)
R/LF123K32-2525BM	R/LF123K126-16BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123K32-3225BM	R/LF123K126-20BM			
R/LF123K32-3232BM	R/LF123K126-24BM			
	R/LF123K126-32BM			
	R/LF123L110-16B-075BM			
	R/LF123L110-16B-140BM			
R/LF123L15-2525B-075BM	R/LF123L110-20B-075BM		5512 044-01	5680 043-17 (30IP)
R/LF123L15-2525B-140BM	R/LF123L110-20B-140BM			
R/LF123L16-2525BM	R/LF123L063-16BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123L25-2525BM	R/LG123L100-16BM			
R/LF123L25-3225BM	R/LF123L100-20BM			
R/LF123L25-2525B-050BM				
R/LF123L28-2525B-075BM				
R/LF123L28-2525B-140BM				
R/LF123L28-3225B-075BM			5512 044-01	5680 043-17 (30IP)
R/LF123L28-3225B-140BM				
		C5-R/LF123 L13-35060B C6-R/LF123 L16-45065B	3212 012-360	5680 043-17 (30IP)
		C5-R/LF123 L25-35070B C6-R/LF123 L25-45075B	3212 012-360	5680 043-17 (30IP)
R/LF123L32-3225BM	R/LF123L138-20BM		5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LF123L32-3232BM	R/LF123L138-24BM			
R/LF123M32-3232B	R/LF123M125-20B		5512 044-01	5680 048-07 (30IP)
NF123M32-4040B	NF123M125-24B			
R/LF123M32-4040B	R/LF123M125-24B			

¹⁾ For holder without M in the ordering code, use screw 3212 012-360

CoroCut® external screw clamp tools

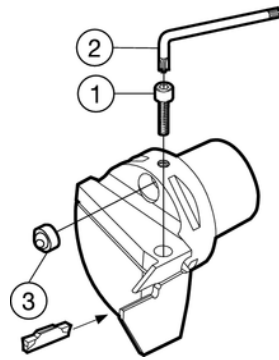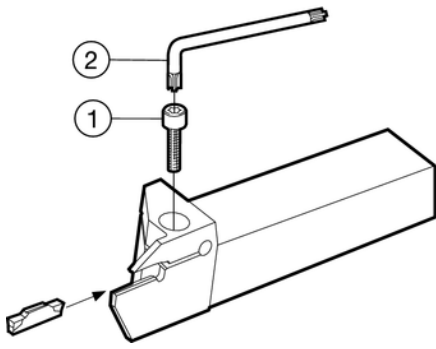

Nozzle for Coromant Capto® cutting units


Cutting unit size	Nozzle
C3-C4	5691 029-06
C5-C6	5691 029-02

Shank holders		Coromant Capto®	
Metric	Inch	1	2
		Clamping screw	Key (Torx Plus)
R/LF123M50-4040B	R/LF123M200-24B	5512 046-01	5680 048-15 (25IP)
R/LF123R32-3232B	R/LF123R125-20B	5512 044-01	5680 048-07 (30IP)
NF123R32-4040B	NF123R125-24B		
R/LF123R32-4040B	R/LF123R125-24B		
R/LF123R50-4040B	R/LF123R200-24B	3212 012-311	5680 048-15 (25IP)
R/LG123G07-1616C	R/LG123G028-10C	3212 012-310	5680 043-17(30IP)
R/LG123G07-2020C	R/LG123G028-12C		
R/LG123G07-2525C	R/LG123G028-16C		
R/LG123H13-2525B-040BM	R/LF123H050-2525B-040BM	5512 044-01	5680 043-17(30IP)
R/LG123H13-2525B-052BM	R/LF123H050-2525B-052BM		
R/LG123H13-2525B-064BM	R/LF123H050-2525B-064BM		
R/LG123H13-2525B-092BM	R/LF123H050-2525B-092BM		
R/LG123H13-2525B-132BM	R/LF123H050-2525B-132BM		
R/LG123H13-2525B-220BM	R/LF123H050-2525B-220BM		
R/LG123H13-2525B-300BM	R/LF123H050-2525B-300BM		
R/LG123H20-2525B-064BM	R/LG123H079-16B-064BM	5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LG123H20-2525B-092BM	R/LG123H079-16B-092BM		
R/LG123H20-2525B-132BM	R/LG123H079-16B-132BM		
R/LG123K08-2020C	R/LG123K032-12C	5512 044-01	5680 043-17 (30IP)
R/LG123K08-2525CM	R/LG123K032-16CM		
R/LG123K20-2525B-058BM	R/LG123K079-16B-058BM	5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LG123K20-2525B-088BM	R/LG123K079-16B-088BM		
R/LG123K20-2525B-168BM	R/LG123K079-16B-168BM		
R/LG123L20-2525B-050BM	R/LG123L079-16B-050BM	5512 044-01 ¹⁾	5680 043-17 (30IP)
R/LG123L20-2525B-075BM	R/LG123L079-16B-075BM		
R/LG123L20-2525B-140BM	R/LG123L079-16B-140BM		
R/LX123J16-2525B-070	R/LX123J062-16B-070	3212 012-360	5680 043-17 (30IP)
R/LX123J16-3232B-070	R/LX123J062-20B-070		
R/LX123L25-2525B-007	R/LX123L095-16B-007	3212 012-360	5680 043-17 (30IP)
R/LX123L25-3232B-007	R/LX123L095-20B-007		
R/LX123G04-2020B-045	R/LX123G016-12B-045	3212 012-309	5680 043-15 (25IP)
R/LX123G04-2525B-045	R/LX123G016-16B-045		
R/LX123J05-2020B-045	R/LX123J020-12B-045	3212 012-360	5680 043-17 (30IP)
R/LX123J05-2525B-045	R/LX123J020-16B-045		
R/LX123J05-3225B-045	R/LX123J020-20B-045		


¹⁾ For holder without M in the ordering code, use screw 3212 012-360

CoroCut® parting blade

Spring clamp

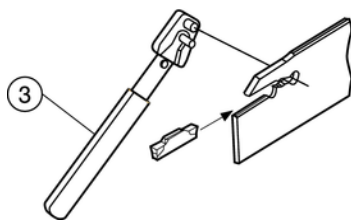


Screw clamp



	1	2	3 ¹⁾
Parting blade	Clamping screw	Key (Torx Plus)	Insert key
N123D15-21A2	-	-	5680 058-01
N123D15-25A2	-	-	-
N123E15-21A2	-	-	5680 058-01
N123E20-25A2	-	-	-
N123F30-21A2	-	-	5680 058-01
N123F55-25A2	-	-	-
N123G30-21A2	-	-	5680 058-01
N123G55-25A2	-	-	-
N123H55-25A2	-	-	5680 058-01
N123J55-25A2	-	-	5680 058-01
N123K55-25A2	-	-	5680 058-01
R/LF123E25-25B1	3212 012-259	5680 043-14 (20IP)	-
R/LF123F25-25B1	3212 012-259	5680 043-14 (20IP)	-
R/LF123G25-25B1	3212 012-259	5680 043-14 (20IP)	-
R/LF123H32-25B1	3212 012-259	5680 043-14 (20IP)	-
R/LF123M100-45B1	5512 046-01	5680 043-15 (25IP)	-
R/LF123M120-93B1	5512 046-01	5680 043-15 (25IP)	-
R/LF123R120-93B1	3212 012-311	5680 043-15 (25IP)	-



1) Optional part delivered to separate order.

CoroCut® internal screw clamp tools



Shank holders		1	2
Metric	Inch	Clamping screw	Key (Torx Plus)
R/LAG123D 04-16B	R/LAG123D 016-10B	5512 031-03	5680 043-13 (15IP)
R/LAG123D 05-20B	R/LAG123D 020-12B	5512 031-03	5680 043-13 (15IP)
R/LAG123E 05-20B	R/LAG123E 020-12B	5512 031-03	5680 043-13 (15IP)
R/LAG123E 07-25B	R/LAG123E 028-16B	3212 012-259	5680 043-14 (20IP)
R/LAG123E 09-32B	R/LAG123E 035-20B	3212 012-259	5680 043-14 (20IP)
R/LAG123G 06-20B	R/LAG123G 024-12B	5512 031-03	5680 043-13 (15IP)
R/LAG123G 07-25B	R/LAG123G 030-16B	3212 012-309	5680 043-15 (25IP)
R/LAG123G 09-32B	R/LAG123G 037-20B	3212 012-309	5680 043-15 (25IP)
R/LAG123G 11-40B	R/LAG123G 043-24B	3212 012-309	5680 043-15 (25IP)
R/LAG123H 07-25B	R/LAG123H 030-16B	3212 012-309	5680 043-15 (25IP)
R/LAG123H 10-32B	R/LAG123H 039-20B	3212 012-359	5680 043-17 (30IP)
R/LAG123H 11-40B	R/LAG123H 043-24B	3212 012-360	5680 043-17 (30IP)
R/LAG123H 13-50B	R/LAG123H 051-32B	3212 012-360	5680 043-17 (30IP)
R/LAG123J 08-25B	R/LAG123J 031-16B	3212 012-309	5680 043-15 (25IP)
R/LAG123J 11-32B	R/LAG123J 045-20B	3212 012-359	5680 043-17 (30IP)
R/LAG123J 11-40B	R/LAG123J 045-24B	3212 012-360	5680 043-17 (30IP)
R/LAG123J 13-50B	R/LAG123J 051-32B	3212 012-360	5680 043-17 (30IP)
R/LAG123K 11-40B	R/LAG123K 043-24B	3212 012-360	5680 043-17 (30IP)
R/LAG123K 13-50B	R/LAG123K 053-32B	3212 012-360	5680 043-17 (30IP)
R/LAX123J 25-40B-020	R/LAX123J094-24B-020	5512-044-01	5680 043-17 (30IP)
R/LAX123L 25-40B-020	R/LAX123L094-24B-020	5512-044-01	5680 043-17 (30IP)

CoroCut® 3 external tools



Shank holders		Coromant Capto®		1	2	4 ¹⁾
Metric	Inch	Clamping screw	Key (Torx Plus)	Screwdriver ¹⁾		
RF123T06-1010BM	RF123T023-06BM	–	5513 020-63 ²⁾	5680 049-01 (15IP)	5680 046-01 (8IP)	
RF123T06-1212BM	RF123T023-08BM	–	5513 020-62 ³⁾	5680 049-01 (15IP)	5680 046-01 (8IP)	
RF123T06-1616BM	RF123T023-10BM	–	C3-RF123T06-22045BM	5513 020-62 ³⁾	5680 049-01 (15IP)	5680 046-01 (8IP)
			C4-RF123T06-27060BM	5513 020-62 ³⁾	5680 049-01 (15IP)	5680 046-01 (8IP)
RF123T06-2020BM	RF123T023-12BM	–	5513 020-62 ³⁾	5680 049-01 (15IP)	5680 046-01 (8IP)	
RF123T06-2525BM	RF123T023-16BM	–				
RF123T06-3232BM	RF123T023-20BM	–				
LF123U06-1010BM	LF123U023-06BM	–	5513 020-63 ²⁾	5680 049-01 (15IP)	5680 046-01 (8IP)	
LF123U06-1212BM	LF123U023-08BM	–	5513 020-62 ³⁾	5680 049-01 (15IP)	5680 046-01 (8IP)	
LF123U06-1616BM	LF123U023-10BM	–	C3-LF123U06-22045BM	5513 020-62 ³⁾	5680 049-01 (15IP)	5680 046-01 (8IP)
			C4-LF123U06-27060BM	5513 020-62 ³⁾	5680 049-01 (15IP)	5680 046-01 (8IP)
LF123U06-2020BM	LF123U023-12BM	–	5513 020-62 ³⁾	5680 049-01 (15IP)	5680 046-01 (8IP)	
LF123U06-2525BM	LF123U023-16BM	–				
LF123U06-3232BM	LF123U023-20BM	–				

1) Optional part to be ordered separately.


2) For holders without M in the ordering code use screw 5513 020-09

3) For holders without M in the ordering code use screw 5513 020-32

Nozzle for Coromant Capto® cutting units

Cutting unit size	Nozzle
C3-C4	5691 029-08
C5-C6	5691 029-02



Insert changing and clamping for T-Max Q-Cut® external spring clamp tools

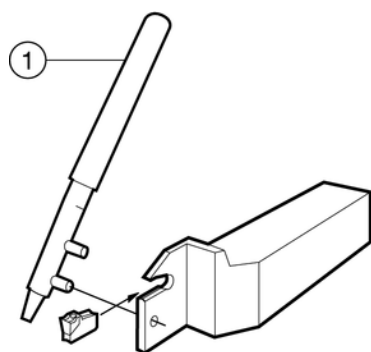

Shank holders			Shank holders		
Metric	Inch	Insert key	Metric	Inch	Insert key
R/L151.20-0808-20	R151.20-06-20	5680 057-021	R/L151.21-1616-20	R/L151.21-10-20	5680 057-021
R/L151.20-1010-20	R/L151.20-08-20		R/L151.21-1616-25	R/L151.21-10-25	
R/L151.20-1212-20	R/L151.20-10-20		R/L151.21-2020-25	R/L151.21-12-25	
R/L151.20-1612-20			R/L151.21-2020-30	R/L151.21-12-30	
R/L151.20-1616-20			R/L151.21-2525-30	R/L151.21-16-30	
R/L151.20-1212-25	R/L151.20-08-25		R/L151.21-3225-30		
R/L151.20-1612-25	R/L151.20-10-25			151.2-12-20-5	
R/L151.20-1616-25	R/L151.20-12-25			151.2-12-25-5	
R/L151.20-2012-25				151.2-17-25-5	
R/L151.20-2016-25				151.2-17-30-5	
R/L151.20-2020-25			151.2-22-30-5		
R/L151.20-2525-25			151.2-28-30-5		
R/L151.20-1612-30	R/L151.20-10-30	5680 057-011	R/L151.20-2020-40	R/L151.20-12-40	
R/L151.20-1616-30	R/L151.20-12-30		R/L151.20-2525-40	R/L151.21-12-40	
R/L151.20-2012-30	R/L151.20-12-30A		R/L151.21-2020-40	R/L151.21-12-40	
R/L151.20-2016-30			R/L151.21-2525-40	R/L151.21-16-40	
R/L151.20-2020-30			R/L151.21-3225-40	R/L151.21-16-40A	
R/L151.20-2020-30A			R/L151.21-2525-40A	R/L151.21-20-40	
R/L151.20-2525-30A			R/L151.21-3225-40A		
			R/L151.21-3232-40		
			R/L151.21-2525-50	R/L151.21-16-50	
			R/L151.21-3232-50	R/L151.21-20-50	
			R/L151.21-2525-60	R/L151.21-16-60	
			R/L151.21-3232-60	R/L151.21-20-60	
				151.2-28-40-5	
				151.2-28-60-5	

Blades	Insert key	Blades	Insert key
151.2-27-20-8	5680 057-021	151.2-27-40-8	5680 057-011
151.2-27-25-8		151.2-27-50-8	
151.2-27-30-8		151.2-40-40-8	
151.2-36-30-8		151.2-40-50-8	
151.2-40-20-8		151.2-56-50-8	
151.2-40-25-8		151.2-56-60-8	
151.2-40-30-8		151.2-21-40	
R/L151.2-16-30-8		151.2-25-40	
151.2-21-20		151.2-25-50	
151.2-21-25		151.2-25-60	
151.2-25-25			
151.2-21-30			
151.2-25-30			

T-Max Q-Cut® external screw clamp tools

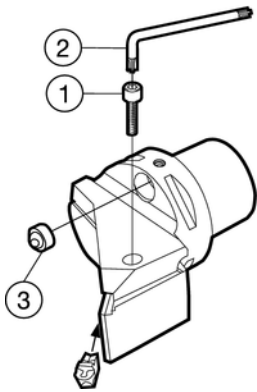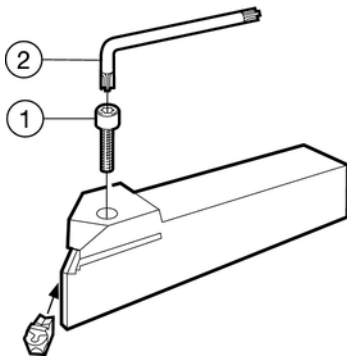


Shank holders		Coromant Capto®		1	2
Metric	Inch			Clamping screw	Key (Torx Plus)
	R/LB151.22-24-20			3212 012-259	5680 043-14 (20IP)
	R/LB151.22-24-25				
	R/LB151.22-24-30				
	R/LB151.22-24-40			3212 012-360	5680 043-17 (30IP)
	R/LB151.22-24-50				
	R/LB151.22-24-60				
	R/LB151.22-24-80				
R/LF151.22-1616-20	R/LF151.22-10-20	C3-R/LF151.22-22045-20		3212 012-259	5680 043-14 (20IP)
R/LF151.22-2020-20	R/LF151.22-12-20	C4-R/LF151.22-27050-20			
R/LF151.22-2525-20	R/LF151.22-16-20	C5-R/LF151.22-35060-20			
R/LF151.22-1616-25	R/LF151.22-10-25	C3-R/LF151.22-22050-25		3212 012-259	5680 043-14 (20IP)
R/LF151.22-2020-25	R/LF151.22-12-25	C4-R/LF151.22-27050-25			
R/LF151.22-2525-25	R/LF151.22-16-25	C5-R/LF151.22-35060-25			
R/LF151.22-1616-30	R/LF151.22-12-30	C3-R/LF151.22-22050-30		3212 012-259	5680 043-14 (20IP)
R/LF151.22-2020-30	R/LF151.22-16-30	C4-R/LF151.22-27055-30			
R/LF151.22-2525-30	R/LF151.22-20-30	C5-R/LF151.22-35060-30			
R/LF151.22-3225-30		C6-R/LF151.22-45065-30			
R/LF151.22-2020-40	R/LF151.22-12-40	C4-R/LF151.22-27055-40		3212 012-360	5680 043-17 (30IP)
R/LF151.22-2525-40	R/LF151.22-16-40	C5-R/LF151.22-35060-40			
R/LF151.22-3225-40	R/LF151.22-20-40	C6-R/LF151.22-45065-40			
R/LF151.22-2525-50	R/LF151.22-16-50	C4-R/LF151.22-27055-50		3212 012-360	5680 043-17 (30IP)
R/LF151.22-3225-50	R/LF151.22-20-50	C5-R/LF151.22-35060-50			
		C6-R/LF151.22-45065-50			
		C8-R/LF151.22-42080-50			
R/LF151.22-2525-60	R/LF151.22-16-60	C5-R/LF151.22-35060-60		3212 012-360	5680 043-17 (30IP)
R/LF151.22-3225-60	R/LF151.22-20-60	C6-R/LF151.22-45065-60			
		C8-R/LF151.22-42080-60			
		C8-R/LF151.22-42080-80		3212 012-360	5680 043-17 (30IP)
R/LS151.22-2525-20	R/LS151.22-12-20	C3-R/LS151.22-22045-20		3212 012-259	5680 043-14 (20IP)
		C4-R/LS151.22-27050-20			
R/LS151.22-2525-25	R/LS151.22-12-25	C3-R/LS151.22-22050-25		3212 012-259	5680 043-14 (20IP)
	R/LS151.22-16-25	C4-R/LS151.22-27050-25			
		C4-R/LS151.22-35060-25			
R/LS151.22-2020-30	R/LS151.22-12-30	C3-R/LS151.22-22050-30		3212 012-259	5680 043-14 (20IP)
R/LS151.22-2525-30	R/LS151.22-16-30	C4-R/LS151.22-27055-30			
	R/LS151.22-20-30	C5-R/LS151.22-35060-30			
R/LS151.22-2020-40	R/LS151.22-16-40	C4-R/LS151.22-27055-40		3212 012-360	5680 043-17 (30IP)
R/LS151.22-2525-40	R/LS151.22-20-40	C5-R/LS151.22-35060-40			
R/LS151.22-2525-50	R/LS151.22-20-50	C4-R/LS151.22-27055-50		3212 012-360	5680 043-17 (30IP)
R/LS151.22-3225-50		C5-R/LS151.22-35060-50			
R/LS151.22-2525-60	R/LS151.22-20-60	C5-R/LS151.22-35060-60		3212 012-360	5680 043-17 (30IP)
R/LS151.22-3225-60		C6-R/LS151.22-45065-60			
	R/LB151.23-24-20			3212 012-059	5680 043-14 (20IP)
	R/LB151.23-24-25				
	R/LB151.23-24-30				
	R/LB151.23-24-40			3212 012-360	5680 043-17 (30IP)
	R/LB151.23-24-50				
	R/LB151.23-24-60				
	R/LB151.23-24-80				
R/LF151.23-1616-20M1	R/LF151.23-08-20	C3-R/LF151.23-22050-20		3212 012-309	5680 043-14 (20IP)
R/LF151.23-2020-20M1	R/LF151.23-10-20	C4-R/LF151.23-27055-20			
R/LF151.23-2525-20M1		C5-R/LF151.23-35060-20			
R/LF151.23-1616-25M1	R/LF151.23-08-25	C3-R/LF151.23-22055-25		3212 012-259	5680 043-14 (20IP)
R/LF151.23-2020-25M1	R/LF151.23-10-25	C4-R/LF151.23-27060-25			
R/LF151.23-2525-25M1	R/LF151.23-12-25	C5-R/LF151.23-35060-25			
R/LF151.23-1616-30M1	R/LF151.23-12-30	C3-R/LF151.23-22055-30		3212 012-310	5680 043-15 (25IP)
R/LF151.23-2020-30M1	R/LF151.23-16-30	C4-R/LF151.23-27060-30			
R/LF151.23-2525-30M1	R/LF151.23-20-30	C5-R/LF151.23-35060-30			
R/LF151.23-3225-30M1		C6-R/LF151.23-45065-30			
R/LF151.23-2020-40M1	R/LF151.23-12-40	C4-R/LF151.23-27067-40		3212 012-360	5680 043-17 (30IP)
R/LF151.23-2525-40M1	R/LF151.23-16-40	C5-R/LF151.23-35067-40			
R/LF151.23-3225-40M1	R/LF151.23-20-40	C6-R/LF151.23-45067-40			
R/LF151.23-2525-50M1	R/LF151.23-16-50	C5-R/LF151.23-35075-50		3212 012-360	5680 043-17 (30IP)
R/LF151.23-3225-50M1	R/LF151.23-20-50	C6-R/LF151.23-45075-50			
R/LF151.23-2525-60M1	R/LF151.23-16-60	C5-R/LF151.23-35075-60		3212 012-360	5680 043-17 (30IP)
R/LF151.23-3225-60M1	R/LF151.23-20-60	C6-R/LF151.23-45080-60			

Nozzle for Coromant Capto® cutting units


Cutting unit size	3 Nozzle
C3-C4	5691 029-01
C5-C6	5691 029-02

T-Max Q-Cut® external screw clamp tools

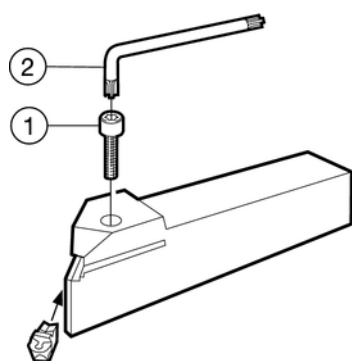

Shank holders		1	2
Metric	Inch	Clamping screw	Key (Torx Plus)
R/LF151.37-2525-024B25	R/LF151.37-16-024B25	3212 012-360	5680 043-17 (30IP)
R/LF151.37-2525-029B25	R/LF151.37-16-029B25		
R/LF151.37-2525-034B25	R/LF151.37-16-034B25		
R/LF151.37-2525-044B25	R/LF151.37-16-044B25		
R/LF151.37-2525-064B25	R/LF151.37-16-064B25		
	R/LF151.37-16-094B25		
	R/LF151.37-16-132B25		
R/LF151.37-2525-027B30	R/LF151.37-16-027B30	3212 012-360	5680 043-17 (30IP)
R/LF151.37-2525-032B30	R/LF151.37-16-032B30		
R/LF151.37-2525-042B30	R/LF151.37-16-042B30		
R/LF151.37-2525-062B30	R/LF151.37-16-062B25		
R/LF151.37-2525-112B30	R/LF151.37-16-112B30		
R/LF151.37-2525-025B40	R/LF151.37-16-025B40	3212 012-360	5680 043-17 (30IP)
R/LF151.37-2525-030B40	R/LF151.37-16-030B40		
R/LF151.37-2525-045B40	R/LF151.37-16-045B40		
R/LF151.37-2525-070B40	R/LF151.37-16-070B40		
R/LF151.37-2525-090B40	R/LF151.37-16-090B40		
R/LF151.37-2525-023B50	R/LF151.37-16-023B50	3212 012-360	5680 043-17 (30IP)
R/LF151.37-2525-038B50	R/LF151.37-16-038B50		
R/LF151.37-2525-058B50	R/LF151.37-16-058B50		
R/LF151.37-2525-088B50	R/LF151.37-16-088B50		
R/LG151.37-2525-027B30	R/LF151.37-16-027B30	3212 012-360	5680 043-17 (30IP)
R/LG151.37-2525-032B30	R/LF151.37-16-032B30		
R/LG151.37-2525-042B30	R/LF151.37-16-042B30		
R/LG151.37-2525-023B50	R/LF151.37-16-023B50	3212 012-360	5680 043-17 (30IP)
R/LG151.37-2525-038B50	R/LF151.37-16-038B50		
NF151.42-2525-40		3212 012-360	5680 043-17 (30IP)
NF151.42-3225-40			
NF151.42-2525-60		3212 012-360	5680 043-17 (30IP)
NF151.42-3225-60			
R/LF151.42-2525-40		3212 012-360	5680 043-17 (30IP)
R/LF151.42-3225-40			
R/LF151.42-2525-60		3212 012-360	5680 043-17 (30IP)
R/LF151.42-3225-60			


T-Max Q-Cut® internal screw clamp tools

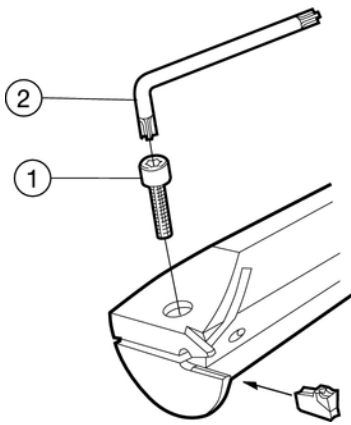

Shank holders		1	2
Metric	Inch	Clamping screw	Key (Torx Plus)
R/LAF151.37-25-024A25		3212 012-257	5680 043-14 (20IP)
R/LAF151.37-25-024A30		3212 012-257	5680 043-14 (20IP)
R/LAF151.37-25-025A30			
R/LAF151.37-40-035A50		3212 012-359	5680 043-17 (30IP)
R/LAF151.37-40-036A50			
R/LAG151.22-25R-20	R/LAG151.22-D16-20	3212 012-257	5680 043-14 (20IP)
R/LAG151.22-32S-20	R/LAG151.22-D20-20		
R/LAG151.22-25R-25	R/LAG151.22-D15-25	3212 012-257	5680 043-14 (20IP)
R/LAG151.22-32S-25	R/LAG151.22-D20-25		
R/LAG151.22-40T-25	R/LAG151.22-D24-25		
R/LAG151.22-25R-30	R/LAG151.22-D16-30	3212 012-257	5680 043-14 (20IP)
R/LAG151.22-32S-30	R/LAG151.22-D20-30		
R/LAG151.22-40T-30	R/LAG151.22-D24-30		
R/LAG151.22-32S-40	R/LAG151.22-D20-40	3212 012-359	5680 043-17 (30IP)
R/LAG151.22-40T-40	R/LAG151.22-D24-40		
R/LAG151.22-50U-40	R/LAG151.22-D32-40		
R/LAG151.22-32S-50	R/LAG151.22-D20-50	3212 012-359	5680 043-17 (30IP)
R/LAG151.22-40T-50	R/LAG151.22-D24-50		
R/LAG151.22-50U-50	R/LAG151.22-D32-50		
R/LAG151.22-40T-60	R/LAG151.22-D20-60	3212 012-359	5680 043-17 (30IP)
R/LAG151.22-50U-60	R/LAG151.22-D24-60		
	R/LAG151.22-D32-60		
	R/LAG151.32-D12M59-25	5512 031-04	5680 043-10 (8IP)
R/LAG151.32-16M-20	R/LAG151.32-D10-20	5512 031-03	5680 043-13 (15IP)
R/LAG151.32-20Q-20	R/LAG151.32-D12-20		
R/LAG151.32-16M-25	R/LAG151.32-D10-25	5512 031-03	5680 043-13 (15IP)
R/LAG151.32-20Q-25	R/LAG151.32-D12-25		
R/LAG151.32-25R-25	R/LAG151.32-D16-25		
R/LAG151.32-32S-25	R/LAG151.32-D20-25		
R/LAG151.32-20Q-30	R/LAG151.32-D12-30	5512 031-03	5680 043-13 (15IP)
R/LAG151.32-25R-30	R/LAG151.32-D16-30		
R/LAG151.32-32S-30	R/LAG151.32-D20-30		
R/LAG151.32-25R-40	R/LAG151.32-D16-40	5512 031-03	5680 043-13 (15IP)
R/LAG151.32-32S-40	R/LAG151.32-D20-40	3212 012-359	5680 043-17 (30IP)
R/LAG151.32-40T-40	R/LAG151.32-D24-40	3212 012-359	5680 043-17 (30IP)
R/LAG151.32-32S-50	R/LAG151.32-D20-50	3212 012-359	5680 043-17 (30IP)
R/LAG151.32-40T-50	R/LAG151.32-D24-50		
R/LAG151.32-40T-60	R/LAG151.32-D24-60	3212 012-359	5680 043-17 (30IP)
R/LAG151.32-16M12-20	R/LAG151.32-D10M47-20	5512 031-07	5680 043-10 (8IP)
R/LAG151.32-16M15-25	R/LAG151.32-D10M59-25	5512 031-04	5680 043-10 (8IP)
R/LAG151.32-20Q16-30	R/LAG151.32-D12M63-30		
R/LAG151.32-20Q18-40	R/LAG151.32-D12Q71-40	5512 031-03	5680 043-10 (8IP)


Adaptors for CoroCut® and T-Max Q-Cut® parting blades

Radial mounting

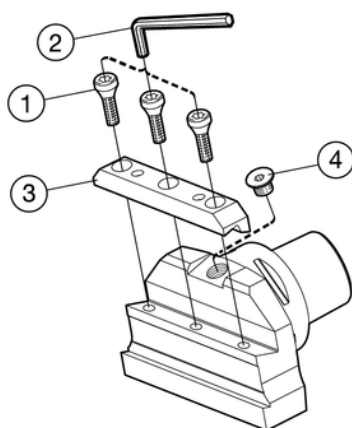


	1	2	3	4	
Adaptor	Screw	Key (mm)	Clamp	Plug	Optional coolant adapter
C5-APBA-40058-21	3212 010-410	3021 010-060 (6.0)	5412 120-01	5519 055-01	5691 050-011
C6-APBA-60060-25	3212 010-411	3021 010-060 (6.0)	5412 120-02	5519 055-01	5691 050-011
C8-APBA-60068-25	3212 010-411	3021 010-060 (6.0)	5412 120-02	5519 055-01	5691 050-011
C6-APBA-80068-45	3212 010-412	3021 010-060 (6.0)	5412 120-03	5519 055-01	5691 050-011
C8-APBA-80068-45	3212 010-412	3021 010-060 (6.0)	5412 120-03	5519 055-01	5691 050-011

Axial mounting

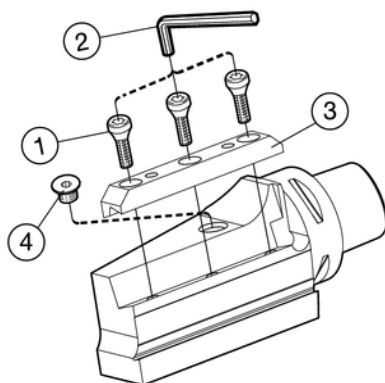

	1	2	3	4	
Adaptor	Screw	Key (mm)	Clamp	Plug	Optional coolant adapter
C5-APBR/L-31095-21	3212 010-410	3021 010-060 (6.0)	5412 120-01	5519 055-01	5691 050-011
C6-APBR/L-37147-25	3212 010-411	3021 010-060 (6.0)	5412 120-02	5519 055-01	5691 050-011
C8-APBR/L-46155-25	3212 010-411	3021 010-060 (6.0)	5412 120-02	5519 055-01	5691 050-011

Adaptor for CoroCut® and T-Max Q-Cut® parting blades

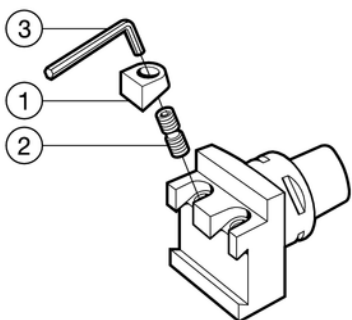


	1	2	3	4
Adaptor	Clamp	Clamp screw	Insert key ¹⁾	Key (Size, mm)
C4-151.2-25040-21	150.2-820	269-833	5680 057-021	3021 010-040 (4.0)
C5-151.2-33040-21	150.2-820	269-833	5680 057-011	3021 010-040 (4.0)
C6-151.2-43045-21				
C5-151.2-33040-25				
C6-151.2-43045-25				

¹⁾ Accessories to be ordered separately

A


Tool block for CoroCut® 1- and 2-edge T-Max Q-Cut®

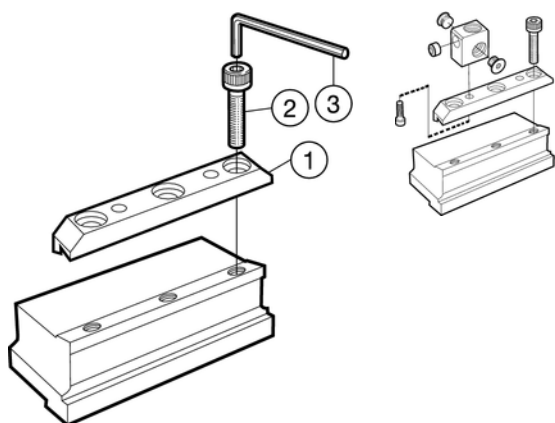

Tool block		1	2	3
Metric	Inch	Clamp	Clamp screw	Key (mm)
151.2-2020-21M	151.2-12-21M	5412 120-01	3212 010-410	3021 010-060 (6.0)
151.2-2520-21				
151.2-2020-25	151.2-16-25M	5412 120-02	3212 010-411	3021 010-060 (6.0)
151.2-2520-25	151.2-20-25M			
151.2-3232-25	151.2-24-25M			
151.2-3232-45	151.2-20-45	5412 120-03	3212 010-412	3021 010-060 (6.0)
151.2-4040-45	151.2-24-45			
151.2-5050-93	151.2-32-93	5412 120-04	3212 010-464	3021 010-080 (8.0)

C

Coolant adaptor



4	5	6	7	8
Nozzle	Mounting screw	Plug	Key (mm)	Key (mm)
5691 029-02	3212 010-358	5519 055-01	3021 010-050 (5.0)	3021 010-060 (6.0)


G

H

I


J

T-Max® external and internal tools for ceramic inserts

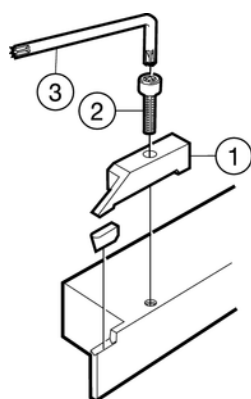

	1	2	3	
Ceramic shank holders	Clamp Right hand	Clamp Left hand	Clamp screw	Key (Torx Plus)
R/LF150.23-3244M-0317C	5412 117-01	5412 117-02	3212 036-506	5680 043-17 (30IP)
R/LF150.23-3244M-0476C	5412 117-05	5412 117-06	3212 036-506	5680 043-17 (30IP)
R/LF150.23-3244M-0635C	5412 117-09	5412 117-10	3212 036-506	5680 043-17 (30IP)
R/LF150.23-3244M-0952C	5412 117-17	5412 117-18	3212 036-506	5680 043-17 (30IP)


T-Max® ceramic boring bars



	1	2	3	
Boring bar	Clamp Right hand	Clamp Left hand	Clamp screw	Key (Torx Plus)
R/LAG150.23-50V-0317C	5412 115-01	5412 115-02	3212 106-504	5680 043-16 (27IP)
R/LAG150.23-50V-0476C	5412 115-05	5412 115-06	3212 106-504	5680 043-16 (27IP)
R/LAG150.23-50V-0635C	5412 115-03	5412 115-04	3212 106-504	5680 043-16 (27IP)
R/LAG150.23-50V-0952C	5412 115-11	5412 115-12	3212 106-504	5680 043-16 (27IP)


CoroCut® 1- and 2-edge inserts

Parting

123-CF
Wiper TECHNOLOGY

Low feed choice

Radial feed

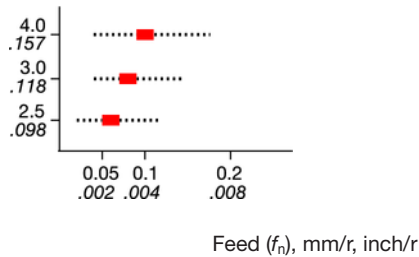Insert width (l_a), mm, inch

Stainless steels and sticky materials


Very good chip control at low feeds.

The positive geometry eliminates the risk of built-up edge.

Gives soft cutting action.

Generates good surface finish, due to wiper design on the side.


Available as CoroCut 2-edge inserts.



123-CM

Medium feed choice

Radial feed

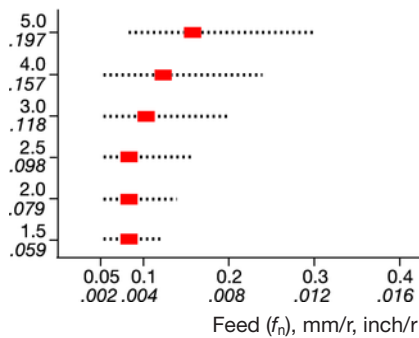Insert width (l_a), mm, inch


Parting off stainless steels

Also recommended for thin walled tubes and small diameter components in all materials.

The positive geometry eliminates the risk of built-up edge.

Low cutting forces resulting in reduced vibration.


Available as CoroCut 1 and 2-edged inserts.



123-CR

High feed choice

Radial feed

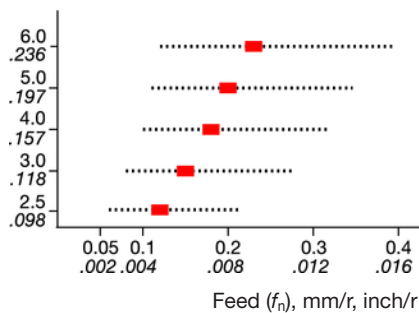Insert width (l_a), mm, inch


Rough machining

Strong cutting edges, reduce risk of edge fractures.

Suitable for parting off bars and interrupted cuts.

For steel and cast iron, but also suitable for stainless steels when there is a need for strong edges.


Available as CoroCut 1 and 2-edged inserts.



123-CS

Low feed

Radial feed

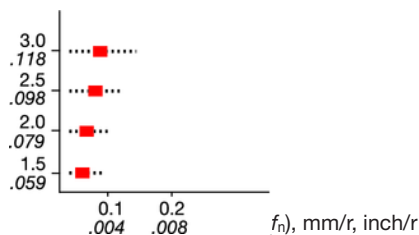Insert width (l_a), inch

Pip and burr free machining.

Ideal solution for minimizing pips and burrs on components thanks to the sharp cutting edge and front angles of 10° and 15°.

Recommended for small components.

Suitable for free cutting steel.


Available as CoroCut 2-edge inserts.

■ = Recommended starting value.

For cutting speed recommendations, see page B138

CoroCut® 1- and 2-edge inserts


Grooving




123-GF

Low feed choice

Radial feed

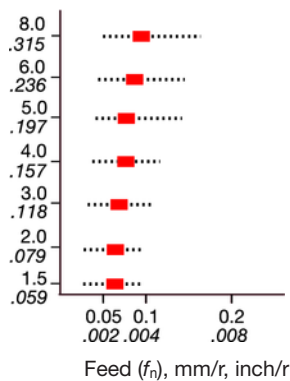Insert width (l_a), mm, inch

Axial feed

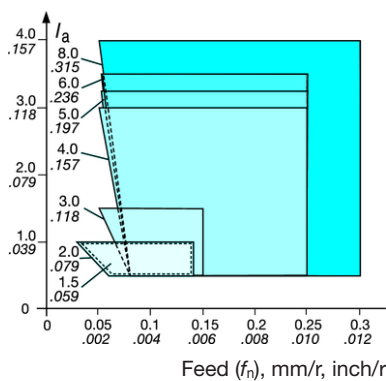Cutting depth (a_p), mm, inch

For precision grooves


Good accuracy and repeatability due to tight tolerances on inserts.

Low cutting forces and good surface finishing due to sharp cutting edge.

Large number of different widths, Designed for side turning.

Available as CoroCut 2-edge inserts.

Can be ordered as Tailor Made with different insert width and corner radii.



123-GM


Medium feed choice

M Seat size

 l_a , mm (inch)

9-11 (.354-.433)


Radial feed

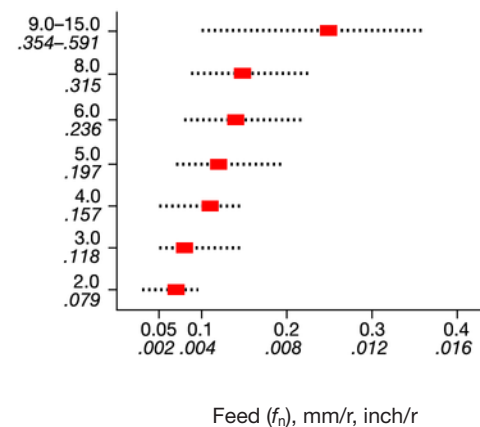Insert width (l_a), mm, inch

Grooving in all materials


Outstanding chip control.

Reduces chip width giving good surfaces.



123-GR

Radial feed

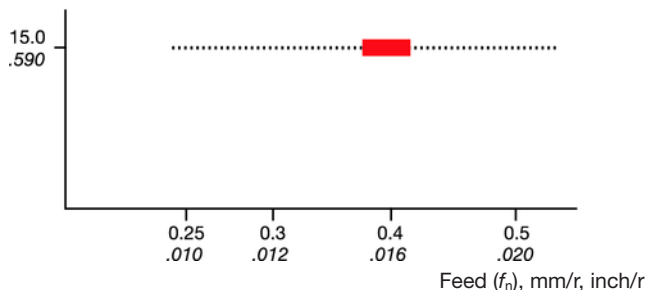Insert width (l_a), mm, inch

Rough grooving, strong cutting edge for tough conditions like grooving through cast skin.

Good for widening of grooves.


■ = Recommended starting value.

For cutting speed recommendations, see page B138

CoroCut® 1- and 2-edge inserts

Grooving


B




123-GS

Low feed choice

Radial feed
Insert width (l_a), mm, inch




Axial feed
Cutting depth (a_p), mm, inch



Allround geometry for grooving with low feed in most materials.
Periphery ground with sharp cutting edge.


C



123-GE

Cubic boron nitride tipped

Radial feed
Insert width (l_a), mm, inch

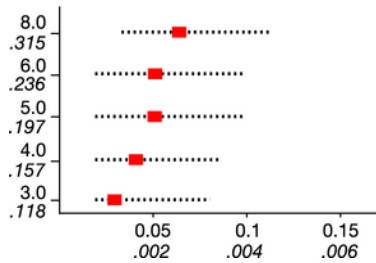


Alternative for finish grooving of hardened materials
Maintains close tolerances and gives excellent finish on components.
Available as CoroCut 1-edged inserts.

G

Profiling


H




123-RM

Medium feed choice

Radial feed
Insert width (l_a), mm, inch

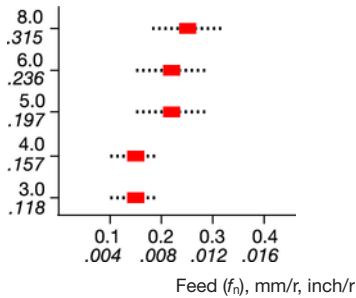


Axial feed
Cutting depth (a_p), mm, inch

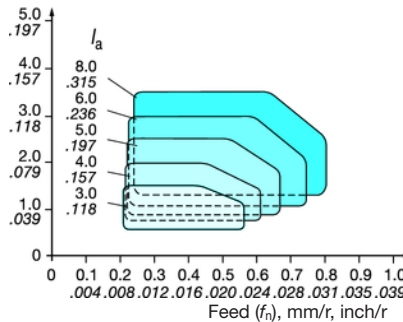


Excellent for profiling in all materials
Outstanding chip control even at low feeds and small depths of cut.
Good surface finish.
Available as CoroCut 1 and 2-edged inserts.

I




123-RO

Radial feed
Insert width (l_a), mm, inch



Axial feed
Cutting depth (a_p), mm, inch

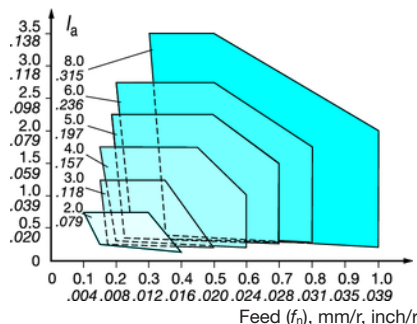


Excellent for profiling in stainless steel, HRSA and other sticky materials
HRSA and other sticky materials.
Outstanding chip control at low feeds and small depths of cut.
Good surface finish. Sharp cutting edge.
Available as CoroCut 2-edge inserts.

J



■ = Recommended starting value.
For cutting speed recommendations, see page B138

CoroCut® 1- and 2-edge inserts


Profiling



123-RS



Radial feedInsert width (l_a), mm, inch**Axial feed**Cutting depth (a_p), mm, inch

Allround geometry for profiling with low chip thickness in most materials. Periphery ground with sharp cutting edge.




123-RE

Cubic boron nitride tipped


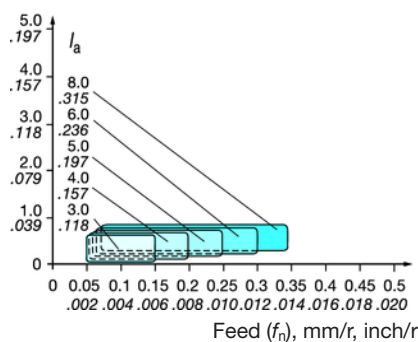
Radial feedInsert width (l_a), mm, inch**Axial feed**Cutting depth (a_p), mm, inch**Alternative for finish profiling of hardened materials**

Gives outstanding productivity and exceptional surface finish. Available as CoroCut 1- edged inserts.




123-RS

Diamond tipped


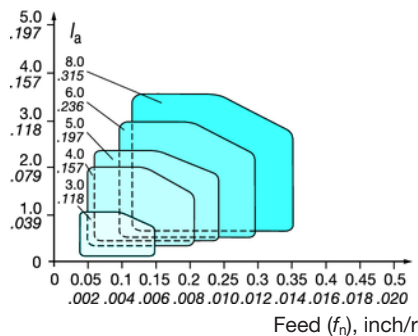
Radial feedInsert width (l_a), inch**Axial feed**Cutting depth (a_p), inch**Alternative for finish profiling of non-ferrous materials.**

Gives outstanding productivity and exceptional surface finish. For use under stable conditions. Available as CoroCut 1-edged inserts.

Aluminium profiling



123-AM

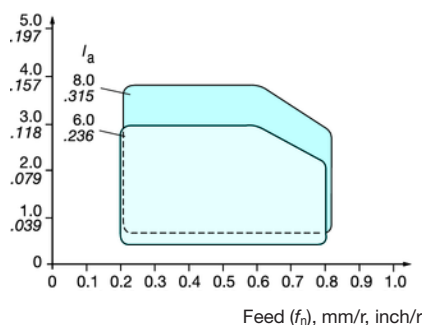Radial feedInsert width (l_a), mm, inch**Axial feed**Cutting depth (a_p), mm, inch**First choice for profiling in non-ferrous materials.**

Good chip flow giving good surface finish. Sharp cutting edge. Available as CoroCut 2-edge inserts.


■ = Recommended starting value.

For cutting speed recommendations, see page B138

CoroCut® 1- and 2-edge inserts

Turning and plunge turning

B




123-TF
TECHNOLOGY
Wiper

Low feed choice


Radial feed

Insert width (l_a), mm, inch

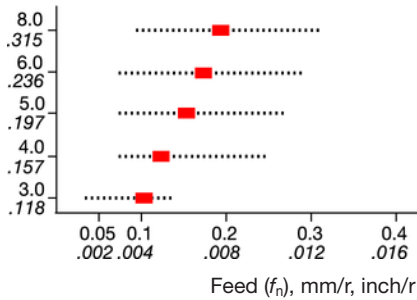

Axial feed


Cutting depth (a_p), mm, inch

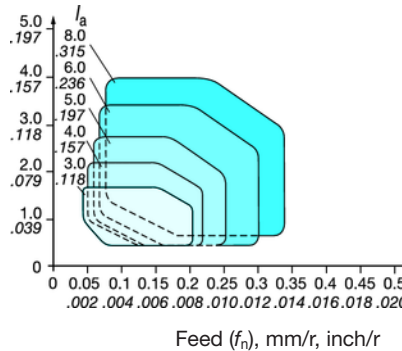

The first choice for plunge turning and face grooving

Suitable for all turning operations in stainless steels.
The positive geometry eliminates the risk of built-up edge.
Good chip control and surface finish
Wiper design on the side.
Available as CoroCut 1 and 2-edged inserts.
First choice for face grooving.

C




123-TM

Medium feed choice


Radial feed

Insert width (l_a), mm, inch

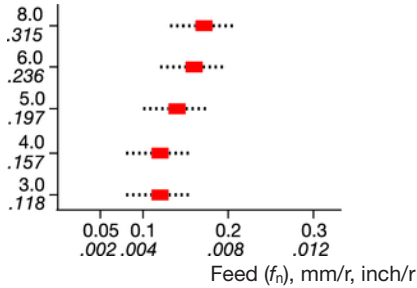

Axial feed

Cutting depth (a_p), mm, inch

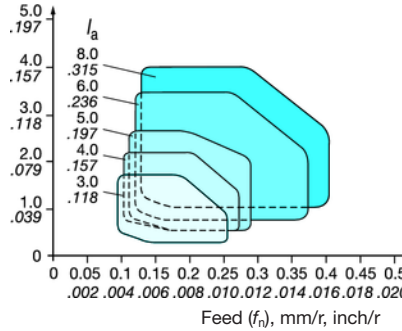

General turning operations

The positive geometry eliminates the risk of built-up edge.
Available as CoroCut 2-edge inserts.

G

CoroCut® 3-edge inserts

H


Shallow parting



123-CM

Radial feed

Insert width (l_a), mm, inch

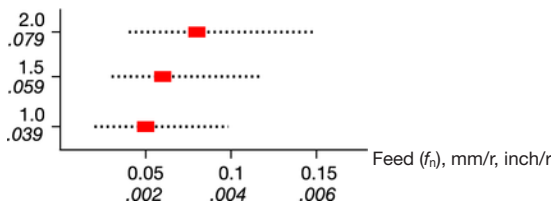

First choice for shallow parting

First choice in most materials
Sharp edge line, chip breaking geometry
To be used at normal cutting speeds
100 – 250 m/min (330 – 820 ft/min)


I



123-CS

Radial feed

Insert width (l_a), mm, inch

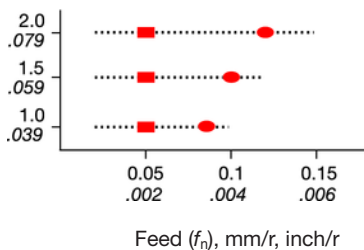

First choice for shallow parting at low speeds

For sticky materials and ball bearing materials
Extremely sharp edge line with an open chip former
To be used for non-ferrous materials at normal cutting speeds 100 – 250 m/min (330 – 820 ft/min)
Right (R) or left (L) hand inserts to be used for pip and burr free machining

J

■ = Recommended starting value at normal speeds

● = Recommended starting value at low speeds

For cutting speed recommendations, see page B138


CoroCut® 3-edge inserts

Grooving




123-GS

Radial feed

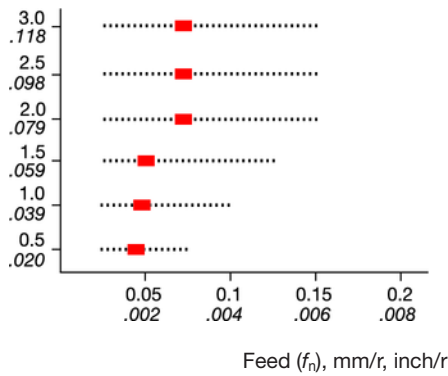Insert width (l_a), mm, inch

Axial feed

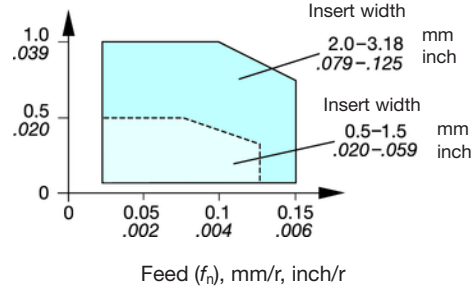
Cutting depth (a_p), mm, inch

Profiling




123-RS

Radial feed

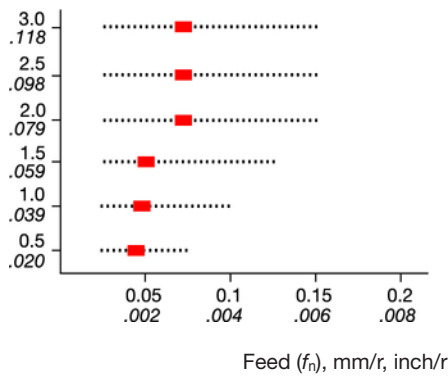Insert width (l_a), mm, inch

Axial feed

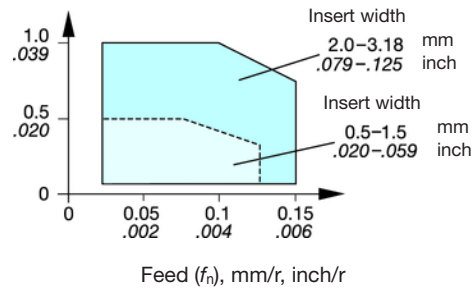Cutting depth (a_p), mm, inch

■ = Recommended starting value at normal speeds


● = Recommended starting value at low speeds

For cutting speed recommendations, see page B138

T-Max Q-Cut® 151.2 inserts

Parting


B



151.2-4E

Radial feed

Insert width (l_a), mm, inch

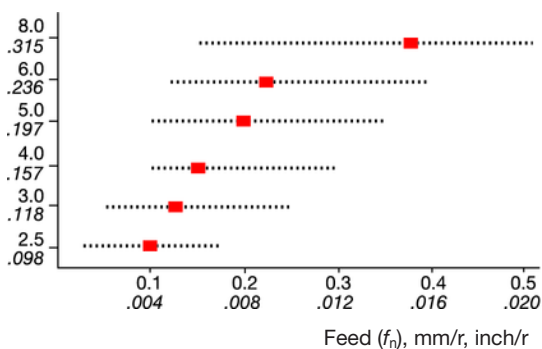

High feed choice

First choice for parting off bars

Strong geometry ideal for interrupted cuts.
For parting off steel and cast iron.
Good chip control at high feeds.


C



151.2-5E

Radial feed

Insert width (l_a), mm, inch

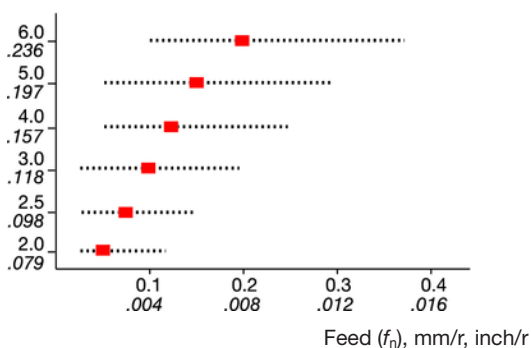


High feed choice

First choice for parting off tubes

Particularly recommended for thin walled tubes and small diameter components in all materials.
For parting off stainless steel.


G



151.2-5F

Radial feed


Insert width (l_a), mm, inch

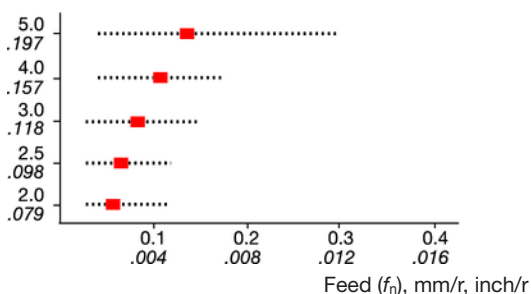

Optimizer to minimize pips and burrs on components due to sharp cutting edge, with a wide choice of front angles

Recommended for stainless steels, ductile and work hardening materials.

H




151.2-7E



Radial feed

Insert width (l_a), mm, inch

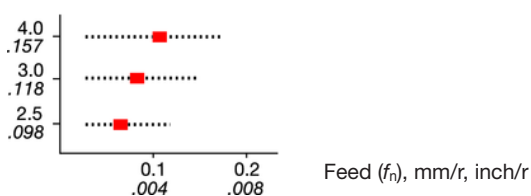


Low feed choice

Alternative for good chip control at low feeds

Soft cutting action.
Low cutting forces.
Generates good surface finish, due to Wiper design.
Very good chip control.

I



151.2-9E

Radial feed

Insert width (l_a), mm, inch



Optimizer for ball bearing operations and long chipping materials

Good chip control giving high productive and problem-free machining.


J

■ = Recommended starting value.

For cutting speed recommendations, see page B138

T-Max Q-Cut® 151.2 inserts


Grooving



151.2-5G

Medium feed choice

Radial feed

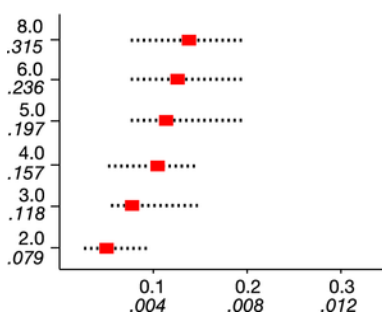Insert width (l_a), mm, inchFeed (f_n), mm/r, inch/r

First choice for general purpose grooving.


Outstanding chip control.
Reduces chip width giving good surfaces.
For grooving in all materials



151.2-4G

Low feed choice

Radial feed

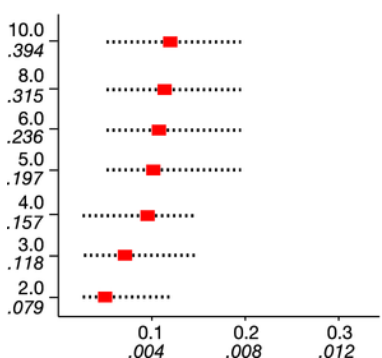Insert width (l_a), mm, inchFeed (f_n), mm/r, inch/r

Alternative choice for precision grooving.

Good accuracy and repeatability due to tight tolerances on inserts.
Low cutting forces and good chip control in a wide range of materials.
Sharp cutting edge.
Can be ordered as Tailor Made with different insert width and corner radii.




151.2-6G

High feed choice


Wiper TECHNOLOGY

Radial feed

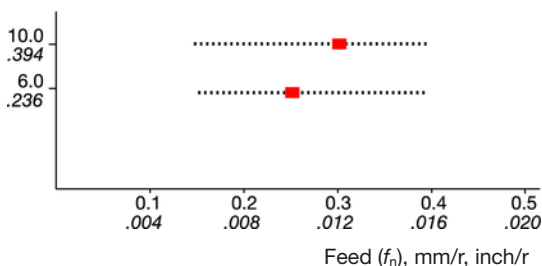Insert width (l_a), mm, inchFeed (f_n), mm/r, inch/r

Alternative choice when chip control is of prime importance at high production rates.


Particularly recommended for mass production operations, e.g. cam shaft production.



151.2-EG

Cubic boron nitride tipped

Radial feed

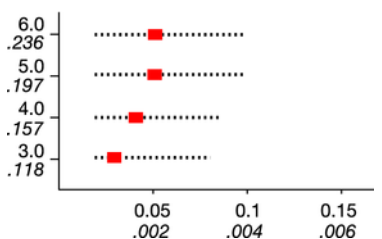Insert width (l_a), inchFeed (f_n), mm/r, inch/r

Alternative for finish grooving of hardened materials

Maintains close tolerances and gives excellent finish on components.


■ = Recommended starting value.

For cutting speed recommendations, see page B138

T-Max Q-Cut® 151.2 inserts

Profiling


B




151.2-5P

Medium feed choice

Radial feed
Insert width (l_a), mm, inch



Axial feed
Cutting depth (a_p), mm, inch

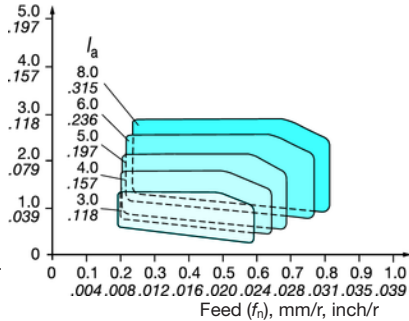


First choice for profiling in all materials.

Outstanding chip control even at low feeds and small depths of cut. Generates good surface finish.


For profiling in all materials.

C




151.2-4P

Radial feed
Insert width (l_a), mm, inch




Axial feed
Cutting depth (a_p), mm, inch

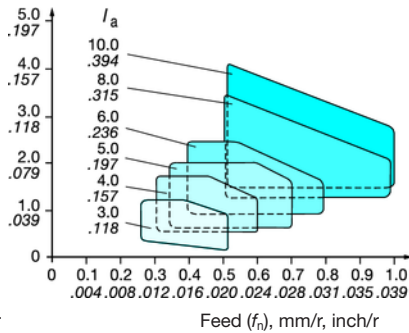

Optimizer for profiling and turning in stainless steels and heat resistant materials where there is a risk of built-up edges forming.

Generates excellent surface finish. Recommended for stainless steels and heat resistant materials. Diamond coated (grade CD1810) is a good alternative for finish profiling of non-ferrous materials.


G




151.2-F-P

Diamond tipped

Radial feed
Insert width (l_a), mm, inch



Axial feed
Cutting depth (a_p), mm, inch

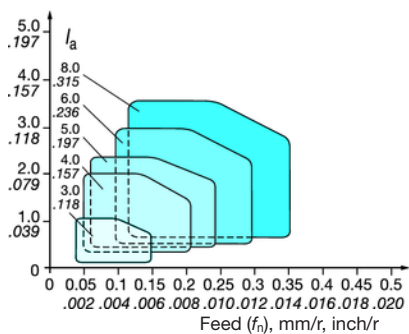


Alternative for finish profiling of non-ferrous materials.

Gives outstanding productivity and exceptional surface finish.

For use under stable conditions


H




151.2-E-P

Cubic boron nitride tipped

Radial feed
Insert width (l_a), mm, inch



Axial feed
Cutting depth (a_p), mm, inch

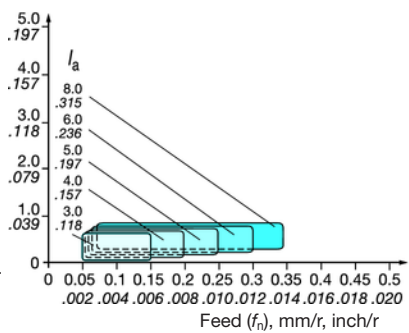

Alternative for finish profiling of hardened materials.

Gives outstanding productivity and exceptional surface finish.


J

■ = Recommended starting value.

For cutting speed recommendations, see page B138

T-Max Q-Cut® 151.2 inserts


Turning




151.2-5T

Medium feed choice

Radial feed

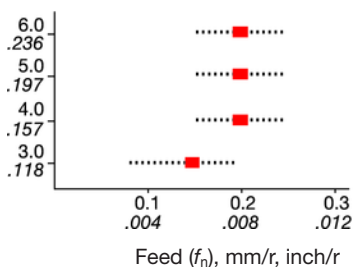Insert width (l_a), mm, inch


Axial feed

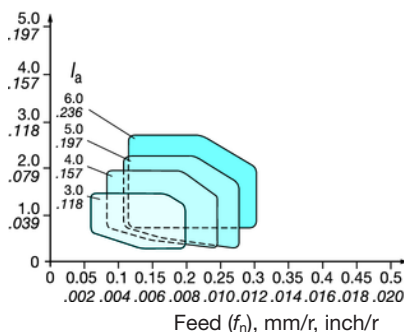Cutting depth (a_p), mm, inch

First choice for turning with T-Max Q-Cut®.

Good chip control.


Versatile - one insert can replace two conventional (one left and one right hand).




151.2-4T

High feed choice

Radial feed

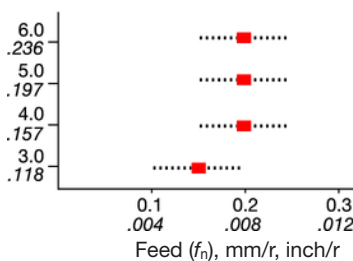Insert width (l_a), mm, inch

Axial feed

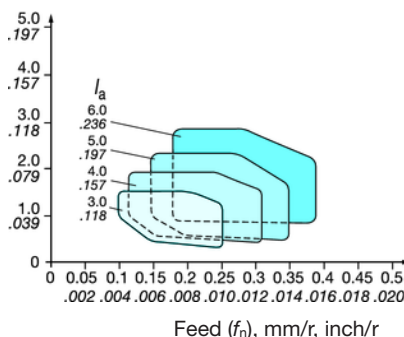Cutting depth (a_p), mm, inch

Alternative, especially for turning with high feeds.

Good chip control.


Versatile - one insert can replace two conventional.

Undercutting



151.2-4U

Radial feed

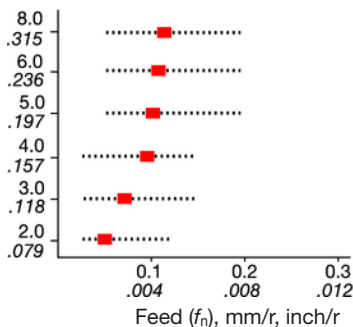
Insert width (l_a), mm, inch

For the turning of reliefs and undercuts.

Large clearance angle permits undercutting of smaller diameters down 23 mm (.906 inch).


Parting

First choice for Multi-Spindle machines.



151.2-3F

Radial feed

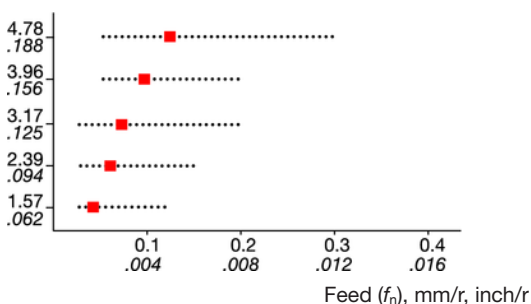Insert width (l_a), mm, inch

First choice for parting off in low speed applications.

Parting and breakdown where cutting oil is applied
Parallel wiper design for excellent flatness and surface finish
Insert widths of 1.57, 2.39, 3.17, 3.96 mm (.062, .094, .125, .156 inch)
Neutral 5°, 10° and 15° right hand front angle

■ = Recommended starting value.


For cutting speed recommendations, see page B138

T-Max Q-Cut® 151.3 inserts

Internal grooving



151.3-4G

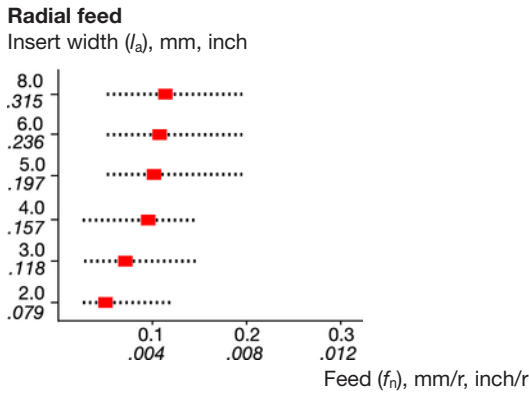

Note:


Inserts type 151.3 (-4G, -7G and -7P) can only be used with holders type F151.37 or bars type AG151.32

Alternative choice for internal grooving of smallest bores.?

Good accuracy and repeatability due to tight tolerances on inserts.
Low cutting forces and good chip control in a wide range of materials.
Sharp cutting edge.


Low feed choice

Face grooving



151.3-7G

Wiper
TECHNOLOGY
Medium feed choice

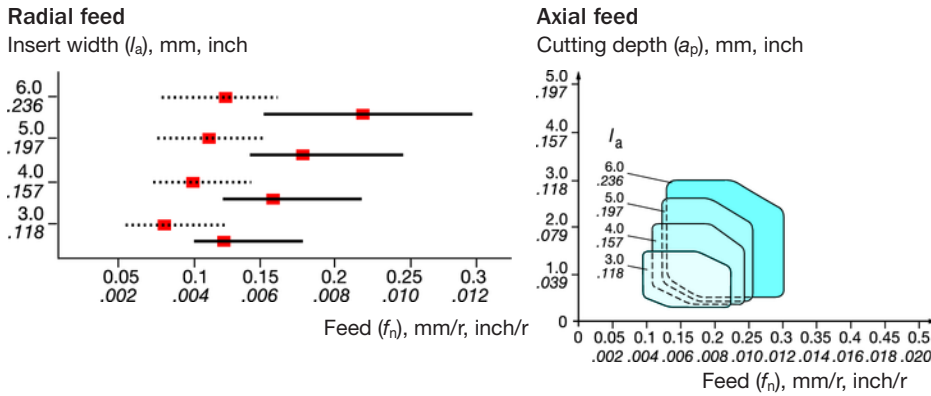


First choice for face grooving.

Good chip control both when cutting first groove and opening up. Smaller diameter grooves can be cut. Excellent stability. For face grooving in all materials.


First choice for internal turning/grooving

Good chip control. Generates good surface finish, due to Wiper design.

..... = Axial feed, approx. range, inch/r, first cut
———— = Axial feed, approx. range, inch/r, opening cut



151.3-7P

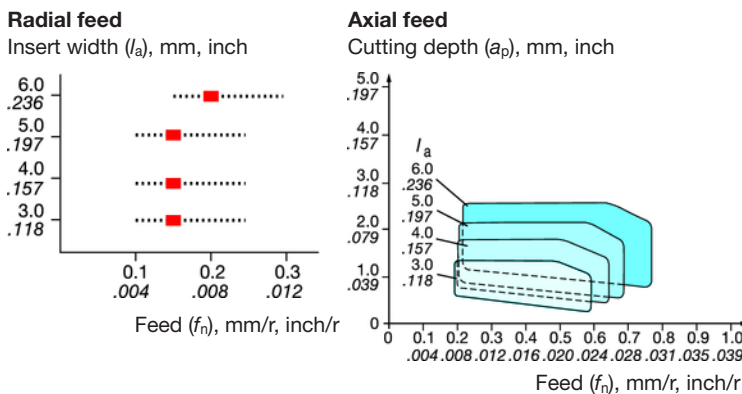

For profiling in face grooving operations.

Good chip control in both axial and radial direction. Well suited also for internal profiling operations.

■ = Recommended starting value.

For cutting speed recommendations, see page B138

CoroThread®


Circlip grooving



254R/LG

Radial feed

Insert width (l_a), mm, inch

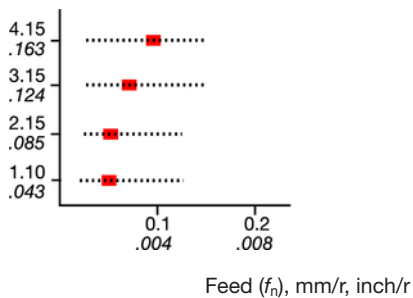

Alternative for good economy when grooving circlips.

High productivity and reliability through low cutting forces with reduced vibration.

Three cutting edges give good economy. Recommended for use in all materials.


■ = Recommended starting value.

For cutting speed recommendations, see page B138

Cutting data recommendations for CoroCut® XS

Parting off


Insert width (l_a), mm, inch

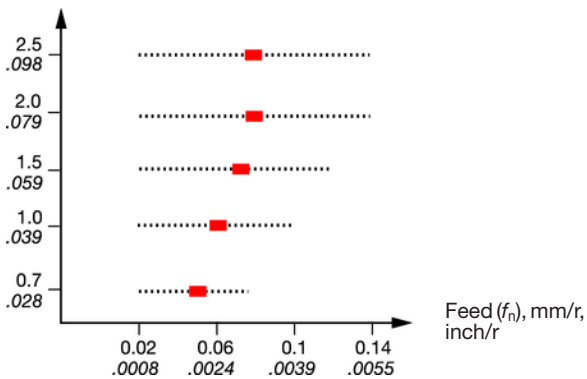

■ = Recommended starting value.


Grooving

Insert width (l_a), mm, inch

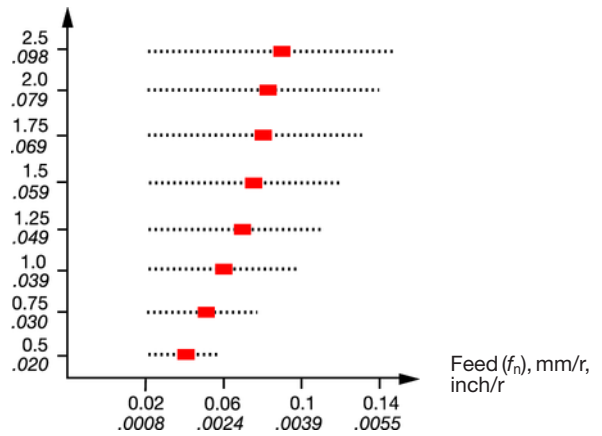


Turning

Cutting depth (a_p), mm, inch

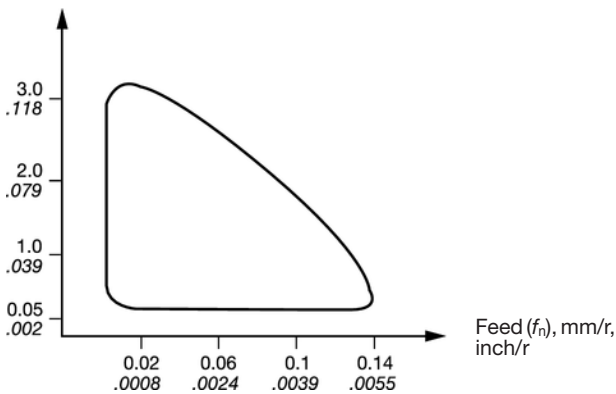

Back turning

Cutting depth (a_p), mm, inch

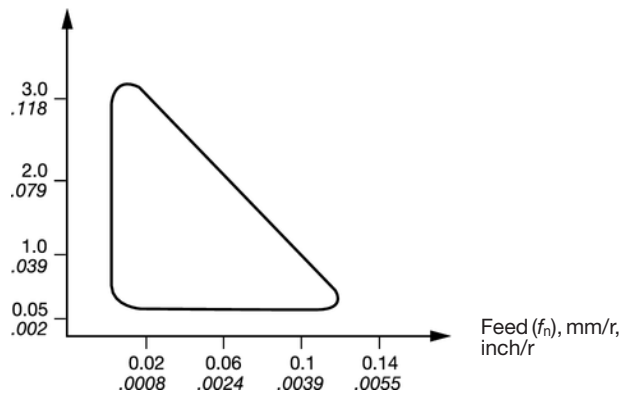

Threading, (Infeed recommendations)

Metric 60°

Pitch, mm	a_p mm	a_p inch	n_{ap}
0.20	0.12	.005	4
0.25	0.15	.006	4
0.30	0.18	.007	4
0.35	0.20	.008	4
0.40	0.25	.010	4
0.45	0.28	.011	4
0.50	0.28	.011	4
0.75	0.46	.018	4
1.00	0.61	.024	5
1.25	0.74	.029	6
1.50	0.89	.035	6
1.75	1.07	.042	8
2.00	1.22	.048	8

Can be used for thread types:
 - ISO metric 60°
 - UN 60°
 - NPT

a_p = total depth of thread
 n_{ap} = number of passes

UN 60°

Pitch, t.p.i.	a_p mm	a_p inch	n_{ap}
72	0.22	.0086	4
64	0.25	.0098	4
56	0.28	.0110	4
48	0.33	.0129	4
44	0.36	.0142	4
40	0.40	.0157	4
36	0.43	.0169	4
32	0.49	.0193	5
28	0.56	.0220	5
24	0.65	.0256	5
20	0.80	.0315	6
18	0.86	.0339	6
16	0.97	.0382	7
14	1.12	.0441	8
13	1.19	.0469	8
12	1.30	.0512	9

Cutting speed recommendations

Cutting speed (v_c), m/min (ft/min)

Grade 1025/1105

P

60-200
(195-655)

M

60-180
(195-590)

N

90-400
(295-1310)

S


20-50
(65-165)

Cutting data recommendations for CoroCut® MB

Turning


Insert size 07

Cutting depth (a_p), mm, inch

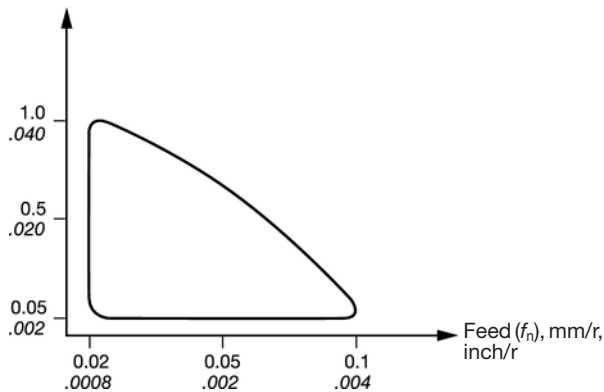

Grooving and face grooving

Insert width (l_a), mm, inch

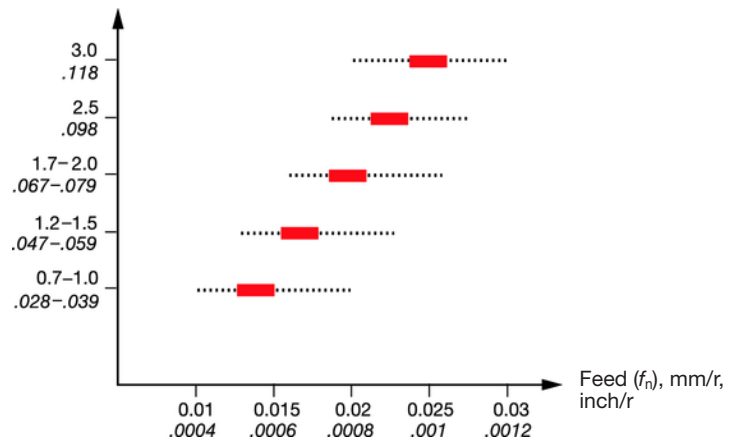

■ = Recommended starting value.

Threading, (Infeed recommendations)

Thread	Insert	a_p mm	a_p inch	nap
V-profile 60°	MB-07TH050VM-10R/L	0.33	.013	4
	MB-07TH100VM-10R/L	0.64	.025	5
	MB-07TH150VM-10R/L	0.89	.035	6
	MB-07TH200VM-10R/L	1.19	.047	8
	MB-07TH250VM-10R/L	1.50	.059	10
Metric 60°	MB-07TH050MM-10R/L	0.33	.013	4
	MB-07TH100MM-10R/L	0.64	.025	5
	MB-07TH150MM-10R/L	0.89	.035	6
	MB-07TH175MM-10R/L	1.07	.042	8
	MB-07TH200MM-10R/L	1.19	.047	8
MB-07TH250MM-10R/L	1.50	.059	10	
UN 60°	MB-07TH320UN-10R/L	0.48	.019	4
	MB-07TH280UN-10R/L	0.58	.023	5
	MB-07TH240UN-10R/L	0.66	.026	5
	MB-07TH200UN-10R/L	0.79	.031	6
	MB-07TH180UN-10R/L	0.86	.034	6
	MB-07TH160UN-10R/L	0.94	.037	7
MB-07TH140UN-10R/L	1.09	.043	8	
Whitworth 55°	MB-07TH190WH-10R/L	0.91	.036	6
	MB-07TH140WH-10R/L	1.21	.048	8
	MB-07TH110WH-10R/L	1.54	.061	9
NPT 60°	MB-07TH180NT-10R/L	1.11	.044	8
	MB-07TH140NT-10R/L	1.42	.056	10

a_p = total depth of thread

nap = number of passes

Thread	Insert	a_p mm	a_p inch	nap
ACME 29°	MB-07TH160AC-11R	0.96	.038	6
	MB-07TH140AC-11R	1.09	.043	7
	MB-07TH120AC-11R	1.24	.049	8
	MB-07TH100AC-11R	1.60	.063	10
	MB-07TH080AC-11R	1.90	.075	12
STUB-ACME 29°	MB-07TH160SA-10R	0.66	.026	5
	MB-07TH140SA-10R	0.74	.029	5
	MB-07TH120SA-10R	0.81	.032	6
	MB-07TH100SA-10R	1.09	.043	7
	MB-07TH080SA-10R	1.27	.050	8

Cutting speed recommendations

Cutting speed (v_c), m/min (ft/min)

Grade 1025

P

M

N

S

60-200 (195-655) 60-180 (195-590) 90-400 (295-1310) 20-50 (65-165)

Grade CB7015

H

60-200 (195-655)

Cutting speed recommendations, metric values

The recommendations are valid for use with cutting fluid.

ISO P	CMC No.	Steel	Specific cutting force k_{c1}	Hardness Brinell	<<<< WEAR RESISTANCE		
					CT525	GC3115	GC3020
					$h_{ex}, mm \approx feed f_n, mm/r$		
MC No.	CMC No.	Material	N/mm ²	HB	Cutting speed (v_c), m/min		
P1.1.Z.AN	01.1	Unalloyed C = 0.1–0.25%	1500	125	235-170	355-185	355-185
P1.2.Z.AN	01.2	C = 0.25–0.55%	1600	150	220-155	330-140	330-140
P1.3.Z.AN	01.3	C = 0.55–0.80%	1700	170	210-145	300-125	300-125
P2.1.Z.AN	02.1	Low-alloy $\leq 5\%$ Non-hardened	1700	180	205-145	290-135	290-135
P2.5.Z.HT	02.2	Hardened and tempered	1850	275	185-120	270-105	270-105
P2.5.Z.HT	02.2	Hardened and tempered	2050	350	150-100	220-85	220-85
P3.0.Z.AN	03.11	High-alloy $> 5\%$ Annealed	1950	200	130-100	260-115	260-115
P3.0.Z.HT	03.21	Hardened tool steel	3000	325	80-55	205-75	205-75
P1.5.C.UT	06.1	Castings Unalloyed	1550	180	150-100	175-75	175-75
P2.6.C.UT	06.2	Low-alloy (alloying elements $\leq 5\%$)	1600	200	135-85	200-90	200-90
P3.0.C.UT	06.3	High-alloy (alloying elements $> 5\%$)	2050	225	115-70	160-75	160-75
P3.2.C.AQ	06.33	Manganese steel, 12–14% Mn	2900	250	75-50	90-50	90-50
ISO M	CMC No.	Stainless steel	Specific cutting force k_{c1}	Hardness Brinell	<<<< WEAR RESISTANCE		
					CT525	GC1105	GC1005
					$h_{ex}, mm \approx feed f_n, mm/r$		
MC No.	CMC No.	Material	N/mm ²	HB	Cutting speed (v_c), m/min		
P5.0.Z.AN	05.11	Ferritic/martensitic Bars/forged Non-hardened	1800	200	195-135	400-175	400-175
P5.0.Z.PH	05.12	PH-hardened	2850	330	135-95	215-95	215-95
P5.0.Z.HT	05.13	Hardened	2350	330	150-100	255-110	255-110
M1.0.Z.AQ	05.21	Austenitic Bars/forged	1800	180	190-130	435-190	435-190
M1.0.Z.PH	05.22	PH-hardened	2850	330	115-80	235-100	235-100
M2.0.Z.AQ	05.23	Super austenitic	2250	200	130-90	260-115	260-115
M3.1.Z.AQ	05.51	Austenitic-ferritic (Duplex) Bars/forged Non-weldable $\geq 0.05\%C$	2000	230	115-90	335-145	335-145
M3.2.Z.AQ	05.52	Weldable $< 0.05\%C$	2450	260	90-70	300-130	300-130
P5.0.C.UT	15.11	Ferritic/martensitic Cast Non-hardened	1700	200	165-115	-	-
P5.0.C.HT	15.13	Hardened	2150	330	110-75	-	-
M1.0.C.UT	15.21	Austenitic Cast	1700	180	160-110	-	-
	15.22	PH-hardened	2450	330	95-65	-	-
M3.1.C.AQ	15.51	Austenitic-ferritic (Duplex) Cast Non-weldable $\geq 0.05\%C$	1800	230	100-80	-	-
M3.2.C.AQ	15.52	Weldable $< 0.05\%C$	2250	260	80-60	-	-
ISO K	CMC No.	Cast iron	Specific cutting force k_{c1}	Hardness Brinell	<<<< WEAR RESISTANCE		
					GC3115	GC3020	GC4225
					$h_{ex}, mm \approx feed f_n, mm/r$		
MC No.	CMC No.	Material	N/mm ²	HB	Cutting speed (v_c), m/min		
K1.1.C.NS	07.1	Malleable Ferritic (short chipping)	790	130	340-170	325-160	320-170
	07.2	Pearlitic (long chipping)	900	230	250-115	240-110	235-110
K2.1.C.UT	08.1	Grey Low tensile strength	890	180	290-140	275-135	275-130
K2.2.C.UT	08.2	High tensile strength	970	220	250-120	235-115	240-115
K3.1.C.UT	09.1	Nodular SG iron Ferritic	900	160	260-115	245-110	250-105
K3.3.C.UT	09.2	Pearlitic	1350	250	205-100	195-90	195-90
K3.4.C.UT	09.3	Martensitic	2100	380	145-70	140-65	140-70

TOUGHNESS >>>>						
GC4225	GC1115	GC1125	GC1025	GC2135	GC1145	GC235
0.05-0.5	0.05-0.5	0.05-0.5	0.05-0.5	0.05-0.5	0.05-0.5	0.05-0.5
340-180 315-140 290-120	360-180 325-145 290-130	295-145 265-115 235-105	235-115 210-90 185-85	205-100 180-75 175-70	200-100 185-75 175-70	165-130 150-120 140-105
280-130 265-100 215-80	290-135 250-115 200-95	235-110 205-95 165-75	185-85 165-75 135-60	175-80 155-70 125-55	180-85 165-70 130-55	140-110 120-85 95-70
255-105 195-75	255-115 185-75	205-95 150-65	170-75 120-50	155-70 105-45	160-75 105-45	70-60 45-33
165-70 190-85 130-95 85-45	- - - -	135-65 160-85 120-50 70-40	110-55 130-65 80-45 55-30	105-50 120-60 90-40 50-29	110-50 125-65 85-38 -	100-70 90-55 80-45 100-80
TOUGHNESS >>>>						
GC1115	GC1125	GC1025	GC2135	GC1145	GC235	H13A
0.05-0.5	0.05-0.5	0.05-0.5	0.05-0.5	0.05-0.5	0.05-0.5	0.05-0.5
235-110 185-85 200-90	190-85 150-65 160-70	160-70 120-55 130-55	145-65 110-45 120-50	150-60 110-45 125-50	130-100 90-70 100-75	90-70 60-40 70-50
265-125 185-90 200-95	215-100 150-70 160-75	175-80 120-55 130-60	165-70 105-50 115-55	165-65 110-50 105-50	125-95 75-55 85-65	100-65 50-33 65-45
225-105 185-90	180-85 150-70	145-70 120-55	135-60 110-50	145-60 115-50	125-95 95-70	- -
215-100 -	175-80 145-65	140-65 120-50	130-60 110-45	140-55 115-45	110-85 70-55	75-60 50-38
230-110 150-80	185-90 120-65	150-70 95-50	135-60 90-45	145-60 90-45	105-80 65-50	70-45 45-29
195-95 155-80	155-75 125-65	125-60 105-50	115-55 95-45	120-55 95-45	110-85 85-60	- -
TOUGHNESS >>>>						
GC1125	GC1025	H13A				
0.05-0.5	0.05-0.5	0.05-0.5				
255-125 170-95	205-100 140-75	100-85 70-55				
210-110 175-90	170-85 140-70	80-65 80-60				
185-95 150-75 100-55	150-80 120-60 85-45	70-55 60-45 40-30				

Cutting speed recommendations, metric values

The recommendations are valid for use with cutting fluid.

ISO N	CMC No.	Non-ferrous material	Specific cutting force k_{c1}	Hardness Brinell	<<<< WEAR RESISTANCE		
					CD10	GC1005	H10
					$h_{ex}, \text{mm} \approx \text{feed } f_n, \text{mm/r}$		
			N/mm ²	HB	Cutting speed (v_c), m/min		
		Aluminium alloys					
N1.2.Z.UT	30.11	Wrought or wrought and coldworked, non-aging	400	60	2100 (2650 - 265)	1900 (2400 - 240)	1800 (2250-225)
N1.2.Z.AG	30.12		650	100	2100 (2650 - 265)	1900 (2400 - 240)	1800 (2250-225)
		Aluminium alloys					
N1.3.C.UT	30.21	Cast, non aging	600	75	2100 (2650 - 265)	1900 (2400 - 240)	1800 (2250-225)
N1.3.C.AG	30.22	Cast or cast and aged	700	90	2100 (2650 - 265)	1900 (2400 - 240)	1800 (2250-225)
		Aluminium alloys					
N1.4.C.NS	30.41	Cast, 13-15% Si	700	130	1600 (2000 - 200)	500 (630 - 65)	450 (560-55)
	30.42	Cast, 16-22% Si	700	130	800 (1000 - 100)	350 (440 - 45)	300 (375-38)
		Copper and copper alloys					
N3.3.U.UT	33.1	Free cutting alloys, $\geq 1\%$ Pb	550	110	600 (750 - 75)	500 (630 - 65)	500 (630-65)
N3.2.C.UT	33.2	Brass, leaded bronzes, $\leq 1\%$ Pb	550	90	600 (750 - 75)	500 (630 - 65)	500 (630-65)
N3.1.U.UT	33.3	Bronze and non-leadad copper incl. electrolytic copper	1350	100	300 (375 - 38)	300 (375 - 38)	300 (375-38)
ISO S	CMC No.	Heat resistant super alloys	Specific cutting force k_{c1}	Hardness Brinell	<<<< WEAR RESISTANCE		
					S05F	GC1105	GC1005
					$h_{ex}, \text{mm} \approx \text{feed } f_n, \text{mm/r}$		
			N/mm ²	HB	Cutting speed (v_c), m/min		
		Iron base					
S1.0.U.AN	20.11	Annealed or solution treated	2400	200	200-135	180-120	70-38
S1.0.U.AG	20.12	Aged or solution treated and aged	2500	280	165-110	150-100	150-100
		Nickel base					
S2.0.Z.AN	20.21	Annealed or solution treated	2650	250	100-60	90-55	90-55
S2.0.Z.AG	20.22	Aged or solution treated and aged	2900	350	90-60	80-50	80-50
S2.0.C.NS	20.24	Cast or cast and aged	3000	320	80-50	70-45	70-45
		Cobalt base					
S3.0.Z.AN	20.31	Annealed or solution treated	2700	200	100-65	90-60	90-60
S3.0.Z.AG	20.32	Solution treated and aged	3000	300	90-55	80-50	80-50
S3.0.C.NS	20.33	Cast or cast and aged	3100	320	80-50	70-45	70-45
		Titanium alloys		Rm ¹⁾			
S4.1.Z.UT	23.1	Commercial pure (99.5% Ti)	1300	400	-	-	-
S4.2.Z.AN	23.21	α , near α and $\alpha + \beta$ alloys, annealed	1400	950	-	-	-
S4.3.Z.AG	23.22	$\alpha + \beta$ alloys in aged conditions, β alloys, annealed or aged	1400	1050	-	-	-
ISO H	CMC No.	Material	Specific cutting force k_{c1}	Hardness Brinell	<<<< WEAR RESISTANCE		
					CB20	CC670	CB7015
					$h_{ex}, \text{mm} \approx \text{feed } f_n, \text{mm/r}$		
		Hardened material	N/mm ²	HB	Cutting speed (v_c), m/min		
		Extra hard steel					
H1.3.Z.HA	04.1	Hardened and tempered	4300	60 HRC	125-120	110-100	145-135
		Chilled					
H2.0.C.UT	10.1	Cast or cast and aged	2250	400	200-195	110-100	-

1) Rm = ultimate tensile strength measured in MPa.

Cutting speed recommendations, inch values

The recommendations are valid for use with cutting fluid.

ISO P	CMC No.	Steel	Specific cutting force k_{c1}	Hardness Brinell	<<<< WEAR RESISTANCE		
					CT525	GC3115	GC3020
					h_{ex} , inch \approx feed, f_n inch/r		
MC No.	CMC No.	Material	lbs/in ²	HB	Cutting speed (V_c) ft/min		
P1.1.Z.AN	01.1	Unalloyed C = 0.1–0.25%	216,500	125	770-550	1150-610	1150-610
P1.2.Z.AN	01.2		233,000	150	720-510	1050-460	1050-460
P1.3.Z.AN	01.3		247,000	170	690-475	980-405	980-405
P2.1.Z.AN	02.1	Low-alloy $\leq 5\%$ Non-hardened	249,500	180	670-475	950-440	950-440
P2.5.Z.HT	02.2		268,000	275	600-400	880-335	880-335
P2.5.Z.HT	02.2		298,000	350	485-320	710-270	710-270
P3.5.Z.AN	03.11	High-alloy $> 5\%$ Annealed	282,000	200	425-320	840-375	840-375
P3.5.Z.HT	03.21		435,000	325	260-180	670-245	670-245
P1.5.C.UT	06.1	Castings Unalloyed	225,000	180	490-330	570-235	570-235
P2.6.C.UT	06.2		230,500	200	440-280	650-290	650-290
P3.0.C.UT	06.3		300,500	225	375-230	520-245	520-245
P3.2.C.AQ	06.33		420,500	250	245-165	290-155	290-155
ISO M	CMC No.	Stainless steel	Specific cutting force k_{c1}	Hardness Brinell	<<<< WEAR RESISTANCE		
					CT525	GC1105	GC1005
					h_{ex} , inch \approx feed, f_n inch/r		
MC No.	CMC No.	Material	lbs/in ²	HB	Cutting speed (V_c) ft/min		
P5.0.Z.AN	05.11	Ferritic/martensitic Bars/forged Non-hardened	262,000	200	640-440	1300-570	1300-570
P5.0.Z.PH	05.12		411,500	330	450-310	710-305	710-305
P5.0.Z.HT	05.13		340,000	330	485-330	840-365	840-365
M1.0.Z.AQ	05.21	Austenitic Bars/forged Austenitic	259,000	180	620-430	1450-610	1450-610
M1.0.Z.PH	05.22		414,000	330	370-255	770-330	770-330
M2.0.Z.AQ	05.23		328,000	200	420-290	860-370	860-370
M3.1.Z.AQ	05.51	Austenitic-ferritic (Duplex) Bars/forged Non-weldable $\geq 0.05\%C$	286,500	230	375-295	1100-475	1100-475
M3.2.Z.AQ	05.52		356,500	260	295-225	980-420	980-420
P5.0.C.UT	15.11	Ferritic/martensitic Cast Non-hardened	246,500	200	540-375	-	-
P5.0.C.HT	15.13		311,000	330	355-245	-	-
M1.0.C.UT	15.21	Austenitic Cast Austenitic	248,000	180	520-360	-	-
	15.22		356,000	330	320-220	-	-
M3.1.C.AQ	15.51	Austenitic-ferritic (Duplex) Cast Non-weldable $\geq 0.05\%C$	258,000	230	335-260	-	-
M3.2.C.AQ	15.52		326,500	260	260-200	-	-
ISO K	CMC No.	Cast iron	Specific cutting force k_{c1}	Hardness Brinell	<<<< WEAR RESISTANCE		
					GC3115	GC3020	GC4225
					h_{ex} , inch \approx feed, f_n inch/r		
MC No.	CMC No.	Material	lbs/in ²	HB	Cutting speed (V_c) ft/min		
K1.1.C.NS	07.1	Malleable Ferritic (short chipping)	115,000	130	1100-560	1050-520	1050-550
	07.2		131,000	230	810-370	780-355	760-350
K2.1.C.UT	08.1	Grey Low tensile strength	130,000	180	950-450	900-435	900-430
K2.2.C.UT	08.2		140,500	220	810-395	770-370	780-370
K3.1.C.UT	09.1	Nodular SG iron Ferritic	130,000	160	850-375	810-355	810-350
K3.3.C.UT	09.2		194,500	250	670-325	640-290	640-300
K3.4.C.UT	09.3		307,500	380	470-230	455-220	450-220

							TOUGHNESS >>>>
GC4225	GC1115	GC1125	GC1025	GC2135	GC1145	GC235	
.002-.020	.002-.020	.002-.020	.002-.020	.002-.020	.002-.020	.002-.020	
1100-590 1050-460 950-395	1200-580 1050-470 950-415	960-475 860-380 770-340	770-370 680-295 610-270	670-330 590-250 570-235	650-330 600-245 570-225	530-430 490-385 460-345	
920-415 860-320 700-255	940-450 820-375 660-305	770-365 660-305 530-245	600-280 540-245 435-195	570-260 500-220 400-180	580-275 530-230 425-185	460-355 390-275 315-220	
830-345 640-235	830-380 600-250	670-305 490-205	550-250 395-160	500-225 335-140	520-235 350-140	230-205 145-110	
540-230 620-280 425-315 275-145	- - - -	440-210 520-275 395-170 225-130	365-175 425-220 265-155 180-95	335-160 390-200 295-130 160-95	360-170 410-205 280-120 -	325-220 295-185 260-155 325-260	
							TOUGHNESS >>>>
GC1115	GC1125	GC1025	GC2135	GC1145	GC235	H13A	
.002-.020	.002-.020	.002-.020	.002-.020	.002-.020	.002-.020	.002-.020	
770-355 600-275 650-295	620-285 480-220 520-235	520-230 385-170 420-185	470-210 350-150 385-165	485-195 365-150 410-170	425-320 300-225 320-245	295-225 195-130 220-170	
870-415 600-290 650-315	700-335 485-230 520-250	570-270 385-180 415-200	530-230 340-160 370-180	530-215 355-165 335-160	415-315 245-185 280-210	320-215 160-110 215-145	
730-350 610-295	580-280 490-235	475-225 390-185	440-190 360-165	470-195 375-165	410-310 310-230	- -	
700-325 -	560-260 470-215	455-205 390-170	425-190 360-150	450-175 375-150	360-275 235-180	250-190 165-125	
750-365 495-260	600-290 395-205	485-230 310-160	445-190 295-145	470-195 300-140	350-265 210-160	230-155 140-95	
640-305 510-265	510-245 405-210	410-190 335-165	375-170 300-145	- -	365-275 270-205	- -	
							TOUGHNESS >
GC1125	GC1025	H13A					
.002-.020	.002-.020	.002-.020					
830-415 560-310	670-325 455-255	325-275 230-175					
680-365 570-295	560-280 460-235	265-210 260-200					
600-320 485-250 330-180	490-225 390-200 270-140	230-175 195-145 135-100					

Cutting speed recommendations, inch values

The recommendations are valid for use with cutting fluid.

ISO N	CMC No.	Non-ferrous material Material	Specific cutting force k_{c1} lbs/in ²	Hardness Brinell HB	<<<< WEAR RESISTANCE		
					CD10	GC1005	H10
					h_{ex} , inch \approx feed, f_n inch/r		
					Cutting speed (V_c) ft/min		
N1.2.Z.UT	30.11	Aluminium alloys Wrought or wrought and coldworked, non-aging	58,000	60	6900 (8650-860)	6250 (7800-780)	5900 (7400-740)
N1.2.Z.AG	30.12		94,500	100	6900 (8650-860)	6250 (7800-780)	5900 (7400-740)
N1.3.C.UT	30.21	Aluminium alloys Cast, non aging	87,000	75	6900 (8650-860)	6250 (7800-780)	5900 (7400-740)
N1.3.C.AG	30.22	Cast or cast and aged	101,500	90	6900 (8650-860)	6250 (7800-780)	5900 (7400-740)
N1.4.C.NS	30.41	Cast, 13–15% Si	101,500	130	5250 (6550-660)	1650 (2050-205)	1500 (1900-190)
	30.42	Cast, 16–22% Si	101,500	130	2600 (3250-325)	1150 (1450-145)	980 (1250-125)
N3.3.U.UT	33.1	Copper and copper alloys Free cutting alloys, $\geq 1\%$ Pb	79,500	110	1950 (2450-245)	1650 (2050-205)	1650 (2050-205)
N3.2.C.UT	33.2	Brass, leaded bronzes, $\leq 1\%$ Pb	80,000	90	1950 (2450-245)	1650 (2050-205)	1650 (2050-205)
N3.1.U.UT	33.3	Bronze and non-leadad copper incl. electrolytic copper	196,000	100	980 (1250-125)	980 (1250-125)	980 (1250-125)
ISO S	CMC No.	Heat resistant super alloys Material	Specific cutting force k_{c1} lbs/in ²	Hardness Brinell HB	<<<< WEAR RESISTANCE		
					S05F	GC1105	GC1005
					h_{ex} , inch \approx feed, f_n inch/r		
					Cutting speed (V_c) ft/min		
S1.0.U.AN	20.11	Iron base Annealed or solution treated	348,000	200	660-435	590-385	590-385
S1.0.U.AG	20.12	Aged or solution treated and aged	359,000	280	550-360	490-320	490-320
S2.0.Z.AN	20.21	Nickel base Annealed or solution treated	383,000	250	330-200	295-185	295-185
S2.0.Z.AG	20.22	Aged or solution treated and aged	420,500	350	295-200	265-165	265-165
S2.0.C.NS	20.24	Cast or cast and aged	436,500	320	255-160	235-150	235-150
S3.0.Z.AN	20.31	Cobalt base Annealed or solution treated	391,500	200	330-215	295-185	295-185
S3.0.Z.AG	20.32	Solution treated and aged	432,000	300	295-180	265-165	265-165
S3.0.C.NS	20.33	Cast or cast and aged	450,500	320	255-160	235-150	235-150
Titanium S4.1.Z.UT	23.1	Commercial pure (99.5% Ti)	188,500	Rm ¹⁾ 400	-	-	-
S4.2.Z.AN	23.21	Titanium alloys α , near α and $\alpha + \beta$ alloys, annealed	203,000	950	-	-	-
S4.3.Z.AG	23.22	$\alpha + \beta$ alloys in aged conditions, β alloys, annealed or aged	203,000	1050	-	-	-
ISO H	CMC No.	Hardened material Material	Specific cutting force k_{c1} lbs/in ²	Hardness Brinell HB	<<<< WEAR RESISTANCE		
					CB20	CC670	CB7015
					h_{ex} , inch \approx feed, f_n inch/r		
					Cutting speed (V_c) ft/min		
H1.3.Z.HA	04.1	Extra hard steel Hardened and tempered	625,500	60 HRC	420-400	355-320	475-450
H2.0.C.UT	10.1	Chilled Cast or cast and aged	326,500	400	650-640	360-325	-

1) Rm = ultimate tensile strength measured in MPa.

TOUGHNESS >>>>									
GC1125	GC1025	H13A							
.002-.031	002-.031	.002-.031							
4900 (6150-610)	4900 (6150-610)	4900 (6150-610)							
4900 (6150-610)	4900 (6150-610)	4900 (6150-610)							
4900 (6150-610)	4900 (6150-610)	4900 (6150-610)							
4900 (6150-610)	4900 (6150-610)	4900 (6150-610)							
1300 (1650-165) 820 (1050-105)	1300 (1650-165) 820 (1050-105)	1300 (1650-165) 820 (1050-105)							
1150 (1450-145) 1300 (1650-165) 820 (1050-105)	1150 (1450-145) 1300 (1650-165) 820 (1050-105)	1150 (1450-145) 1300 (1650-165) 820 (1050-105)							
TOUGHNESS >>>>									
H10	GC1115	GC1125	GC1025	H13A	GC2135	GC1145	GC235	CC670	CB7015
.002-.012	.002-.012	.002-.012	.002-.012	.002-.012	.002-.012	.002-.012	.002-.012	.002-.012	.002-.012
-	330-180	260-140	195-115	165-120	165-95	150-145	165-120	-	-
-	235-135	185-110	145-90	130-85	130-85	115-75	130-85	-	-
-	215-130	170-105	145-90	100-75	130-85	95-75	100-75	1950-1050	1300-980
-	190-105	150-85	130-75	65-45	115-70	65-40	65-45	1650-810	1150-820
-	140-75	115-60	100-50	65-45	80-31	65-40	65-45	820-390	650-410
-	235-155	185-125	165-110	115-90	145-90	115-75	115-90	1350-720	820-490
-	190-105	150-85	130-75	75-50	115-55	75-37	75-50	1150-680	820-490
-	140-75	115-60	100-50	65-45	80-45	65-40	65-45	1050-490	650-410
620-485	1000-455	720-325	620-310	570-470	550-265	-	-	-	-
255-195	330-180	265-140	210-120	235-190	-	-	-	-	-
230-180	310-155	245-120	200-105	215-175	-	-	-	-	-
TOUGHNESS >>>>									

Grades for parting and grooving

	ISO	ANSI		
P Steel	01	C8		▲
	10	C7	GC 3115, GC 4225, GC 1125, GC 1025, GC 1145, GC 2135, GC 3020, CT 525, GC 1105, GC 1115	
	20	C6		
	30	C6		
	40	C5		
	50	C5		▼
M Stainless steel	10	-	GC 1105, GC 1005, CT 525, H13A, GC 1115	▲
	20	-	GC 1125, GC 1025, GC 2135, GC 235	
	30	-	GC 1145	
	40	-		▼
K Cast iron	01	C4		▲
	10	C3	GC 3115, GC 4225, GC 1125, GC 1135, GC 3020, H13A, GC 1115	
	20	C2		
	30	C1		▼
N Non-ferrous metals	01	C4	CD10	▲
	10	C3	H10, GC 1005, H13A, GC 1025, GC 1125, GC 1135, GC 1105, GC 1115	
	20	C2		
	30	C1		▼
S Heat resistant and super alloys	10	-	S05F, GC 1105, GC 1005, H13A, GC 1125, GC 1135, GC 1115, GC 1025, CC 670, CB 7015, H10	▲
	20	-		
	30	-	GC 1145, GC 2135, GC 235	
	40	-		▼
H Hardened materials	01	C4		▲
	10	C3	CB 7015, CB 20, CC 670	
	20	C2		
	30	C1		▼


The position and form of the grade symbols indicate the suitable field of application.

Centre of the field of application.

Recommended field of application.

▲ Wear resistance

▼ Toughness



= Basic grades



= Complementary grades



Grades for parting and grooving

P

Steel, cast steel, long chipping malleable iron

Basic grades

GC3115 (HC) – P15 (P05-P25)

A very high wear resistant CVD-coated grade. Especially recommended for grooving and turning at stable conditions due to its excellent hot hardness, while also effective in hard steels. To be used at high cutting speeds under good conditions.

GC3020 (HC) – P15 (P05-P25)

A very high wear resistant CVD-coated grade. Especially recommended for grooving and turning at stable conditions due to its excellent hot hardness, while also being effective in hard steels. To be used at high cutting speeds under good conditions.

GC4225 (HC) - P20 (P10-P35)

An all-round CVD-coated grade with excellent combination of high wear resistance and good edge security, first choice for grooving and turning operations under stable conditions. Medium to high cutting speeds.

GC1025 (HC) – P25 (P15–P45)

An excellent all-round grade for parting-off, grooving and turning operations. This PVD-coated grade works very well in low carbon steel and other smearing materials. Speeds and feeds from medium to low.

GC1125 (HC) - P30 (P15-P45)

This improved PVD-coated cemented carbide is an excellent allround grade. A first choice for parting-off tubes in steel. Also very good in grooving and turning operations. Speeds and feeds from medium to low.

GC2135 (HC) – P35 (P20-P50)

A CVD-coated carbide grade for toughness demanding operations such as cut-off to centre and interrupted cuts. Back up alternative when grooving and turning. Very good bulk and edge line toughness. To be used at low to medium cutting speeds.

Complementary grades

CT525 (HT) – P10 (P01-P15)

A titanium based grade with excellent resistance to oxidation and smearing. For high quality surface finishes when grooving low alloyed and alloyed steels under fairly good conditions. Moderate cutting speeds and feeds.

GC235 (HC) – P45 (P25-P50)

Parting and grooving of steel in operations requiring toughness. Suitable for low speeds and under unfavourable conditions.

GC1115 (HC) – P15 (P05-P25)

Recommended to be used as a complementary grade at low feedrate or medium cutting speed.

GC1105 (HC) - P15 (P05-P25)

Recommended only for Small Part Machining and to be used as a complementary grade to GC1025 at low feed rate or medium cutting speed.

M

Austenitic/ferritic/martensitic stainless steel, cast steel, manganese steel, alloy cast iron, malleable iron, free cutting steel.

Basic grades

GC1105 (HC)-M15 (M05-M20)

The substrate consists of a hard fine-grained WC with 6% Co for high hot hardness and good resistance against plastic deformation. The new thin PVD TiAlN-coating with excellent adhesion, also on sharp edges, guarantees toughness, even flank wear and high performance. Suitable for finishing of stainless steels at high speeds.

GC1125 (HC) - M25 (M15-M35)

An improved allround PVD-coated grade. This grade has a combination of high wear resistance and good edge security for stainless steels. First choice for grooving and turning operations. Also good for parting-off, especially tubes. Medium to low cutting speeds.

GC2135 (HC) – M30 (M20-M40)

First choice CVD-coated carbide grade for parting-off in stainless steel and other toughness demanding operations. Very good bulk and edge line toughness. To be used at medium to low cutting speeds.

GC1025 (HC) - M25 (M15-M35)

An excellent all-round PVD-coated grade with a combination of high wear resistance and good edge security for stainless steels. Recommended for grooving and turning operations, also good for parting-off especially tubes. Medium to low cutting speeds.

GC1145 (HC) – M40 (M40-M50)

This grade is a solution for stainless steel applications with very high demands on toughness behavior. It is suitable in parting off operations and applications demanding very good edge line toughness. The grade is coated with a PVD-oxide that works well in smearing materials. The substrate has an extremely good bulk toughness and should be used at low cutting speeds.

Complementary grades

GC1005 (HC) – M10 (M05-M20)

PVD-coated carbide. The combination of a hard fine grain substrate with good plastic deformation resistance and a coating with high wear resistance at high temperatures, makes this grade suitable for finishing of stainless steels at high speeds.

CT525 (HT) – M10 (M05-M15)

A titanium based grade with excellent resistance to oxidation and smearing. For high quality surface finishes when grooving stainless steels under good conditions. Moderate cutting speeds and feeds.

H13A (HW) – M15 (M10-M30)

Combines good abrasive wear resistance and toughness for grooving of heat resistant steels and titanium alloys.

GC235 (HC) – M35 (M25-M40)

Parting and grooving of stainless steels where toughness is required. Use at low speeds and under unfavourable conditions.

GC1115 (HC) – M15 (M05-M25)

A PVD coated fine-grained carbide. The substrate has high hot hardness and good resistance against plastic deformation combined with good edge line security. The thin PVD-oxide coating with excellent resistance to smearing material and good adhesion on sharp edges. This guarantees toughness, even flank wear and high performance.

Grades for parting and grooving



Cast iron, chilled cast iron, short chipping malleable iron.



Non ferrous metals

Basic grades

GC3115 (HC) – K15 (K05-K25)

A very high wear resistant CVD-coated grade for high cutting speeds in grooving and turning under good conditions. Due to its excellent hot hardness also effective on hard cast-iron.

GC4225 (HC) - K25 (K10 - K35)

An all-round CVD-coated grade with excellent combination of high wear resistance and good edge security. To be used in grooving and turning operations at medium to high cutting speeds. Also good in parting off tubes.

GC1125 (HC) - K30 (K15-K35)

A PVD-coated allround grade for toughness demanding operations and interrupted cuts. This grade has a good edge security due to the superior coating. To be used at medium to low cutting speeds

GC1025 (HC) - K30 (K15-K35)

A PVD-coated allround grade for toughness demanding operations and interrupted cuts. To be used at medium to low cutting speeds.

GC1135 (HC) - K20 (K10-K30)

Good allround PVD-coated grade with good wear resistance and very good edge line toughness for toughness demanding threading operations in K-area.

Complementary grades

GC3020 (HC) – K15 (K05-K25)

A very high wear resistant CVD-coated grade for high cutting speeds in grooving and turning under good conditions. Due to its excellent hot hardness it is also effective on hard cast-iron.

H13A (HW) – K20 (K10-K30)

Good abrasive wear resistance and toughness for parting/grooving of cast iron.

GC1115 (HC) - K15 - (K05-K25)

Recommended to be used as a complementary grade at low feedrate or medium cutting speed.

Basic grades

CD10 (DP) – N01 (N01-N15)

A polycrystalline diamond (PCD) grade recommended for machining of non-ferrous metals and non-metallic materials. Very good surface finish.

H10 (HW) – N10 (N05-N15)

Uncoated carbide grade with good edge sharpness. Recommended for machining of Aluminium and for intermittent cuts.

GC1005 (HC) - N10 (N05-N15)

PVD-coated carbide grade. The combination of a hard fine grain substrate and a coating with high wear resistance, makes this grade most suitable for roughing of aluminium.

H13A (HW) – N20 (N10-N30)

Uncoated carbide grade. Combines good abrasive wear resistance and toughness for parting and grooving of Aluminium alloys.

GC1025 (HC) - N25 (N15-N20)

A PVD-coated grade for toughness demanding operations, recommended for interrupted cuts.

GC1125 (HC) - N25 (N15-N35)

A PVD-coated grade for toughness demanding operations, recommended for interrupted cuts

GC1135 (HC) - N25 (N10-N30)

Good allround PVD-coated carbide grade with very good edge line toughness for all kinds of threading operations in non-ferrous metals. To be used at medium cutting speeds.

Complementary grades

GC1105 (HC) - N15 (N05-N25)

A PVD-coated grade with excellent adhesion on sharp edges, guarantees toughness, even flank wear and high performance.

GC1115 (HC) - N15 (N10-N20)

A PVD coated fine-grained carbide for applications when sharp edges are needed. The combination of a hard substrate with good edge line security and a coating with high wear resistance makes this grade suitable for toughness demanding operations in non ferrous materials.

Letter symbols specifying the designation of hard cutting materials:

Hardmetals:

HW Uncoated hardmetal containing primarily tungsten carbide (WC)

HT Uncoated hardmetal, also called cermet, containing primarily titanium carbides (TiC) or titanium nitrides (TiN) or both.

HC Hardmetals as above, but coated

Ceramics:

CA Oxide ceramics containing primarily aluminium oxide (Al_2O_3).

CM Mixed ceramics containing primarily aluminium oxide (Al_2O_3) but containing components other than oxides.

CN Nitride ceramics containing primarily silicon nitride (Si_3N_4).

CC Ceramics as above, but coated.

Diamond:

DP Polycrystalline diamond¹⁾

Boron nitride:

BN Polycrystalline boron nitride¹⁾

¹⁾ Polycrystalline diamond and polycrystalline boron nitride are also named superhard cutting materials.

Grades for parting and grooving



Heat resistant and super alloys

Basic grades

S05F (HC) - S10 (S05-S15)

MT-CVD-coated TiCN-Al₂O₃-TiN layer with a fine grained carbide substrate. An allround grade for heat resistant super alloys. Both for high speed finishing and roughing operations.

GC1105 (HC) - S15 (S10-S20)

The substrate consists of a hard fine-grained WC with 6% Co for high hot hardness and good resistance against plastic deformation. The new thin PVD TiAlN-coating with excellent adhesion, also on sharp edges, guarantees toughness, even flank wear and outstanding performance in heat resistant super alloys.

GC1005 (HC) - S15 (S10-S20)

PVD-coated carbide. The combination of a hard fine grain substrate with good plastic deformation resistance and a coating with high wear resistance at high temperatures, makes this grade most suitable for Ni, Fe or Co-based heat resistant super alloys.

H13A (HW) - S15 (S10-S30)

Uncoated carbide grade. Combines good abrasive wear resistance and toughness for parting and grooving. First choice in titanium.

GC1025 (HC) - S25 (S15-S35)

A PVD-coated grade for toughness demanding operations, recommended for interrupted cuts. To be used at low cutting speeds.

GC1125 (HC) - S25 (S15-S35)

A PVD-coated grade for toughness demanding operations, recommended for interrupted cuts. To be used at low cutting speeds

CC670 (CA) - S10 (S05-S25)

A silicon carbide whisker reinforced aluminium oxide based ceramic with excellent bulk toughness. Recommended for heat resistant alloys under favourable conditions.

CB7015 (BN) - S15 (S05-S25)

A high performance cubic boron nitride composite also suited for heat resistant super alloys. This grade allows sharp edges optimized for surface finish and low dept of cuts.

GC1145 (HC) - S40 (S40-S50)

A first choice when parting off in heat resistance super alloys due to a very secure grade. The tough substrate is coated with a PVD coating including an oxide layer to improve the heat protection. To be used at low cutting speeds.

GC1115 (HC) - S20 (S10-S25)

Recommended for heat resistant super alloys. A PVD coated fine-grained carbide with high hot hardness combined with superior edge line security. Good resistance against notch makes the grade suitable to use in difficult materials.

GC1135 (HC) - S25 (S10-S35)

Good allround PVD-coated carbide grade for toughness demanding super alloy threading. To be used at low cutting speeds. First choice in S-area.

Complementary grades

H10 (HW) - S15 (S10-S20)

Uncoated carbide grade with good edge sharpness. Recommended for finishing in Titanium.

GC2135 (HC) - S30 (S20 - S40)

A CVD-coated grade for toughness demanding operations such as cut-off to centre and interrupted cuts in heat resistant super alloys.

GC235 (HC) - S30 (S25-S40)

A CVD-coated carbide grade for parting and grooving of heat resistant super alloys. Use at low cutting speeds.

GC2145 - S40 (S30-S40)

A tough PVD-coated grade. First choice in parting off in heat resistant super alloys.



Hardened materials

Basic grades

CB20 (BN) - H01 (H01-H10)

High performance Cubic Boron Nitride composite. Suitable for hardened ferrous materials. Can be used for both continuous and interrupted cuts.

CC670 (CA) - H10 (H05-H15)

A silicon carbide whisker reinforced aluminium oxide based ceramic with excellent bulk toughness. Primarily recommended for heat resistant alloys and hard part turning under unfavourable conditions

CB7015 (BN) - H15 (H05-H20)

High performance Cubic Boron Nitride composite for hardened ferrous materials. Suitable for both continuous and interrupted cuts.