

SITOR cylindrical fuse link, 10 x 38 mm, 20 A, aR, Un AC: 600 V, Un DC: 700 V, DC acc. to UL



Figure similar

General technical data

Size of the fuse link 10x38 mm

Dissipation

Power loss [W]
 • for rated value of the current / at AC / in hot operating state / per pole 4.8 W

Main circuit

Operating voltage / rated value 600 V
 Operating current / Rated value 20 A

Product details

Product component / striker No
Net weight 16 g
Equipment marking
 • acc. to DIN EN 61346-2 F
 • acc. to DIN EN 81346-2 F



[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NC1020>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NC1020/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=3NC1020

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

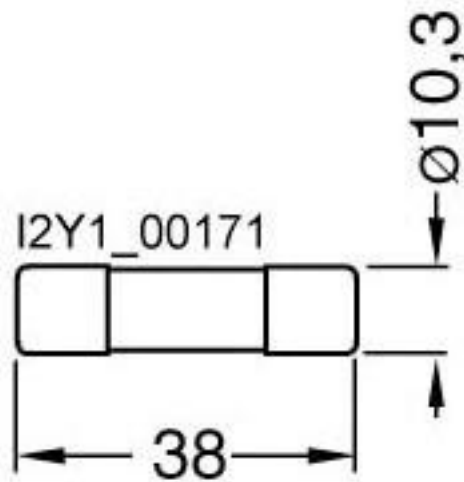


Figure similar