

SITOR cylindrical fuse link, 10 x 38 mm, 32 A, aR, Un AC: 600 V



Figure similar

### General technical data

**Size of the fuse link** 10x38 mm

### Dissipation

**Power loss [W]**  
 • for rated value of the current / at AC / in hot operating state / per pole 7.5 W

### Main circuit

Operating voltage / rated value 600 V  
 Operating current / Rated value 32 A

### Product details

Product component / striker No  
**Net weight** 10 g  
**Equipment marking**  
 • acc. to DIN EN 61346-2 F  
 • acc. to DIN EN 81346-2 F



[sonstig](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NC1032>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3NC1032/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=3NC1032](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=3NC1032)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

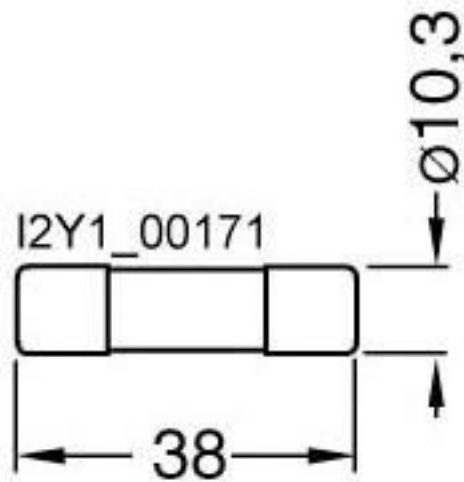


Figure similar