

AS-INTERFACE MOUNT. PLATE K60 FOR COMPACT MODULE K60 FOR 2 RIBBON CABLES, AS-INTERFACE CABLE (YELLOW) AND AS-INTERFACE CABLE 24V (BLACK)



Figure similar

General technical data		
Type of device		accessories digital I/O modules for operation in the field, IP67 - K60
Design of the product		K60 mounting plate for wall mounting
Note 1		additional seals are required only when the flat cables end in the module (3RK1 902-0AR00)
Connections/Terminals		
connection		insulation piercing method for AS-Interface flat cable
Connection system		insulation piercing method for AS-Interface flat cable
Mechanical data		
Type of mounting		for wall mounting
Ambient conditions		
Ambient temperature	°C	-25 ... +85
degree of protection		IP67 with screw-mounted K60 compact module
Certificates/approvals		

General Product Approval	Declaration of Conformity	Shipping Approval
--------------------------	---------------------------	-------------------



Shipping Approval	other
-------------------	-------



[Confirmation](#)

[Environmental Confirmations](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1901-0CA00>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1901-0CA00>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1901-0CA00>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1901-0CA00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1901-0CA00&lang=en)

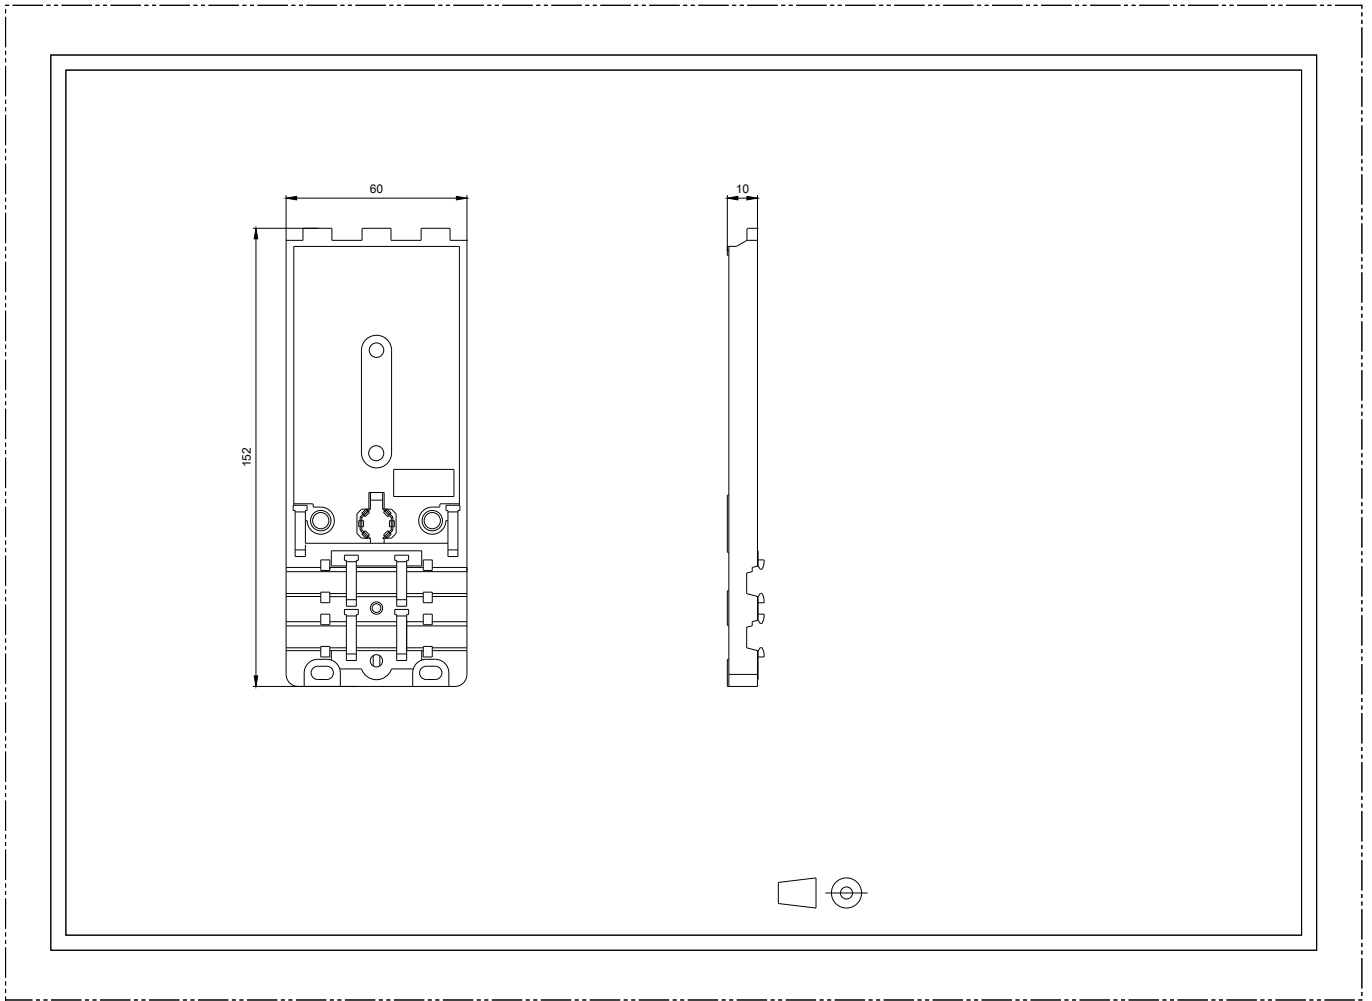

last modified:

06/12/2017