


M1 Circuit Breakers

FEATURES

- Bolt-on main breaker for Murray Rock Solid single phase load centers
- UL listed
- Interrupting rating of 22KA
- 120/240V AC
- Wire range #4 – 300 kcmil Cu/Al
- Shunt trip available, use ST suffix for ordering

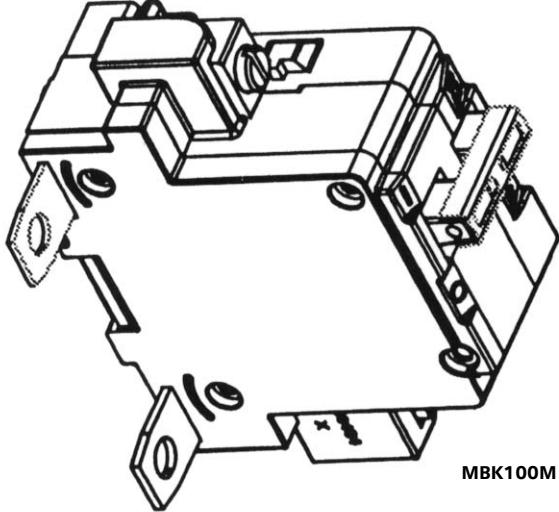


Catalog Number	Amperage	Interrupting Rating	UL Type
MBK100M	100	22K	M1
MBK125M	125	22K	M1

fastfax

MURRAY

M1 Circuit Breakers

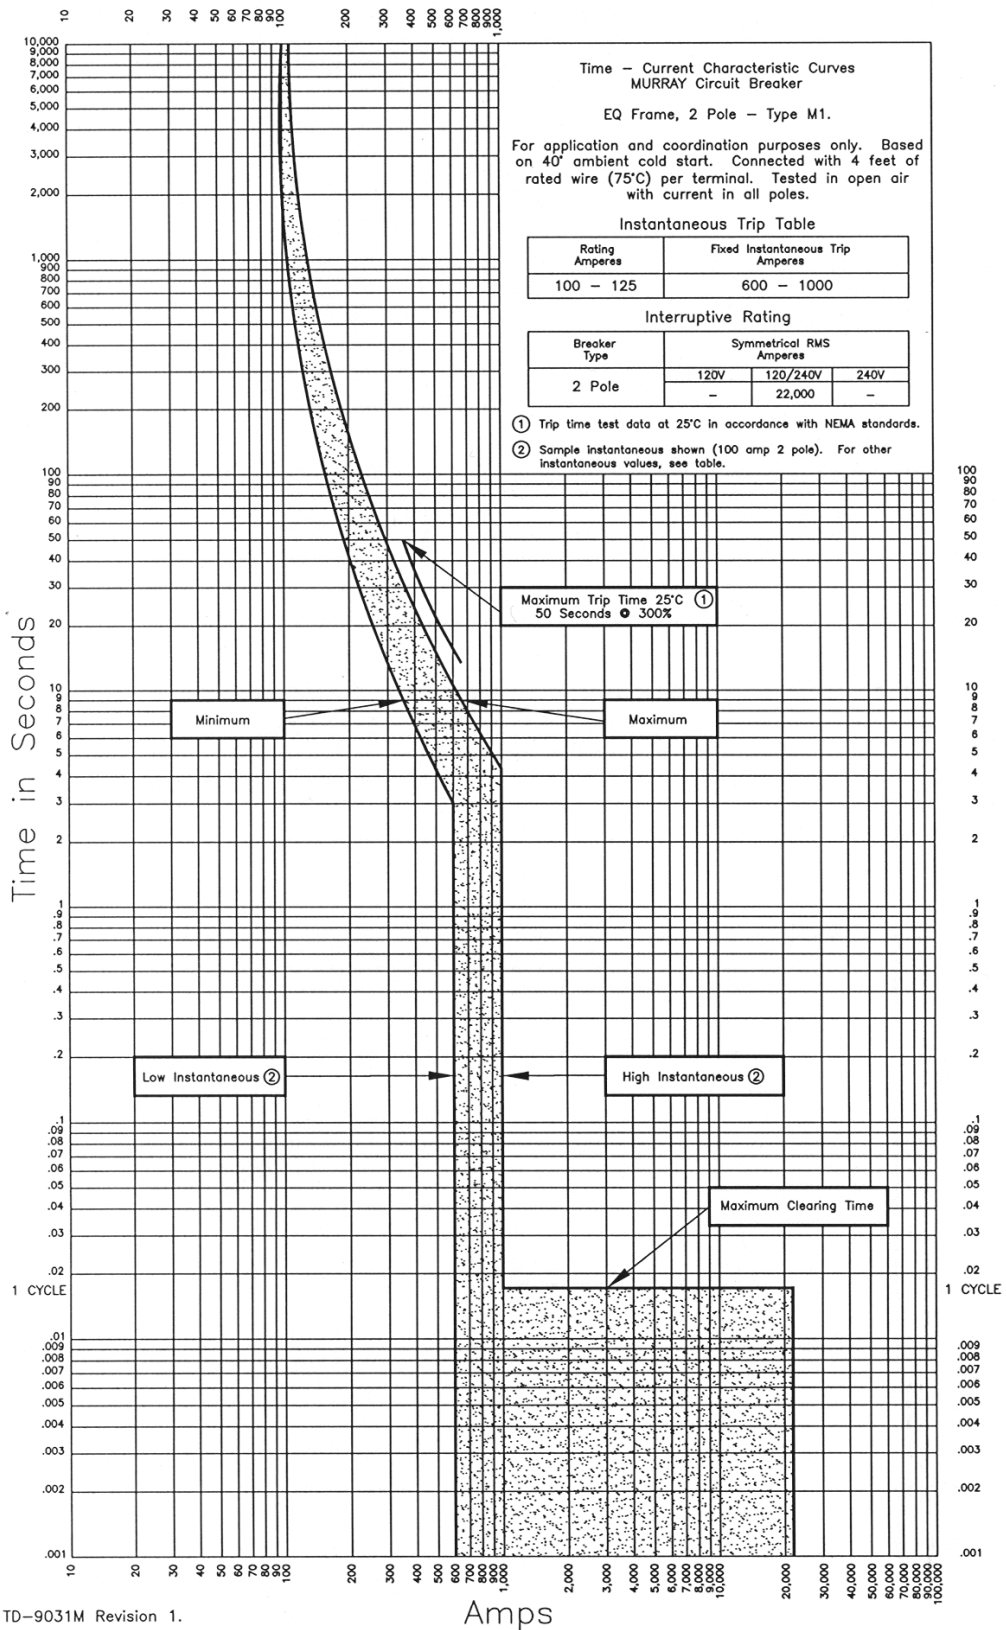

M1 Circuit Breakers

M1 Series Ratings								
240V 2 Breaker Series								
Branch Breaker or Fuse			Main Breaker or Fuse			Interrupting Rating RMS Symm		
UL Type	Amps	Poles	UL Type	Amps	Poles	RMS Symm Amps	Volts	Phase
MP-T	15- 70	1	M1	100-125	2	22,000	120/240	1
MP-T	15-125	2	M1	100-125	2	22,000	120/240	1
MH-T	15- 50	1, 2	M1	100-125	2	22,000	120/240	1
MH-T	15- 50	2	M1	100-125	2	22,000	120/240	1
MP-AT	15- 20	1	M1	100-125	2	22,000	120	1
MP-GT	15- 30	1	M1	100-125	2	22,000	120	1
MP-GT	15- 60	2	M1	100-125	2	22,000	120/240	1
MP-ET	15- 30	1	M1	100-125	2	22,000	120	1
MP-ET	15- 60	2	M1	100-125	2	22,000	120/240	1
M1	100-125	2	MD-MT,MD-MTR	150-200	2	65,000	120/240	1
M1	100-125	2	MPP-MT	150-225	2	65,000	120/240	1
M1	100-125	2	MPP-PT	150-225	2	100,000	120/240	1
M1	100-125	2	T (300V)	100-200	2	100,000	120/240	1

For 240V 3 and 4 Breaker Series information please contact your local sales representative.

M1 Circuit Breakers

