


NEMA TYPE 12/3R

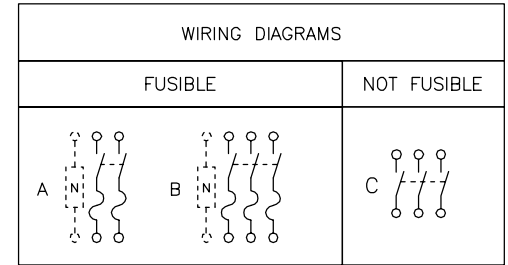

TERMINAL LUGS			
AMPERES	MAX WIRE	MIN WIRE	TYPE
30	#6 AWG	#12 AWG	AL
30	#6 AWG	#14 AWG	CU

*FROM SIDE OF ENCLOSURE

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	AMPERAGE RATINGS	WIRING DIAG	HORSEPOWER RATINGS															
				240VAC				480VAC				600VAC				250 VDC	600 VDC		
				STD		MAX		STD		MAX		STD		MAX					
1 ϕ	3 ϕ	1 ϕ	3 ϕ	1 ϕ	3 ϕ	1 ϕ	3 ϕ	1 ϕ	3 ϕ	1 ϕ	3 ϕ	STD	MAX						
H221AWK	240VAC,250VDC	30	A	1 1/2 \bullet	3 \ddagger	3 \bullet	7 1/2 \ddagger	-	-	-	-	-	-	-	-	5	-	-	-
H321AWK	240VAC,250VDC	30	B	1 1/2 \blacktriangle	3 \blacksquare	3 \blacktriangle	7 1/2 \blacksquare	-	-	-	-	-	-	-	-	5	-	-	-
H361AWK	600VAC,600VDC	30	B	-	-	-	-	3 \blacktriangle	5 \blacksquare	7 1/2 \blacktriangle	15 \blacksquare	-	7 1/2	-	20	5 \blacktriangle	-	10 \blacktriangle	15
HU361AWK	600VAC,600VDC	30	C	-	-	5 \blacktriangle	10 \blacksquare	-	-	7 1/2 \blacktriangle	20 \blacksquare	-	-	10 \blacktriangle	30	-	5	-	15 \blacktriangle
HU361AWKEI	600VAC,600VDC	30	C	-	-	5 \blacktriangle	10 \blacksquare	-	-	7 1/2 \blacktriangle	20 \blacksquare	-	-	10 \blacktriangle	30	-	5 \blacktriangle	-	15 \blacktriangle

- NOTES:
 UL LISTED - E2875
 FINISH - GRAY BAKED ENAMEL
 ALL NEUTRALS - INSULATED
 WHEN MOUNTING THESE SWITCHES, ALLOW 3.00/[76] MIN CLEARANCE BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.
 \blacktriangle USE BOTH OUTER SWITCHING POLES
 \bullet USE BOTH SWITCHING POLES
 \blacksquare IF CORNER GROUNDED DELTA, INSTALL NEUTRAL AND USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.
 \ddagger FOR CORNER GROUNDED DELTA ONLY, USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.

HEAVY DUTY SAFETY SWITCHES
 VISIBLE BLADE TYPE
 30 AMPERE-SERIES F6
 ENCLOSURE - NEMA TYPE 12/3R



DWG# 2231
 NO.