


APPLETON RECEPTACLE

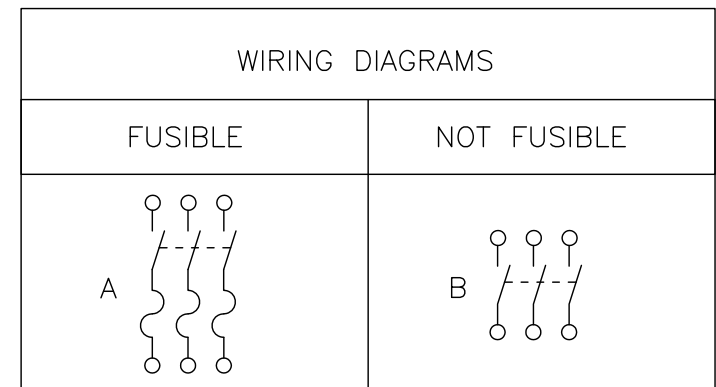

TERMINAL LUG DATA ‡			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
30	# 2 AWG	# 14 AWG	CU
60	# 2 AWG	# 14 AWG	CU

DUAL DIMENSIONS: INCHES
MILLIMETERS

NOTES:
 FINISH: SWITCH – GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.
 RECEPTACLE – EPOXY POWDER COATING OVER COPPER-FREE CAST ALUMINUM
 UL LISTED-FILE E85159
 CSA CERTIFIED
 SUITABLE FOR USE AS SERVICE EQUIPMENT.
 SHORT CIRCUIT RATING:
 10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.
 200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R OR J FUSES.
 WHEN USED IN AN OUTDOOR APPLICATION REMOVE DRAIN IN BOTTOM ENDWALL.
 WHEN MOUNTING THESE SWITCHES, ALLOW 4.00 IN / 102 MM MIN. CLEARANCE BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.

■ FOR SINGLE PHASE HP RATINGS USE 2 OUTER SWITCHING POLES.
 ◆ USE 2 OUTER SWITCHING POLES
 ‡ LUGS SUITABLE FOR 60° C OR 75°C COPPER CONDUCTORS.

CATALOG NUMBER	VOLTAGE RATING	AMPERE RATING	WIRING DIAG	HORSEPOWER RATINGS■								250 VDC ◆		
				240VAC		480VAC		600VAC						
				MAX		STD		MAX		STD		STD	MAX	
				1Ø	3Ø	1Ø	3Ø	1Ø	3Ø	3Ø	1Ø			3Ø
H361AWAVW	600VAC;250VDC	30	A	–	–	3	5	7 1/2	15	7 1/2	–	20	5	–
H362AWAVW	600VAC;250VDC	60	A	–	–	5	15	20	30	15	–	50	10	–
HU361AWAVW	600VAC;250VDC	30	B	5	10	–	–	10	20	–	15	30	–	5
HU362AWAVW	600VAC;250VDC	60	B	10	20	–	–	25	50	–	30	60	–	10

HEAVY DUTY SAFETY SWITCHES
 WITH RECEPTACLE
 30-60 AMPERES
 ENCLOSURE – NEMA TYPE 12 INDUSTRIAL AND
 NEMA TYPE 3R RAIN-TIGHT



DWG# 1934V
NO.