



KNOCKOUTS							
SYMBOL	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

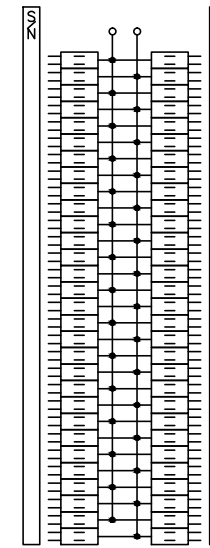

HOM60120L225PC

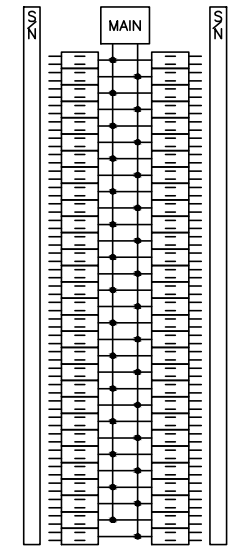

HOM60120M200PC

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER	MAXIMUM SYSTEM VOLTAGE	MAINS AMPERE RATING	SPACES	MAXIMUM NUMBER OF SINGLE POLE CIRCUITS	MAIN WIRE SIZE AWG AL	MAIN WIRE SIZE AWG CU
HOM60120L225PC	120/240VAC	225	60	120	4-300	4-250
HOM60120M200PC	1PH 3W	200	60	120	4-250	4-250

NOTES:
FINISH - GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPATIZED STEEL
UL LISTED - FILE E-6294
NEUTRALS - INSULATED GROUNDABLE

HOMELINE LOAD CENTERS
INDOOR TYPE 1,
200-225 AMPS, 60 SPACES, 120 CIRCUIT MAX



by Schneider Electric

DWG# PWFDS-SYRS-0081
NO.