



NEMA TYPE 3R  
NO KNOCKOUTS

NOTES: FINISH - GRAY BAKED ENAMEL  
 UL LISTED - FILE E-154828  
 ALL NEUTRALS - INSULATED GROUNDABLE  
 SUITABLE FOR USE AS SERVICE EQUIPMENT  
 SHORT CIRCUIT CURRENT RATINGS:  
 10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.  
 200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R FUSES HAVING  
 CLASS R REJECTION KITS INSTALLED OR CLASS J FUSES.  
 \* FOR CORNER GROUNDED DELTA SYSTEMS ONLY AND WITH SOLID NEUTRAL ASSEMBLY INSTALLED.  
 ■ NEUTRAL ASSEMBLY H600SN MUST BE USED FOR 480VAC, CORNER GROUNDED DELTA SYSTEM.

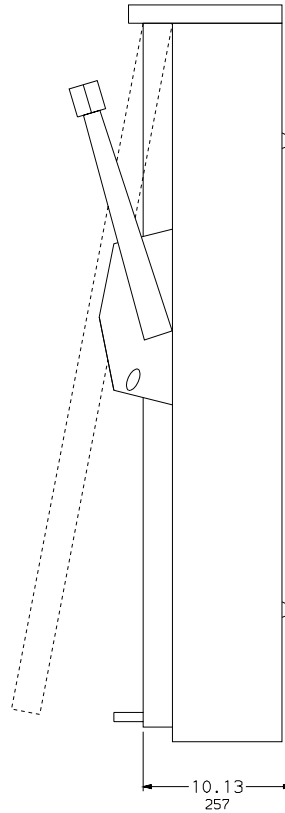

NOTE: DOOR OPENS  
UPWARD

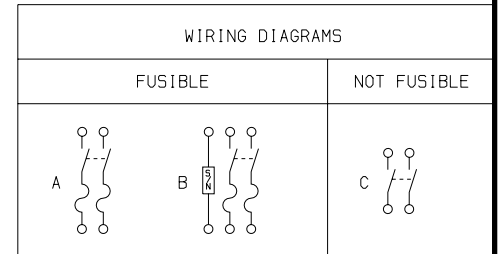

TERMINAL LUGS DATA			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
600	(2) 500 KCMIL	(2) #3/0 AWG	AL OR CU

DUAL DIMENSIONS: INCHES  
MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS			
			240VAC		480VAC	
			STD.	MAX.	STD.	MAX.
H226NR	240VAC; 250VDC	B	75 *	200*	-	-
H226R	240VAC; 250VDC	A	75 *	200*	-	-
H266R	600VAC; 600VDC	A	-	-	150 ■	400 ■
HU266R	600VAC; 600VDC	C	-	-	-	-

HEAVY DUTY SAFETY SWITCHES  
 VISIBLE BLADE TYPE  
 600 AMPERE  
 ENCLOSURE - NEMA TYPE 3R RAINPROOF (SUFFIX R)

**SQUARE D COMPANY**

DWG. NO. 1930