

Lighting solutions

Consumer products



Motion Activated • Floodlights • Dusk to Dawn
Worklights • Recessed • Ambient • Undercabinet

EATON

Powering Business Worldwide

Eaton is one of the world's largest manufacturers of residential, commercial, industrial, institutional, and roadway lighting fixtures. Eaton's product lines have been trusted over the years for their quality and performance. Intensive market research, new-product development, an extensive sales network and a dedicated customer fulfillment team are leading examples of Eaton's commitment to the lighting industry.

To ensure and support our Customer First commitment, Eaton has aggressively invested in key product acquisitions, a state-of-the-art distribution and service network, and technically superior manufacturing facilities. Eaton's vast system of dedicated resources gets the right product to the right place—at the right time—time and time again.



Products

Eaton provides high quality products and services that best suit the needs of each customer within every segment of the lighting industry. This goal is achieved through intensive market research and product development combined with an industry-first, state-of-the-art distribution and service network.

Knowledge

No other manufacturer stands behind its customers like Eaton—from products to service to education—Eaton makes a difference. The Source, Eaton's lighting training and teaching facility, offers professional seminars in lighting technology, effect and performance.

Service

We put you first, and support our philosophy with a dedicated Customer First Center with centralized warehousing, distribution and customer service for all your lighting requirements. We are committed to being your single source for all your lighting needs.

Support

In the area of electronic commerce, Eaton continues to stay on the cutting edge to support our customers. Customer ordering via Web Services, EDI, and Fax along with order cycle process management and notification creates a seamless, efficient order cycle process to best serve our customers.

Technology

Eaton is the source for superior quality lighting products in all markets, bringing creativity, insight, and knowledge together to provide the best, and the brightest, lighting solutions.



Powering Business Worldwide

Product Features & Technologies

Eaton is the source for superior quality lighting products in all markets, bringing creativity, insight, and knowledge together to provide the best and the brightest lighting solutions. Below you will find descriptions that detail some of the features and technology icons listed throughout this book.

For more information, contact your representative or visit www.eaton.com/lighting.



cULus® Listed

Tested and listed with Underwriters Laboratory for product safety certification in US and Canada.



ENERGY STAR®

Meets ENERGY STAR® requirements to help save money and protect the environment through energy efficiency.



California Title 24 & Title 20

Can be used to comply with California Title 24 High Efficacy requirements
Certified to California Title 20 Appliance Database



California Title 24

Can be used to comply with T24 California Non-Residential lighting controls requirements




LED Technology

Uses long lasting, energy efficient, white LED technology.



Solar Powered

Easy installation and energy efficient. Perfect for applications where line voltage is not available.



Degree of Motion

We offer multiple options for the detection range you need with our Motion Activated products.

For a quick reference, look for the degree of motion icons.



Precision Plus Doppler Radar™

Patented motion sensing technology that combines both PIR and Doppler radar technology for optimal detection.



Commercial Linear Disconnect

Factory supplied pre-wired disconnect. Meets NEC and CEC code requirements.



Lamp Technology

Metalux provides a full range of energy efficient lighting solutions in T8, T5 and LED platforms.



Cold Start Ballast

Standard T8 ballasts support cold start down to 0°F. Perfect for unheated locations such as sheds, shops, and garages.

Table of Contents

Motion Activated
2-9

Solar Powered
10-12

Floodlights
13-16

Dusk to Dawn
17-24

Worklights
25-28

Recessed Lighting
29-52

Ambient Lighting
53-59

Exit and Emergency
60-62

Undercabinet LED Lighting
63-64

Bulbs & Accessories
65-68

Product Index
69-72



Motion Activated Lighting

Outdoor Security Floodlights

Motion activated lighting is the most efficient way to provide security lighting to your home or office. Equipped with adjustable timers and integrated photo controls, these convenient fixtures also save money by providing light only when and where you need it.


ALL-PRO™

Motion Activated | Outdoor Security Lighting




Detection Zones


Our line of motion activated security lighting comes equipped with sensors calibrated for three primary detection zones, designed for full perimeter coverage of your home.



110°
Small Area Lighting
Smaller area coverage
best for entryways
and walkways



180°
Medium Area Lighting
Complete wall to wall
coverage for garage
and patio areas



270°
Large Area Lighting
Widest coverage
best for corners

Motion Technology

Want a better performing motion sensor? Upgrade to Precision Plus Doppler Radar™, our patented line of industry-leading motion technology. These products combine advanced microwave sensors with our standard Passive Infrared (PIR) technology to maximize detection density and accuracy.



STANDARD (PIR)



Passive Infrared (PIR)
Standard motion technology
detects side-to-side movement.



MICROWAVE



Doppler Radar Technology
Detects movement towards
and away from home.



PREMIUM



Precision Plus Doppler Radar™
Combines both PIR & Doppler radar
technology for optimal detection.

ALL-PRO™ LED Revolve™ | Low Profile LED Security Floodlight

The new Revolve™ LED outdoor security product line by ALL-PRO™ combines advanced LED technology and industry-leading optic design to bring you a low profile fixture with uncompromising performance.

Refractive optics eliminate the need for bulky reflectors, while allowing you to easily aim the light precisely where you need it by simply rotating the optic.

The end result is a sleek, aesthetically appealing LED fixture that remains virtually unnoticeable when not in use.



270° Motion Sensor – Revolve™ Low Profile Triple Head LED Security Floodlight

- 2400 lumens; 75 lumens per watt
- 3500K and 5000K color temperature options for maximum versatility
- Maintenance-free LEDs with 70,000 hours of life
- Motion sensor coverage of 270°, range up to 50'
- Sleek, contoured design optimized for low profile applications
- Optics rotate 360° for one-handed adjustment; no tools required
- Durable, die-cast aluminum housing
- 5 Year limited warranty

T24 Can be used to comply with California Title 24 High Efficacy requirements
T20 Certified to California Title 20 Appliance Database



Model #	Description	Unit Carton UPC	Master Carton Qty.
REV32735M	270° Triple Head LED Floodlight, 3500K - Bronze	0 80083 72191 7	2
REV32735MW	270° Triple Head LED Floodlight, 3500K - White	0 80083 72190 0	2
REV32750M	270° Triple Head LED Floodlight, 5000K - Bronze	0 80083 72185 6	2
REV32750MW	270° Triple Head LED Floodlight, 5000K - White	0 80083 72184 9	2



180° Motion Sensor – Revolve™ Low Profile Twin Head LED Security Floodlight

- 2150 lumens; 80 lumens per watt
- 3500K and 5000K color temperature options for maximum versatility
- Maintenance-free LEDs with 70,000 hours of life
- Motion sensor coverage of 180°, range up to 50'
- Sleek, contoured design optimized for low profile applications
- Optics rotate 360° for one-handed adjustment; no tools required
- Durable, die-cast aluminum housing
- 5 Year limited warranty

T24 Can be used to comply with California Title 24 High Efficacy requirements
T20 Certified to California Title 20 Appliance Database



Model #	Description	Unit Carton UPC	Master Carton Qty.
REV21835M	180° Twin Head LED Floodlight, 3500K - Bronze	0 80083 72203 7	2
REV21835MW	180° Twin Head LED Floodlight, 3500K - White	0 80083 72202 0	2
REV21850M	180° Twin Head LED Floodlight, 5000K - Bronze	0 80083 72197 9	2
REV21850MW	180° Twin Head LED Floodlight, 5000K - White	0 80083 72196 2	2



180° Motion Sensor – Precision Plus Doppler Radar™ LED Twin Head Floodlight

- 2000 Lumens; 67 lumens per watt
- 5000K Color temperature
- Maintenance-free LEDs with 70,000 hours of life
- Motion sensor detects 180° up to 70 ft.
- Motion sensor turns lights ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Includes flood override mode: keep lights on at night for 6 hours
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
MST18920DLC	180° Twin Head LED Floodlight - Bronze	0 80083 63239 8	2



270° Motion Sensor – Twin Head LED Security Floodlight

- 2400 Lumens; up to 77 lumens per watt
- 5000K Color temperature
- Maintenance-free with 70,000 hours of life
- Motion sensor detects motion 270° up to 70 ft.
- Motion sensor turns light ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Includes flood override mode: keep lights on at night for 6 hours
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
MST27920LES	270° Twin Head LED Floodlight - Bronze	0 80083 62431 7	2
MST27920LWES	270° Twin Head LED Floodlight - White	0 80083 63032 5	2



180° Motion Sensor – Twin Head LED Security Floodlight

- Over 2000 Lumens; up to 74 lumens per watt
- 5000K Color temperature
- Maintenance-free with 70,000 hours of life
- Motion sensor detects motion 180° up to 70 ft.
- Motion sensor turns light ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Includes flood override mode: keep lights on at night for 6 hours
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
MST18920L	180° Twin Head LED Floodlight - Bronze	0 80083 63027 1	2
MST18920LW	180° Twin Head LED Floodlight - White	0 80083 63029 5	2



180° Motion Sensor – Twin Head Round LED Security Floodlight

- Up to 1600 lumens; up to 78 lumens per watt
- 5000K Color temperature
- Maintenance-free with 50,000 hours of life
- Motion sensor detects motion 180° up to 70 ft.
- Motion sensor turns light ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Includes flood override mode: keep lights on at night for 6 hours
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
MST18R17L	180° Twin Head LED Floodlight - Bronze	0 80083 70508 5	2
MST18R17LW	180° Twin Head LED Floodlight - White	0 80083 70509 2	2



110° Motion Sensor – Small Single Head LED Security Floodlight

- 1475 Lumens; 72 lumens per watt
- 5000K Color temperature
- Maintenance-free LEDs with 70,000 hours of life
- Motion sensor detects motion 110° up to 70 ft.
- Motion sensor turns light ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Includes flood override mode: keep lights on at night for 6 hours
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
MSS11315LES	110° Small Single Head LED Floodlight - Bronze	0 80083 62430 0	2



180° Motion Sensor – Dual Position LED Floodlight

- 1000 Lumens, 81 lumens per watt
- 5000K color temperature
- Maintenance-free LEDs with 35,000 hours of life
- Wall or eave mountable with patent-pending dual-position design
- Motion sensor detects 180° up to 50 ft.
- Motion sensor turns light ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Includes flood override mode; keep lights on at night for 6 hours
- Polycarbonate housing
- 5 year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
MST1850L	180° LED Dual Position - Bronze	0 80083 72759 9	4
MST1850LW	180° LED Dual Position - White	0 80083 72758 2	4



**270° Motion Sensor – Precision Plus Doppler Radar™
200 Watt Twin Head Security Floodlight with Lamp Covers**

- Motion sensor detects 270° up to 90 ft.
- Heavy duty die-cast metal housing construction
- Easy adjustable heads
- Metal lamp covers provide maximum bulb protection
- Motion sensor turns lights ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Integral photo cell design prevents lights from turning ON with motion during the daylight hours
- Perfect for wall or eave mount applications



Model #	Description	Unit Carton UPC	Master Carton Qty.
MS276RD	270° 200W PAR with Reflectors - Bronze	0 80083 53914 7	2
MS276RDW	270° 200W PAR with Reflectors - White	0 80083 53915 4	2



**180° Motion Sensor – Precision Plus Doppler Radar™
200 Watt Twin Head Security Floodlight**

- Motion sensor detects 180° up to 70 ft.
- Heavy duty die-cast metal housing construction
- Easy adjustable heads
- Motion sensor turns lights ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Integral photo cell design prevents lights from turning ON with motion during the daylight hours
- Perfect for wall or eave mount applications



Model #	Description	Unit Carton UPC	Master Carton Qty.
MS185D	180° 200W PAR - Bronze	0 80083 60228 5	2
MS185DW	180° 200W PAR - White	0 80083 60229 2	2



**270° Motion Sensor – 200 Watt Twin Head Security Floodlight
with Lamp Covers**

- Motion sensor detects motion 270° up to 70 ft.
- Heavy duty die-cast metal housing construction
- Metal lamp covers provide maximum bulb protection
- Motion sensor turns lights ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Integral photo cell design prevents lights from turning ON with motion during daylight hours
- Perfect for wall or eave mount applications



Model #	Description	Unit Carton UPC	Master Carton Qty.
MS245R	270° PAR with Reflectors - Bronze	0 44427 00655 9	2
MS245RW	270° PAR with Reflectors - White	0 44427 00657 3	2



180° Motion Sensor – 200 Watt Twin Head Security Floodlight with Lamp Covers

- Motion sensor detects motion 180° up to 70 ft.
- Heavy duty die-cast metal housing construction
- Metal lamp covers provide maximum bulb protection
- Motion sensor turns lights ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Integral photo cell design prevents lights from turning ON with motion during daylight hours
- Perfect for wall or eave mount applications



(2) 100W PAR bulbs (sold separately)



Model #	Description	Unit Carton UPC	Master Carton Qty.
MS185R	180° PAR with Reflectors - Bronze	0 44427 00639 9	2
MS185RW	180° PAR with Reflectors - White	0 44427 00641 2	2



180° Motion Sensor – 200 Watt Twin Head Security Floodlight

- Motion sensor detects motion 180° up to 70 ft.
- Heavy duty die-cast metal housing construction
- Motion sensor turns lights ON automatically when motion is detected and OFF after a pre-selected time delay (up to 12 minutes)
- Integral photo cell design prevents lights from turning ON with motion during daylight hours
- Perfect for wall or eave mount applications



(2) 100W PAR bulbs (sold separately)



Model #	Description	Unit Carton UPC	Master Carton Qty.
MS185	180° PAR - Bronze	0 44427 00635 1	2
MS185W	180° PAR - White	0 44427 00637 5	2



180° Motion Sensor

- Motion sensor detects motion 180° up to 70 ft.
- Motion sensor turns lights ON automatically when motion is detected and OFF after a preselected time delay (up to 12 minutes)
- Integral photo cell design prevents lights from turning ON with motion during daylight hours
- Power outage protection: saves energy by automatically resetting at dawn if lights are triggered by power interruption
- Maximum load 300 Watts



Model #	Description	Unit Carton UPC	Master Carton Qty.
MS180	180° Sensor - Bronze	0 44427 00631 3	4
MS180W	180° Sensor - White	0 44427 00633 7	4



110° Motion Sensor – 300 Watt Twin Head Security Floodlight

- Motion sensor detects motion 110° up to 50 ft.
- Durable plastic construction
- Motion sensor turns light ON automatically when motion is detected and OFF after a pre-selected time delay
- Perfect for wall or eave mount applications



Model #	Description	Unit Carton UPC	Master Carton Qty.
MS34	110° PAR - Black	0 44427 35127 7	6
MS34W	110° PAR - White	0 44427 35128 4	6



110° Motion Sensor – 100 Watt Halogen Plug-In Security Floodlight

- Motion sensor detects motion 110° up to 40 ft.
- Versatile plug-in design, 8 foot extra-reach electrical cord
- Adjustable time and light sensitivity settings
- Manual override – can be used as standard floodlight
- Motion sensor turns light ON automatically when motion is detected and OFF after a pre-selected time delay
- Integral photo cell design prevents light from turning ON during daylight hours
- Perfect for most indoor and outdoor wall mount applications; easy plug-in design



Model #	Description	Unit Carton UPC	Master Carton Qty.
MS100PG	110° Halogen - Gray	0 44427 35123 9	2



HS8 – Motion Activated Night Light

- Built-in motion sensor
- Automatically turns on with motion
- Unique design leaves second outlet unobstructed

Model #	Description	Unit Carton UPC	Master Carton Qty.
HS8	Motion Activated Night Light - White	0 44427 50006 4	6



Solar Powered Lighting

LED Floodlights

Solar Powered LED lighting is a fast, convenient solution for a multitude of applications. New, high performance versions rival standard LED floods, install in half the time and use zero electricity.

ALL-PRO™ LED

ALL-PRO™ Solar floodlights are easy to install, and easy to use, all you need is sunlight. Integrated motion sensors turn lights on automatically at night when motion is detected, and their versatile design makes them perfect for decks, storage buildings and portable emergency use.



180° Motion Sensor – High Output Solar Powered LED Light

- Motion sensor detects motion 180° up to 70 ft.
- Provides over 1000 lumens, equivalent to 90W incandescent
- Integrated Li-Ion batteries provide up to 70 min. run time
- No wiring necessary
- Easy installation with mounting bracket
- Motion sensor turns lights ON automatically when motion is detected and OFF after a pre-selected time delay (1-3 minutes)
- Integral photo cell design prevents lights from turning ON with motion during daylight hours
- Durable weather resistant plastic construction
- 16 ft. cord

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
MST800LW	180° LED Solar - White	0 80083 70917 7	2



180° Motion Sensor – Solar Powered LED Light

- Motion sensor detects motion 180° up to 70 ft.
- Provides up to 520 lumens, equivalent to 60W incandescent
- Integrated Li-Ion batteries provide up to 70 min. run time
- No wiring necessary
- Motion sensor turns lights ON automatically when motion is detected and OFF after a pre-selected time delay (1-3 minutes)
- Integral photo cell design prevents lights from turning ON with motion during daylight hours
- Durable weather resistant plastic construction
- 16 ft. cord

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
MSLED180	180° LED Solar - Black	0 80083 56236 7	2
MSLED180W	180° LED Solar - White	0 80083 56531 3	2



130° Motion Sensor – Single Head Solar Powered LED Light

- Motion sensor detects motion 130° up to 25 ft.
- Provides up to 240 lumens
- Integrated Li-Ion batteries provide up to 70 min. run time
- No wiring necessary
- Easy installation with mounting bracket
- Motion sensor turns lights ON automatically when motion is detected and OFF after a pre-selected time delay (1-3 minutes)
- Integral photo cell design prevents lights from turning ON with motion during daylight hours
- Durable weather resistant plastic construction
- 16 ft. cord



Model #	Description	Unit Carton UPC	Master Carton Qty.
MSS1301LW	Single Head Solar Powered LED with Motion Sensor	0 80083 70518 4	2



130° Motion Sensor – Twin Head Solar Powered LED Light

- Motion sensor detects motion 130° up to 25 ft.
- Provides up to 320 lumens
- Replaceable Ni-MH batteries provide up to 70 min. run time
- No wiring necessary
- Easy installation with mounting bracket
- Motion sensor turns lights ON automatically when motion is detected and OFF after a pre-selected time delay (1-3 minutes)
- Integral photo cell design prevents lights from turning ON with motion during daylight hours
- Durable weather resistant plastic construction
- 16 ft. cord



Model #	Description	Unit Carton UPC	Master Carton Qty.
MST1301LW	Twin Head Solar Powered LED with Motion Sensor	0 80083 70970 0	2



120° Motion Sensor – Solar Powered LED “Wedge” Light

- Motion sensor detects motion 120° up to 25 ft.
- Provides up to 300 lumens, equivalent to 40W incandescent
- Integrated Li-ion batteries provide up to 60 min. run time
- Easy installation with mounting bracket for portable / emergency use
- Integral polycrystalline solar panel, no wiring necessary
- Auto 1 minute fixed time setting



Model #	Description	Unit Carton UPC	Master Carton Qty.
MSLED300	120° LED Solar Wedge - Black	0 80083 72821 3	2
MSLED300W	120° LED Solar Wedge - White	0 80083 74816 7	2



Floodlights

Switch-Controlled Outdoor Security Lighting

Floodlights are a convenient way of lighting any outside area. Simply turn on the inside light switch and enjoy the safety and convenience of a well lit home or office.



Revolve™ Low Profile Triple Head LED Security Floodlight

- 2400 lumens; 75 lumens per watt
- 3500K and 5000K color temperature options for maximum versatility
- Maintenance-free LEDs with 70,000 hours of life
- Sleek, contoured design optimized for low profile applications
- Optics rotate 360° for one-handed adjustment; no tools required
- Durable, die-cast aluminum housing
- 5 Year limited warranty

T24 Can be used to comply with California Title 24 High Efficacy requirements
T20 Certified to California Title 20 Appliance Database

LED ENERGY STAR LISTED

Model #	Description	Unit Carton UPC	Master Carton Qty.
REV335F	Triple Head LED Floodlight, 3500K - Bronze	0 80083 72193 1	2
REV335FW	Triple Head LED Floodlight, 3500K - White	0 80083 72192 4	2
REV350F	Triple Head LED Floodlight, 5000K - Bronze	0 80083 72187 0	2
REV350FW	Triple Head LED Floodlight, 5000K - White	0 80083 72186 3	2



Revolve™ Low Profile Twin Head LED Security Floodlight

- 2150 lumens; 80 lumens per watt
- 3500K and 5000K color temperature options for maximum versatility
- Maintenance-free LEDs with 70,000 hours of life
- Sleek, contoured design optimized for low profile applications
- Optics rotate 360° for one-handed adjustment; no tools required
- Durable, die-cast aluminum housing
- 5 Year limited warranty

T24 Can be used to comply with California Title 24 High Efficacy requirements
T20 Certified to California Title 20 Appliance Database

LED ENERGY STAR LISTED

Model #	Description	Unit Carton UPC	Master Carton Qty.
REV235F	Twin Head LED Floodlight, 3500K - Bronze	0 80083 72205 1	2
REV235FW	Twin Head LED Floodlight, 3500K - White	0 80083 72204 4	2
REV250F	Twin Head LED Floodlight, 5000K - Bronze	0 80083 72199 3	2
REV250FW	Twin Head LED Floodlight, 5000K - White	0 80083 72198 6	2



LED Wall Pack

- Equivalent up to 100W Metal Halide
- 5000K Color temperature
- Innovative design with low profile form
- Universal installation and tool-less features
- Ideal for outdoor illumination of general areas and architectural floodlighting
- Durable, die-cast aluminum housing
- 120V (standard household supply)
- 5 Year limited warranty

LED ENERGY STAR LISTED

Model #	Description	Unit Carton UPC	Master Carton Qty.
WP1050L	LED Wall Pack Floodlight, 1000 lumens - Bronze	0 80083 72066 8	2
WP1850L	LED Wall Pack Floodlight, 1600 lumens - Bronze	0 80083 71985 3	2
WPFLD-TRN	LED Wall Pack Ground Mount Kit	0 80083 72492 5	12



Twin Head Round LED Floodlight

- LED floodlight with switch controlled on/off operation
- Provides up to 1700 Lumens; up to 78 lumens per watt
- 5000K Color temperature
- Maintenance-free LEDs with 50,000 hours of life
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
FTR1740L	Twin Head Round LED Floodlight - Bronze	0 80083 70506 1	2
FTR1740LW	Twin Head Round LED Floodlight - White	0 80083 70507 8	2



Large Single Head LED High Output Floodlight

- 3000 lumens; up to 71 lumens per watt
- 5000K color temperature
- Maintenance-free LEDs with 70,000 hours of life
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
FSL2850L	Large High Output Single Head LED Floodlight - Bronze	0 80083 75676 6	2
FSL2850LW	Large High Output Single Head LED Floodlight - White	0 80083 75677 3	2



Large Single Head LED Floodlight

- LED floodlight with switch controlled on/off operation
- 2000 Lumens; up to 70 Lumens per watt
- 5000K Color temperature
- Maintenance-free LEDs with 70,000 hours of life
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
FSL2030L	Large Single Head LED Floodlight - Bronze	0 80083 63041 7	2
FSL2030LW	Large Single Head LED Floodlight - White	0 80083 63040 0	2



Small Single Head LED Floodlight with Photo Control

- 1500 Lumens; up to 72 Lumens per watt
- 5000K Color temperature
- Maintenance-free LEDs with 70,000 hours of life
- Integral photo control provides nighttime ON / daytime OFF functionality
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
FSS1530L	Small Single Head LED Floodlight - Bronze	0 80083 63034 9	2
FSS1530LW	Small Single Head LED Floodlight - White	0 80083 63037 0	2



LED Vapor Tight Floodlight - Available November 2016

- Equivalent light output up to 100W incandescent and 23W CFL fixtures
- 3000K Color temperature
- Cage provides protection against vandalism
- Vapor tight protects against dust and moisture
- Durable, die-cast aluminum housing
- Integrated and LED bulb option
- Universal 120-277V power supply (integrated); 120V (bulb option)
- Wet location
- Versatile mounting options - Wall & Ceiling
- 5 Year warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
VT1730I	Integrated LED Vaportight Floodlight	0 80083 75786 2	4
VT1730	LED Vaportight Floodlight with Bulb	0 80083 75787 9	4



100 Watt Vapor Tight Incandescent Floodlight

- Vapor tight incandescent light with bulb guard and 1/2 in. conduit openings on top and sides
- Durable, low-maintenance lighting perfect for barn, workshop, shed or livestock lighting
- Perfect for ceiling mount applications



100W Incandescent bulb (sold separately)



Model #	Description	Unit Carton UPC	Master Carton Qty.
VT100G	100W Incandescent - Silver	0 44427 55011 3	4



150 Watt Metal PAR Floodlight

- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications



150W PAR bulb (sold separately)



Model #	Description	Unit Carton UPC	Master Carton Qty.
MT125	150W PAR - Bronze	0 44427 30043 5	6
MT125W	150W PAR - White	0 44427 30044 2	6



300 Watt Plastic Twin Head PAR Floodlight


- Weatherproof and corrosion resistant construction
- Perfect for wall or eave mount applications



(2) 150W PAR bulbs (sold separately)



Model #	Description	Unit Carton UPC	Master Carton Qty.
PWT250BR	300W PAR - Bronze	0 44427 30011 4	4
PWT250WH	300W PAR - White	0 44427 30012 1	4

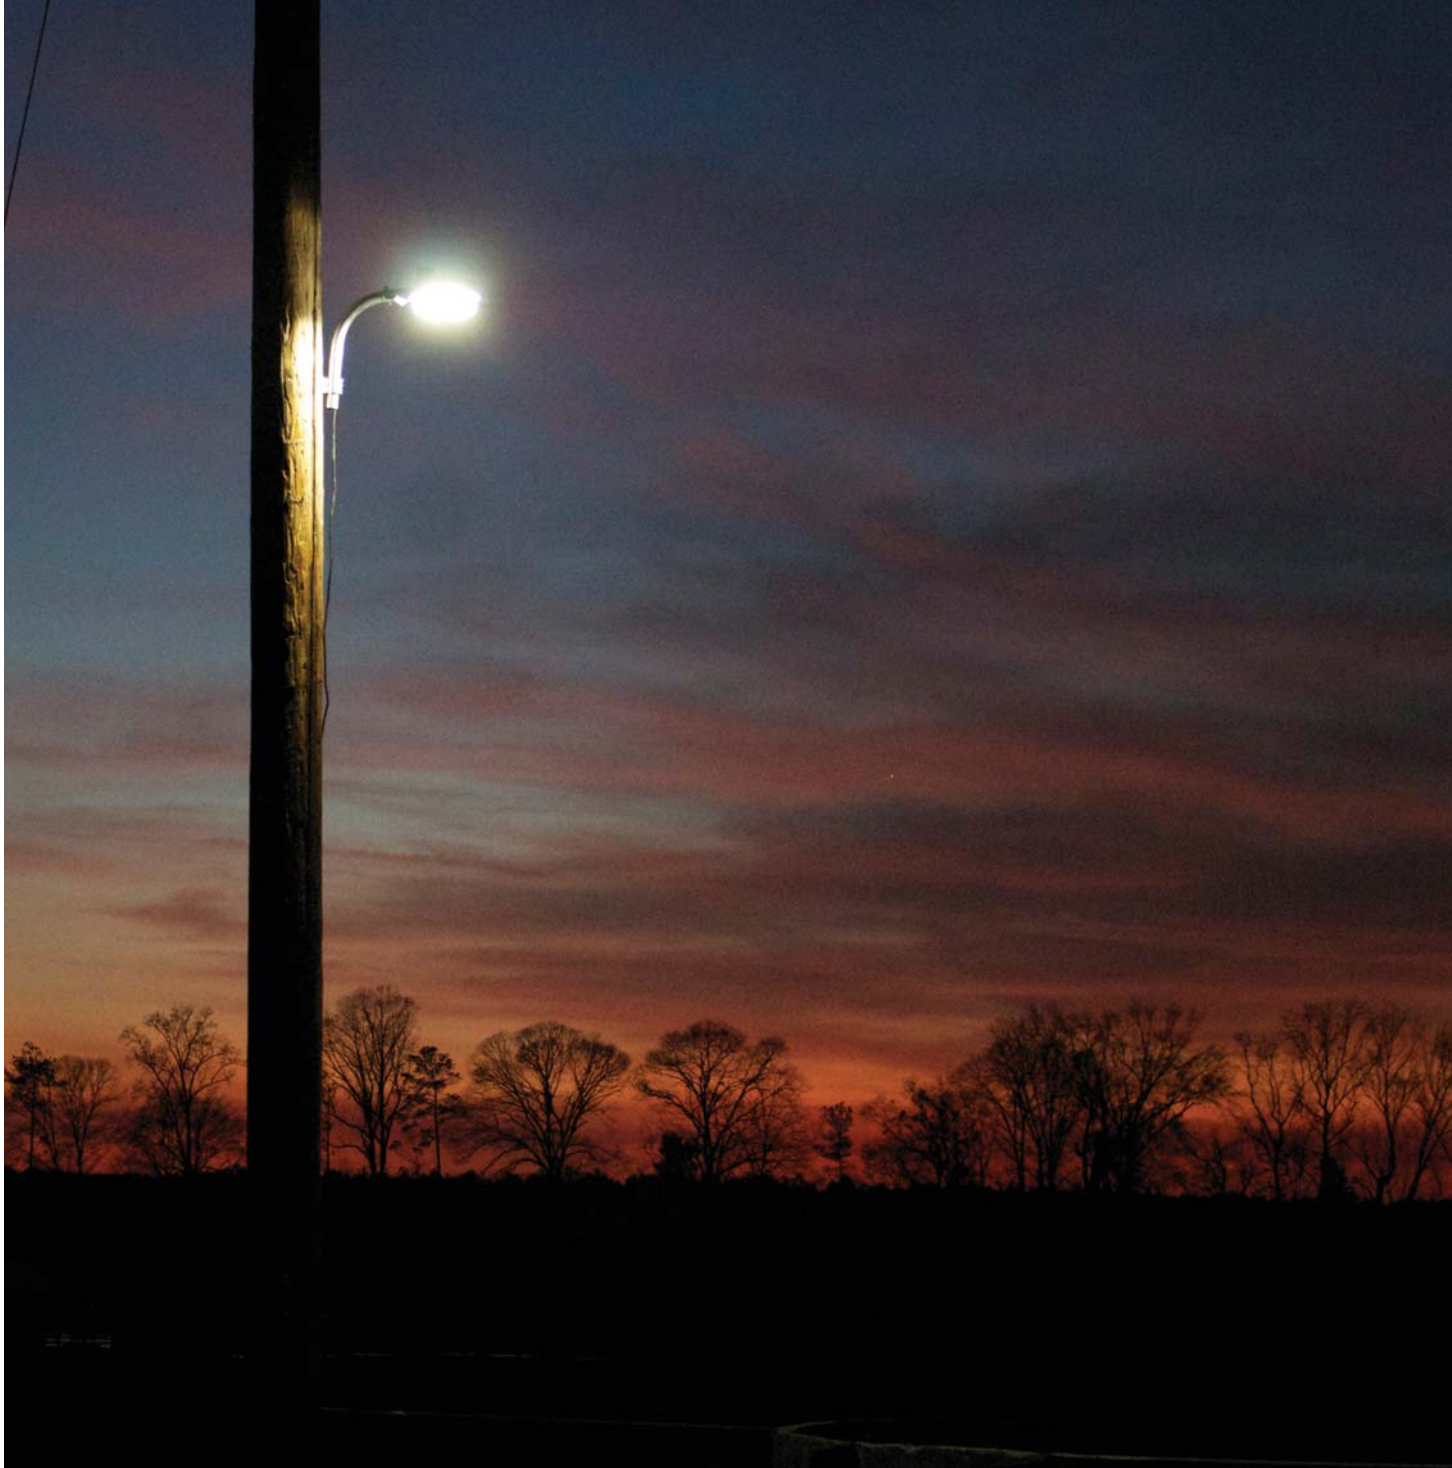

Dusk to Dawn Lighting

Automatic Nighttime ON / Daytime OFF

Dusk to Dawn lighting automatically turns ON at dusk and OFF at dawn. Fixtures are available to illuminate small, medium and large areas with convenient, energy efficient lighting.



Revolve™ Low Profile Triple Head LED Security Floodlight with Photo Control

- 2400 lumens; 75 lumens per watt
- 3500K and 5000K color temperature options for maximum versatility
- Maintenance-free LEDs with 70,000 hours of life
- Sleek, contoured design optimized for low profile applications
- Optics rotate 360° for one-handed adjustment; no tools required
- Durable, die-cast aluminum housing
- 5 Year limited warranty

T24 Can be used to comply with California Title 24 High Efficacy requirements
T20 Certified to California Title 20 Appliance Database



Model #	Description	Unit Carton UPC	Master Carton Qty.
REV335PC	Triple Head LED Dusk to Dawn Floodlight, 3500K - Bronze	0 80083 72195 5	2
REV335PCW	Triple Head LED Dusk to Dawn Floodlight, 3500K - White	0 80083 72194 8	2
REV350PC	Triple Head LED Dusk to Dawn Floodlight, 5000K - Bronze	0 80083 72189 4	2
REV350PCW	Triple Head LED Dusk to Dawn Floodlight, 5000K - White	0 80083 72188 7	2



Revolve™ Low Profile Twin Head LED Security Floodlight with Photo Control

- 2150 lumens; 80 lumens per watt
- 3500K and 5000K color temperature options for maximum versatility
- Maintenance-free LEDs with 70,000 hours of life
- Sleek, contoured design optimized for low profile applications
- Optics rotate 360° for one-handed adjustment; no tools required
- Durable, die-cast aluminum housing
- 5 Year limited warranty

T24 Can be used to comply with California Title 24 High Efficacy requirements
T20 Certified to California Title 20 Appliance Database



Model #	Description	Unit Carton UPC	Master Carton Qty.
REV235PC	Twin Head LED Dusk to Dawn Floodlight, 3500K - Bronze	0 80083 72207 5	2
REV235PCW	Twin Head LED Dusk to Dawn Floodlight, 3500K - White	0 80083 72206 8	2
REV250PC	Twin Head LED Dusk to Dawn Floodlight, 5000K - Bronze	0 80083 72201 3	2
REV250PCW	Twin Head LED Dusk to Dawn Floodlight, 5000K - White	0 80083 72200 6	2



LED Wall Pack with Photo Control

- Equivalent up to 100W Metal Halide
- 5000K Color temperature
- Innovative design with low profile form
- Universal installation and tool-less features
- Ideal for outdoor illumination of general areas and architectural floodlighting
- Durable, die-cast aluminum housing
- 120V (standard household supply)
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
WP1050LPC	LED Wall Pack Dusk to Dawn, 1000 lumens - Bronze	0 80083 72067 5	2
WP1850LPC	LED Wall Pack Dusk to Dawn, 1600 lumens - Bronze	0 80083 72027 9	2
WPFLD-TRN	LED Wall Pack Ground Mount Kit	0 80083 72492 5	12



Large Single Head LED High Output Floodlight with Photo Control

- 3000 lumens; up to 71 lumens per watt
- 5000K color temperature
- Maintenance-free LEDs with 70,000 hours of life
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 year limited warranty

LED 

Model #	Description	Unit Carton UPC	Master Carton Qty.
FSL2850LPC	High Output Single LED Floodlight - Bronze	0 80083 75670 4	2
FSL2850LPCW	High Output Single LED Floodlight - White	0 80083 75671 1	2



Large Single Head LED Floodlight with Photo Control

- 2000 lumens; up to 71 lumens per watt
- 5000K color temperature
- Maintenance-free LEDs with 70,000 hours of life
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 year limited warranty

LED 

Model #	Description	Unit Carton UPC	Master Carton Qty.
FSL2030LPC	Large Single Head LED Floodlight - Bronze	0 80083 75672 8	2
FSL2030LPCW	Large Single Head LED Floodlight - White	0 80083 75673 5	2



Twin Head LED Floodlight with Photo Control

- 1000 lumens, 81 lumens per watt
- 5000K color temperature
- Maintenance-free LEDs with 35,000 hours of life
- Wall or eave mountable
- Polycarbonate housing
- 5 year limited warranty

LED 

Model #	Description	Unit Carton UPC	Master Carton Qty.
FT1850LPC	Twin LED Dusk to Dawn Flood - Bronze	0 80083 74231 8	4
FT1850LPCW	Twin LED Dusk to Dawn Flood - White	0 80083 74230 1	4



Small Single Head LED Floodlight with Photo Control

- 1500 Lumens; up to 72 Lumens per watt
- 5000K Color temperature
- Maintenance-free LEDs with 70,000 hours of life
- Integral photo control provides nighttime ON / daytime OFF functionality
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
FSS1530LPCES	Small Single Head LED Floodlight - Bronze - Energy Star	0 80083 63050 9	2
FSS1530LPCW	Small Single Head LED Floodlight - White	0 80083 63055 4	2



Dusk to Dawn LED Twin Head Floodlight

- 1600 lumens; up to 78 lumens per watt
- 5000K Color temperature
- Maintenance-free LEDs with 50,000 hours of life
- Integral photo control provides nighttime ON / daytime OFF functionality
- Durable, die-cast aluminum housing
- Perfect for wall or eave mount applications
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
FTR1740LPC	Twin Head LED Floodlight - Bronze	0 80083 70510 8	2
FTR1740LPCW	Twin Head LED Floodlight - White	0 80083 70511 5	2



Dusk to Dawn LED Patio and Entry Light

- Provides up to 630 lumens; up to 56 lumens per watt
- Maintenance-free LEDs with 35,000 hours of life
- Larger area coverage than standard 60W incandescent or 13W CFL
- Diffused lens provide “no glare” area lighting
- Lens height: 2.5”
- Integral photo control provides nighttime ON / daytime OFF functionality
- Perfect for new construction residential applications



Model #	Description	Unit Carton UPC	Master Carton Qty.
FES0650LPC	LED Patio and Entry Light, 573 Lumens - Bronze	0 80083 66908 0	2
FES0650LPCW	LED Patio and Entry Light, 637 Lumens - White	0 80083 66909 7	2



Dusk to Dawn LED Patio and Entry Light

- Provides up to 1100 lumens
- 3500K and 5000K
- Maintenance-free LEDs with 35,000 hours of life
- Larger area coverage than standard 75W incandescent or 23W CFL
- Diffused lens provide “no glare” area lighting
- Lens height: 4.5”
- Integral photo control provides nighttime ON / daytime OFF functionality
- Perfect for retrofitting in residential and light commercial buildings

T24 Can be used to comply with California Title 24 High Efficacy requirements
T20 Certified to California Title 20 Appliance Database

LED

Model #	Description	Unit Carton UPC	Master Carton Qty.
FE0650LPC	LED Dusk to Dawn Area Light, 652 Lumens - Bronze	0 80083 66692 8	2
FE0650LPCW	LED Dusk to Dawn Area Light, 783 Lumens - White	0 80083 66693 5	2
FE1450LPC	LED Dusk to Dawn Area Light, 1100 Lumens - Bronze	0 80083 75266 9	2
FE1435LPC	LED Dusk to Dawn, 1100 Lumens - Bronze	0 80083 76038 1	2



Dusk to Dawn LED Area and Wall Light

- Provides up to 5500 lumens; up to 104 lumens per watt
- Maintenance-free LEDs with 50,000 hours of life
- Exceptional large light coverage 150W that is equivalent up to 300W incandescent or 150W metal halide or 84W CFL
- NEMA replaceable photo control provides nighttime ON / daytime OFF functionality
- Perfect for lighting dark, secluded areas
- 5 Year limited warranty

LED

Model #	Description	Unit Carton UPC	Master Carton Qty.
AL5550LPCBZ	LED Area and Wall Light, 5500 Lumens - Bronze	0 80083 73469 6	2
AL5550LPCGY	LED Area and Wall Light, 5500 Lumens - Gray	0 80083 73470 2	2



Dusk to Dawn LED Area and Wall Light

- Provides up to 3500 lumens; up to 62 lumens per watt
- Maintenance-free LEDs with 50,000 hours of life
- Exceptional large light coverage that is equivalent to 300W incandescent or 100W metal halide or 85W CFL
- NEMA replaceable photo control provides nighttime ON / daytime OFF functionality
- Perfect for lighting dark, secluded areas
- 5 Year limited warranty

LED

Model #	Description	Unit Carton UPC	Master Carton Qty.
AL3150LPCBZ	LED Area and Wall Light, 3000 Lumens - Bronze	0 80083 74646 0	2
AL3150LPCGY	LED Area and Wall Light, 3500 Lumens - Gray	0 80083 74647 7	2



Dusk to Dawn LED Area and Wall Light

- Provides up to 5500 lumens; up to 104 lumens per watt
- Maintenance-free LEDs with 50,000 hours of life
- Exceptional large light coverage that is equivalent up to 300W incandescent or 150W metal halide or 85W CFL
- Integral photo control provides nighttime ON / daytime OFF functionality
- Perfect for barns, side roads or security lighting
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
AL3050LPCBZ	LED Area and Wall Light, 3300 Lumens - Bronze	0 80083 70996 0	2
AL3050LPCGY	LED Area and Wall Light, 3300 Lumens - Gray	0 80083 70997 7	2
AL5500LPCIBZ	LED Area and Wall Light, 5500 Lumens - Bronze	0 80083 73206 7	2
AL5500LPCIGY	LED Area and Wall Light, 5500 Lumens - Gray	0 80083 73207 4	2



LED Wall Pack

- Equivalent light output up to 26W CFL wall pack
- 3500K and 5000K
- Maintenance-free LEDs with 50,000 hours of life
- High impact, weather resistant housing and lens
- Integral photo control provides convenient nighttime ON / daytime OFF functionality
- 120V (standard household supply)
- Perfect for patio or entrance lighting
- 5 year limited warranty




Model #	Description	Unit Carton UPC	Master Carton Qty.
WP1150LPC	LED Wall Pack, 5000K - 1100 lumens	0 80083 75266 9	2
WP1135LPC	LED Wall Pack, 3500K - 1100 lumens	0 80083 76039 8	2



65 Watt Fluorescent Safety and Security Area Light

- Durable, die-cast aluminum construction
- Integral photo control provides nighttime ON / daytime OFF functionality
- Mounting pattern on top of box allows you to predrill holes for quick and easy installation
- Perfect for lighting dark, secluded areas or any place where a medium-to-large concentration of light is needed



65W mogul base
Fluorescent bulb
(included)

* Aluminum extension arm sold separately




Model #	Description	Unit Carton UPC	Master Carton Qty.
AL6501FL	65W Fluorescent*	0 80083 58496 3	1



100 Watt Metal Halide Industrial Grade Area Light

- Durable, die-cast aluminum construction with high impact lens
- Easy installation with EZ-Mount™ bracket and Quick-Connect™ wiring system
- Replaceable photo control provides nighttime ON / daytime OFF functionality
- Perfect for lighting large areas such as commercial buildings, storage areas, parking lots or any place where safety and security are important



Model #	Description	Unit Carton UPC	Master Carton Qty.
GT100MH	100W Metal Halide	0 80083 50104 5	1



300 Watt Plastic Twin Head Floodlight With Photo Control

- Weatherproof and corrosion resistant construction
- Integral photo control provides nighttime ON / daytime OFF functionality
- Perfect for wall or eave mount applications




Model #	Description	Unit Carton UPC	Master Carton Qty.
PWT250PC	300W PAR - Bronze	0 44427 45038 3	6
PWT250PCW	300W PAR - White	0 44427 45039 0	6



13 Watt GU24 Fluorescent Entry Light

- High impact, weather resistant housing and lens
- Integral photo control provides nighttime ON / daytime OFF functionality
- Electronic ballast design provides reliable starting in cold weather applications
- Perfect for patio or entrance lighting




Model #	Description	Unit Carton UPC	Master Carton Qty.
FE13PC	13W Fluorescent - Bronze	0 44427 45052 9	2
FE13PCW	13W Fluorescent - White	0 44427 45053 6	2



23 Watt GU24 Fluorescent Patio Light

- Frosted high-impact protective lens
- Self-diagnostic LED (Title 24) indicator light
- Will accept 13W – 27W GU24 bulbs
- Fluorescent bulb lasts 5 times longer than standard incandescent bulbs
- Integral photo control provides nighttime ON / daytime OFF functionality
- Durable, die-cast aluminum construction
- Perfect for patio or entrance lighting



Model #	Description	Unit Carton UPC	Master Carton Qty.
PFL23PCW-T24	23W Fluorescent Patio Light - White	0 80083 56527 6	2



23 Watt GU24 Fluorescent Floodlight

- Frosted high-impact protective lens
- Self-diagnostic LED (Title 24) indicator light
- Will accept 13W – 23W GU24 bulbs
- Fluorescent bulb lasts 5 times longer than standard incandescent bulbs
- Integral photo control provides nighttime ON / daytime OFF functionality
- Durable, die-cast aluminum construction
- Perfect for wall or eave mount applications



23 Watt Fluorescent bulb (included)



Model #	Description	Unit Carton UPC	Master Carton Qty.
FFL23PC-T24	23 Wall GU24 Fluorescent Floodlight - Black	0 80083 56528 3	2
FFL23PCW-T24	23 Wall GU24 Fluorescent Floodlight - White	0 80083 56529 0	2



18/26 Watt Fluorescent Floodlight

- High impact, weather resistant housing and lens
- Integral photo control provides nighttime ON / daytime OFF functionality
- Electronic ballast design provides reliable starting in cold weather applications
- Perfect for wall or eave mount application



18W/26W 4-Pin Fluorescent bulb (included)




Model #	Description	Unit Carton UPC	Master Carton Qty.
FNF18PC	18W Fluorescent - Bronze	0 44427 45054 3	6
FNF18PCW	18W Fluorescent - White	0 44427 45055 0	6
FNF26PC	26W Fluorescent - Bronze	0 44427 45056 7	6
FNF26PCW	26W Fluorescent - White	0 44427 45057 4	6



26 Watt Fluorescent Wall Pack

- High impact, weather resistant housing and lens
- Integral photo control provides convenient nighttime ON / daytime OFF functionality
- Electronic ballast design provides reliable starting in cold weather applications
- Perfect for patio or entrance lighting



26W Fluorescent bulb (included)



Model #	Description	Unit Carton UPC	Master Carton Qty.
FW26PCI	26W Fluorescent - Bronze	0 80083 70730 0	2
FW26PCWI	26W Fluorescent - White	0 80083 70731 7	2



Worklights

Multi-Functional Portable Lights & Standlights

Strength and durability, safety and portability. Our multi-functional worklights are great tools to have around your house, garage, workshop or automobile. They offer many innovative design features for handling almost any type of project or job.



LED225M

Might-D-Light Mini – USB Rechargeable Portable Light

- Precision optics with up to 345 lumens
- 3-Way integrated switch: Both panels On/single panel ON/OFF
- New design with Pass Thru feature providing light when operating in closed position
- Slimmer more compact design
- Concealed “D” ring, hook on each end for additional hanging options
- Hinge adjusts up to 270°
- Recharge using any USB power source (USB cable included)
- Strong magnets
- Up to 4.5 hour battery life



Closed view



Folded view

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
LED225M	USB Rechargeable Compact Folding LED Light	0 80083 75070 2	4



LED125B

Might-D-Light Mini – Compact Folding LED Worklight with Bungee Hooks

- Super bright LED lights
- 3-Way integrated switch: both panels ON/single panel ON/OFF
- Extendable bungee hooks stow inside each panel for easy storage
- Integrated neodymium magnets for securing to most metals
- Hinge adjusts up to 270°
- Durable polycarbonate lenses
- 3 Alkaline “AA” batteries (included)
- Up to 4.5 hour battery life



Closed view



Folded view

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
LED125B	Compact Folding LED Worklight with Bungee Hooks - Black	0 80083 73053 7	6
LED125C	Compact Folding LED Worklight with Bungee Hooks - Camo	0 80083 61020 4	6



LED125C



LED140

Might-D-Light – USB Rechargeable Folding LED Worklight

- Precision optics with up to 400 lumens
- 2 Level light output
- Recharge the worklight using any USB power source (USB cable included)
- Hands-free options with 2 versatile hooks
- Strong magnets
- Versatile, concealed hook rotates 360°
- Concealed “D” Ring hook for additional hanging options
- Continuous charging allows the worklight to be fully charged at all times while plugged in
- Up to 3 hour battery life



Closed view



Folded view

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
LED140	USB Rechargeable Folding LED Worklight - Dark Green	0 80083 70719 5	2
LED140C	USB Rechargeable Folding LED Worklight - Camo	0 80083 70720 1	2



LED140C



Might-D-Light – USB Rechargeable LED Sticklight

- Super bright LEDs: Up to 200 lumens
- 3 Modes of light output - flood/spot/both
- Adjustable rotatable head spotlight
- Recharge the sticklight using any USB power source (USB cable included)
- Hands-free options, large versatile hook, strong magnets and belt clip
- Integrated bottle opener
- Strong magnets
- Versatile, concealed hook rotates 360°
- Continuous charging allows the worklight to be fully charged at all times while plugged in
- Up to 9 hour run time



Bottle opener and belt clip



Spot light

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
LED150	Rechargeable LED Sticklight - Dark Gray	0 80083 70717 1	4
LED150C	Rechargeable LED Sticklight - Camo	0 80083 70718 8	4



Rechargeable LED Worklight

- 35 Total long-life LED lights providing 80 lumens
- LED lights on the end of light doubles as a spotlight/flashlight
- Cordless rechargeable unit with AC & DC charging adapters included
- Durable plastic construction with polycarbonate lens
- 360° Rotating swivel hook
- Cushioned grip with convenient instant-ON switch
- Magnetic clamp
- 120 Volts (standard household supply)
- Up to 12 hours of battery life (when used only as a flashlight)

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
LED120	35 LED Rechargeable Worklight	0 80083 50895 2	4



Plug-In LED Worklight

- 60 Long-life LED lights providing 140 lumens
- 15 ft., 18-gauge power cord
- Durable plastic construction with polycarbonate lens
- 360° Rotating swivel hook
- Cushioned grip with instant-ON switch
- 120 Volts (standard household supply)

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
LED110	60 LED Plug-in Worklight	0 80083 50894 5	4



Portable LED Worklight

- Provides up to 2600 lumens; up to 78 lumens per watt
- Maintenance-free LEDs with 35,000 hours lifetime
- 300W halogen equivalent portable LED worklight
- Integrated wall mount tab
- Durable, sturdy housing with acrylic lens
- 5 Year limited warranty

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
WL2540LP	Portable LED Worklight	0 80083 70063 9	4



LED Stand Worklight

- Provides up to 2600 lumens; up to 78 lumens per watt
- Maintenance-free LEDs with 35,000 hours lifetime
- 300W halogen equivalent portable LED worklight
- Tripod stand with non-skid feet, adjusts up to 4 ft. total height
- Quick-disconnect feature to remove portable worklight from stand
- Integrated wall mount tab
- Durable, sturdy housing with acrylic lens
- 5 Year limited warranty



Quick Disconnect

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
WL2540LST	LED Stand Worklight	0 80083 70806 2	2



5100 Lumen Twin Head LED Stand Worklight

- Provides up to 5100 lumens; up to 78 lumens per watt
- Maintenance-free LEDs with 35,000 hours lifetime
- 600W halogen equivalent LED stand worklight
- Tripod stand with non-skid feet, adjusts over 5 ft. total height
- Quick-disconnect feature to remove portable worklight from stand
- Durable, sturdy die-cast aluminum housing with acrylic lens
- 5 Year limited warranty



Quick Disconnect

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
WLT5040LST	Twin Head LED Stand Worklight	0 80083 70808 6	2



Recessed Lighting


HALO®

HALO® recessed products deliver solutions to any downlighting application with a full line of aperture sizes. This product family offers numerous lamp types including LED, CFL, halogen and incandescent with an array of complementing trim options in designer finishes.


BENEFITS OF LED RETROFITS!

Dimmable • 90% LESS Energy • LESS Heat • LOW Maintenance

Replaces Lamp & Trim

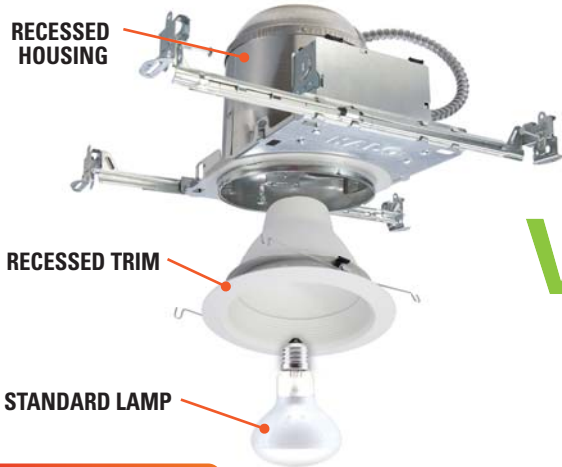

VS

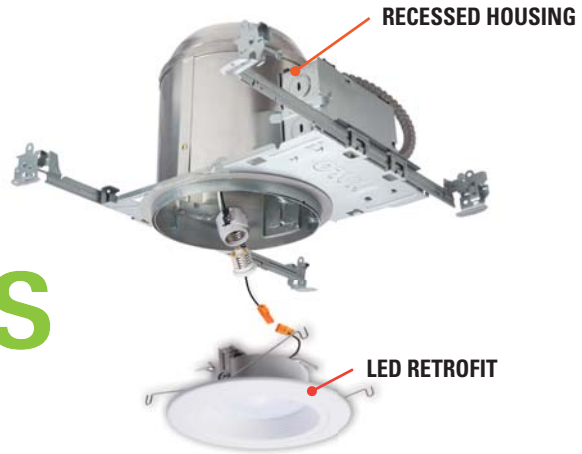

EASY to Install



WARM WHITE	2700K REPLACES 65W™	Comfortable, pleasant light
SOFT WHITE	3000K REPLACES 60W™	Balanced, general purpose light
BRIGHT WHITE	3500K REPLACES 60W™	Efficient task lighting
COOL WHITE	4000K REPLACES 60W™	Simulates natural, outdoor light

ALL NAIL!™
Precisely aligned pre-installed nail with mini leveling foot.

Channel Bars
with Pass-N-Thru™
Inverted "q" interlocking channel for rigidity and stability. Pass-N-Thru bar hangers allow tool-less shortening.

air401
Pre-installed gasket. No caulk required. ASTM E283 compliant.

HINGED J-BOX
Hinged cover on junction box for easy access and secure cover retention. Box repositionable 90°.

Slide-N-Side™
Pre-installed tool-less strain reliefs eliminate the need for additional NM cable connectors.

Quick Connect™
Captive wiring tray holds pre-installed push-in wiring connectors in place allowing for one-handed connections.

SPEED CLAMP
(2) Exclusive integral speed clamps securely lock housing to ceiling. Two-tier tabs adjust 3/8" to 2" for various ceiling materials.

E26 Series Housings
Optimized for modern Edison E26 base EISA compliant lamps including LED and CFL

HALO
1956-2016
40TH ANNIVERSARY
EATON



4" LED Air-Tite™ IC Rated New Construction and Remodel Housings

- For use with HALO® LED RL4 Series
- Air-Tite™ meets restricted airflow requirements per ASTM E-283 test standard
- For direct contact with air-permeable insulation in insulated ceilings (may also be used in Non-IC)
- Remodel housing installs from below the ceiling in 1/2 in. or 5/8 in. ceiling material
- Can be used for State of California Title 24 high efficacy compliance

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
H995ICAT	4" LED Air-Tite™ IC New Construction, T24	0 80083 61693 0	6
H995RICAT	4" LED Air-Tite™ IC Remodel Housing, T24	0 80083 61694 7	6



5" LED Air-Tite™ IC Rated New Construction and Remodel Housings

- For use with HALO® LED RL56 Series
- Air-Tite™ meets restricted airflow requirements per ASTM E-283 test standard
- For direct contact with air-permeable insulation in insulated ceilings (may also be used in non-insulated ceilings)
- Remodel housing installs from below the ceiling in 1/2 in. or 5/8 in. ceiling material
- Can be used for State of California Title 24 high efficacy compliance

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
H550ICAT	5" LED Air-Tite™ IC New Construction Housing, T24	0 80083 62654 0	6
H550RICAT	5" LED Air-Tite™ IC Remodel Housing, T24	0 80083 62656 4	6



6" LED Air-Tite™ IC Rated New Construction and Remodel Housings

- For use with HALO® LED RL56 and ML56 Series
- Air-Tite™ meets restricted airflow requirements per ASTM E-283 test standard
- For direct contact with air-permeable insulation in insulated ceilings (may also be used in non-insulated ceilings)
- Remodel housing installs from below the ceiling in 1/2 in. or 5/8 in. ceiling material
- Can be used for State of California Title 24 high efficacy compliance

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
H750ICAT	6" LED Air-Tite™ IC New Construction, T24	6 23961 87265 5	6
H750RICAT	6" LED Air-Tite™ IC Remodel Housing, T24	6 23961 05224 8	6
H2750ICAT	6" LED Air-Tite™ Shallow IC New Construction	0 80083 61817 0	6



6" LED Air-Tite™ IC Rated Slope New Construction Kit

- LED Slope kit includes Housing, LED Module, and Baffle Reflector
- 6" 1200 Lumen slope housing replaces up to 70W PAR halogen lamps
- 90 CRI 3000K LED Module in warm white rated for 50,000 hours
- LED Module includes 40° flood optic
- White Baffle Trim fully contoured and optimized for the slope housing
- Housing rated for Air-Tite™ per ASTM-E283 and Insulation Contact

KIT

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
HL612930456WKIT	6" LED Housing IC 1200 Lm, LED Module 90 CRI 3000K, White Baffle Reflector	N/A	1



Satin Nickel Trim Cover

Tuscan Bronze Trim Cover

Primed White Trim Cover

Trim Covers Available

- RL4TRMSNR - 4" Trim Cover - Satin Nickel
- RL4TRMTBZR - 4" Trim Cover - Tuscan Bronze
- RL4TRMWHR - 4" Trim Cover - Primed White

4" LED Air-Tite™ Retrofit – Integrated Light Engine with Baffle Trim

- Over 600 lumens
- 50,000 hours with 70% maintained lumens
- Compatible with 4" standard recessed housings: HALO®, ALL-PRO™ and more
- High brightness, diffusing, optical quality lens
- Dimmable to 5% with select dimmers
- Easy installation with universal mounting clips
- Wet and damp location listed and IC (Insulated Ceiling) rated



Model #	Description	Unit Carton UPC	Master Carton Qty.
RL460WH827	4" LED Retrofit - White Baffle Trim, 80 CRI/2700K	0 80083 65816 9	4
RL460WH927	4" LED Retrofit - White Baffle Trim, 90 CRI/2700K	0 80083 69948 3	4
RL460WH830	4" LED Retrofit - White Baffle Trim, 80 CRI/3000K	0 80083 65818 3	4
RL460WH930	4" LED Retrofit - White Baffle Trim, 90 CRI/3000K	0 80083 66992 9	4
RL460WH835	4" LED Retrofit - White Baffle Trim, 80 CRI/3500K	0 80083 66400 9	4
RL460WH935	4" LED Retrofit - White Baffle Trim, 90 CRI/3500K	0 80083 69055 8	4
RL460WH840	4" LED Retrofit - White Baffle Trim, 80 CRI/4000K	0 80083 71190 1	4
RL460WH940	4" LED Retrofit - White Baffle Trim, 90 CRI/4000K	0 80083 71194 9	4

5" / 6" LED Air-Tite™ Retrofit – Integrated Light Engine with Baffle Trim

- 600 Lumens
- 50,000 hours with 70% maintained lumens
- Compatible with 5" & 6" standard and shallow recessed housings: HALO®, ALL-PRO™ and more
- High brightness, diffusing, optical quality lens
- Dimmable to 5% with select dimmers
- Easy installation with universal mounting clips
- Wet and damp location listed and IC (Insulated Ceiling) rated



Model #	Description	Unit Carton UPC	Master Carton Qty.
RL560WH6827R	5" / 6" LED Retrofit - White Baffle Trim, 80 CRI/2700K	0 80083 71796 5	4
RL560WH6927R	5" / 6" LED Retrofit - White Baffle Trim, 90 CRI/2700K	0 80083 71798 9	4
RL560WH-R	5" / 6" LED Retrofit - White Baffle Trim, 80 CRI/3000K	0 80083 62902 2	4
RL560WH6930R	5" / 6" LED Retrofit - White Baffle Trim, 90 CRI/3000K	0 80083 69056 5	4
RL560WH6835R	5" / 6" LED Retrofit - White Baffle Trim, 80 CRI/3500K	0 80083 68204 1	4
RL560WH6935R	5" / 6" LED Retrofit - White Baffle Trim, 90 CRI/3500K	0 80083 69058 9	4
RL560WH9835R	5" / 6" LED Retrofit - White Baffle Trim, 80 CRI/900 Lumen/3500K	0 80083 71607 4	4
RL560WH9935R	5" / 6" LED Retrofit - White Baffle Trim, 90 CRI/900 Lumen/3500K	0 80083 71609 8	4
RL560WH6840R	5" / 6" LED Retrofit - White Baffle Trim, 80 CRI/4000K	0 80083 71082 9	4
RL560WH6940R	5" / 6" LED Retrofit - White Baffle Trim, 90 CRI/4000K	0 80083 71186 4	4

Trim Covers Available

- RL56TRMSNR - 5" / 6" Trim Cover - Satin Nickel
- RL56TRMTBZR - 5" / 6" Trim Cover - Tuscan Bronze
- RL56TRMWHR - 5" / 6" Trim Cover - Primed White



4" LED Air-Tite™ Retrofit Downlight

- Over 600 lumens
- 50,000 hours with 70% maintained lumens
- Compatible with 4" standard recessed housings: HALO®, ALL-PRO™ and more
- High brightness, diffusing, optical quality lens
- Dimmable to 5% with select dimmers
- Easy installation with universal mounting clips
- Wet and damp location listed and IC (Insulated Ceiling) rated

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
LT460WH6930R	4" LED Retrofit - White Plastic Baffle Trim, 90 CRI/3000K	0 80083 74616 3	4



5" / 6" LED Air-Tite™ Retrofit Downlight

- 600 Lumens
- 50,000 hours with 70% maintained lumens
- Compatible with 5" & 6" standard and shallow recessed housings: HALO®, ALL-PRO™ and more
- High brightness, diffusing, optical quality lens
- Dimmable to 5% with select dimmers
- Easy installation with universal mounting clips
- Wet and damp location listed and IC (Insulated Ceiling) rated

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
LT560WH6930R	5" / 6" LED Retrofit - White Plastic Baffle Trim, 90 CRI/3000K	0 80083 74618 7	4



4" & 5" / 6" LED Retrofit – Adjustable Gimbal with Integrated Light Engine

- Over 600 lumens; 50,000 hours with 70% maintained lumens
- Compatible with many 4" and 5" & 6" standard and shallow recessed housings: HALO®, ALL-PRO™ and more
- 35° Tilt up to 360° rotation
- Flexible mounting with friction clips (RA4/RA56) and torsion springs (RA56)
- Damp location listed and IC (Insulated Ceiling) rated

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
RA406927WHR	4" LED Gimbal - White Baffle Trim, 90 CRI/2700K	0 80083 69160 9	2
RA406930WHR	4" LED Gimbal - White Baffle Trim, 90 CRI/3000K	0 80083 69162 3	2
RA5606927WHR	5" / 6" LED Gimbal - White Baffle Trim, 90 CRI/2700K	0 800836 9164 7	2
RA5606930WHR	5" / 6" LED Gimbal - White Baffle Trim, 90 CRI/3000K	0 80083 69316 0	2



4" LED Surface Mount Downlight

- Over 600 lumens; 50,000 hours with 70% maintained lumens
- Flexible mounting with junction box bracket (included)
- Compatible with 4" standard recessed housings: HALO®, ALL-PRO™ and more
- Slot-N-Lock quick installation system
- Ceiling and wall mount capability
- Wet location listed - ceiling and IC (Insulated Ceiling) rated


LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
SLD405827WHR	4" Surface LED, 80 CRI, 2700K, 120V, White	0 80083 72926 5	2
SLD405927WHR	4" Surface LED, 90 CRI, 2700K, 120V, White	0 80083 72930 2	2
SLD405830WHR	4" Surface LED, 80 CRI, 3000K, 120V, White	0 80083 69764 9	2
SLD405930WHR	4" Surface LED, 90 CRI, 3000K, 120V, White	0 80083 69768 7	2
SLD405835WHR	4" Surface LED, 80 CRI, 3500K, 120V, White	N/A	N/A
SLD405935WHR	4" Surface LED, 90 CRI, 3500K, 120V, White	N/A	N/A
SLD405840WHR	4" Surface LED, 80 CRI, 4000K, 120V, White	N/A	N/A
SLD405940WHR	4" Surface LED, 90 CRI, 4000K, 120V, White	N/A	N/A

Trim Covers Available

- SLD4TRMSNR - 4" Trim Cover - Satin Nickel
- SLD4TRMTBZR - 4" Trim Cover - Tuscan Bronze
- SLD4TRMWHR - 4" Trim Cover - Primed White

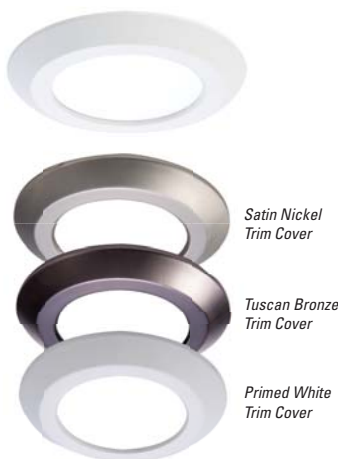

5" / 6" LED Universal Surface Mount Downlight

- Over 600 lumens; 50,000 hours with 70% maintained lumens
- Flexible mounting with junction box bracket (included)
- Compatible with 5" and 6" standard and shallow recessed housings: HALO®, ALL-PRO™ and more
- Slot-N-Lock quick installation system
- Ceiling and wall mount capability
- Wet location listed - ceiling and IC (Insulated Ceiling) rated

LED



Model #	Description	Unit Carton UPC	Master Carton Qty.
SLD606827WHR	5" / 6" Surface LED, 80 CRI, 2700K, 120V, White	0 80083 72928 9	2
SLD606927WHR	5" / 6" Surface LED, 90 CRI, 2700K, 120V, White	0 80083 72932 6	2
SLD606830WHR	5" / 6" Surface LED, 80 CRI, 3000K, 120V, White	0 80083 69766 3	2
SLD606930WHR	5" / 6" Surface LED, 90 CRI, 3000K, 120V, White	0 80083 69770 0	2
SLD606835WHR	5" / 6" Surface LED, 80 CRI, 3500K, 120V, White	N/A	N/A
SLD606935WHR	5" / 6" Surface LED, 90 CRI, 3500K, 120V, White	N/A	N/A
SLD606840WHR	5" / 6" Surface LED, 80 CRI, 4000K, 120V, White	N/A	N/A
SLD606940WHR	5" / 6" Surface LED, 90 CRI, 4000K, 120V, White	N/A	N/A

Trim Covers Available

- SLD6TRMSNR - 5" / 6" Trim Cover - Satin Nickel
- SLD6TRMTBZR - 5" / 6" Trim Cover - Tuscan Bronze
- SLD6TRMWHR - 5" / 6" Trim Cover - Primed White



For use with HALO® ML56 LED
5" / 6" Trims

ML56 Series – LED Light Module

- Available in over 600 and 900 lumen series
- 50,000 hours with 70% maintained lumens
- Compatible with 5" & 6" recessed housings: HALO®, ALL-PRO™ and more
- Fits standard and shallow recessed housings
- High brightness, diffusing, impact resistant lens
- Dimmable to 5% with select dimmers
- Flexible mounting with torsion springs
- Wet and damp location listed (shower light)



Model #	Description	Unit Carton UPC	Master Carton Qty.
ML5606927	ML56 DL Engine, 600 lm, 90 CRI, 2700K	0 80083 63108 7	6
ML5609930	ML56 DL Engine, 900 lm, 90 CRI, 3000K	0 80083 62651 9	6
ML5606930	ML56 DL Engine, 600 lm, 90 CRI, 3000K	0 80083 62649 6	6
ML5606827	ML56 DL Engine, 600 lm, 80 CRI, 2700K	0 80083 63096 7	6
ML5606830	ML56 DL Engine, 600 lm, 80 CRI, 3000K	0 80083 63326 5	6
ML5609830	ML56 DL Engine, 900 lm, 80 CRI, 3000K	0 80083 63328 9	6



For use with HALO® ML56 LED
Light Modules










ML56 Series – 5" & 6" Trims

- Compatible with 5" & 6" standard and shallow recessed housings: HALO®, ALL-PRO™ and more
- Easily attaches to housing using torsion springs or friction clips



Model #	Description	Unit Carton UPC	Master Carton Qty.
592H-R	5" White Trim with Haze Reflector	0 80083 62332 7	4
593WB-R	5" White Baffle Trim	0 80083 62386 0	4
593SNB-R	5" Satin Nickel Baffle Trim	0 80083 62390 7	4
594WB-R	5" White Eyeball Trim	0 80083 62317 4	4
692H-R	6" White Trim with Haze Reflector	0 80083 62402 7	4
693WB-R	6" White Baffle Trim	0 80083 62406 5	4
693SNB-R	6" Satin Nickel Baffle Trim	0 80083 62410 2	4
694WB-R	6" White Eyeball Trim	0 80083 62323 5	4

4" HOUSING & TRIM COMPATIBILITY
 Use only with lamps specified on housing label, spec sheets,
 or www.HaloItg.com

Trim Series	Model #	Description	NEW CONSTRUCTION (Above Ceiling Access)			REMODEL (Below Ceiling Access)	
			E4ICATSB	H99TAT	H99ICAT	E4RTATSB	H99RATT
993 Series – 4" Coilex® Baffle							
	993W	White Trim with White Baffle	•	•	•	•	•
	993P	White Trim with Black Baffle	•	•	•	•	•
	993SN	Satin Nickel Trim with Black Baffle	•	•	•	•	•
	993TBZ	Tuscan Bronze Trim with Black Baffle	•	•	•	•	•
951 Series – 4" Shower Light							
	951PS	White Trim, Wet Location	•	•		•	•
	951SNS	Satin Nickel Trim, Wet Location		•	•	•	•
	951TBZS	Tuscan Bronze Trim, Wet Location		•	•	•	•
998 Series – 4" Adjustable Eyeball - 30° Tilt							
	998P	White Trim with White Eyeball	•	•	•	•	•
	998SN	Satin Nickel Trim with Satin Nickel Eyeball	•	•	•	•	•
	998TBZ	Tuscan Bronze Trim with Tuscan Bronze Eyeball	•	•	•	•	•
953 Series – 4" Metal Baffle							
	953W	White Trim with White Baffle	•	•	•	•	•
	953P	White Trim with Black Baffle	•	•	•	•	•
	953SN	Satin Nickel Trim with Satin Nickel Baffle	•	•	•	•	•
	953TBZ	Tuscan Bronze Trim with Tuscan Bronze Baffle	•	•	•	•	•
999 Series – 4" Reflector							
	999MB	White Trim with Specular Black Reflector	•	•	•	•	•
	999RG	White Trim with Residential Gold Reflector	•	•	•	•	•
	999P	White Trim with Specular Clear Reflector	•	•	•	•	•
	999W	White Trim with White Reflector	•	•	•	•	•
	999H	White Trim with Haze Reflector	•	•	•	•	•
	999SN	Satin Nickel Trim with Satin Nickel Reflector	•	•	•	•	•
	999TBZ	Tuscan Bronze Trim with Tuscan Bronze Reflector	•	•	•	•	•
4001 Series – 4" Baffle (Friction Clip Retention)							
	4001BB	White Trim with Black Step Baffle	•	•	•	•	•
	4001WB	White Trim with White Step Baffle	•	•	•	•	•
4002 Series – 4" Adjustable Eyeball - 30° Tilt (Friction Clip Retention)							
	4002WH	White Trim with Eyeball 30° Tilt	•	•	•	•	•
4003 Series – 4" Reflector (Friction Clip Retention)							
	4003SC	White Trim with Specular Clear Reflector	•	•	•	•	•
4055 Series – 4" Flat Frosted Glass Lens (Friction Clip Retention)							
	4055WH	White Trim with Flat Frosted Glass Lens	•	•	•	•	•

* When using an Air-Tite™ trim to meet California Title 24 air tight compliance, an additional gasket is required between the finished ceiling and the trim flange ring. For California Title 24 compliance, use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATTRIM-6PK.



4" IC Rated Shallow New Construction Housing

- Air-Tite™ housing prevents airflow between attic and living areas
- ALL NAIL!™ hanger bar system has pre-installed nails
- Hanger bars allow for easy adjustment
- Adjustable socket bracket with integral T-bar clip for grid ceilings
- Pre-installed Quick-Connect™ wiring connectors, 120V line voltage
- IC Rated, for direct contact with insulation



Model #	Description	Unit Carton UPC	Master Carton Qty.
E4ICATSB	Air-Tite™ IC New Construction	0 80083 75152 5	6



4" Non-IC Rated Shallow Remodel Housing

- Air-Tite™ housing prevents airflow between attic and living areas
- Non-IC Rated, for use in non-insulated ceilings
- Pre-installed Quick-Connect™ wiring connectors, 120V line voltage
- Adjustable socket bracket



Model #	Description	Unit Carton UPC	Master Carton Qty.
E4RTATSB	Air-Tite™ Non-IC Remodel Housing	0 80083 75150 1	6



New Construction

4" Air-Tite™ New Construction and Remodel Housings

- Air-Tite™ pre-installed gasket prevents airflow between attic and living areas
- For use in shallow ceilings
- Thermally protected housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars on new construction housing



Model #	Description	Unit Carton UPC	Master Carton Qty.
H99TAT	Air-Tite™ Non-IC New Construction	0 80083 58426 0	6
H99RTAT	Air-Tite™ Non-IC Remodel Housing	0 80083 58436 9	6



Remodel



New Construction

4" Air-Tite™ IC Rated New Construction Housing

- Air-Tite™ pre-installed gasket prevents airflow between attic and living areas
- For use in shallow ceilings
- Thermally protected housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars on new construction housing



Model #	Description	Unit Carton UPC	Master Carton Qty.
H99ICAT	Air-Tite™ IC Rated New Construction	0 80083 58225 9	6



993 Series – 4” Coilex® Baffle Trims

- Die-cast trim ring with metal reflector
- For general lighting



Model #	Description	Unit Carton UPC	Master Carton Qty.
993W	White Trim with White Baffle	6 62400 16428 9	12
993P	White Trim with Black Baffle	6 62400 32106 4	12
993SN	Satin Nickel Trim with Black Baffle	6 23960 25048 5	12
993TBZ	Tuscan Bronze Trim with Black Baffle	6 23961 31141 3	12



951 Series – 4” Shower Light Trims

- Wet location Listed for use as shower light
- Non-conductive, non-corrosive polymer trim
- Prismatic glass lens
- Full reflector for even light distribution



Model #	Description	Unit Carton UPC	Master Carton Qty.
951PS	White Trim, Wet Location	6 22697 28311 7	6
951SNS	Satin Nickel Trim, Wet Location	6 23960 38755 6	6
951TBZS	Tuscan Bronze Trim, Wet Location	6 23961 31157 4	6



998 Series – 4” Adjustable Eyeball Trim with 30° Tilt

- Adjustable eyeball
- For PAR16 and R16 lamps
- 30° tilt, 360° rotation



Model #	Description	Unit Carton UPC	Master Carton Qty.
998P	White Trim with White Eyeball	6 62400 13209 7	12
998SN	Satin Nickel Trim with Satin Nickel Eyeball	6 23960 25049 2	12
998TBZ	Tuscan Bronze Trim with Tuscan Bronze Eyeball	6 23961 31143 7	12



953 Series – 4” Metal Baffle Trims

- Die-cast trim ring with metal baffle
- For general lighting



Model #	Description	Unit Carton UPC	Master Carton Qty.
953W	White Trim with White Baffle	0 80083 51602 5	12
953P	White Trim with Black Baffle	0 80083 51600 1	12
953SN	Satin Nickel Trim with Satin Nickel Baffle	6 23960 38753 2	12
953TBZ	Tuscan Bronze Trim with Tuscan Bronze Baffle	6 23961 31149 9	12



999 Series – 4" Metal Reflector

- Die-cast trim ring with metal reflector
- For general lighting

Model #	Description	Unit Carton UPC	Master Carton Qty.
999MB	White Trim with Specular Black Reflector	6 62400 00655 8	12
999RG	White Trim with Residential Gold Reflector	6 62400 32054 8	12
999P	White Trim with Specular Clear Reflector	6 62400 32058 6	12
999W	White Trim with White Reflector	6 23961 39428 7	12
999H	White Trim with Haze Reflector	6 22696 60622 1	12
999SN	Satin Nickel Trim with Satin Nickel Reflector	6 23960 25050 8	12
999TBZ	Tuscan Bronze Trim with Tuscan Bronze Reflector	6 23961 31145 1	12



4" High Gloss White Trim Ring with Baffle

- White high-gloss trim ring
- Step plastic baffle
- Friction clip retention

Model #	Description	Unit Carton UPC	Master Carton Qty.
4001BB	White Trim with Black Baffle	0 80083 75818 0	6
4001WB	White Trim with White Baffle	0 80083 75484 7	6



4" White Trim Ring with Eyeball

- White trim ring
- 30° tilt, 360° rotation
- Formed metal trim ring
- Friction clip retention

Model #	Description	Unit Carton UPC	Master Carton Qty.
4002WH	White Trim with White Eyeball	0 80083 75819 7	6



4" White Trim Ring with Clear Specular Reflector

- White trim ring
- Clear specular reflector
- Formed metal ring
- Friction clip retention

Model #	Description	Unit Carton UPC	Master Carton Qty.
4003SC	White Trim with Clear Specular Reflector	0 8008375486 1	6













4" Prismatic Glass Lens with Cut-Cone Reflector

- Wet location listed for use in showers
- Friction clip retention
- Prismatic glass lens



Model #	Description	Unit Carton UPC	Master Carton Qty.
4055WH	Prismatic Glass Lens with Cut-Cone Reflector	0 80083 75836 4	6

5" HOUSING & TRIM COMPATIBILITY
 Use only with lamps specified on housing label, spec sheets,
 or www.HaloItg.com

Trim Series	Model #	Description	NEW CONSTRUCTION (Above Ceiling Access)			REMODEL (Below Ceiling Access)		
			ESICAT	HSICAT	HST	ESRICAT	HSRICAT	HERT
5000 Series – 5" Metal Splay								
	5000P	White Trim with White Splay	•	•	•	•	•	•
	5000SN	Satin Nickel Trim with Satin Nickel Splay	•	•	•	•	•	•
	5000TBZ	Tuscan Bronze Trim with Tuscan Bronze Splay	•	•	•	•	•	•
5001 Series – 5" Metal Baffle Splay (Torsion Spring Retention)								
	5001P	White Trim with White Baffle	•	•	•	•	•	•
	5001MB	White Trim with Black Baffle	•	•	•	•	•	•
	5001SN	Satin Nickel Trim with Satin Nickel Baffle	•	•	•	•	•	•
	5001TBZ	Tuscan Bronze Trim with Tuscan Bronze Baffle	•	•	•	•	•	•
5010 Series – 5" Metal Step Baffle (Torsion Spring Retention)								
	5010W	White Trim with White Baffle	•	•	•	•	•	•
	5010	White Trim with Black Baffle	•	•	•	•	•	•
5020 Series – 5" Trims with Reflector Cones (Torsion Spring Retention)								
	5020P	White Trim with White Reflector	•	•	•	•	•	•
	5020H	White Trim with Haze Reflector	•	•	•	•	•	•
	5020SC	White Trim with Clear Specular Reflector	•	•	•	•	•	•
	5020BL	White Trim with Black Specular Reflector	•	•	•	•	•	•
	5020RG	White Trim with Residential Gold Reflector	•	•	•	•	•	•
	5020SN	Satin Nickel Trim with Satin Nickel Reflector	•	•	•	•	•	•
	5020TBZ	Tuscan Bronze Trim with Tuscan Bronze Reflector	•	•	•	•	•	•
5070 Series – 5" Adjustable Eyeball Trims - 30° Tilt (Torsion Spring Retention)								
	5070P	White Trim with White Eyeball	•	•	•	•	•	•
	5070SN	Satin Nickel Trim with Satin Nickel Eyeball	•	•	•	•	•	•
	5070TBZ	Tuscan Bronze Trim with Tuscan Bronze Eyeball	•	•	•	•	•	•
5054 Series – 5" Dome Lens Shower Light								
	5054PS	White Trim with Frosted Diffuser	•	•	•	•	•	•
	5054SNS	Satin Nickel Trim with Frosted Diffuser	•	•	•	•	•	•
	5054TBZS	Tuscan Bronze Trim with Frosted Diffuser	•	•	•	•	•	•
5110 Series – 5" Perfex™ Baffle (Coil Spring Retention)								
	5110BB	White Trim with Black Perfex™ Baffle	•	•	•	•	•	•
	5110WB	White Trim with White Perfex™ Baffle	•	•	•	•	•	•
5150 Series – 5" Frosted Glass Dome Lens with Reflector (Torsion Spring Retention)								
	5150WH	White Trim with Frosted Glass Dome Lens with Reflector	•	•	•	•	•	•
5165 Series – 5" White Gimbal 35° Tilt (Torsion Spring Retention)								
	5165WH	White Trim with White Gimbal 35° Tilt	•	•	•	•	•	•
5186 Series – 5" White Splay (Torsion Spring Retention)								
	5186WH	White Trim with White Splay	•	•	•	•	•	•

* When using an Air-Tite™ trim to meet California Title 24 air tight compliance, an additional gasket is required between the finished ceiling and the trim flange ring. For California Title 24 compliance, use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATTRIM-6PK.



5" Air-Tite™ IC Rated New Construction and Remodel Housing

- For use in insulated ceilings
- Air-Tite™ housing prevents airflow between attic and living areas
- ALL NAIL!™ bar hangers with pre-installed nails
- q-Channel interlocking hangers with Pass-N-Thru™
- Hinged junction box with Slide-N-Side™
- Pre-installed Quick-Connect™ wiring connectors
- Socket bracket adjusts lamp to various trim styles and designs



Model #	Description	Unit Carton UPC	Master Carton Qty.
E5ICAT	Air-Tite™ IC New Construction	0 80083 73742 0	6
E5RICAT	Air-Tite™ IC Remodel Housing	0 80083 73742 0	6



5" Air-Tite™ IC Rated New Construction and Remodel Housings

- Air-Tite™ pre-installed gasket prevents airflow between attic and living areas
- Thermally protected insulation contact (IC) housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars on new construction housing
- Accommodates smaller sized PAR20 and PAR30 halogen lamps



Model #	Description	Unit Carton UPC	Master Carton Qty.
H5ICAT	Air-Tite™ IC New Construction Housing	6 62400 60267 5	6
H5RICAT	Air-Tite™ IC Remodel Housing	6 62400 61055 7	6




5" Non-IC Rated New Construction and Remodel Housings

- Insulation must be kept 3 in. from all sides of the housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars on new construction housing
- Accommodates smaller sized PAR20 and PAR30 halogen lamps




Model #	Description	Unit Carton UPC	Master Carton Qty.
H5T	Non-IC New Construction Housing	6 62400 60265 1	6
H5RT	Non-IC Remodel Housing	6 62400 60267 5	6

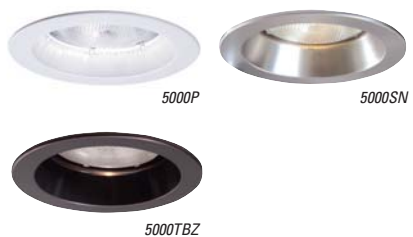

5000 Series – 5" Metal Splay Trims

- Straight precision-sided trim ring
- Open metal splay trim
- Dual socket position socket for BR and PAR lamps

Model #	Description	Unit Carton UPC	Master Carton Qty.
5000P	White Trim with White Splay	6 62400 60271 2	6
5000SN	Satin Nickel Trim with Satin Nickel Splay	6 23961 11288 1	6
5000TBZ	Tuscan Bronze Trim with Tuscan Bronze Splay	6 23961 31180 2	6

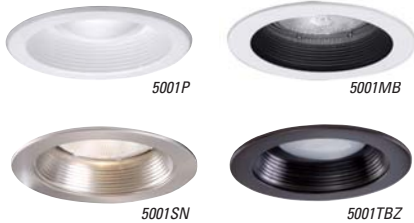

5001 Series – 5” Metal Baffle Splay Trims

- Straight precision-sided trim ring
- Torsion springs pull trim tight to ceiling
- Dual socket position for use with BR and PAR Lamps

Model #	Description	Unit Carton UPC	Master Carton Qty.
5001P	White Trim with White Baffle	6 62400 60272 9	6
5001MB	White Trim with Black Baffle	6 62400 60273 6	6
5001SN	Satin Nickel Trim with Satin Nickel Baffle	6 23961 11289 8	6
5001TBZ	Tuscan Bronze Trim with Tuscan Bronze Baffle	6 23961 31182 6	6



5010 Series – 5” Metal Step Baffle Trims

- Straight precision-sided trim ring
- Torsion springs pull trim tight to ceiling
- Dual socket position for BR and PAR Lamps

Model #	Description	Unit Carton UPC	Master Carton Qty.
5010W	White Trim with White Baffle	6 62400 60275 0	6
5010	White Trim with Black Baffle	6 62400 60274 3	6



5020 Series – 5” Trims with Reflector Cones

- Straight precision sided trim ring
- Torsion springs pull trim tight to ceiling
- Dual socket position for BR and PAR Lamps

Model #	Description	Unit Carton UPC	Master Carton Qty.
5020P	White Trim with White Reflector	6 62400 60278 1	6
5020H	White Trim with Haze Reflector	6 22697 05339 0	6
5020SC	White Trim with Clear Specular Reflector	6 62400 60276 7	6
5020BL	White Trim with Black Specular Reflector	6 62400 60277 4	6
5020RG	White Trim with Residential Gold Reflector	6 62400 60279 8	6
5020SN	Satin Nickel Trim with Satin Nickel Reflector	6 23961 11284 3	6
5020TBZ	Tuscan Bronze Trim with Tuscan Bronze Reflector	6 23961 31177 2	6



5054 Series – 5” Dome Lens Shower Light Trims

- Frosted glass dome lens
- Wet location listed for use as shower light
- Non-conductive, non-corrosive polymer trim



Model #	Description	Unit Carton UPC	Master Carton Qty.
5054PS	White Trim with Frosted Diffuser	6 23961 53164 4	6
5054SNS	Satin Nickel Trim with Frosted Diffuser	6 23961 83625 1	6
5054TBZS	Tuscan Bronze Trim with Frosted Diffuser	6 23961 82736 5	6



5070 Series – 5" Adjustable Eyeball Trims - 30° Tilt with 360° Rotation

- Straight precision-sided trim ring
- For directional accent lighting
- Torsion springs pull trim tight to ceiling

Model #	Description	Unit Carton UPC	Master Carton Qty.
5070P	White Trim with White Eyeball	6 62400 60268 2	6
5070SN	Satin Nickel Trim with Satin Nickel Eyeball	6 23961 11378 9	6
5070TBZ	Tuscan Bronze Trim with Tuscan Bronze Eyeball	6 23961 31186 4	6



5" Perftex™ Baffle

- Perforated pattern baffle
- Coil spring retention
- Self-flange trim sized to hide gaps caused by construction tolerances

Model #	Description	Unit Carton UPC	Master Carton Qty.
5110BB	Black Perftex™ Baffle	0 80083 75454 0	6
5110WB	White Perftex™ Baffle	0 80083 75452 6	6



5" White Frosted Glass Dome Lens, Self-flange trim

- Low-profile, frosted glass lens
- Wet location Showerlight
- Torsion spring retention
- Socket supporting internal reflector
- Self-flange trim sized to hide gaps caused by construction tolerances



Model #	Description	Unit Carton UPC	Master Carton Qty.
5150WH	White Frosted Glass Dome Lens, Self-flange trim	0 80083 75766 4	6



5" White Gimbal 35° Tilt, Self-flange Trim

- Adjustable gimbal trim for PAR30S lamp
- Torsion spring retention
- Socket supporting
- 35° tilt, 360° rotation
- Self-flange trim sized to hide gaps caused by construction tolerances

Model #	Description	Unit Carton UPC	Master Carton Qty.
5165WH	White Frosted Glass Dome Lens, Self-flange trim	0 80083 75450 2	6



5" White Splay, Self-flange

- Splay trim for BR & PAR lamps
- Torsion Spring retention
- Socket supporting internal reflector
- Self-flange trim sized to hide gaps caused by construction tolerances

Model #	Description	Unit Carton UPC	Master Carton Qty.
5186WH	White Splay, Self-flange	0 80083 75754 1	6






6" HOUSING & TRIM COMPATIBILITY

Use only with lamps specified on housing label, spec sheets, or www.HaloItg.com

Trim Series	Model #	Description	NEW CONSTRUCTION (Above Ceiling Access)									REMODEL (Below Ceiling Access)							
			Standard (7" Depth)				Shallow (5" Depth)			Slope (6/12 Slope)		Standard (7" Depth)				Shallow (5" Depth)			
			E7ICAT	H7ICT	H7ICAT	H7T	E27ICAT	H27ICAT	H27T	H47ICT	H47ICAT	H47T	E7RICAT	H7RICT	H7RICAT	H7RT	E27RICAT	H27RICAT	H27RT
310/410 Series - Baffle (Coil Spring Retention)																			
	310W	White Trim/Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	310P	White Trim, Black Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	310SN	Satin Nickel, Black Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	310TBZ	Tuscan Bronze, Black Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	410W	White Trim/Baffle, wider aperture				•										•			
	410P	White Trim, Black Baffle, wider aperture				•										•			
30 Series - Air-Tite Baffle (Socket Supported)																			
	30WATH	White Trim/Baffle, Clear Reflector	•	•	•	•							•	•	•	•			•
	30PAT	White Trim, Black Baffle, Clear Reflector	•	•	•	•							•	•	•	•			•
	30SNAT	Satin Nickel Trim/Baffle/Reflector	•	•	•	•							•	•	•	•			•
	30TBZAT	Tuscan Bronze Trim/Baffle/Reflector	•	•	•	•							•	•	•	•			•
	30SBAT	Black Trim/Baffle/Reflector	•	•	•	•							•	•	•	•			•
353 Series - Metal Baffle (Coil Spring Retention)																			
	353SN	Satin Nickel Trim/Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	353TBZ	Tuscan Bronze Trim/Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
78 Series - Eyeball 30° Tilt																			
	78P	White Trim/Eyeball	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	78PAT	Air-Tite™ White Trim/Eyeball*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	78SN	Satin Nickel Trim/Eyeball	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	78TBZ	Tuscan Bronze Trim/Eyeball	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
70 Series - Albalite Lens Shower Light Lens (Wet Location)																			
	70P	White Trim				•			•							•			
	70PS	Air-Tite™ White Trim*				•			•							•			
	170P	White Trim with Reflector	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	170PS	Air-Tite™ White Trim with Reflector*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
72 Series - Dome Shower Light Lens (Wet Location)																			
	172PS	Air-Tite™ White*	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	172SNS	Air-Tite™ Satin Nickel*	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	172TBZS	Air-Tite™ Tuscan Bronze*	•	•	•	•	•	•	•				•	•	•	•	•	•	•
300 Series - Open Trim (Torsion Spring Retention)																			
	300P	White with Socket Support	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	300SN	Satin Nickel with Socket Support	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	300TBZ	Tuscan Bronze with Socket Support	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	301P	White				•			•							•			•
	301SN	Satin Nickel				•			•							•			•
	301TBZ	Tuscan Bronze				•			•							•			•
426 Series - Specular Clear Reflector Cone (Coil Spring Retention)																			
	426	White with Specular Clear Reflector Cone	•	•	•	•	•	•	•				•	•	•	•	•	•	•
498 Series - Sloped Ceiling Baffle																			
	498W	White Trim/Baffle								•	•	•							
	498P	White Trim, Black Baffle								•	•	•							
6100 Series - 6" Tapered Metal Baffle with (2) Trim Rings (Coil Spring Retention)																			
	6100BB	White Trim with Tapered Black Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	6100WB	White Trim with Tapered White Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
6106 Series - 6" Straight Reflector Cone, Self-flange (Coil Spring Retention)																			
	6106SC	White Trim with Specular Clear Reflector	•	•	•	•	•	•	•				•	•	•	•	•	•	•

* When using an Air-Tite™ trim to meet California Title 24 air tight compliance, an additional gasket is required between the finished ceiling and the trim flange ring. For California Title 24 compliance, use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATTRIM-6PK.

6" HOUSING & TRIM COMPATIBILITY
Use only with lamps specified on housing label, spec sheets,
or www.Haloitg.com

Trim Series	Model #	Description	NEW CONSTRUCTION (Above Ceiling Access)									REMODEL (Below Ceiling Access)							
			Standard (7" Depth)			Shallow (5" Depth)			Slope (6/12 Slope)			Standard (7" Depth)			Shallow (5" Depth)				
			E7ICAT	H7ICT	H7ICAT	H7T	E27ICAT	H27ICAT	H27T	H47ICT	H47ICAT	H47T	E7RICAT	H7RICT	H7RICAT	H7RT	E27RICAT	H27RICAT	H27RT
6109 Series - Tapered Coliex® Baffle (Coil Spring Retention)																			
	6109BB	White Trim with Black Tapered Coliex Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	6109WB	White Trim with White Tapered Coliex Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
6110 Series - Perftex™ Baffle (Coil Spring Retention)																			
	6110BB	White Trim with Black Perftex™ Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
	6110WB	White Trim with White Perftex™ Baffle	•	•	•	•	•	•	•				•	•	•	•	•	•	•
6125 Series - Full Cone Baffle (Torsion Spring Retention)																			
	6125WB	White Trim with White Full Cone Baffle	•	•	•	•							•	•	•	•			
6130 Series - Eyeball 35° Tilt (Torsion Spring Retention)																			
	6130WH	White Trim with White Eyeball 35° Tilt	•	•	•	•	•	•	•				•	•	•	•	•	•	•
6150 Series - Frosted Glass Dome Lens with Reflector (Torsion Spring Retention)																			
	6150WH	White Trim with Frosted Glass Dome Lens with Reflector, Showerlight	•	•	•	•	•	•	•				•	•	•	•	•	•	•

* When using an Air-Tite™ trim to meet California Title 24 air tight compliance, an additional gasket is required between the finished ceiling and the trim flange ring. For California Title 24 compliance, use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATRIM-6PK.



6" Air-Tite™ IC Rated New Construction and Remodel Housing

- Air-Tite™ housing prevents airflow between attic and living areas
- ALL NAIL!™ hanger bar system has pre-installed nails
- q-Channel bars with Pass-N-Thru™
- Hinged junction box with Slide-N-Side™
- Pre-installed Quick-Connect™ wiring connectors
- IC rated, for direct contact with insulation



Model #	Description	Unit Carton UPC	Master Carton Qty.
E7ICAT	Air-Tite™ IC New Construction	0 80083 73772 7	6
E7RICAT	Air-Tite™ IC Remodel Housing	0 80083 73754 3	6



6" Air-Tite™ IC Rated New Construction and Remodel Housings

- Air-Tite™ pre-installed gasket prevents airflow between attic and living areas
- Thermally protected insulation contact (IC) housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars on new construction housing



Model #	Description	Unit Carton UPC	Master Carton Qty.
H7ICAT	Air-Tite™ IC New Construction	6 62400 16447 0	6
H7RICAT	Air-Tite™ IC Remodel Housing	6 62400 61058 8	6



6" IC Rated New Construction and Remodel Housings

- Thermally protected insulation contact (IC) housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars on new construction housing



Model #	Description	Unit Carton UPC	Master Carton Qty.
H7ICT	IC New Construction	6 62400 13293 6	6
H7RICT	IC Remodel Housing	6 62400 60071 8	6



6" Non-IC Rated New Construction and Remodel Housings

- Insulation must be kept 3 in. from all sides of the housing
- Thermally protected housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars on new construction housing



Model #	Description	Unit Carton UPC	Master Carton Qty.
H7T	Non-IC New Construction	6 62400 13302 5	6
H7RT	Non-IC Remodel Housing	6 62400 60072 5	6



6" Air-Tite™ IC Rated Shallow New Construction and Remodel Housing

- For use in shallow insulated ceilings
- Air-Tite housing prevents airflow between attic and living areas
- All-Nail bar hangers with pre-installed nail and integral T-grid clip
- Hinged junction box with Slide-N-Side
- q-channel interlocking hangers with Pass-N-Thru
- Quick connect push-in wire nuts included
- Socket bracket adjusts lamp to various trim styles and designs



Model #	Description	Unit Carton UPC	Master Carton Qty.
E27ICAT	Air-Tite™ IC Shallow New Construction	0 80083 73748 2	6
E27RICAT	Air-Tite™ IC Shallow Remodel Housing	0 80083 73760 4	6




6" Air-Tite™ IC Rated Shallow New Construction and Remodel Housings

- For use in shallow ceilings with 2 in. x 6 in. joist construction
- Air-Tite™ pre-installed gasket prevents airflow between attic and living areas
- Thermally protected insulation contact (IC) housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars on new construction housing



Model #	Description	Unit Carton UPC	Master Carton Qty.
H27ICAT	Shallow Air-Tite™ IC New Construction	6 62400 60589 8	6
H27RICAT	Shallow Air-Tite™ IC Remodel Housing	6 23961 86676 0	6

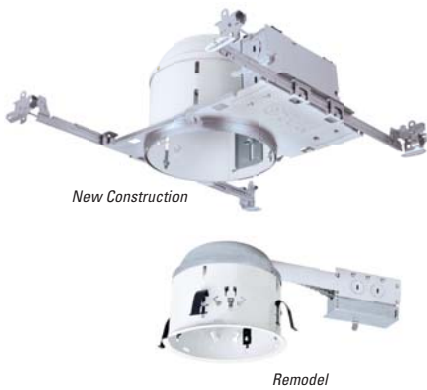

6" Non-IC Rated Shallow New Construction and Remodel Housings

- For use in shallow ceilings with 2 in. x 6 in. joist construction
- Insulation must be kept 3 in. from all sides of the housing
- Thermally protected housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars on new construction housing



Model #	Description	Unit Carton UPC	Master Carton Qty.
H27T	Non-IC New Construction	6 62400 13314 8	6
H27RT	Non-IC Remodel	6 62400 60073 2	6



6" Air-Tite™ IC Rated Slope Ceiling New Construction Housing

- For 2/12 to 6/12 slope ceilings
- Thermally protected insulation contact (IC) housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars



Model #	Description	Unit Carton UPC	Master Carton Qty.
H47ICAT	Slope Air-Tite™ IC New Construction	6 62400 30207 0	4



6" Slope Ceiling New Construction Housing

- For 2/12 to 6/12 slope ceilings
- Thermally protected housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars



Model #	Description	Unit Carton UPC	Master Carton Qty.
H47ICT	Slope IC New Construction	6 62400 13331 5	4
H47T	Slope Non-IC New Construction	6 62400 13332 2	4




30 Series – 6” Super Trim Air-Tite™ Baffle

- Metal baffle
- Self-flange socket supporting trim with torsion spring construction
- Accepts a wide range of lamps
- Makes installation Air-Tite™ regardless of housing used

*When using an Air-Tite™ trim to meet California Title 24 air tight compliance, an additional gaskets required between the finished ceiling and the trim flange ring. For California Title 24 compliance, use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATRIM-6PK.



Model #	Description	Unit Carton UPC	Master Carton Qty.
30WATH	White Trim, White Baffle	6 62400 60832 5	18
30PAT	White Trim, Black Baffle, Clear Reflector	6 62400 60331 3	18
30TBZAT	Tuscan Bronze Trim, Baffle and Reflector	6 23961 31205 2	18
30SNAT	Satin Nickel Trim, Baffle and Reflector	6 23961 11428 1	18
30SBAT	Black Specular Reflector	6 22697 06085 5	18

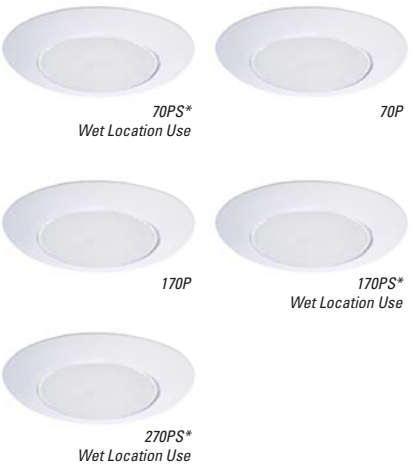


70/170/270 Series – 6” Albalite Lens Trims

- White trim with frosted glass lens
- PS version is wet location Listed for use in showers, with non-conductive, non-corrosive gasketed polymer trim ring
- Torsion spring retention

*When using an Air-Tite™ trim to meet California Title 24 air tight compliance, an additional gasket is required between the finished ceiling and the trim flange ring. For California Title 24 compliance, use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATRIM-6PK.

Model #	Description	Unit Carton UPC	Master Carton Qty.
70PS	Non-IC Wet Location, Air-Tite™, White Trim	6 62400 13039 0	12
70P	White Trim	6 62400 13038 3	12
170P	White Trim	6 62400 13075 8	6
170PS	Wet Location, Air-Tite™, White Trim	6 62400 13076 5	6
270PS	CFL, Wet Location, White Trim	6 23961 52446 2	8

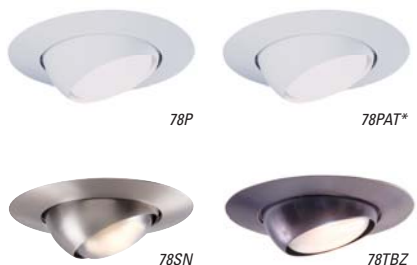

78 Series – 6” Adjustable Eyeball Trims with 30° Tilt

- Wide choice of finishes for any decor
- 30° tilt, 360° rotation

*When using an Air-Tite™ trim to meet California Title 24 air tight compliance, an additional gasket is required between the finished ceiling and the trim flange ring. For California Title 24 compliance, use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATRIM-6PK.

Model #	Description	Unit Carton UPC	Master Carton Qty.
78P	White Trim with White Eyeball	6 62400 13062 8	6
78PAT*	White Trim with White Eyeball - Air-Tite™	6 62400 61174 5	6
78SN	Satin Nickel Trim with Eyeball	6 23961 11379 6	6
78TBZ	Tuscan Bronze Trim with Eyeball	6 23961 31188 8	6



172/272 Series – 6" Dome Shower Light Trims

- Frosted glass dome
- Wet location Listed for use in showers
- Non-conductive gasketed polymer trim
- Torsion spring retention

* When using an Air-Tite™ trim to meet California Title 24 air tight compliance, an additional gasket is required between the finished ceiling and the trim flange ring. For California Title 24 compliance, use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATRIM-6PK.

Model #	Description	Unit Carton UPC	Master Carton Qty.
172PS	Wet Location, Air-Tite™, White Trim	6 62400 66355 3	6
172SNS	Wet Location, Satin Nickel Trim	6 23961 11427 4	6
172TBZS	Wet Location, Tuscan Bronze Trim	6 23961 31203 8	6
272PS	CFL, Wet Location, White Trim	6 23960 26537 3	6



300 Series – 6" Open Trims with Socket Support for IC Housings

- Open trim for BR and PAR lamps
- Torsion spring retention

Model #	Description	Unit Carton UPC	Master Carton Qty.
300P	White Open Trim	6 62400 30242 1	6
300SN	Satin Nickle Open Trim	6 23961 11381 9	6
300TBZ	Tuscan Bronze Open Trim	6 23961 31192 5	6



301 Series – 6" Open Trims for Non-IC Housings

- Open trim for BR and PAR lamps
- Coil spring retention

Model #	Description	Unit Carton UPC	Master Carton Qty.
301P	White Open Trim	6 62400 13086 4	12
301SN	Satin Nickel Open Trim	6 23961 11380 2	12
301TBZ	Tuscan Bronze Open Trim	6 23961 31190 1	12



310 Series – 6" Coilex™ Baffle Trims

- Black or white phenolic baffle with separate trim ring
- Coil spring retention
- Accessories available: TRM6 designer trim rings, OT403 oversize trim ring

Model #	Description	Unit Carton UPC	Master Carton Qty.
310W	White Trim with White Baffle	0 80083 51588 2	6
310P	White Trim with Black Baffle	0 80083 51590 5	6
310SN	Satin Nickle Trim with Black Baffle	0 80083 51592 9	6
310TBZ	Tuscan Bronze Trim with Black Baffle	0 80083 51604 9	6



353TBZ



353SN

353 Series – 6" Metal Baffle Trims

- Metallic finish trim rings and baffles
- Coil spring retention

Model #	Description	Unit Carton UPC	Master Carton Qty.
353TBZ	Tuscan Bronze Trim and Baffle	6 23961 31196 3	6
353SN	Satin Nickel Trim and Baffle	6 23961 11423 6	6



410W



410P

410 Series – 6" Coilex™ Baffle Trims

- For PAR38 and R40 lamps
- For use with H7T and H7RT housings

Model #	Description	Unit Carton UPC	Master Carton Qty.
410W	White Trim with White Baffle	0 80083 75782 4	6
410P	White Trim with Black Baffle	0 80083 51586 8	6



426

426 Series – 6" Specular Clear Reflector Cone

- Accepts a wide variety of lamps
- Coil spring retention
- Removable trim ring

Model #	Description	Unit Carton UPC	Master Carton Qty.
426	White Trim with Specular Clear Reflector Cone	0 80083 75776 3	6



498W



498P

498 Series – 6" Slope Baffle Trims

- One piece seamless baffle
- Baffle ridges are parallel to floor plane

Model #	Description	Unit Carton UPC	Master Carton Qty.
498W	White Slope Trim with White Baffle	0 66240 016733 4	4
498P	White Slope Trim with Black Baffle	0 66240 013171 7	4



6100BB
Narrow & Wide Trim Ring included

6" Tapered Metal Baffle with (2) Trim Rings

- Contoured tapered sides of metal baffle
- Coil spring retention
- Narrow and wide plastic removable trim rings included



6100WB
Narrow & Wide Trim Ring included

Model #	Description	Unit Carton UPC	Master Carton Qty.
6100BB	White Trim with White Baffle	0 80083 75480 9	6
6100WB	White Trim with Black Baffle	0 80083 75478 6	6



6" Straight Reflector Cone, Self-flange

- White self-flange reflector cone
- Clear specular reflector
- Coil spring retention
- Self-flange trim ring size to hide gaps caused by construction tolerances

Model #	Description	Unit Carton UPC	Master Carton Qty.
6106SC	White Trim with Clear Specular Reflector	0 80083 75476 2	6



6109BB

6109WB

6" Plastic Tapered Coilex® Baffle

- Contoured tapered sides of Coilex baffle
- Coil spring retention
- Self-flange trim sized to hide gaps caused by construction tolerances

Model #	Description	Unit Carton UPC	Master Carton Qty.
6109BB	White Trim with Black Plastic Tapered Coilex Baffle	0 80083 75774 9	6
6109WB	White Plastic Tapered Coilex Baffle	0 80083 75772 5	6



6110BB

6110WB

6" Perftex™ Baffle

- Perforated pattern baffle
- Coil spring retention
- Self-flange trim sized to hide gaps caused by construction tolerances

Model #	Description	Unit Carton UPC	Master Carton Qty.
6110BB	White Trim with Black Perftex™ Baffle	0 80083 75770 1	6
6110WB	White Perftex™ Baffle	0 80083 75768 8	6



6" Full Cone Baffle, Self-flange

- Full cone baffle
- Socket supporting baffle
- Torsion spring retention
- Self-flange trim ring sized to hide gaps caused by construction tolerances



Model #	Description	Unit Carton UPC	Master Carton Qty.
6125WB	White Trim with White Baffle	0 80083 75446 5	6



6" White Trim with Eyeball

- White trim ring
- 35° tilt, 360° rotation
- Torsion spring retention
- Socket supporting eyeball
- Self-flange trim ring size to hide gaps caused by construction tolerances

Model #	Description	Unit Carton UPC	Master Carton Qty.
6130WH	White Trim with White Eyeball	0 80083 75448 9	6




6" Showerlight with Frosted Glass Lens

- White trim ring
- Low profile, frosted glass dome lens
- Wet location listed for use in showers
- Non-conductive gasketed polymer trim
- Torsion spring retention
- Self-flange trim ring sized to hide gaps caused by construction tolerances



Model #	Description	Unit Carton UPC	Master Carton Qty.
6150WH	Wet Location, White Trim with Frosted Lens	0 80083 75482 3	6

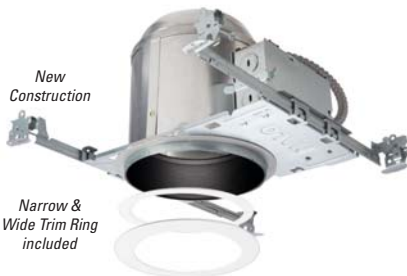

6" Air-Tite™ IC Rated Contractor Pack Includes 6 Housings and 6 Trims

- Air-Tite™ pre-installed gasket prevents airflow between attic and living areas
- Thermally protected insulation contact (IC) housing
- Slide-N-Side™ junction box with Quick Connect™
- Got Nail!™ and Pass-N-Thru™ hanger bars on new construction housing
- White metal baffle with narrow and wide trim rings included

CONTRACTOR PACK



Model #	Description	Unit Carton UPC	Master Carton Qty.
H7ICAT6100BB-6PK	Air-Tite™ IC New Construction		1



Ambient Lighting

LED and Fluorescent Applications

Our Metalux® product line offers an extensive selection of attractive, versatile and energy-efficient lighting fixtures ideal for most any residential or commercial application.



Metalux® LED





The Benefits of LED Lighting

- ✓ SAVES up to 35% ENERGY
- ✓ Long-Life
- ✓ Low Maintenance
- ✓ Clean, uniform light

2 ft. LED Fixtures

1000 LUMENS	(1) T8 17W Equivalent 
2000 LUMENS	(2) T8 17W Equivalent 

4 ft. LED Fixtures

2000 LUMENS	(1) T8 32W Equivalent 
4000 LUMENS	(2) T8 32W Equivalent 



LED Shoplights

- Equivalent to (2) T8 fluorescent lamps
- Fully assembled
- Easy on/off pull chain
- 5 ft. cord set



Model #	Description	Unit Carton UPC	Master Carton Qty.
4SHPLD2240R	LED Shoplight, 4K, 3 ft. 120V, 2200 lumens	0 80083 75080 1	2
4SHPLD3240R	LED Shoplight, 4K, 4 ft. 120V, 3200 lumens, link	0 80083 75081 8	2



LED Striplights

- Equivalent to either (1) or (2) T8 fluorescent lamps depending on model
- Ideal for single or continuous row applications
- Available in either 120V triac or 120/277V, 0 to 10V dimmable
- Frost lens provides clean, even illumination



Model #	Description	Unit Carton UPC	Master Carton Qty.
2SLSTP1040DD-120V	2 ft. Mini LED Strip, 120V, Dimmable, 1000 Lumens	0 80083 70577 1	2
2SLSTP2040DD-120V	2 ft. Mini LED Strip, 120V, Dimmable, 2000 lumens	0 80083 70578 8	2
4SLSTP2040DD-UNV	4 ft. Mini LED Strip, 120-277V, Dimmable, 2000 Lumens	0 80083 70581 8	2
4SLSTP4040DD-120V	4 ft. Mini LED Strip, 120V, Dimmable, 4000 lumens	0 80083 70580 1	2
4SLSTP4040DD-UNV	4 ft. Mini LED Strip, 120/277V, Dimmable, 4000 lumens	0 80083 70582 5	2



LED Contoured Wraparound

- Equivalent replacement for standard fluorescent wrap
- Ideal for continuous or standard row mounting
- Frosted lens provides clean, even illumination



Model #	Description	Unit Carton UPC	Master Carton Qty.
4CWPLD4040C	4 ft. LED Contoured Wrap, 4200 lumens, 4000K, UNV	0 80083 74907 2	



LED Low Profile Wrap

- Equivalent to (2) T8 fluorescent lamps
- Ideal for single mount applications
- Clean, even light distribution
- Quick and easy assembly



Model #	Description	Unit Carton UPC	Master Carton Qty.
4WPLD2340R	4 ft. Linear LED Wrap, 120V, Non-Dim, 2400 lumens	0 80083 74747 4	2
4WPLD3140R9	4 ft. Linear LED Wrap, 120V, 95 CRI, Non-Dim, 3200 lumens	0 80083 74746 7	2
2WPLD2040R	2 ft. Linear LED Wrap, 120V, Non-Dim, 2000 lumens	0 80083 75062 7	2



LED Low Profile Flush Mount

- Clean, uniform light distribution
- Long-lasting LEDs reduces energy/maintenance costs
- Simple, lightweight construction for easy installation



Model #	Description	Unit Carton UPC	Master Carton Qty.
FMLED8WH830PR	8" LED Ceiling Mount, 120V, Non-Dim, 600 lumens, 3000K	0 80083 73256 2	2
FMLED12WH830PR	12" LED Ceiling Mount, 120V, Non-Dim, 1055 lumens, 3000K	0 80083 72876 3	2
FMLED16WH830PR	16" LED Ceiling Mount, 120V, Non-Dim, 1975 lumens, 3000K	0 80083 72878 7	2
FMLED20WH830PR	20" LED Ceiling Mount, 120V, Non-Dim, 2400 lumens, 3000K	0 80083 72357 9	2
FMLED8WH840PR	8" LED Ceiling Mount, 120V, Non-Dim, 600 lumens, 4000K	0 80083 71903 7	8
FMLED12WH840PR	12" LED Ceiling Mount, 120V, Non-Dim, 1055 lumens, 4000K	0 80083 70679 2	4
FMLED16WH840PR	16" LED Ceiling Mount, 120V, Non-Dim, 1975 lumens, 4000K	0 80083 70680 8	4
FMLED20WH840PR	20" LED Ceiling Mount, 120V, Non-Dim, 2400 lumens, 4000K	0 80083 70681 5	2



LED Flat Panel Light

- Equivalent replacement for standard 2x2 fluorescent
- Ideal for office, retail and schools
- Frosted lens provides clean, even illumination



Model #	Description	Unit Carton UPC	Master Carton Qty.
22SP3435RT	2x2 LED Flat Panel Light, 120/277V, Dimmable, 3400 lumens, 3500K	0 80083 75169 3	2



LED Recessed Troffer

- Equivalent replacement for standard fluorescent troffer
- Fits standard T-grid ceiling
- Tool-less entry for easy maintenance
- Ideal for offices, retail spaces and schools




Model #	Description	Unit Carton UPC	Master Carton Qty.
22GRLED1322X2RT	2x2 LED Troffer, 120/277V, Dimmable, 3200 lumens, 3500K	0 80083 72460 4	1
24GRLED1382X4RT	2x4 LED Troffer, 120/277V, Dimmable, 3800 lumens, 3500K	0 80083 69967 4	1



Narrow Residential/Commercial Striplight

- Narrow striplight - 2ft., 4 ft. & 8 ft. /1 & 2 Lamp
- 120V Residential or 120/277V commercial electronic ballast
- Linear disconnect only included on commercial models
- Uses various T8 fluorescent lamps (sold separately)




Model #	Description	Unit Carton UPC
8TSNF232	8 ft., 4-Lamp Narrow Tandem Strip, T8/32W, 120/277V Commercial Ballast	6 23961 08496 6
8TSNF232R	8 ft., 4-Lamp Narrow Tandem Strip, T8/32W, 120V Residential Ballast	0 80083 65930 2
8TSNF254T5HO-LP41	8 ft., 4-Lamp HO Narrow Tandem Strip w/ Lamps, T5HO/54W, 120/277V Commercial Ballast	0 80083 70251 0
SNF232R	4 ft., 2-Lamp Narrow Strip, T8/32W, 120V Residential Ballast	6 23961 08552 9
SNF232	4 ft., 2-Lamp Narrow Strip, T8/32W, 120/277V Commercial Ballast	6 23961 08551 2
SNF232RC	4 ft., 2-Lamp Narrow Strip, T8/32W, 120V Residential Ballast	6 23961 08552 9
SNF232RT	4 ft., 2-Lamp Narrow Strip, T8/32W, 120/277V Commercial Ballast	0 80083 71518 3
SNF132	4 ft., 1-Lamp Narrow Strip, T8/32W, 120/277V Commercial Ballast	6 23961 08550 5
SNF132RC	4 ft., 1-Lamp Narrow Strip, T8/32W, 120V Residential Ballast	0 80083 54247 5
SNF217RB	2 ft., 2-Lamp Narrow Strip, T8/17W, 120V Residential Ballast	0 80083 73105 3
SNF117RB	2 ft., 1-Lamp Narrow Strip, T8/17W, 120V Residential Ballast	0 80083 73101 5



Wide Residential/Commercial Striplight

- Wide striplight - 2ft., 4 ft. & 8 ft. /2 Lamp
- 120V Residential or 120/277V commercial electronic ballast
- Uses various T12 or T8 lamp types (sold separately)



Model #	Description	Unit Carton UPC
SSF296HO4WP	8 ft., 2-Lamp HO Wide Strip, T12HO/110W, 120V Residential Ballast	6 23961 08572 7
SSF296T124WP	8 ft., 2-Lamp Wide Strip, T12/75W, 120V Residential Ballast	0 80083 52056 5
SSF2964WP	8 ft., 2-Lamp Wide Strip T8/59W, 120/277V Commercial Ballast	6 23961 08571 0
8TSSF232	8 ft., 4-Lamp Tandem Standard Strip, T8/32W, Commercial Ballast	0 80083 51844 9
SSF248HO	4 ft., 2-Lamp HO Wide Strip, T12HO/48W, 120V Residential Ballast	6 23961 08573 4
SSF232	4 ft., 2-Lamp Standard Strip, T8/32W, Commercial Ballast	0 80083 51844 9
SSF217R	2 ft., 4-Lamp Wide Striplight, T8/17W, 120V Electronic Ballast	0 80083 71368 4




WSC432R



WSC2U632R

Decorative Softside Cloud Residential

- Tuff-r-Puff™ lens eliminates breakage
- Easy surface mount installation
- 120V Residential electronic ballast
- Uses (4) 32W T8 lamps (WSC432R), (2) 32W T8 lamps (WSC232R) or (2) 32W U6T8 lamps (WSC2U632R) (sold separately)



Model #	Description	Unit Carton UPC
WSC432R	4 ft., 4-Lamp Softside Cloud, T8/32W, 120V Residential Ballast	0 80083 52584 3
WSC232R	4 ft., 2-Lamp Softside Cloud, T8/32W, 120V Residential Ballast	0 80083 52363 4
WSC2U632R	2 ft., 2-U-Lamp Softside Cloud, U6T8/32W, 120V Residential Ballast	6 23961 12642 0



Premium Application Wraparound

- Premium clear prismatic lens
- 120V Residential electronic ballast
- Easy removable diffuser for lamp replacement
- Uses (4) 32W lamps (WS432R) or (2) 32W lamps (WS232R) (sold separately)




Model #	Description	Unit Carton UPC
WS432R	4 ft., 4-Lamp Premium Wrap, T8/32W, 120V Residential Ballast	0 80083 66201 2
WS232R	4 ft., 2-Lamp Premium Wrap, T8/32W, 120V Residential Ballast	0 80083 66200 5



General Application Wraparound

- Clear prismatic lens
- Hook and Latch lens simplifies lamp replacement
- Available with either residential or commercial electronic ballast
- Uses (4) 32W lamps (WN432R), (2) 32W lamps (WN232R) or (2) 17W lamps (WN217R) (sold separately)




Model #	Description	Unit Carton UPC
WN432R	4 ft., 4-Lamp General Wrap, T8/32W, 120V Residential Ballast - Energy Star	0 80083 51649 0
WN432	4 ft., 4-Lamp General Wrap, T8/32W, 120V-277V Commercial Ballast	0 80083 50926 3
WN232R	4 ft., 2-Lamp General Wrap, T8/32W, 120V Residential Ballast - Energy Star	0 80083 51647 6
WN232	4 ft., 2-Lamp General Wrap, T8/32W, 120V-277V Commercial Ballast	0 80083 50924 9
WN217R	2 ft., 2-Lamp General Wrap, T8/17W, 120V Residential Ballast - Energy Star	0 80083 51648 3
WN217	2 ft., 2-Lamp General Wrap, T8/17W, 120V-277V Commercial Ballast	0 80083 52551 5



Residential Troffer

- Integral grid lock clip secures fixture in place
- 120V Residential or 120/277V commercial electronic ballast
- Linear disconnect only included on commercial models
- Uses (4) 32W T8 lamps (2GR8432, 2GR8432L35W328G & 2GR832R), (3) 32W T8 lamps (2GR8332) or (2) U6T8/32W U-lamps (2GR8U6T8R) (sold separately)



Model #	Description	Unit Carton UPC
2GR8432R	4 ft., 4-Lamp T8/32W, 120V Residential Ballast	0 80083 50463 3
2GR8U6T8R	2 ft., 2-U-Lamp U6T8/32W, 120V Residential Ballast	0 80083 50468 8



Commercial Troffer

- Troffer – Commercial 4ft. / 2 Lamp
- Clear prismatic lens
- Flange kit included for installation in hard ceilings
- 120V Residential or 120/277V commercial electronic ballast
- Linear disconnect only included on commercial models
- Uses (2) 32W T8 fluorescent lamps (sold separately)



Model #	Description	Unit Carton UPC
2GR8332	4 ft., 3-Lamp T8/32W, 120/277V Commercial Ballast	0 80083 50466 4
2GR8432	4 ft., 4-Lamp T8/32W, 120/277V Commercial Ballast	0 80083 50464 0
2GR8432L35W218G	4 ft., 4-Lamp T8/32W, 120/277V Commercial Ballast, Lamps and Whip Included	0 80083 50465 7



Residential/Commercial Troffer

- Troffer – Commercial 4ft. / 2 Lamp
- Clear prismatic lens
- Flange kit included for installation in hard ceilings
- 120V Residential or 120/277V commercial electronic ballast
- Linear disconnect only included on commercial models
- Uses (2) 32W T8 fluorescent lamps (sold separately)



Model #	Description	Unit Carton UPC
FC8232	4 ft., 2-Lamp T8/32W, 120V Residential Ballast	0 80083 50467 1



Parabolic Commercial Troffer

- 3 in. Deep silver louvers with 18 cells
- Integral grid lock clip secures fixture in place
- 120/277V Commercial electronic ballast
- Uses (3) 32W T8 fluorescent lamps (sold separately)




Model #	Description	Unit Carton UPC
2EP332	4 ft., 3-Lamp T8/32W, 120/277V Commercial Ballast	0 80083 50469 5



T8 Fluorescent Gridlight

- Equipped with 120V residential electronic ballast
- 0° F cool start standard operating temperature
- Uniquely designed ceiling grid clips for easy installation
- Tool-less ballast access
- White enamel finish




Model #	Description	Unit Carton UPC
GL217R	24" T8, 2 Lamp Gridlight, 120V, for use with 2 - 17W lamps	0 80083 70234 3
GL232R	48" T8, 2 Lamp Gridlight, 120V, for use with 2 - 32W lamps	0 80083 70235 0
GL432R	48" T8, 2 Lamp Gridlight, 120V, for use with 4 - 32W lamps	0 80083 70246 6



Industrial Lighting

- Narrow reflectors for high mounting heights
- Ideal for warehouses, pole barns and any other high ceiling applications



Model #	Description	Unit Carton UPC
ICF296HOCWE12	8 ft. 2 Lamp High Output Low Bay Industrial, 120V, (2) T12HO 110W	0 80083 70248 0
ICF248HOCWE12	4 ft. 2 Lamp High Output Low Bay Industrial, 120V, (2) T12HO 60W	0 80083 70247 3
ICF232RC	4 ft. 2 Lamp Low Bay Industrial, 120V, (2) T8 32W	0 80083 57366 0
HBL632RT	4 ft. 6 Lamp Fluorescent High Bay, 120/277V, (6) T8 32W	0 80083 61576 6




Exit and Emergency Lighting

The ALL-PRO Exit and Emergency series offers a full line of LED products. Key features include a no maintenance nickel cadmium battery, long life LED's, and proprietary optical designs that improve spacings to reduce hardware cost. The emergency light and combo exit have a reduced product footprint to both improve the aesthetic and reduce the amount of shelf space required. All products are UL 924 listed and carry a 5 year warranty.



APC, APCH Series

- Bright white, long-life LED heads
- High power combo capable of running two additional LED remote heads
- Dual voltage input 120/277 VAC, 60Hz; UL 924
- Single and double face included
- Sealed nickel cadmium battery included
- Wall, ceiling or end mountable
- Operating temperature range 10°C to 40°C
- 5 Year limited warranty

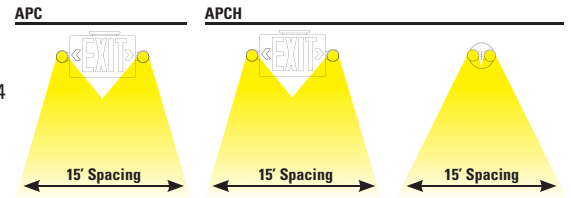

Model #	Description	Unit Carton UPC	Master Carton Qty.
APC7R	Self-Powered with LED Heads - Red lettering	0 80083 56655 6	8
APC7G	Self-Powered with LED Heads - Green lettering	0 80083 56716 4	8
APCH7R	Self-Powered with LED Heads, High Power with Remote Capacity - Red lettering	0 80083 56717 1	8
APCH7G	Self-Powered with LED Heads, High Power with Remote Capacity - Green lettering	0 80083 56718 8	6



APX Series

- Long-life LED lamps provide uniform diffused illumination
- Dual voltage input 120/277 VAC, 60Hz; UL 924
- Single and double face included
- Sealed nickel cadmium battery included (APX7)
- Wall, ceiling or end mountable
- Universal J-box mounting pattern
- Operating temperature range 10°C to 40°C
- 5 Year limited warranty

Model #	Description	Unit Carton UPC	Master Carton Qty.
APX6R	AC only LED - Red lettering	0 80083 56651 8	6
APX6G	AC only LED - Green lettering	0 80083 56652 5	6
APX7R	Self-Powered with LED - Red lettering	0 80083 56653 2	6
APX7G	Self-Powered with LED - Green lettering	0 80083 56654 9	6



APXEL Series


- LED source
- Nickel cadmium battery
- Red or green letters
- Mirror background edge lit exit
- UL 924, 120/277 VAC
- 5 Year limited warranty

Model #	Description	Unit Carton UPC	Master Carton Qty.
APXEL61R	AC only, Red Lettering, Single Sided	0 80083 63524 5	6
APXEL61G	AC only, Green Lettering, Single Sided	0 80083 63548 1	6
APXEL62R	AC only, Red Lettering, Double Sided	0 80083 63552 8	6
APXEL62G	AC only, Green Lettering, Double Sided	0 80083 63556 6	6
APXEL71R	Self Powered, Red Lettering, Single Sided	0 80083 63546 7	6
APXEL71G	Self Powered, Green Lettering, Single Sided	0 80083 63550 4	6
APXEL72R	Self Powered, Red Lettering, Double Sided	0 80083 63554 2	6
APXEL72G	Self Powered, Green Lettering, Double Sided	0 80083 63558 0	6



APEL Series

- Bright white, long-life LED heads
- Dual voltage input 120/240/277 VAC, 60 Hz; UL 924
- Sealed nickel cadmium battery included
- Wall or ceiling mountable
- Operating temperature range of 10°C to 40°C
- 5 Year limited warranty




Model #	Description	Unit Carton UPC	Master Carton Qty.
APEL	LED Emergency Light	0 80083 56650 1	8



APWR Series

- Bright white, long-life LED heads
- Lamp heads adjust 80° from vertical with 358° rotation
- Single and double head option
- Wet location listed; UL 924
- 5 Year limited warranty




Model #	Description	Unit Carton UPC	Master Carton Qty.
APWR1	Single Head Remote, Wet Location Listed	0 80083 60856 0	30
APWR2	Double Head Remote, Wet Location Listed	0 80083 60858 4	30



LEMRO Emergency Light

- Rotatable LED emergency heads
- AccuLED optic enables 25' coverage
- Nickel cadmium battery
- UL 924, 120/277 VAC
- 5 Year limited warranty



Model #	Description	Unit Carton UPC	Master Carton Qty.
LEMRO	LED Emergency Light	0 80083 68956 9	6



LED Open Sign

- Durable, light-weight construction
- Maintenance-free LED technology
- Multiple mounting options



Model #	Description	Unit Carton UPC	Master Carton Qty.
OPNLED	Red/Blue LED Open Sign	0 80083 71942 6	2



HALO[®] Undercabinet Lighting

HALO[®] undercabinet lighting products offer unmatched flexibility, versatility and performance.



HU1018D930PR



HU1018D930MBR

Halo LED Undercabinet Kit

- Sleek 3/4" profile
- Up to 615 lumens
- 3000K color temperature
- 90 CRI
- 50,000 hours with 70% maintained lumens
- Direct wire or plug-in
- Available in 9", 18", 24" and 36" lengths
- Dimming down to 5% using a Triac or ELV dimmer
- White and matte black finish
- Kit includes 6" linkable connector and 4' power cord
- Ideal for task, accent, office, cove, utility, and display lighting
- Damp Location Listed
- Five-year Limited Warranty

Model #	Description	Unit Carton UPC	Master Carton Qty.
HU1009D930PR	9" Dimmable Fixture, 3000K, 192 lumens, White	0 80083 74744 3	4
HU1018D930PR	18" Dimmable Fixture, 3000K, 427 lumens, White	0 80083 74826 6	4
HU1024D930PR	24" Dimmable Fixture, 3000K, 615 lumens, White	0 80083 74828 0	4
HU1036D930PR	36" Dimmable Fixture, 3000K, 859 lumens, White	0 80083 74830 3	4
HU1009D930MBR	9" Dimmable Fixture, 3000K, 192 lumens, Black	0 80083 74732 7	4
HU1018D930MBR	18" Dimmable Fixture, 3000K, 427 lumens, Black	0 80083 74824 1	4
HU1024D930MBR	24" Dimmable Fixture, 3000K, 615 lumens, Black	0 80083 74826 5	4
HU1036D930MBR	36" Dimmable Fixture, 3000K, 859 lumens, Black	0 80083 74838 9	4



Bulbs & Accessories

Replacement Accessories

Offering replacement items such as bulbs, lens, springs, hooks, light sensors and alternate mounting options to continue the use of your Outdoor Security, Ambient and HALO® products.



EA24

- 24 in. aluminum arm with hardware – 2 in. diameter
- Fits most Dusk to Dawn security lights: models AL650IFL, AL70MH, AL100MH E-70-H, N150HNCL and similar fixtures by other manufacturers

Model #	Description	Unit Carton UPC	Master Carton Qty.
EA24	Extension arm	0 44427 00071 7	1



SL4000

- Automatic light sensor
- Turns lights ON at dusk and OFF at dawn
- Raintight design
- 300 Watt capacity
- 120 Volts

Model #	Description	Unit Carton UPC	Master Carton Qty.
SL4000	Button Type Photo Sensor	0 44427 00069 4	1



SL3120

- Twist-lock light sensor
- Turns lights ON at dusk and OFF at dawn
- 1000 Watt capacity
- 120 Volts
- Replacement sensor for the AL3150LPC series, AL5550LPC series

Model #	Description	Unit Carton UPC	Master Carton Qty.
SL3120	Twist & Lock Photo Sensor	0 44427 53120 4	1



Replacement Entry and Patio Lens

- Replacement lens fits FE13PC/FE13PCW Dusk to Dawn entry and patio light
- Easy to install twist-on design
- High-impact design

**800-0411 Replacement lens for fixture with 4-pin fluorescent lamp*

**LENS-FE13 replacement lens for fixture with GU24 fluorescent lamp*

Model #	Description	Unit Carton UPC	Master Carton Qty.
800-0411	Replacement Lens - Clear	0 80083 6267 3	4
LENS-FE13	Replacement Lens - Frosted	0 80083 70732 4	4



Wire Hook and Chain

- 36" Wire hook and chain
- Fits Metalux® strips

Model #	Description	Unit Carton UPC	Master Carton Qty.
WHC36RT	36 in., Wire Hook and Chain	0 80083 60115 8	6



2' x 4' Lens



2' x 2' Lens

2 ft. x 4 ft. /2 ft. x 2 ft. Replacement Troffer Lens

- Replacement lens for 2 ft. x 4 ft. and 2 ft. x 2 ft. Metalux® recessed troffer
- Replacement lens fit Metalux® troffers only

Model #	Description	Unit Carton UPC	Master Carton Qty.
R-A12-242G-U	2 ft. x 4 ft. Replacement Troffer Lens	6 62401 72364 5	10
R-A12-222G-U	2 ft. x 2 ft. Replacement Troffer Lens	6 62401 72363 8	20



HALO® Trim Replacement Springs

- Set of 4 coil replacement springs
- For use with 301, 310, 401 and 426 trims in the H7 recessed housing family

Model #	Description	Unit Carton UPC	Master Carton Qty.
RS7H	Halo® Trim Replacement Springs, set of 4	6 6240061018 2	2



LED Flood Adapter Kit

- Fits small and large single and twin head LED fixtures
- UL approved for use with 4" round surface mount fixture boxes and with .5" nominal electrical rigid metal conduit
- Bronze or white finish

Model #	Description	Unit Carton UPC	Master Carton Qty.
FLD-KIT-SFCGND	LED Flood Adapter Kit - Bronze	0 80083 69960 5	6
FLD-KIT-SFCGNDW	LED Flood Adapter Kit - White	0 80083 69961 2	6



PLC13W

- Replacement for FE13PC/FE13PCW
- 4-Pin fluorescent lamp for electronic ballasts
- More light for less energy than incandescent floodlights
- White light color

Model #	Description	Unit Carton UPC	Master Carton Qty.
PLC13W	13W CFL - Replacement for FE13PC/W	0 44427 45034 5	4



PLC26W

- Replacement for FW26PCI and FW26PCIW
- 4-Pin fluorescent lamp for electronic ballasts

Model #	Description	Unit Carton UPC	Master Carton Qty.
PLC26W	26W CFL, 4-Pin	0 80083 70733 1	4



13 Watt GU24 CFL Bulb

- Replacement for FE13PC/FE13PCW with GU24 base socket
- Initial light output (brightness): 900 lumens

Model #	Description	Unit Carton UPC	Master Carton Qty.
FE13-GU24	13W CFL - Replacement for FE13PC/W	0 80083 73468 9	4



65 Watt Fluorescent Bulb

- Replacement for AL650IFL
- This lamp is a replacement bulb only and does not have a ballast
- This bulb will fail if used in any fixture not designed for use with a 65 Watt fluorescent bulb
- White light color
- Mogul base
- Initial light output (brightness): 4000 lumens

Model #	Description	Unit Carton UPC	Master Carton Qty.
B65FMOG	65W CFL - Replacement for AL650IFL	0 80083 51027 6	4



Product Index

Product Index

2EP332	59	310TBZ	49	5010	42
2GR8U6T8R	58	310W	49	5010W	42
2GR8332	58	353SN	50	5020BL	42
2GR8432	58	353TBZ	50	5020H	42
2GR8432L35W218G	58	410P	50	5020P	42
2GR8432R	58	410W	50	5020RG	42
2SLSTP1040DD-120V	54	498P	50	5020SC	42
2SLSTP2040DD-120V	54	498W	50	5020SN	42
2WPLD2040R	55	592H-R	35	5020TBZ	42
4CWPLD4040C	55	593SNB-R	35	5054PS	42
4SHPLD2240R	54	593WB-R	35	5054SNS	42
4SHPLD3240R	54	594WB-R	35	5054TBZS	42
4SLSTP2040DD-UNV	54	692H-R	35	5070P	43
4SLSTP4040DD-120V	54	693SNB-R	35	5070SN	43
4SLSTP4040DD-UNV	54	693WB-R	35	5070TBZ	43
4WPLD2340R	55	694WB-R	35	5110BB	43
4WPLD3140R9	55	800-0411	66	5110WB	43
8TSNF232	56	951PS	38	5150WH	43
8TSNF232R	56	951SNS	38	5165WH	43
8TSNF254T5HO-LP41	56	951TBZS	38	5186WH	43
8TSSF232	56	953P	38	6100BB	51
22GRLED1322X2RT	56	953SN	38	6100WB	51
22SP3435RT	55	953TBZ	38	6106SC	51
24GRLED1382X4RT	56	953W	38	6109BB	51
30PAT	48	993P	38	6109WB	51
30SBAT	48	993SN	38	6110BB	51
30SNAT	48	993TBZ	38	6110WB	51
30TBZAT	48	993W	38	6125WB	52
30WATH	48	998P	38	6130WH	52
70P	48	998SN	38	6150WH	52
70PS	48	998TBZ	38	AL3050LPCBZ	22
78P	48	999H	39	AL3050LPCGY	22
78PAT	48	999MB	39	AL3150LPCBZ	21
78SN	48	999P	39	AL3150LPCGY	21
78TBZ	48	999RG	39	AL5500LPCIBZ	22
170P	48	999SN	39	AL5500LPCIGY	22
170PS	48	999TBZ	39	AL5550LPCBZ	21
172PS	49	999W	39	AL5550LPCGY	21
172SNS	49	4001BB	39	AL6501FL	22
172TBZS	49	4001WB	39	APC7G	61
270PS	48	4002WH	39	APC7R	61
272PS	49	4003SC	39	APCH7G	61
300P	49	4055WH	39	APCH7R	61
300SN	49	5000P	41	APEL	62
300TBZ	49	5000SN	41	APWR1	62
301P	49	5000TBZ	41	APWR2	62
301SN	49	5001MB	42	APX6G	61
301TBZ	49	5001P	42	APX6R	61
310P	49	5001SN	42	APX7G	61
310SN	49	5001TBZ	42	APX7R	61

APXEL61G	61	FSL2850LPCW	19	HU1009D930PR	64
APXEL61R	61	FSL2850LW	15	HU1018D930MBR	64
APXEL62G	61	FSS1530L	15	HU1018D930PR	64
APXEL62R	61	FSS1530LPCES	20	HU1024D930MBR	64
APXEL71G	61	FSS1530LPCW	20	HU1024D930PR	64
APXEL71R	61	FSS1530LW	15	HU1036D930MBR	64
APXEL72G	61	FT1850LPC	19	HU1036D930PR	64
APXEL72R	61	FTR1740L	15	ICF232RC	59
B65FMOG	68	FTR1740LPC	20	ICF248HOCWE12	59
E4ICATSB	37	FTR1740LPCW	20	ICF296HOCWE12	59
E4RTATSB	37	FTR1740LW	15	LED110	27
E5ICAT	41	FW26PCI	24	LED120	27
E5RICAT	41	FW26PCWI	24	LED125B	26
E7ICAT	45	GL217R	59	LED125C	26
E7RICAT	45	GL232R	59	LED140	26
E27ICAT	46	GL432R	59	LED140C	26
E27RICAT	46	GT100MH	23	LED150	27
EA24	66	H5ICAT	41	LED150C	27
FC8232	58	H5RICAT	41	LED225M	26
FE13-GU24	68	H5RT	41	LEMRO	62
FE13PC	23	H5T	41	LENS-FE13	66
FE13PCW	23	H7ICAT	45	LT460WH6930R	33
FE0650LPC	21	H7ICAT6100BB-6PK	52	LT560WH6930R	33
FE0650LPCW	21	H7ICT	46	ML5606827	35
FE1435LPC	21	H7RICT	45	ML5606830	35
FE1450LPC	21	H7RICT	46	ML5606927	35
FES0650LPC	20	H7RT	46	ML5606930	35
FES0650LPCW	20	H7T	46	ML5609830	35
FFL23PC-T24	24	H27ICAT	47	ML5609930	35
FFL23PCW-T24	24	H27RICAT	47	MS34	9
FLD-KIT-SFCGND	67	H27RT	47	MS34W	9
FLD-KIT-SFCGNDW	67	H27T	47	MS100PG	9
FMLED8WH830PR	55	H47ICAT	47	MS180	8
FMLED8WH840PR	55	H47ICT	47	MS180W	8
FMLED12WH830PR	55	H47T	47	MS185	8
FMLED12WH840PR	55	H99ICAT	37	MS185D	7
FMLED16WH830PR	55	H99RTAT	37	MS185DW	7
FMLED16WH840PR	55	H99TAT	37	MS185R	8
FMLED20WH830PR	55	H550ICAT	31	MS185RW	8
FMLED20WH840PR	55	H550RICAT	31	MS185W	8
FNF18PC	24	H750ICAT	31	MS245R	7
FNF18PCW	24	H750RICAT	31	MS245RW	7
FNF26PC	24	H995ICAT	31	MS276RD	7
FNF26PCW	24	H995RICAT	31	MS276RDW	7
FSL2030L	15	H2750ICAT	31	MSLED180	11
FSL2030LPC	19	HBL632RT	59	MSLED180W	11
FSL2030LPCW	19	HL612930456WKIT	31	MSLED300	12
FSL2030LW	15	HS8	9	MSLED300W	12
FSL2850L	15	HU1009D930MBR	64	MSS1301LW	12
FSL2850LPC	19			MSS11315LES	6

Product Index

MST18R17L	6	REV32750MW	4	SNF117RB	56
MST18R17LW	6	RL4TRMSNR	32	SNF132	56
MST800LW	11	RL4TRMTBZR	32	SNF132RC	56
MST1301LW	12	RL4TRMWHR	32	SNF217RB	56
MST1850L	6	RL56TRMSNR	32	SNF232	56
MST1850LW	6	RL56TRMTBZR	32	SNF232R	56
MST18920DLC	5	RL56TRMWHR	32	SNF232RC	56
MST18920L	5	RL460WH827	32	SNF232RT	56
MST18920LW	5	RL460WH830	32	SSF217R	56
MST27920LES	5	RL460WH835	32	SSF232	56
MST27920LWES	5	RL460WH840	32	SSF248HO	56
MT125	16	RL460WH927	32	SSF296HO4WP	56
MT125W	16	RL460WH930	32	SSF296T124WP	56
OPNLED	62	RL460WH935	32	SSF2964WP	56
PFL23PCW-T24	23	RL460WH940	32	VT100G	16
PLC13W	68	RL560WH6827R	32	VT1730	16
PLC26W	68	RL560WH6835R	32	VT1730I	16
PWT250BR	16	RL560WH6840R	32	WHC36RT	67
PWT250PC	23	RL560WH6927R	32	WL2540LP	28
PWT250PCW	23	RL560WH6930R	32	WL2540LST	28
PWT250WH	16	RL560WH6935R	32	WLT5040LST	28
R-A12-222G-U	67	RL560WH6940R	32	WN217	57
R-A12-242G-U	67	RL560WH9835R	32	WN217R	57
RA406927WHR	34	RL560WH9935R	32	WN232	57
RA406930WHR	34	RL560WH-R	32	WN232R	57
RA5606927WHR	34	RS7H	67	WN432	57
RA5606930WHR	34	SL3120	66	WN432R	57
REV235F	14	SL4000	66	WP1050L	14
REV235FW	14	SLD4TRMSNR	34	WP1050LPC	18
REV235PC	18	SLD4TRMTBZR	34	WP1135LPC	22
REV235PCW	18	SLD4TRMWHR	34	WP1150LPC	22
REV250F	14	SLD6TRMSNR	34	WP1850L	14
REV250FW	14	SLD6TRMTBZR	34	WP1850LPC	18
REV250PC	18	SLD6TRMWHR	34	WPFLD-TRN	14, 18
REV250PCW	18	SLD405827WHR	34	WS232R	57
REV335F	14	SLD405830WHR	34	WS432R	57
REV335FW	14	SLD405835WHR	34	WSC2U632R	57
REV335PC	18	SLD405840WHR	34	WSC232R	57
REV335PCW	18	SLD405927WHR	34	WSC432R	57
REV350F	14	SLD405930WHR	34		
REV350FW	14	SLD405935WHR	34		
REV350PC	18	SLD405940WHR	34		
REV350PCW	18	SLD606827WHR	34		
REV21835M	4	SLD606830WHR	34		
REV21835MW	4	SLD606835WHR	34		
REV21850M	4	SLD606840WHR	34		
REV21850MW	4	SLD606927WHR	34		
REV32735M	4	SLD606930WHR	34		
REV32735MW	4	SLD606935WHR	34		
REV32750M	4	SLD606940WHR	34		

**Our Lighting
Product Lines**

Halo
Halo Commercial
Portfolio
Iris
RSA
Metalux
Corelite
Neo-Ray
Fail-Safe
MWS
Ametrix
Shaper
io
Lumark
McGraw-Edison
Invue
Lumière
Streetworks
AtLite
Sure-Lites
Ephesus

**Our Controls
Product Lines**

Greengate
iLumin
Zero 88
Fifth Light Technology
iLight (International Only)

Eaton
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.eaton.com/lighting

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2016 Eaton
All Rights Reserved
Printed in USA
Publication No. CA502002EN
April 2016

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.

Product availability, specifications,
and compliances are subject to
change without notice.



Powering Business Worldwide