



SPECIFICATIONS			
CONTACT CARRIER MATERIAL	NYLON OR TPU		
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
RATED CURRENT [A]	4.0 A		
RATED VOLTAGE [V]	125 VAC/VDC		
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW		
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS [AWG]	3x24 AWG		
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67		

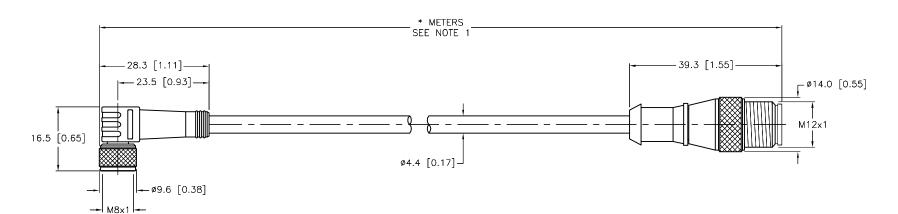



CABLE LENGTH	TOLERANCE*			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK			MINNEAPOLI	MPUS DRIVE S, MN 55441
2. 3. 4.		INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RCI	(763) 5	544–7769 553–7300 553–0708 fax turck.us
MATERIAL		DRFT CBM	DATE 06/22/00	DESCRIPTION	3M-*-RS 4T	
	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	F IV VV	JM- 1-1/3 41	
FINISH	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
TINISH	CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	ER [INCH]			С
†	IN CHIMATION	DO NOT SCALE	THIS DRAWING	FILE: 777000292	5	SHEET 1 OF

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

I					
I	O	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971
I	REV	DESCRIPTION	BY	DATE	ECO NO.