


Accessories for Fieldbus Systems


Bus termination resistor

RSE57-TR2

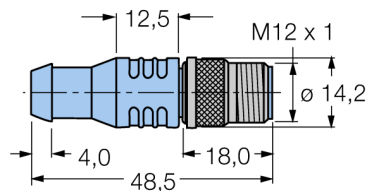

- Type: M12 x 1 male, 5-pin
- For use in CAN (DeviceNet™, CANopen) applications
- Rated voltage: 10...30 VDC (max. 7.6 VDC on pins with resistor)
- Internal resistor 120 Ω, 1/2 W
- Protection class: NEMA 1, 3, 4, 6P and IEC IP68, IP69K
- Temperature range: -40...+80 °C

Pin Assignment

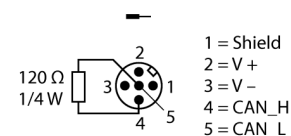

Type designation

Ident-No.

Ident-No (TUSA)

RSE57-TR2

6602308

U2251-1

Connector A side

Number of Pins

Contacts

Contact carriers

Grip

Coupling nut/screw

Protection class

Male, M12, Straight

5

Metal, CuZn, Gold-plated

Plastic, TPU, Blue

Plastic, TPU, blue

Brass, CuZn, nickel-plated

IP68, IP69K, (screwed together)

Rated Voltage

30 V

Ambient temperature

Stationary

-40...+80°C