

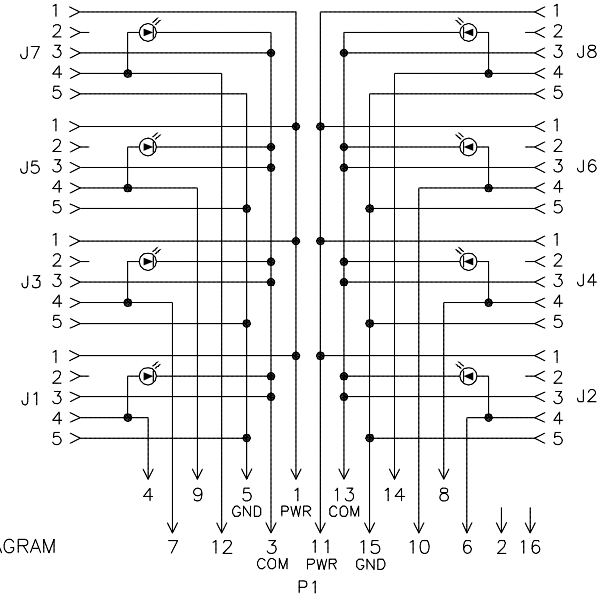


SPECIFICATIONS	
HOUSING MATERIAL/COLOR	NYLON/YELLOW
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
CONTACT CARRIERS/COLOR	NYLON/BLACK (J1-J8)
RECEPTAL/PLATING	BRASS/NICKEL
SEALING RING	VITON O-RING
OPERATING CURRENT	4 A/PORT, 5 A TOTAL
OPERATING CURRENT (PER LED)	FOR PNP SENSOR OUTPUT
OPERATING VOLTAGE	10-48 VDC
TEMPERATURE RANGE	-30°C to +90°C (-22°F to +196°F)
PROTECTION CLASS	IEC IP67, ONLY WHEN ALL RECEPTALS ARE COVERED WITH PLUGS OR CONNECTORS.

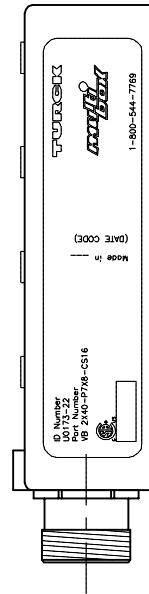

WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

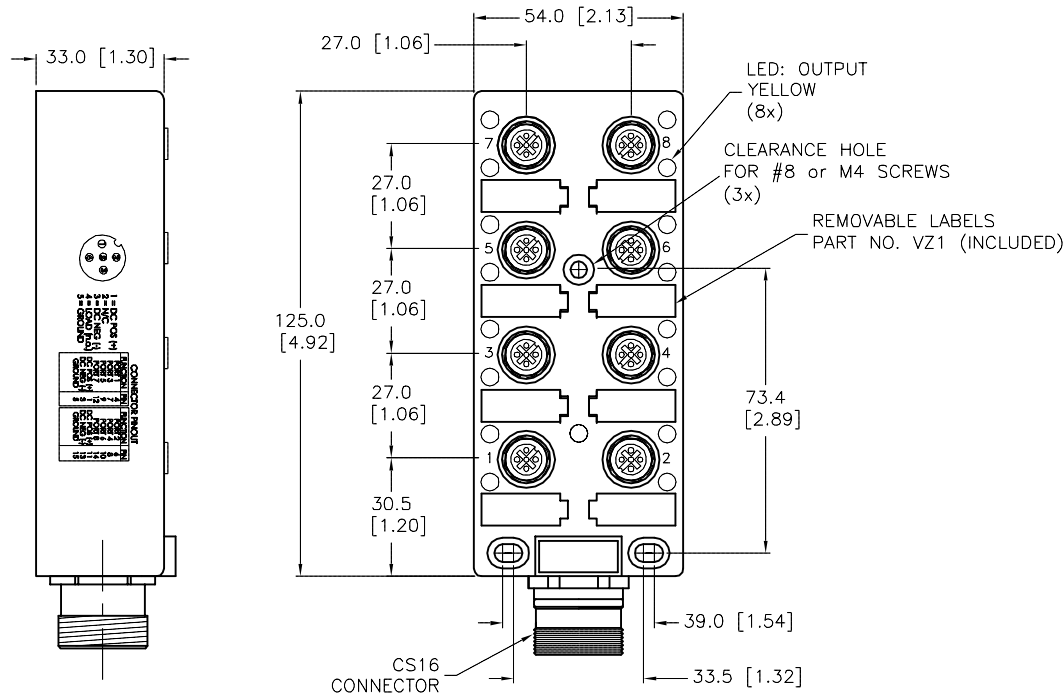

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL PA 6 GF 30	DRFT RJP APVD	DATE 1/3/96 SCALE 1=2.0	DESCRIPTION VB 2X40-P7X8-CS16	
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U0173-22	REV H
H REV	UPDATED CLOSURE CAPS DESCRIPTION	TV BY	09/14/15 DATE	48811 ECO NO.	DO NOT SCALE THIS DRAWING FILE: U0173-22 SHEET 1 OF 1