

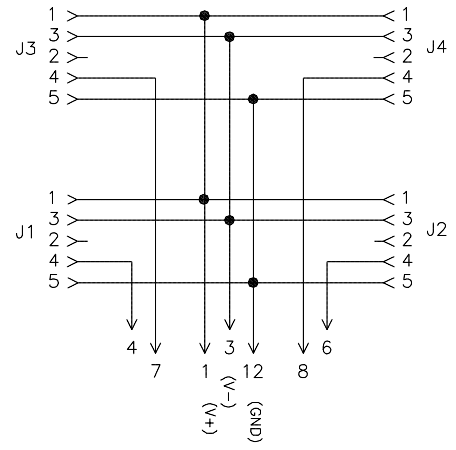


SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
HOUSING MATERIAL/COLOR	NYLON/YELLOW
O-RING MATERIAL	VITON
RATED CURRENT [A]	4 AMPS PER PORT, 9 AMPS TOTAL
RATED VOLTAGE [V]	10-48 V
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IP67

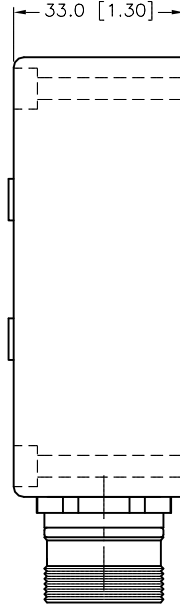


WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

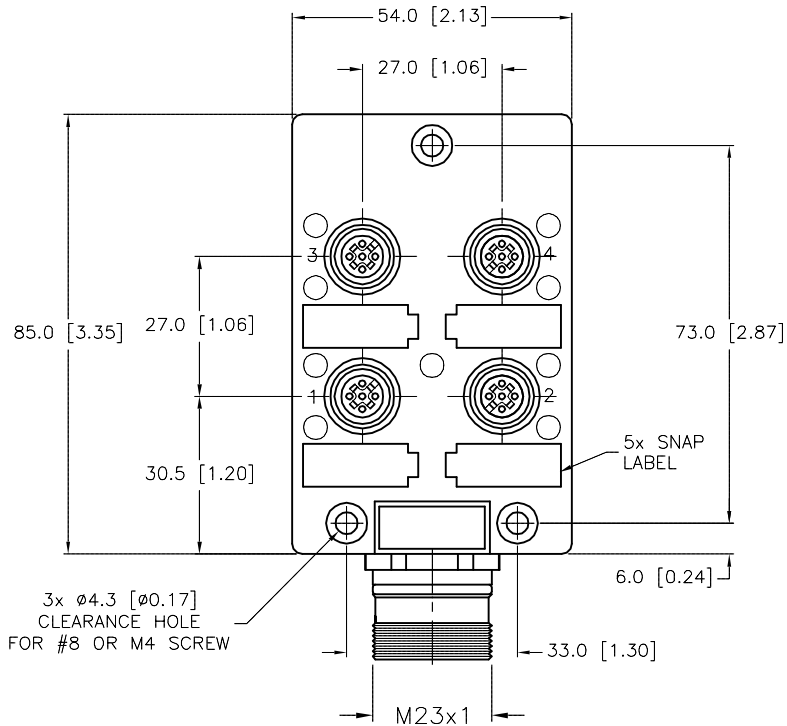

CLOSURE CAPS
2x INCLUDED



RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.			DRFT	SWC	DATE	01/4/94	DESCRIPTION VB 40-CS12
2.			APVD		SCALE	1=1.5	
3.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV F
4.			MILLIMETER [INCH]		U7024		
MATERIAL	SEE SPECIFICATIONS	DO NOT SCALE THIS DRAWING		FILE: U7024		SHEET 1 OF 1	
FINISH	SEE SPECIFICATIONS						

F	UPDATED CLOSURE CAPS	TV	09/16/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.