



| SPECIFICATIONS | |
|-------------------------------|---|
| CABLE DATA | |
| MATING PLUG CABLE | CK 12-11-*, SEE NOTE 1 |
| MATERIAL | |
| HOUSING/COLOR | NYLON/YELLOW |
| CONTACT CARRIERS/COLOR | NYLON/BLACK (J1-J8), TPU/YELLOW (P1) |
| CONTACTS MATERIAL/PLATING | BRASS/GOLD(J1-J8) |
| DISCONNECT MATERIAL/PLATING | BRASS/NICKEL (P1) |
| ELECTRICAL DATA | |
| OPERATING VOLTAGE | 10-48 VDC |
| LED FUNCTION | FOR PNP SENSOR OUTPUT |
| MAXIMUM CURRENT | 4 AMPS PER PORT, 5 AMPS TOTAL |
| MECHANICAL DATA | |
| PROTECTION CLASS TO DIN 40050 | IP 67 - ONLY WITH CK-12 CORDSET AND ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED |
| OPERATION TEMPERATURE RANGE | -30°C to +90°C (-25°F to +194°F) |

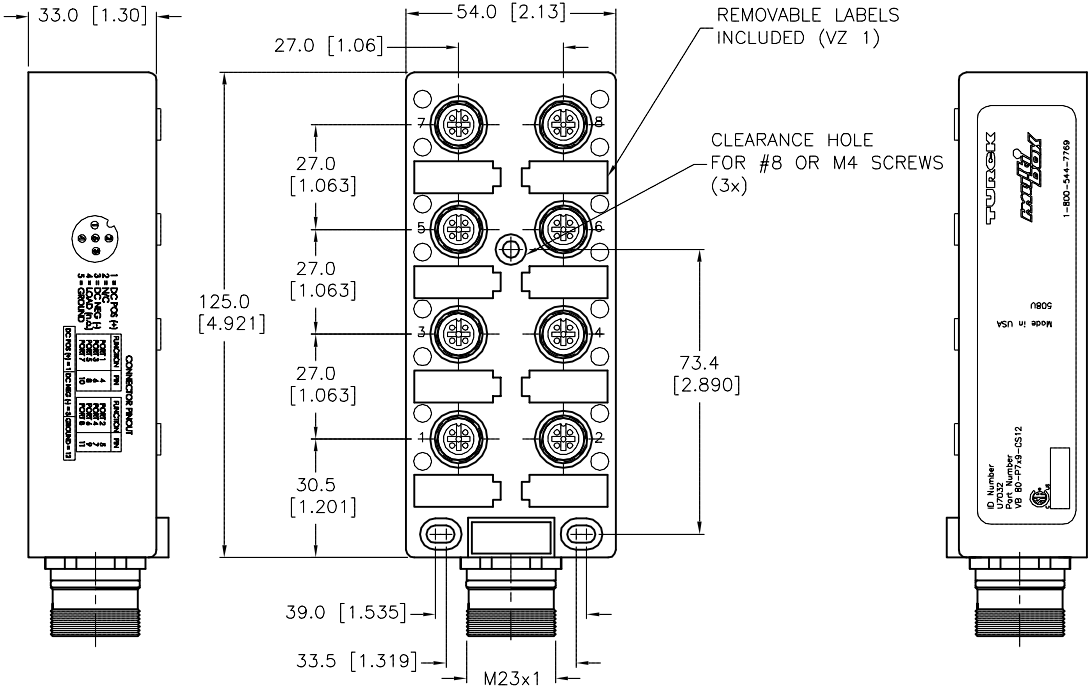

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. USE MATING CORDSET CK 12-11-*(SOLD SEPARATELY).

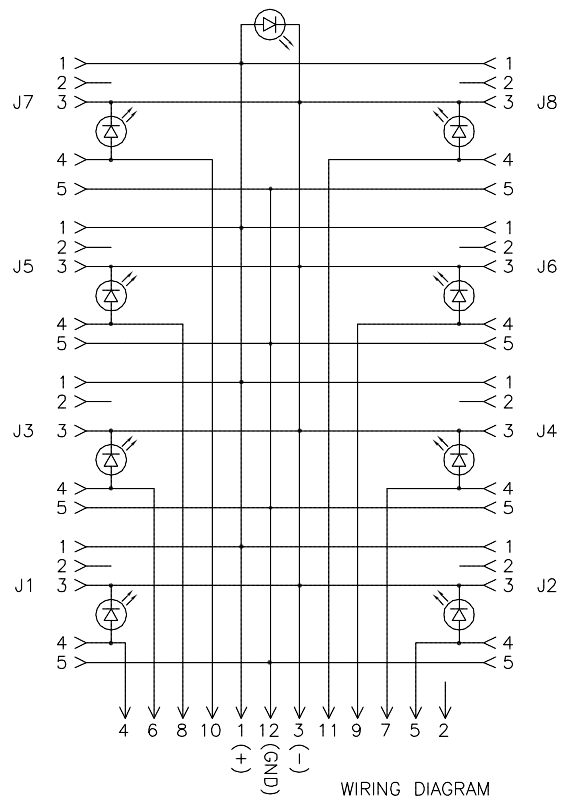

| | | | | | |
|---|---|--|---|---|-------------|
| RELATED DOCUMENTS 1. 2. 3. 4. | 3RD ANGLE PROJECTION | THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. | | 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com | |
| | | DRFT | RJP | DATE | 12/08/94 |
| MATERIAL SEE SPECIFICATIONS | ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY | APVD | | SCALE | 1=2.0 |
| FINISH SEE SPECIFICATIONS | | CONTACT TURCK FOR MORE INFORMATION | UNIT OF MEASUREMENT MILLIMETER [INCH] | | |
| | | | DO NOT SCALE THIS DRAWING | | |
| K UPDATED CLOSURE CAPS | | TV 09/16/15 | | 48811 | |
| REV | DESCRIPTION | BY | DATE | ECO NO. | FILE: U7032 |

| | | | | |
|-----|----------------------|----|----------|---------|
| K | UPDATED CLOSURE CAPS | TV | 09/16/15 | 48811 |
| REV | DESCRIPTION | BY | DATE | ECO NO. |