



MECHANICAL

- Retrofits 2ft fluorescent luminaires to LED
- Fast and easy to install
- No redesign or revised layout needed

OPTICAL

- Diffuser provides broad, even light distribution
- Three CCT options with CRI of 82
- Binning maintains color accuracy and consistency

KIT INCLUDES

- LRK22 includes (2) and LRK32 includes (3) EVERLINE® LED lensed modules/light bars
- LED EVERLINE driver (0-10V dimming)
- Wiring, mounting hardware, installation instructions

ELECTRICAL

- Available as 120-277VAC or 347VAC
- Equipped with 0-10V dimmable LED driver to 1%
- LED system efficacies exceeding 100 LPW

CERTIFICATIONS

- UL Classified UL1598C (US & Canada)
- FCC Title 47 CFR, Part 15, Class A
- RoHS Compliant, contains no lead or mercury
- Select models (identified below) are DesignLights Consortium™ qualified. Consult www.designlights.org/QPL for details.

WARRANTY

- Seven (7) year limited warranty

ORDERING GUIDE

EXAMPLE: LRK32-30L840-U³

Series	Lamp & Length	Nominal Lumens ¹	CRI (nom.)	Color Temp.	Voltage ²
LRK = LED Linear Retrofit Kit	22 = 2L / 2ft 32 = 3L / 2ft	23L = 2,300	8 = 82 (nom.)	35 = 3500K	U = 120-277VAC 347 = 347VAC
		30L = 3,000		40 = 4000K	
		45L ⁴ = 4,500		50 = 5000K	

ORDERING NOTES

1. 23L & 30L lumen packages available for 2-lamp kits. 30L & 45L lumen packages available for 3-lamp kits.
2. 23L is not available in 347V.
3. Append catalog number with 00I for single kit package (2 or 3 LED Lensed Modules & 1 LED Driver) or 10C for 10 kit package (LRK22 only) or 06C for 6 kit package (LRK32 only).
4. LRK-32-45L8xx-U rated at max 35°C.

DesignLights Consortium™ QPL Listed Products

Model Number	Model Number	Model Number	Model Number
LRK22-23L835-U	LRK22-30L850-U	LRK32-45L840-U	LRK32-30L840-347
LRK22-23L840-U	LRK32-30L835-U	LRK32-45L850-U	LRK32-30L850-347
LRK22-23L850-U	LRK32-30L840-U	LRK22-30L840-347	LRK32-45L835-347
LRK22-30L835-U	LRK32-30L850-U	LRK22-30L850-347	LRK32-45L840-347
LRK22-30L840-U	LRK32-45L835-U	LRK32-30L835-347	LRK32-45L850-347



PERFORMANCE DATA									
	Lumen Package	Input Power (watts)	Input Current			LRK System		Reference Luminaire	
			@ 120V	@ 277V	@ 347V	Delivered Lm (nom.)	LPW	Delivered Lm (nom.)	LPW
LRK22	23L	21.6	0.18 A	0.09 A	N/A	2441	114	2011	93
LRK22	30L	31.4	0.26 A	0.12 A	0.09 A	3361	107	2784	89
LRK32	30L	31.7	0.26 A	0.12 A	0.09 A	3515	111	2959	93
LRK32	45L	52.9	0.44 A	0.20 A	0.15 A	5568	105	4691	89

- Performance data provided at 4000K, multiply lumens and LPW by 1.04 for 5000K or 0.97 for 3500K.
- Reference Luminaire testing conducted by NVLAP accredited lab in accordance with IESNA LM-79.
- Consult factory for photometry.
- Application and performance information is subject to change without notification.

OPERATING DATA	
L85 Lumen Maintenance:	>60,000 hrs. at 40°C
L70 Lumen Maintenance:*	>140,000 hrs. at 40°C
Min. Starting Temp.:	-30°C (-22°F)
Sound Rating:	Class A
EMI/RFI:	FCC Title 47 CFR, Part 15, Class A
Power Factor:	>0.98
THD:	<20%
Input Power Frequency	50/60 Hz


*Projected per IESNA TM-21. Data extrapolated based on 10,000 hours of LED testing per IESNA LM-80.

COMPONENTS		
Lm Package	LED Driver	LED Replacement Lamp
23L	D700C30UNVTZCP75C	LRL12-15L8xx-525C
30L	D10CC55yyyTZCP72C	LRL12-15L8xx-525C
45L	D15CC55yyyTZCP86C	LRL12-15L8xx-525PRM

- Where "xx" = 35 (3500K), 40 (4000K), or 50 (5000K) • Where "yyy" = UNV (120-277VAC) or 347 (347VAC)

Applications
<ul style="list-style-type: none"> • All LED Lensed Modules must be connected for proper operation. • The standard base model version of this module without Conformal Coating is designed for indoor fixtures in dry applications. Damage caused by corrosion due to moisture, condensation and other harmful elements, is not covered by the warranty. • Not for use with phase cut dimmers. • Suitable for 2'x2' with minimum 3" height, may be type IC, may include a lens, and may be listed for elevated ambients of up to 40°C max. • Suitable for 2' or 4' strip light, wraparound, and vapor tight (see installation instructions for dimensions and max ambient).

DIMENSIONS: in (mm)

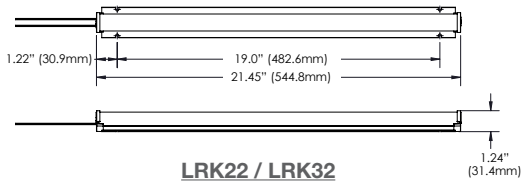

LRK22 / LRK32

Shipping Weight (LRK22): 4.1 lbs.

Shipping Weight (LRK32): 5.1 lbs.

LIGHTING FACTS LABELS

Everline

Light Output (Lumens)	2441
Watts	21.537
Lumens per Watt (Efficacy)	113.34

Color Accuracy Color Rendering Index (CRI)	82
--	-----------

Light Color
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: G8G5-7FKB2V (4/2/2015)
Model Number: LRK22-23L840-U
Type: Lamp - Linear

LRK22-23L840-U

Everline

Light Output (Lumens)	3361
Watts	31.389
Lumens per Watt (Efficacy)	107.08

Color Accuracy Color Rendering Index (CRI)	82
--	-----------

Light Color
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: G8G5-Y57ZHY (4/2/2015)
Model Number: LRK22-30L840-U
Type: Lamp - Linear

LRK22-30L840-U