


HBL1370 -- Manual Motor Controller





Type 1 enclosure for 30A switch with metallic cover (without switch) with ½" and ¾" knockouts on top, bottom and back of steel frame.

Product Specifications

Product Type	 <p>Motor Controllers</p>
Switch Type	NEMA 1 Metallic Enclosure Only
Amperage	30A
Voltage	600V AC
Listings	UL Listed 508 Industrial Control Equipment, CSA-C22.2 No. 14 Industrial Control Equipment, UL File E70402, CSA File LR46197
Base	Thermoset
Top	Thermoset
Toggle	Nylon
Terminal Screws	Brass
Mounting Bridge	Zinc Plated Steel
Contact Blades	Brass
Contacts	Silver Cadmium Oxide
Brush Lifter	Polycarbonate

Dielectric Voltage Withstand	2,200V AC max for 1 Minute
Electrical Life	6,000 Cycles at Rated Switch Parameters
Max Working Voltage	600V AC RMS
Terminal Accommodation	#14 AWG Min - #10 AWG Max. Copper stranded or solid conductor only.
Operating Temperature	Min Continuous -40° C w/o Impact
Mechanical Life: Minimum	10,000 Cycles
Short Circuit Withstand Rating	Motor Disconnect- 5,000 and 10,000 RMS with RK5 Fuses at Rated Switch Value.
Terminal Torque	20 Inch pounds
Catalog Page	Click here for catalog page C17
M Drawings	Click here for M-Drawing
Hubbellnet	Click here for Hubbellnet
Catalog Section	Click here for Section-C
UPC Number	78358501698
Weight in LBs	0.6

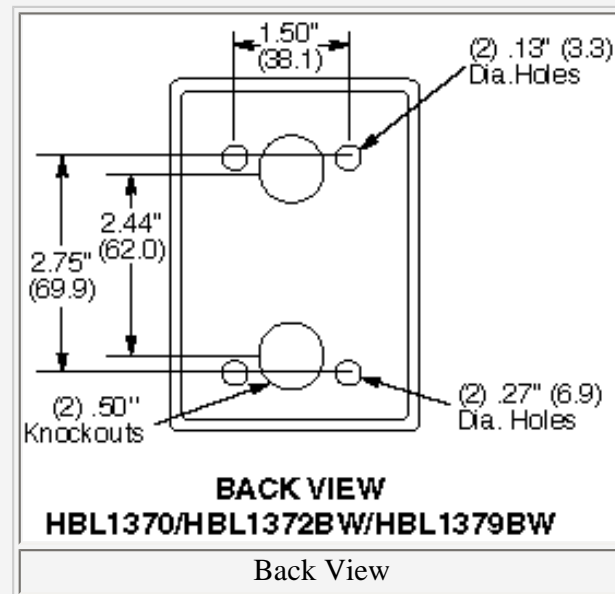

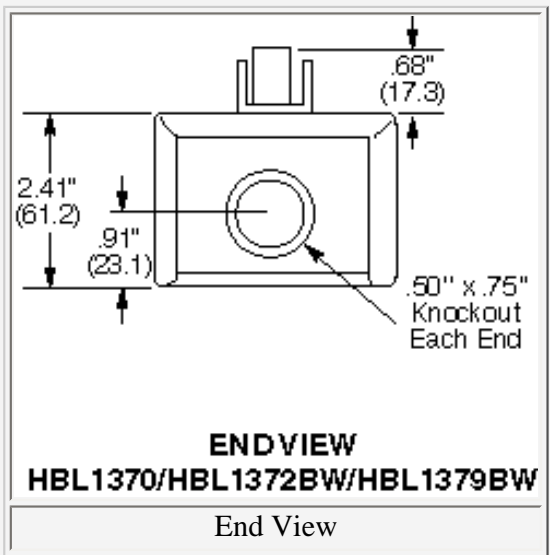

Hubbell Incorporated (Delaware)
185 Plains Road
Milford, CT 06460-2420
Ph: (203) 882-4800
Fax: (800) 255-1031

