

Twist-Lock® Devices




**20 Amp, 125, 250 Volts and 277 Volts AC
2 Pole, 3 Wire, Grounding**



20A 125V NEMA L5-20R 1 HP	20A 250V NEMA L6-20R 2 HP	20A 277V AC NEMA L7-20R 2 HP
---------------------------------	---------------------------------	------------------------------------

Connector Bodies

Watertight Safety-Shroud®		IP66 SUITABILITY	UL Type 4x, 12	
Description	Cord Dia.	Catalog Number		
Black Valox® housing, white Valox® clamps.	.360"-.930" (9-24)	HBL2313SW	HBL2323SW	HBL2333SW

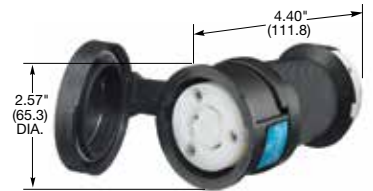

HBL2323SW


Insulgrip®		IP20 SUITABILITY		
Description	Cord Dia.	Catalog Number		
Black and white nylon.	.360"-.930" (9-24)	HBL2313	HBL2323	HBL2333
Corrosion resistant, yellow nylon.	.360"-.930" (9-24)	HBL23CM13	HBL23CM23	-
All black nylon.	.360"-.930" (9-24)	HBL2313BK	HBL2323BK	-
Cord clamps with removable inserts. All black nylon.	.360"-.930" (9-24)	HBL2313EBK	HBL2323EBK	-



HBL2313

Note: See page B-52 for accessories.

Valise®		IP20 SUITABILITY		
Description	Cord Dia.	Catalog Number		
Yellow nylon.	.325"-.720" (8.26-18.3)	HBL2313VY	HBL2323VY	-
Black nylon.	.325"-.720" (8.26-18.3)	HBL2313VBK	HBL2323VBK	HBL2333VBK



HBL2313VY

Note: See page B-53 for accessories.

Receptacles

Watertight Safety-Shroud®		IP66 SUITABILITY	UL Type 4x, 12	
Description	Catalog Number			
Gray Valox® housing and flange, back wired.	HBL2310SW HBL2320SW HBL2330SW			

Note: See page B-54 for accessories.



HBL2320SW

Safety-Shroud® Twist-Lock®		IP20 SUITABILITY		
Description	Catalog Number			
Gray Valox® angle housing, one gang, back wired.	HBL2310AR HBL2320AR HBL2330AR			
Gray Valox® surface mounting, one gang, back wired.	HBL2310SR HBL2320SR HBL2330SR			
Gray Valox® semi-flush, two gang, back wired.	HBL2310SR2 HBL2320SR2 HBL2330SR2			

Single Flush Receptacles		IP20 SUITABILITY		
Description	Catalog Number			
Black nylon face, back and side wired.	HBL2310 HBL2320 HBL2330			
Blue nylon face, back and side wired.	HBL2310M7 HBL2320M4 -			
Isolated ground, orange nylon face, back and side wired.	IG2310 IG2320 -			
Corrosion resistant, yellow nylon face, back and side wired.	HBL23CM10 - -			
Ring terminal connection.	HBL2310RT HBL2320RT -			



HBL2320AR

Note: See page B-52 for accessories.

Insulgrip® Flanged Receptacles

Description	Catalog Number		
Nylon casing, back wired.	HBL2316	HBL2326	HBL2336

Note: See page B-52 for accessories.



HBL2320SR

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.

Dimensions in Inches (mm)