


4x22 AWG ITC/PLTC AWM 2517 105C 300V

SPECIFICATIONS

A	22 AWG 19x.0058" UNILAY TINNED COPPER
B	PVC INSULATION
C	PAPER SEPARATOR
D	PVC JACKET JACKET COLOR: BLUE CABLE IS RoHS COMPLIANT

CONDUCTOR COLORS

- 1 = BROWN
- 2 = WHITE
- 3 = BLUE
- 4 = BLACK

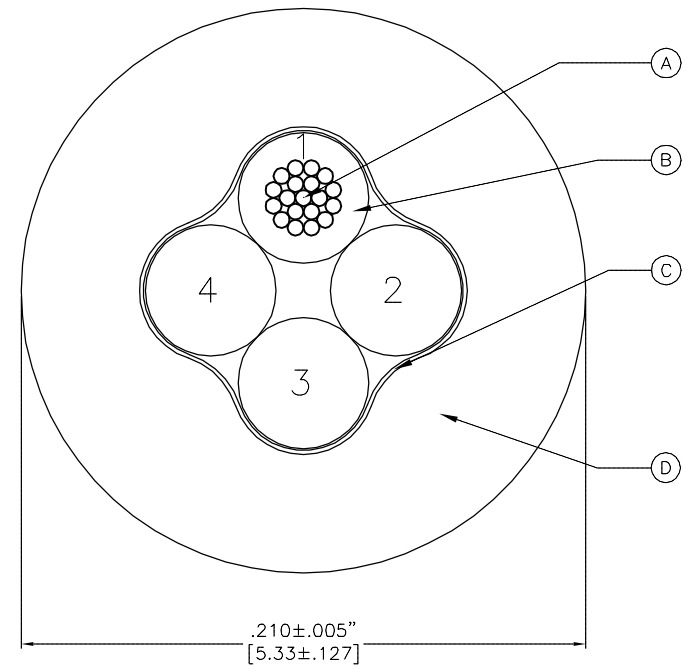

MECHANICAL REQUIREMENTS

STATIC: 5x CABLE O.D.

FLEX NON-SHIELDED: 10x CABLE O.D.

NOTES:

1. BLACK INK

101550598 22 AWG/4 (UL) ITC 105C UL# SUNLIGHT RESISTANT OR PLTC 105C -40C OIL RES I & II OR AWM 105C 300V OR CSA CMX-OUTDOOR-CMG CSA# 105C OR CSA AWM I/II A/B 105C 300V FT4 MSHA# SUPPLIER LOT CODE (WHEN APPLICABLE) MFG DATE CODE (EXAMPLE 00108 (DAY & YEAR))

2. c(UL) IS ACCEPTABLE IN PLACE OF ANY/ALL CSA MARKINGS.

NOTE: CONDUCTOR ROTATION MAY BE INVERTED FROM VIEW SHOWN

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT CK APVD SF	DATE 07/19/11 SCALE NONE	DESCRIPTION CAB,5.33,BLU,PVC,4X22,105C,300V,ITC,MSHA
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT INCH [MILLIMETER]		IDENTIFICATION NO. 101550598 (SOURCE)
B ADD "-40C OIL RES I & II" TO LEGEND		RDS	10/20/14	47712	
REV	DESCRIPTION	BY	DATE	ECO NO.	
				DO NOT SCALE THIS DRAWING	FILE: 101550598 SHEET 1 OF 1

