


TERMINAL LUGS

AMPERES	MAX. WIRE	MIN. WIRE	TYPE
60	#3 AWG	#14 AWG	CU
60	#3 AWG	#12 AWG	AL

KNOCKOUTS

SYMBOL	CONDUIT SIZE		DIAMETER	
	IN	MM	IN	MM
A	.50	13	.88	22
B	.75	19	1.13	29
C	1.00	25	1.38	35
D	1.25	32	1.75	44

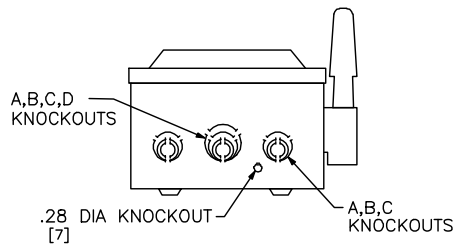

NOTES:
 UL LISTED - E2875
 FINISH - GRAY BAKED ENAMEL
 ALL NEUTRALS - INSULATED GROUNDABLE
 WHEN MOUNTING THESE SWITCHES, ALLOW 3.00 IN / 76 MM MIN. CLEARANCE BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.
 ▲ USE BOTH OUTER SWITCHING POLES
 ● IF CORNER GROUNDED DELTA, INSTALL NEUTRAL AND USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.

DUAL DIMENSIONS: INCHES MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	AMPERAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS					
				240VAC				250 VDC	
				STD.		MAX.		STD.	MAX.
				1PH	3PH	1PH	3PH		
H222NRB	240VAC:250VDC	60	A	3 ▲	7 1/2 ●	10 ▲	15 ●	10 ▲	-
H322NRB	240VAC:250VDC	60	B	3 ▲	7 1/2 ●	10 ▲	15 ●	10 ▲	-

HEAVY DUTY SAFETY SWITCHES
 VISIBLE BLADE TYPE
 60 AMPERE
 ENCLOSURE - NEMA TYPE 3R

SQUARE D
 Schneider Electric

DWG# 3003
 No.