




T&B®

Metal Clad Cable Termination Fittings & Accessories T&B Catalog Number:

UPC Number: STEX100
78621095252
Status: Active
Description:

Star Teck Extreme hazardous location aluminum jacketed cable fitting hub size 1 inch.

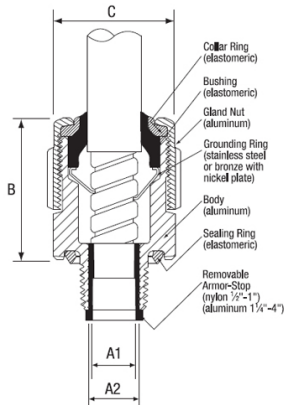

Features

- Patented powergrip grounding ring.
- Removable armor-stop for greater cable ranges.
- Patented elastomeric collar ring/bushing for greater cable ranges.
- Built-in jacket stripping gauge on gland nut.
- Gland nut can be tightened with hammer and screwdriver.

Application

- Provides means for passing armored, metal clad, jacketed cable through a bulkhead or enclosure in hazardous areas. (these fittings are suitable for hazardous areas when used with T&B sealing compound).
- Form a mechanical grip and water and/or oil-resistant termination.
- Provide grounding continuity of cable armor.

General

Material	Aluminum
Strip Length (inches)	1 1/4
Sealing Compound Required-Putty (grams)	30
Sealing Compound Required-Liquid (cc)	16

Dimension Information

Hub Size (inches)	1
Dimension B (inches)	3.580
Dimension C (inches)	2.300
A1:Throat Diameter Minimum (w/Armor Stop)	0.650
A2:Throat Diameter Minimum (wo/Armor Stop)	0.833
Range Over Jacket -Minimum (inches)	0.860
Range Over Jacket -Maximum (inches)	1.205
Range Over Armor -Minimum (inches)	0.780
Range Over Armor -Maximum (inches)	1.125
Strip Length (inches)	1 1/4

Packaging

T&B Order Multiple	2
T&B Inner Pack	2
Package in Units	20

T&B Sold in UOM	Each
T&B Weight Per UOM	80 lbs. per 100

Application Support

Product Specifications & Overview	Available on Website
-----------------------------------	----------------------

Notes

*Note	UL Listed watertight NEMA Type 6P
-------	-----------------------------------

Certifications

RoHS Compliance	Yes
-----------------	-----

Certifications



File Nbr:

E 82038

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email:techsupport@tnb.com